MIL-P-25632B
12 APRIL 1960
SUPERSEDING
MIL-P-25632A(USAF)
30 OCTOBER 1956

MILITARY SPECIFICATION

PITOT STATIC TUBE, ELECTRICALLY HEATED, TEMPERATURE CONTROLLED, 115 VOLT, 400 CYCLE, TYPE MA-1

This specification has been approved by the Department of Defense and is mandatory for use by the Departments of the Army, the Navy, and the Air Force.

1. SCOPE

1.1 This specification covers the one type of electrically heated pitot-static tube capable of accurately sensing total and static pressures at speeds up to mach 3.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids, form a part of this specification:

SPECIFICATIONS

MILITARY

MIL-P-116 — Preservation, Methods of.

MIL-E-5272 — Environmental Testing, Aeronautical and Associated Equipment, General Specification For.

MIL-F-5509 — Fittings, Fluid Connection.

MIL-S-7742 — Screw Threads, Standard, Optimum Selected Series: General Specification For.

MIL-P-7936 — Parts and Equipment, Aeronautical, Preparation For Delivery.

MIL-D-70327 — Drawings, Engineering and Associated Lists.

STANDARDS

MILITARY

MIL-STD-129 — Marking For Shipment and Storage.

MIL-STD-130 — Identification Marking of U. S. Military Property.

MS33586 — Metals, Definition of Dissimilar.

FSC 6610

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T06:51Z
Check the source to verify that this is the current version before use.

MS33656 — Fitting End, Standard Dimensions For Flared Tube Connection and Gasket Seal.

AIR FORCE-NAVY AERONAUTICAL

AN786 — Coupling — Airspeed Tube Union (Brazing).

AND10375 — Colors — Fluid Line Identification.

PUBLICATION

AIR FORCE-NAVY AERONAUTICAL BULLETIN

143 — Specifications and Standards; Use of.

(Copies of documents required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Qualification. The pitot-static tube furnished under this specification shall be a product which has been tested and has passed the qualification tests specified herein, and has been listed on or approved for listing on the applicable qualified products list.

3.2 Selection of specifications and standards. Specifications and standards for necessary commodities and services not specified herein shall be selected according to ANA Bulletin 143 except as provided in 3.2.1 and 3.2.2.

3.2.1 *Commercial parts.* Commercial parts having suitable properties may be used where, on the date of invitation for bids, there are no suitable standard parts. In any case, commercial utility parts, like screws, bolts, nuts, cotter pins, having suitable properties may be used provided:

(a) They can be replaced by the standard parts (MS and AN) without alteration.

(b) The corresponding standard part numbers are referenced in the parts list and, if practical, on the contractor's drawings.

3.2.2 *Standard parts.* With the exception in 3.2, MS and AN standard parts shall be used where they suit the purpose. They shall be identified on the drawings by their part numbers.

3.3 Materials. Materials which are not specifically designated shal be of the best commercial quality, of the lightest practicable weight, and suitable for the purpose intended.

3.3.1 *Fungus proof materials.* Materials that are nutrients for fungi shall not be used where it is practical to avoid them. Where used and not hermetically sealed, they shall be treated with a fungicidal agent acceptable to the procuring activity. However, if they will be used in a hermetically sealed inclosure, fungicidal treatment will not be necessary.

3.3.2 *Nonmagnetic materials.* Nonmagnetic materials shall be used for all parts of the tube, except where magnetic materials are essential.

3.3.3 *Nonferrous materials.* Nonferrous materials shall be used in all parts of the tube, except where ferrous materials are essential.

3.3.4 *Metals.* Metals shall be of the corrosion-resistant type or suitably treated to resist corrosion due to fuels, salt spray, or atmospheric conditions likely to be met in storage or normal service.

3.3.4.1 *Dissimilar metals.* Unless suitably protected against electrolytic corrosion, dissimilar metals shall not be used in intimate contact with each other. Dissimiar metals are defined in MS33586.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T06:51Z
Check the source to verify that this is the current version before use.

3.4 Design and construction. The design of the tube shall conform to figure 1. The tube shall be fabricated so as to withstand conditions encountered in service without failure of any component parts.

3.5 Performance. The pitot-static tube shall perform satisfactorily when subjected to the following conditions:

(a) *Dielectric.* Potential voltage of 1250 rms at sea level pressure.

(b) *Pressure leakage.* Pressure of 80 inches Hg for a period of 1 minute.

(c) *Electrical circuit.* Electrical power consumption shall not exceed 190w for a 5 minute operating period at rated voltage.

(d) *Vibration.* Vertical and horizontal vibrations which oscillate the tube tip through an amplitude of 0.250 inch for three 1-hour periods at 1000, 2000 and 3000 cpm.

(e) *Endurance.* Thirty cycles with rated voltage applied for 10 hours and off 1 hour for each cycle.

(f) *Heat conductivity.* Immersion of sections A, A and B, and A-B and C as shown on figure 1, in ½ pint and 1½ gallon volumes of water, causing the water temperature rise to exceed 13°C, 18°C and 21°C respectively.

(g) *De-Icing.* Removal of accumulated ice with the pitot-static tube positioned at 0° and 25° angles-of-attack, when subjected to wind tunnel speeds of 350 knots at temperatures of —10°C and —35°C, with the liquid water content of the air between 0.75 and 1.5 grams per cubic meter.

(h) *Static and total pressure error.* Pressure error tests conducted in a wind tunnel with speeds between mach 0.3 and mach 1, with the angle-of-attack of the pitot-static tube varied from 0° to 14° in increments of 2°.

(i) *Salt spray.* Exposure to salt sea atmosphere for a period of 50 hours.

(j) *High temperature resistance.* Exposure to +540°C. for a period of 48 hours without damage.

(k) *Low temperature resistance and power consumption.* Exposure to —65°C for a period of 48 hours without damage, after 24 hours at —65°C withstand in initial power surge not to exceed 1200w when rated voltage is applied through a 5 amp fuse, and after 5 seconds and 20 seconds operation at —65°C show consumption readings not exceeding 700w and 500w, respectively.

(l) *Humidity.* Relative humidity up to 100 percent.

3.6 Interchangeability. All parts having the same manufacturer's part number shall be functionally and dimensionally interchangeable. The drawing number requirements of MIL–D–70327 shall govern changes in the manufacturer's part number.

3.7 Electrical connector. The electrical connector shall be a 2-wire type, shall conform to figure 2, and shall be located as shown on figure 3.

3.8 Heater. The power distribution through the heater during de-icing operation shall conform to the minimum wattage densities given on figure 1. The total overload wattage at any time shall not exceed 1200w. Heater elements shall be placed as near as practicable to the heated surfaces. The heater shall be automatically regulated in such a manner so that the power dissipated through the

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T06:51Z
Check the source to verify that this is the current version before use.



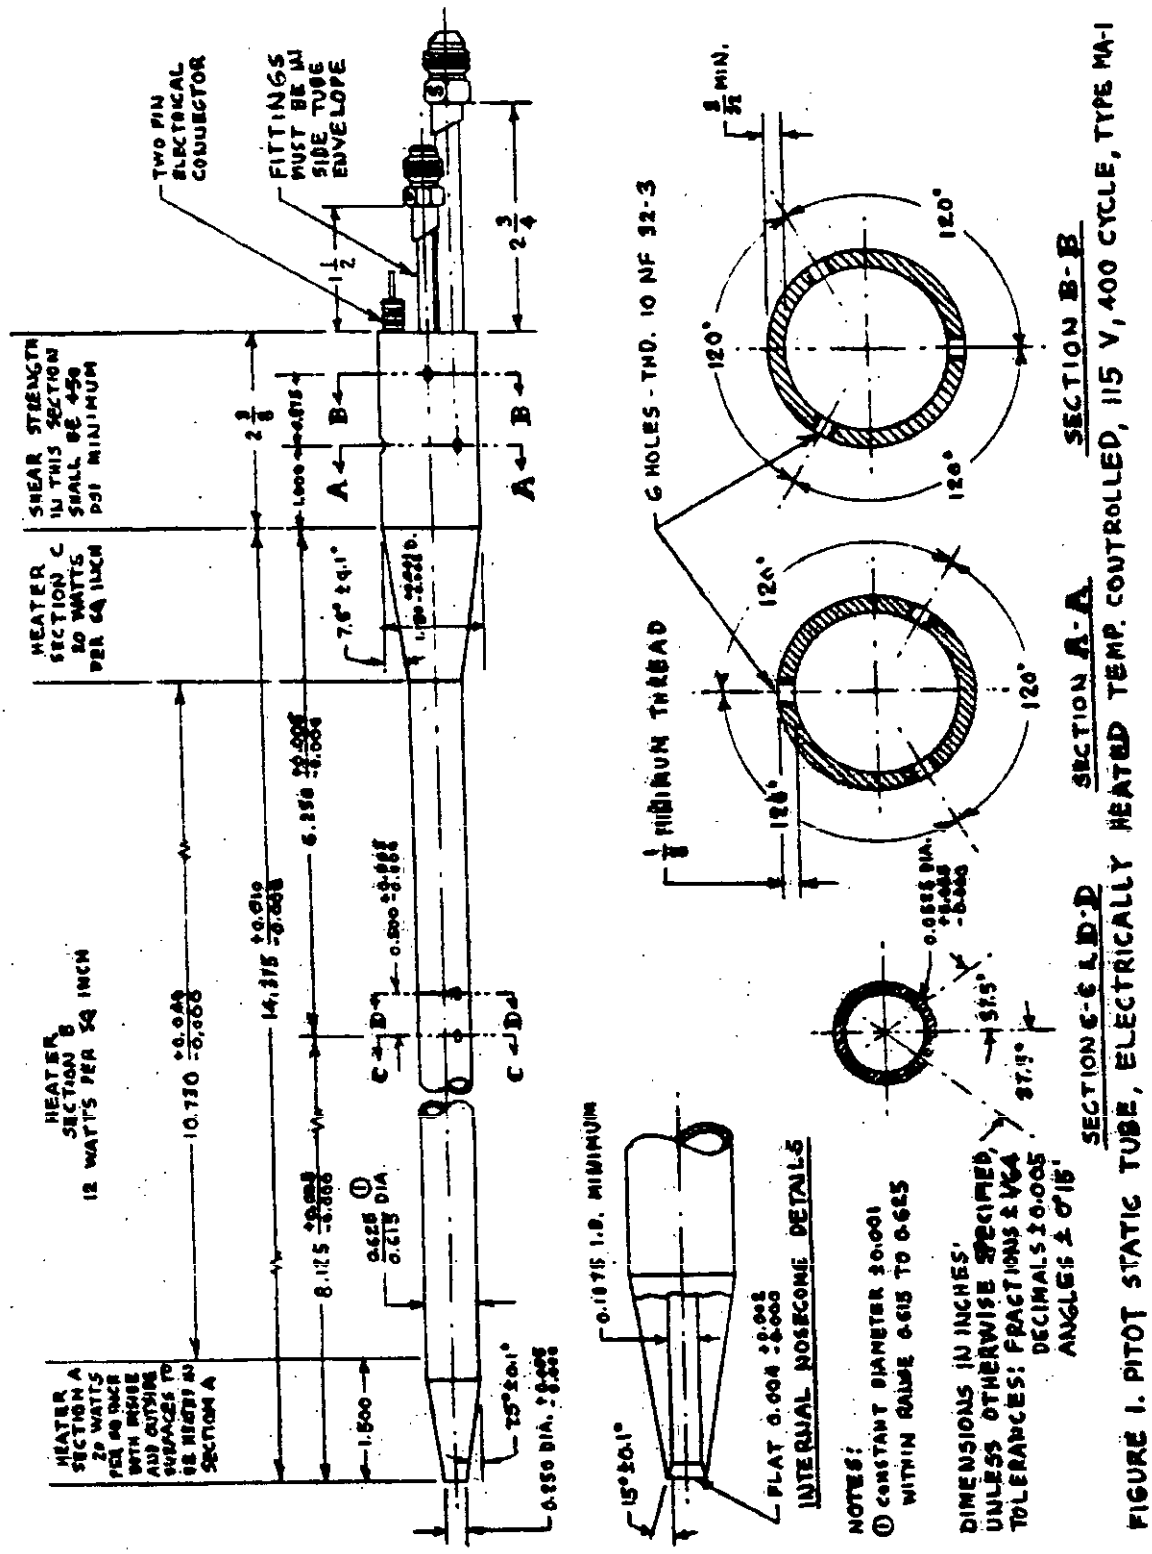


FIGURE 1. PITOT STATIC TUBE, ELECTRICALLY HEATED TEMP. CONTROLLED, 115 V, 400 CYCLE, TYPE MA-1


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T06:51Z
Check the source to verify that this is the current version before use.

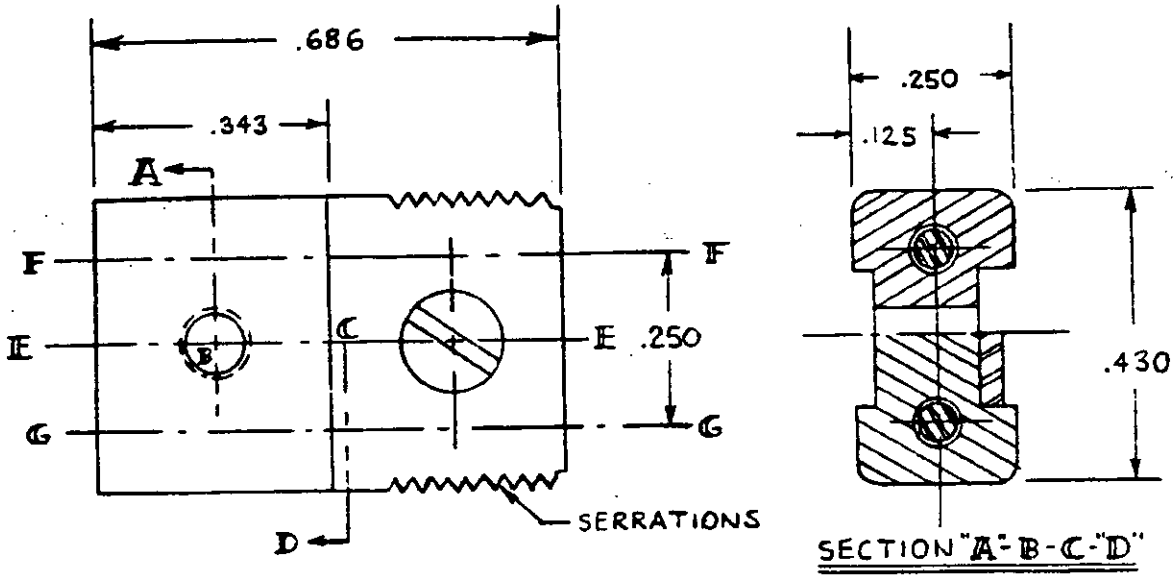

RECEPTACLE HOOD

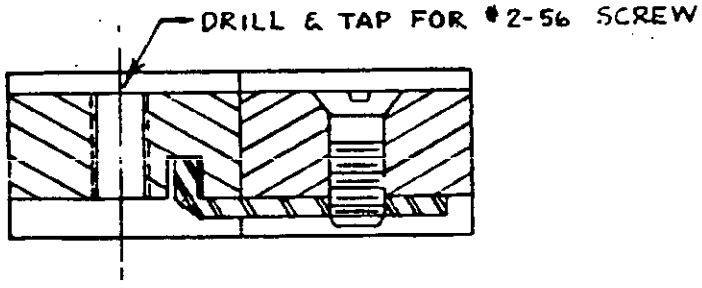

SECTION E-E

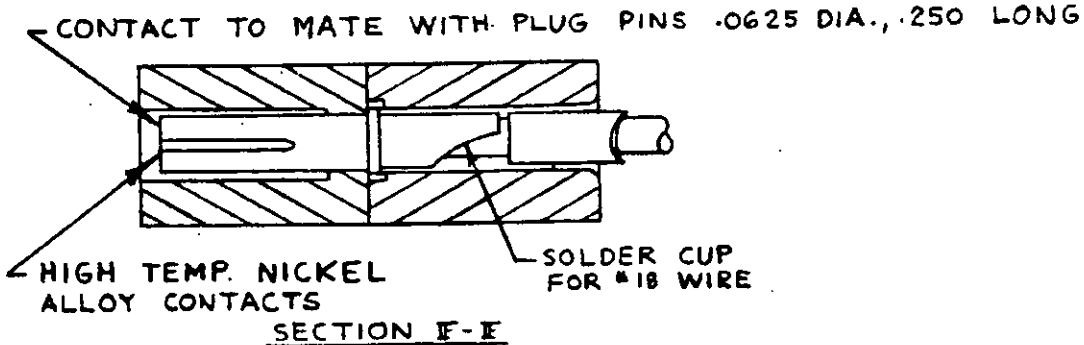


SECTION F-F

DIMENSIONS IN INCHES.
UNLESS OTHERWISE SPECIFIED,
TOLERANCES: FRACTIONS ± 1/64
DECIMALS ± .005

FIGURE 2. ELECTRICAL CONNECTOR DETAIL

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T06:51Z
Check the source to verify that this is the current version before use.

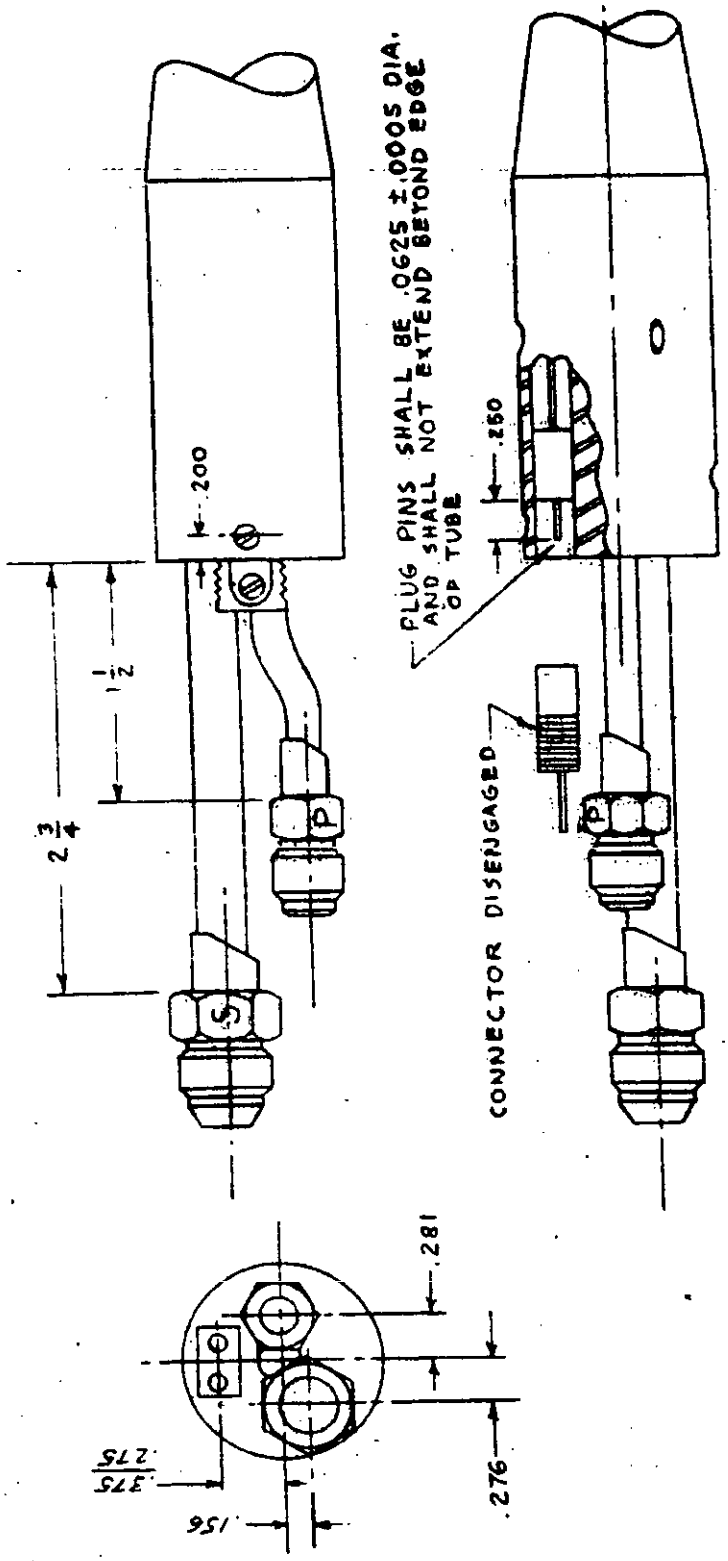

DIMENSIONS IN INCHES.
UNLESS OTHERWISE SPECIFIED,
TOLERANCES: FRACTIONS ± 1/64
DECIMALS ± .005

FIGURE 3. ELECTRICAL CONNECTOR LOCATION

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T06:51Z
Check the source to verify that this is the current version before use.

heater is an inverse function of the heater element temperature. In still air at ambient temperatures above 10°C, the heater dissipation shall not exceed 190w.

3.9 **Heat distortion.** There shall be no permanent distortion of the tube body as a result of extended heater operation.

3.10 **Pressure lines.** The total pressure line shall consist of ¼ inch OD tubing with 0.002 inch wall thickness. The total pressure line fitting shall conform to MIL–F–5509 and AN786. The static pressure line shall consist of $^{5}/_{16}$ inch OD tubing with 0.022 inch wall thickness. The static pressure line fitting shall conform to MIL–F–5509 and figure 4.

3.11 **Static pressure chamber.** The internal volume of the static pressure chamber shall be no smaller than the internal volume of ¾ inch OD tubing (0.035 inch wall thickness) having the same length as the static pressure chamber.

3.12 **Electrical circuit.** The electrical circuit of the tube shall be of the 2 wire type.

3.13 **Concentricity.** The cylindrical portion of the tube body shall be concentric within ±0.001 inch. There shall be no surface irregularities in the vicinity of static pressure orifices.

3.14 **Drainage.** The tube shall be so designed that water cannot be conducted into the pressure lines under any service conditions. There shall be no drain holes in either the total or static pressure chambers.

3.15 **Screw threads.** The threads of all machine screws 0.060 inch diameter or larger shall conform to MIL–S–7742.

3.16 **Weight.** The weight of the complete tube, including mounting screws, shall not exceed 1.25 pounds.

3.17 **Finish.** Protective coatings and finishes which will crack, chip, or scale during normal service life or due to extremes of atmospheric conditions shall not be used.

3.17.1 The outside of the tube shall have a durable dull finish acceptable to the procuring activity.


3.18 **Protective caps.** The total pressure opening and pressure line coupling threads shall be suitably protected by slip-on caps of nonstrategic material. The design of all protective devices shall be subject to the approval of the procuring activity.

3.19 **Identification of product.** Equipment, assemblies, and parts shall be marked for identification in accordance with MIL–STD–130. Identifying information shall be etched, engraved, or stamped on each pitot-static tube in a location that will not interfere with airflow over the tube or its operation.

3.19.1 *Other markings.* Total and static pressure lines shall be identified by the letters P and S, respectively, stamped, etched, or engraved on the couplings as shown on figure 1. The pressure lines shall be color marked in accordance with AND10375. The top of the tube mounting shoulder shall be stamped, etched, or engraved in letters ⅛ inch high with the word TOP. This lettering shall be placed in the space between the aft end of the rear tapered shoulder and the forward row of mounting holes.

3.20 **Workmanship.** The pitot-static tube shall be constructed and finished in a thoroughly workmanlike manner. Particular attention shall be given to neatness and thoroughness of soldering, wiring, marking of parts and assemblies, welding, and brazing, painting, riveting, machine-screw assemblies, and freedom of parts from burrs and sharp edges.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T06:51Z
Check the source to verify that this is the current version before use.

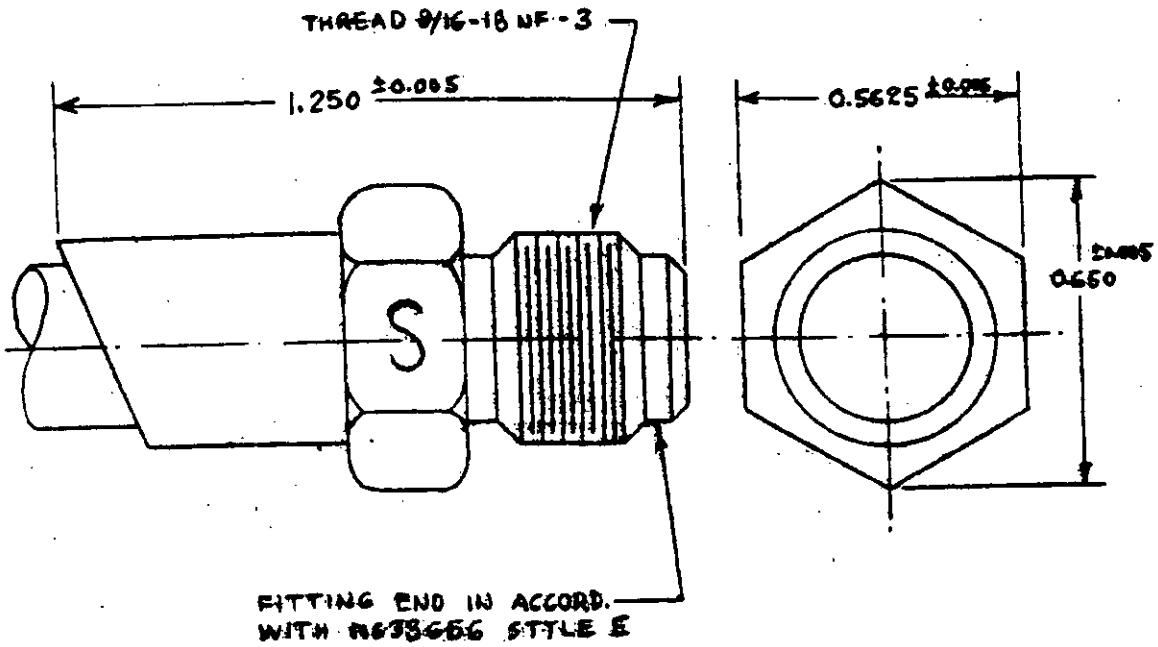

MATERIAL: CORROSION RESISTANT STEEL TYPE 347.

DIMENSIONS IN INCHES.

FIGURE 4. STATIC PRESSURE LINE FITTING

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T06:51Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Unless otherwise specified herein the supplier is responsible for the performance of all inspection requirements prior to submission for Government inspection and acceptance. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. Inspection records of the examinations and tests shall be kept complete and available to the Government as specified in the contract or order.

4.2 **Classification of tests.** The inspection and testing of the pitot-static tube shall be classified as follows:

(a) Acceptance tests. (See 4.3.)

(b) Qualification tests. (See 4.6.)

4.3 **Acceptance tests.** Acceptance tests shall consist of:

(a) Individual tests.

(b) Sampling plans and tests.

4.3.1 *Individual tests.* Each pitot-static tube shall be subjected to the folowing tests as described under 4.5 Test methods:

(a) Examination of product.

(b) Dielectric.

(c) Pressure leakage.

(d) Electrical circuit.

4.3.2 *Sampling plans and tests.*

4.3.2.1 *Sampling plan A.* One pitot-static tube selected at random from every 40 or less produced on the contract or order shall be subjected to the following tests as described under 4.5 Test Methods:

(a) Individual tests.

(b) Vibration.

(c) Endurance.

(d) Heat conductivity.

4.3.2.2 *Sampling plan B.* Unless otherwise specified, three pitot-static tubes selected at random from the first 15 items of the contract or order shall be subjected to the following tests as described under 4.5 Test Methods:

(a) Sampling plan A tests.

(b) De-icing.

(c) Static and total pressure error.

(d) Salt spray.

(e) High temperature resistance.

(e) Low temperature resistance and power consumption.

(g) Humidity.

(h) Endurance cycling.

4.3.2.3 *Rejection and retest.* When one item selected from a production run fails to meet the specification, no items still on hand or later produced shall be accepted until the extent and cause of failure are determined.

4.3.2.3.1 *Individual tests may continue.* For operational and production reasons, individual tests may be continued pending the investigation of a sampling test failure. But final acceptance of items on hand or later produced shall not be made until it is determined that items meet all the requirements of the specification.

4.3.3 *Defects in items already accepted.* The investigation of a test failure could indicate that defects may exist in items already accepted. If so, the contractor shall fully advise the procuring activity or all defects likely to be found and methods of correcting them.

4.4 Test conditions.

4.4.1 *Standard atmospheric conditions.* Whenever the pressure and temperature existing at the time of the test are not specified definitely, it is understood that the test is to be made at atmospheric pressure (approximately 29.92 inches Hg) and at room tem-

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T06:51Z
Check the source to verify that this is the current version before use.

perature (approximately +25°C.). When tests are made with atmospheric pressure or room temperature differing materially from the above values, proper allowance shall be made for the difference from the specified condition.

4.4.2 *Rated voltage.* Unless otherwise specified the pitot-static tube shall be tested with rated voltage defined as 115V 400 cps.

4.5 Test methods.

4.5.1 *Examination of product.* Each tube shall be carefully examined to determine compliance with the requirements of this specification not covered by applicable tests.

4.5.2 *Dielectric.* The tube shall be subjected to a high potential test with a voltage of commercial frequency which shall be applied between each terminal and the case for a period of 60 seconds. The voltage applied shall be 1250V rms at sea level pressure. No damage to the wiring or insulation shall result from this test.

4.5.2.1 In the event a hermetically sealed heater is utilized in the pitot-static tubes, the tube shall be subjected to the following test. The tube shall be placed in a chamber and evacuated to 80,000 feet for a period of 4 hours. At the end of 4 hours, a voltage shall be applied between each terminal and the case for a period of 60 seconds. The voltage applied shall be 150V ac. No damage to the wiring or insulation shall result from this test.

4.5.3 *Pressure leakage.* A pressure of 80 inches Hg shall be applied to each of the pressure lines. With the total and static pressure orifices sealed, the applied pressure, after 1 minute, shall not be below 79.97 inches Hg.

4.5.4 *Electrical circuit.* At an ambient temperature between 20°C. and 30°C., rated voltage shall be applied through a 5 amp fuse to the terminals of the tube for a period of 5 minutes. After this 5 minute period, the power shall be measured and shall not exceed 190w.

4.5.5 *Vibration.* The tube shall be mounted in a sleeve at the aft end and subjected to vertical and horizontal vibrations perpendicular to the tube centerline so that a point on the tip will oscillate through an amplitude of ¼ inch. This test shall consist of three 1 hour periods at 1000, 2000 and 3000 cpm. The tube shall be operated at rated voltage continuously during the test at an ambient temperature between 20°C. and 30°C. No leaks or failure shall result from this test.

4.5.6 *Endurance cycling.* The tube shall be subjected to a life endurance cycling test at an ambient temperature of 20°C. to 30°C. with rated voltage applied for an uninterrupted period of 10 hours and the voltage then removed for 1 hour. This test shall be repeated for a total of 30 consecutive cycles. No damage shall occur which will affect corrosion resistance or proper operation upon completion of the 30 cycles. At the conclusion of this test the tube body shall be dimensionally checked to determine that no permanent distortion or warpage has occurred due to heater operation. The insulation test of 4.5.2 and the pressure leakage test of 4.5.3 shall then be repeated. The endurance test of sampling plan A tests shall consist of the above test except for a period of one cycle.

4.5.7 *Heat conductivity.* The tube shall initially be cooled to a temperature of approximately 0°C. Heater section A (see figure 1) shall be immersed in ½ pint of water at a temperature of 2°C. ±1°C. and rated voltage shall be applied through a 5 amp fuse. After 10 minutes the temperature rise of the water shall not be less than 13°C. The entire procedure shall then be repeated except that heater sections A and B shall be immersed in ½ gallon of water at 2°C. ±1°C. After 10 minutes the temperature rise shall not be less than 18°C. The entire pro-

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T06:51Z
Check the source to verify that this is the current version before use.

cedure shall be repeated a third time except that heater sections A, B and C shall be immersed in ½ gallon of water at 2°C. ±1°C. After 10 minutes the temperature rise of the water shall not be less than 21°C. An insulated water container shall be used for this test.

4.5.6 *De-icing*. The tube shall be tested in an icing wind tunnel at an indicated tunnel speed of 350 knots. The ambient temperature for each test shall be between —10°C. and —35°C. The water droplet size shall be regulated to provide a liquid water content between 0.75 grams per cubic meter and 1.5 grams per cubic meter. Test runs shall be made at angles of attack of 0° and 25°. The procedure for each test run is as follows: Ice shall be allowed to form on the tube until either (a) the total pressure opening has been sealed or (b) the icecap has extended ½ inch in front of the tube tip. Power shall then be applied at rated voltage and the total time required to achieve correct pressure readings shall not exceed 1 minute; and to remove all accumulated ice, 1 minute and 30 seconds.

4.5.8.1 The tube shall continue to operate for an additional 15 minutes of rated voltage and no ice shall form on the tube which will in any way affect the pitot and static pressure measurement.

4.5.9 *Static and total pressure error*. The tube shall be mounted in a wind tunnel and tested for accuracy of both total and static pressure. The pressure error of the tube shall be determined by comparing the pressures sensed by the tube with the actual pressures existing in the tunnel. Two test runs shall be made between mach 0.3 and mach 1 and three tests shall be made between mach 1 and mach. 3. At each test mach number, the angle-of-attack of the tube shall be varied from 0° to 14° in increments of 2°. The total pressure measured by the tube shall not differ by more than ½ percent from the actual total pressure in the tunnel at an angle of attack of 0°. The static pressure measured by the tube shall not differ by more than ½ percent from the actual static pressure in the tunnel. At other angles-of-attack the static pressure measured by the tube shall not differ by more than 1 percent from the actual static pressure in the tunnel. The performance of this wind tunnel test program shall be the responsibility of the procuring activity. After the aerodynamic characteristics of the tube are established in this test program, no changes in the external design of the tube shall be permitted.

4.5.10 *Salt spray*. The tube shall successfully pass a salt spray test conducted for a period of 50 hours, in accordance with MIL-E-5272.

4.5.11 *High temperature resistance*. The tube shall be subjected to a temperature of +540°C. for a period of 48 hours. At the end of this time there shall be no evidence of damage. At the option of the procuring activity, any or all tests shall be conducted after this test.

4.5.12 *Low temperature resistance and power consumption*. The tube shall be subjected to a temperature of —65°C. for a period of 48 hours. After 24 hours at low temperatures, rated voltage shall be applied to the tube through a 5 amp fuse. The initial power surge shall not exceed 1200w and shall not be of such duration as to render the fuse inoperative. After 5 seconds the power consumption shall not exceed 700w and after 20 seconds shall not exceed 500w. Power shall be removed following the power consumption test. At the end of the 48 hour period there shall be no damage to the tube. At the option of the procuring activity any or all tests shall be conducted after this test.

4.5.13 *Humidity*. The tube shall be subjected to a humidity test in accordance with procedure I of MIL-E-5272. Upon completion of the test the tube shall be subjected to and satisfactorily meet the requirements specified in 4.5.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T06:51Z
Check the source to verify that this is the current version before use.

4.6 **Qualification testing.**

4.6.1 *Qualification test samples.* The qualification test samples shall consist of three pitot-static tubes. Samples shall be identified with the manufacturer's own part number and any additional information required by the letter of authorization.

4.6.2 *Qualification required.* Prior to actual procurement, the product which this specification covers shall pass the qualification tests specified herein. If the product is later modified in any way, the modified form shall be subjected to and shall pass the same qualification tests.

4.6.3 *Qualification tests.* The qualification tests shall consist of all the tests specified under 4.5 Test Methods.

5. PREPARATION FOR DELIVERY

5.1 **Packaging, packing, and preservation.** The pitot-static tubes shall be packaged and packed for shipment in accordance with MIL–P–7936. Each tube shall be preserved in accordance with method IA–8 of MIL–P–116.

5.2 **Marking of shipments.** Interior packages and exterior shipping containers shall be marked in accordance with MIL–STD–129. The nomenclature shall be as follows:

Pitot Static Tube, Electrically Heated, Temperature Controlled, 115 Volt, 400 Cycle, Type MA–1.

5.2.1 *Reinspection date.* The reinspection date markings shall be as specified by the procuring activity.

6. NOTES

6.1 Intended use. This tube will be used on high performance aircraft and missiles to supply total and static pressure for flight instruments and control equipment.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.

(b) Level of packing and packaging desired.

(c) Reinspection date markings.

(d) Whether sampling plan B is to be omitted.

6.3 Qualification. With respect to products requiring qualification, awards will be made only for such products as have, prior to the bid opening date, been tested and approved for inclusion in the applicable Qualified Products List whether or not such products have actually been so listed by that date.

6.3.1 The attention of suppliers is called to this requirement, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or orders for the products covered by this specification. Information pertaining to qualification of products covered by this specification may be obtained from

Commander

Wright Air Development Division

ATTN: WCLC

Wright-Patterson Air Force Base, Ohio

Notice. When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T06:51Z
Check the source to verify that this is the current version before use.

Custodians:

Army—Transportation (R & E Command)

Navy—Bureau of Naval Weapons

Air Force

Preparing activity

Air Force

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T06:51Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

POSTAGE AND FEES PAID
NAVY DEPARTMENT

OFFICIAL BUSINESS

OCAMA (OCNSSB)
Tinker AFB OK 73145

FOLD

PLATE NO. 15419 (BACK)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T06:51Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity *(as indicated on reverse hereof)*.

SPECIFICATION

ORGANIZATION *(Of submitter)*	CITY AND STATE

CONTRACT NO.	QUANTITY OF ITEMS PROCURED	DOLLAR AMOUNT
		$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATION FOR CORRECTING THE DEFICIENCIES.

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)*	DATE

DD FORM 1 APR 63 1426 REPLACES NAVSHIPS FORM 4863, WHICH IS OBSOLETE PLATE NO. 15419

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T06:51Z
Check the source to verify that this is the current version before use.