[METRIC]

A-A-2874
October 7, 1994

COMMERCIAL ITEM DESCRIPTION

BOX, FILING, WOOD

The General Services Administration has authorized the use of this commercial item description by all Federal agencies.

A. SCOPE

This Commercial Item Description covers portable wood filing boxes with, and without compressors (see figure 1).

B. CLASSIFICATION

The filing boxes shall be of the following types and sizes, as specified (see G.3.b).

1. Type I - With compressor.

   Size 1 - For 7.62 x 12.70 cm (3 x 5 IN.) cards.
   Size 2 - For 10.16 x 15.24 cm (4 x 6 IN.) cards.
   Size 3 - For 12.70 x 20.32 cm (5 x 8 IN.) cards.

2. Type II - Without compressor.

   Size 1 - For 7.62 x 12.70 cm (3 x 5 IN.) cards.
   Size 2 - For 10.16 x 15.24 cm (4 x 6 IN.) cards.
   Size 3 - For 12.70 x 20.32 cm (5 x 8 IN.) cards.

3. Sizes. Unless otherwise specified, the boxes shall be of the sizes shown in table II.

C. SALIENT CHARACTERISTICS

1. Colors of finish. The boxes shall be Light Oak or Walnut, as specified.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to: The General Services Administration, Office Supplies and Paper products Commodity Center, Engineering Branch, New York, N.Y. 10278.

FSC 7520

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.

2. Material. Solid Wood; for Light Oak boxes, it shall be one of the following: Alder, Ash, Hickory or Oak. For Walnut boxes, it shall be one of the following: Alder, Ash, Beech, Birch, Cherry, Hackberry, Maple, Oak, Pecan, Sweetgum or Walnut.

3. For Type I, the sides and ends of the box shall be not less than 8 mm (5/16 inch) thick. The top and bottom shall be not less than 4.8 mm (3/16 inch) thick. The top and bottom shall be tongued into the sides and ends of the box and secured by adhesive, or securely glued flush to the sides and ends. All edges and corners shall be rounded, with the exception of the contact edges of the lid and base section. The filler strip forming the compressor channel, shall be not less than 8 mm (5/16 inch) thick, and not less than 3.8 cm (1-1/2 inches) wide, and shall be securely glued to the inside bottom of the box. The compressor rod shall be centered in the channel end secured to the ends of the box. Each box shall have two quadrants. The quadrants shall be so installed to assure equal support to both ends of the lid and permit the lid to open not less than 90 degrees and not more than 110 degrees.

4. For Type II. The sides and ends shall be made of solid wood, not less than 8 mm (5/16 inch) thick. The top and bottom shall be made of solid wood not less than 3.2 mm (1/8 inch) thick, and shall be securely glued flush to the sides and ends. All edges and corners shall be rounded with the exception of the contact edges of the lid and base section.

5. Lid. The lid shall be formed by cutting the ends and sides on an ogee curve, and the cut shall start 2.54 cm (1 inch) below the top edge at the back of the box (see figures 1 and 2). The lid shall land evenly and squarely on the contact edges of the base.

6. Compressor (for type I boxes). The compressor shall consist of a plate, rod, and finger release spring torsion lever stop. The compressor components shall be made of cold-rolled steel, or corrosion resistant steel. The plate shall be approximately the size of the card for which the box is designed, and shall be not less than 18 gage thick. The rod shall be not less than 7 gage in diameter. Components made of cold-rolled steel shall be plated with nickel, cadmium or zinc, or the plate or finger release shall be coated with an appropriate pigmented baked enamel. The compressor shall operate smoothly and easily, and shall lock automatically at any point.

7. Butt hinges. The hinges shall be made of cold-rolled steel, and shall be brass plated.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.

7.1 Type 1. The hinge shall be not less than 1.1 mm (0.042 inch) thick. The length of the hinge at the joint shall be not less than 3.81 cm (1-1/2 inches), and the open hinge width shall be not less than 3.18 cm (1-1/4 inches). Each wing shall have not less than two screw holes.

7.2 Type II (stop hinge). The hinge shall be not less than 1 mm (0.040 inch) thick. The length of the hinge at the joint shall be not less than 2.54 cm (1 inch), and the open hinge width shall be not less than 3.02 cm (1-3/16 inches). Each wing shall have not less than two screw holes. The stop hinge shall open a minimum of 90 degrees, and not more than 110 degrees.

8. Quadrant. The quadrant shall be similar to the one shown in figure 1. The quadrant shall be made of cold-rolled steel, not less than 0.76 mm (0.03 inch) thick, and shall be brass plated.

9. Front filler. A filler piece shall be securely glued inside the front of each box. The filler shall be the full height of the card for which the box is designed, and shall not be less than 4.8 mm (3/16 inch) thick.

10. Felt. The felt shall contain not less than 25 percent new wool. The weight of the felt shall be not less than 135.6 grams per square meter (4 ounces per square yard). The felt shall be neatly and securely glued to the underside of the box, and shall cover it completely to within 6.4 mm (1/4 inch) of the edges of the box.

11. Finish of wood parts. Wood parts normally exposed to view, shall be thoroughly cleaned and sanded smooth. Finish shall consist of the following:

(a) Application of stain and lacquer toner.
(b) 1 coat of clear stain, if required.
(c) 1 coat lacquer sealer.
(d) 1 filler coat.
(e) 2 coats clear lacquer.
(f) Rubbing.

The application of finishing materials, drying time, cleaning, and rubbing shall be controlled to produce items with a smooth, uniform surface, without blisters, runs, wrinkles and other defects. All unexposed parts shall have at least one coat of high solids lacquer sealer.

12. Adhesive. The adhesive used in the construction of the boxes shall conform to, or exceed the performance of ASTM-D 4317.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.

13. Dimensions. The inside dimensions of the boxes shall be as specified in table I. The inside height dimensions for type I boxes shall be measured from the top of the filler strip to the underside of the top of the box. (See figure 1.)

TABLE I. Minimum inside dimensions

Type	Size	Width	Height	Depth
I	1	13 cm (5-1/8 IN.)	8.9 cm (3-1/2 IN.)	22.9 cm* (9 IN.)
I	2	15.6 cm (6-1/8 IN.)	11.4 cm (4-1/2 IN.)	22.9 cm* (9 IN.)
I	3	20.6 cm (8-1/8 IN.)	14 cm (5-1/2 IN.)	22.9 cm* (9 IN.)
II	1	13 cm (5-1/8 IN.)	8.9 cm (3-1/2 IN.)	7.9 cm (3-1/8 IN.)
II	2	15.6 cm (6-1/8 IN.)	11.4 cm (4-1/2 IN.)	7.9 cm (3-1/8 IN.)
II	3	20.6 cm (8-1/8 IN.)	14 cm (5-1/2 IN.)	7.9 cm (3-1/8 IN.)

* Minimum usable space 19 cm (7-1/2 IN.).


14. Identification marking: Each box shall be legibly and permanently marked on the underside of the lid with the name or trademark of the manufacturer.

15. Workmanship. The boxes shall be free from defects which may impair serviceability, appearance or may present a hazard to the end user.

D. REGULATORY REQUIREMENTS

In accordance with section 23.403 of the Federal Acquisition Regulations, the government's policy is to acquire items composed of the highest percentage of recovered materials practicable, consistent with maintaining a satisfactory level of competition without adversely affecting performance requirements of exposing suppliers' employees to undue hazards from the recovered materials.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.

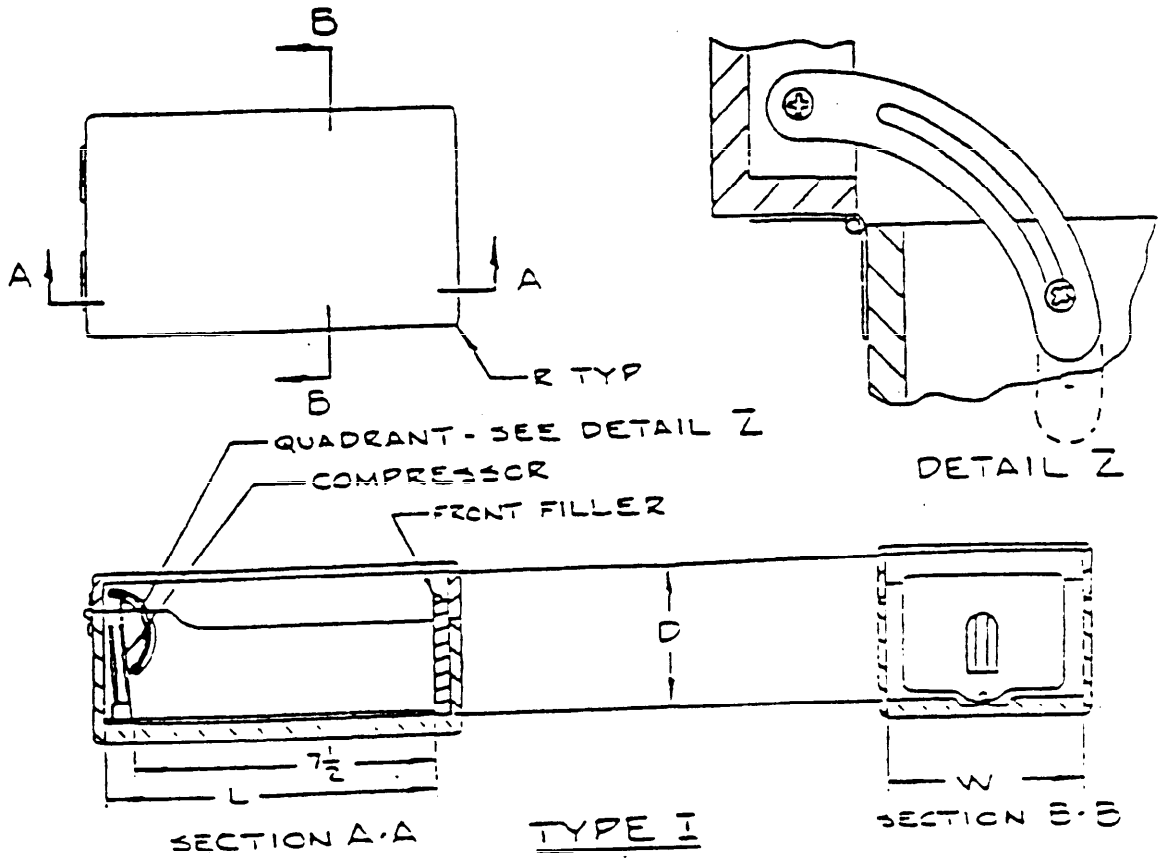



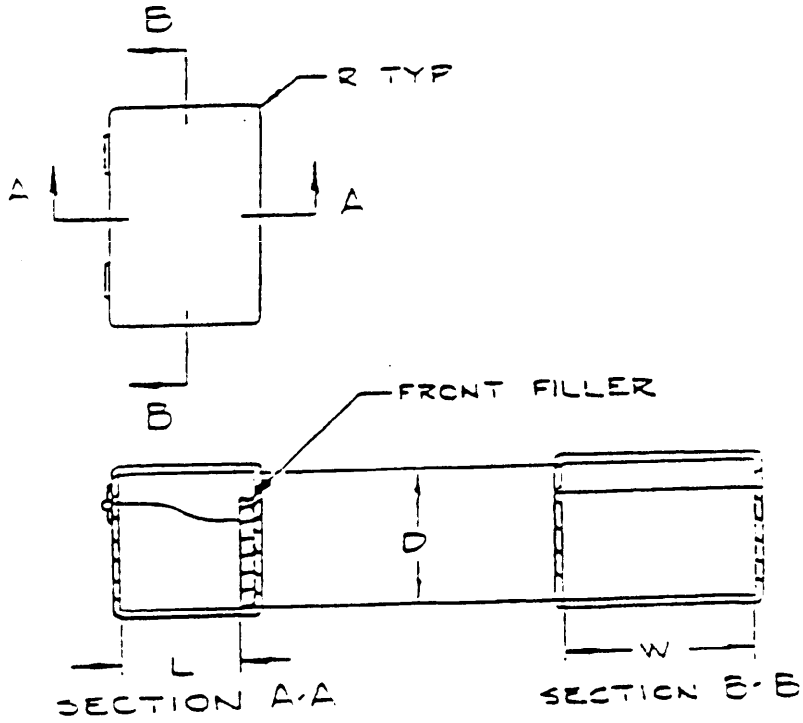


FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 202610-26T08:26Z
Check the source to verify that this is the current version before use.

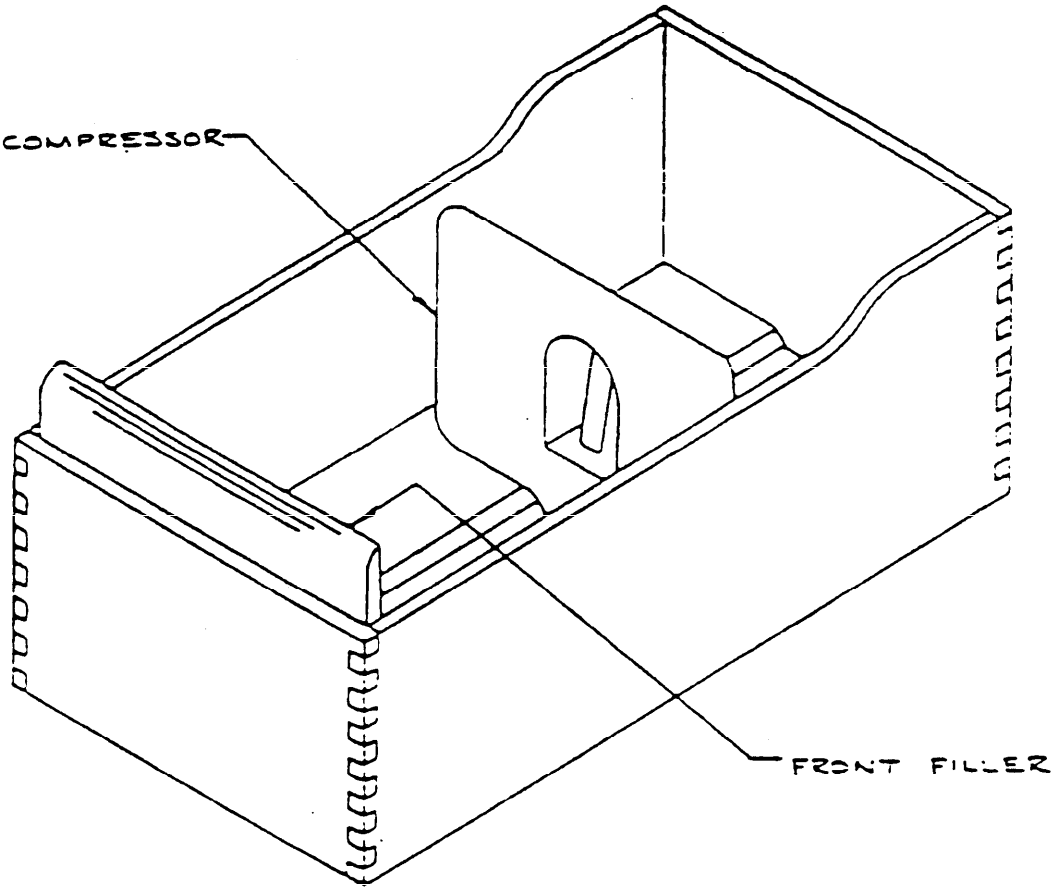

TYPE I, WITH
COVER REMOVED

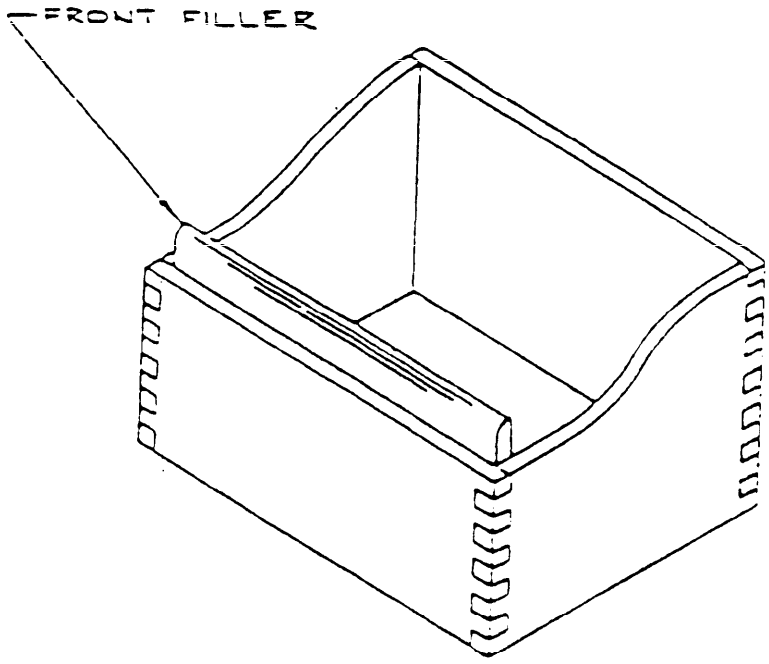

TYPE II, WITH
COVER REMOVED

FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.

E. QUALITY ASSURANCE PROVISIONS

1. Contractor Certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this Commmercial Item Description, and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices. The government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

2. Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

3. Each lot of boxes shall be inspected for conformance to the requirements herein. Inspection shall be in accordance with MIL-STD-105 using the sampling plans specified below.

4. Visual characteristics - Inspection level S-4 with an Acceptable Quality level (AQL) of 4.0 percent defective. The sample unit shall be one box.

5. Dimensional characteristics - Inspection level S-2 with an Acceptable Quality level (AQL) of 4.0 percent defective. The sample unit shall be one box.

F. PACKAGING.

Pakaging, packing, labeling and marking shall be as specified in the contract or order.

G. NOTES.

1. Application for Copies of Documents Referenced Herein:

The issue date in effect on date of invitation for bids or request for proposal shall apply.

1.1 MIL-STD-105 "Sampling Procedures and Tables for Inspection by Attributes" is available from Standardization Documents Order Desk; Building 4D; 700 Robbins Avenue; Philadelphia, PA 19111-5094.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.

1.2 ASTM D4317 "Polyvinyl AQcetate-Based Emulsion Adhesives" is available from the American Society for Testing and Materials, 1916 Race Street, Philadelphia, Pa. 19103.

2. Part Identification Number.

The following part identification numbering procedure is for government purposes and does not constitute a requirement for the contractor.

```
AA2874- B 1 A : This example describes a box with compressor for
         ¦ ¦ ¦ : 7.62 x 12.70 cm (3 x 5 IN.) cards, walnut color.
         ¦ ¦ ¦
         ¦ ¦ ¦
         ¦ ¦ ¦--- Size A - 7.62 x 12.70 cm (3 x 5 IN.)
         ¦ ¦ ¦          B - 10.16 x 15.24 cm (4 x 6 IN.)
         ¦ ¦ ¦          C - 12.70 x 20.32 cm (5 x 8 IN.)
         ¦ ¦ ¦
         ¦ ¦ ¦----- Type 1 - With compressor
         ¦ ¦ ¦          2 - Without compressor
         ¦ ¦ ¦
         ¦ ¦ ¦
         ¦ ¦ ¦-------Color A - Light Oak
         ¦ ¦ ¦          B - Walnut
```

3. Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this Commercial Item Description
(b) Type, and size (see B.1, B.2 and B.3)
(c) Color (see C.1)
(d) Packaging, packing, labeling and marking.

NO OFFICIAL DOD INTEREST
HAS BEEN REGISTERED

PREPARING ACTIVITY:
GSA-FSS

Source: https://assist.dla.mil -- Downloaded: 202610-26T08:26Z
Check the source to verify that this is the current version before use.