INCH-POUND

A-A-55106
15 December 1992

COMMERCIAL ITEM DESCRIPTION

WHISTLE, BALL, PLASTIC

The General Services Administration has authorized the use of this Commercial Item Description in preference to MIL-W-1053.

Abstract. This document covers plastic ball whistles. The plastic whistle is intended for use by military personnel performing police, guard, drill instruction, and other duties which require the use of whistles. The whistle shall be with lanyard.

Salient Characteristics. The design and construction of the whistle with lanyard shall be in accordance with either Figure 1 or Figure 2. The two halves of the split construction whistle shall be permanently joined with a suitable adhesive prior to adding the rivet and eyelet. The color of the whistle shall approximate color No. 14087 (Olive Drab) of FED-STD-595.

Material.

Plastic. The whistle body shall be made of virgin cellulose acetate butyrate conforming to Grade MH of L-P-349 or ethyl cellulose conforming to Type I, Grade 4 of ASTM D 787. Up to 15 percent by weight of scrap material of the same composition as the virgin material will be allowed in any one batch of molding compound.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Personnel Support Center, Clothing and Textiles Directorate, Attn: DPSC-FSSD, 2800 South 20th Street, Philadelphia, PA 19101-8419, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8465

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Cork Ball. Cork for the ball shall be XX quality natural cork or better or cork composition of a clean soft grade uniformly granulated.

Lanyard. The lanyard for the whistle shall be made from cotton tubular braid conforming to Type IV, Class 1 of MIL-B-371. The color of the braid shall approximate Black 174 and have good fastness to crocking and laundering (3 cycles). The length of the braid shall be 37 inches. Ends shall be resin dipped or tipped to prevent fraying. The color of the tips shall be dyed grey or black. Alternately the lanyard shall be 5/32 ± 1/64 inch diameter nylon or polyester solid or diamond braid, dyed black and have good fastness to crocking and laundering (3 cycles). The ends of the braid shall be heat sealed in such a manner as to permit easy access through the eyelet.

Slide Keeper. The slide keeper shall be made of extruded vinyl chloride-vinyl acetate copolymer or polyvinyl chloride. The keeper shall be flexible, black in color, approximately 1/2 inch in length and compatible with the lanyard.

Eyelet. The eyelet for the split construction whistle shall be a rolled flange eyelet made from commercial 0.0105 inch thick brass conforming to the following dimensions with tolerances as indicated:

Flange	- 0.290 ± 0.005 inch
Outside diameter	- 0.183 ± 0.002 inch
Length under flange	- 0.344 ± 0.005 inch

The finish of the eyelet shall be a natural brass.

Rivet, Brass, Flat Countersunk Head. The rivet for the split construction whistle shall be a flat countersunk-head, 1/8 inch body diameter rivet conforming to Type X, Grade F of FF-R-556 except that the brass shall be annealed or eighth hard. The rivet shall have a natural finish.

Marking. Each whistle body shall be permanently and distinctly marked with the letters "U.S.", the name of manufacturer or brand name, and the year of manufacture. The size of the letters shall be approximately 3/32 inch high.

Workmanship. After completion, the finished whistles shall be thoroughly cleaned and all foreign matter removed. The item shall be free from irregularities or defects which adversely affect appearance, performance, reliability or durability, such as cracked or damaged plastic, imperfect split ring, cut or cracked cork ball.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Product Demonstration Model. When required, offerers shall submit samples of their intended production. The Product Demonstration Model will consist of units independently developed. Product Demonstration Models will be analyzed and evaluated by the government. Evaluation criteria and basis for award are contained in the solicitation. Product Demonstration Models will be retained by the government. One (1) Product Demonstration Model approved by DPSC under the resultant contract will serve as a manufacturing standard for the corresponding production items delivered under this contract. Offerers are advised that the Product Demonstration Model does not relieve the successful offerer of his responsibility to perform in accordance with the Commercial Item Description specified above.

Regulatory Requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable.

Quality Assurance

Certification. The contractor shall certify that the product offered meets the salient characteristics of this description and that the product conforms to the producer's own drawings, specifications, standards and quality assurance practices. The government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for, under the provisions of the contract. Reliance on contractor QA systems shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the government for acceptance comply with all requirements of the contract.

Examination. Whistle Lots shall be inspected in accordance with "Sampling Procedures and Tables for Inspection by Attributes", ANSI/ASQC Z1.4, published by the American Society for Quality Control.

Visual Examination. The whistles shall be examined for the defects listed below. The lot size shall be expressed in units of whistles. The sample unit is one whistle. The inspection level shall be II and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 6.5.

Defects. The whistles shall be examined for the following defects: any required component or design characteristic missing or not as specified herein; any aspects of design, construction, assembly, function or finish not in accordance with good commercial practice; color not as specified; marking missing, incorrect, or illegible; measurement of item not as specified; failure to perform, function, and/or fulfill intended purpose.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Dimensional Examination. The finished whistle shall conform to the dimensions specified. Any dimension that is not within the established tolerance shall be classified as a defect. The sample unit shall be one whistle; the inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 2.5.

Packaging Examination. The fully packaged shipping containers shall be examined in accordance with defects listed below. The lot size shall be the number of shipping containers in the inspection lot. The inspection level shall be S-2 and AQL, expressed in terms of defects per hundred units, shall be 2.5.

EXAMINE	DEFECT
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, or method of application
Materials	Any component missing, damaged, or not as specified
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, loose strapping, improper taping, or inadequate stapling
Content	Number of items in container is more or less than required
	NSN shown on one or more items not as specified on shipping container
Palletization	Length, width, or height exceeds specified maximum requirements
	Pallet type not as specified
	Load not bonded as specified

Performance. The whistle shall emit an audible characteristic sound when blown by mouth. The absence of an audible characteristic sound shall constitute a defect. The inspection level shall be S-4 and AQL shall be 1.0.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

PACKAGING.

Packaging. Each completely assembled whistle shall be unit packed in a wrapper, bag, or envelope made of clear polyethelyne film. Twenty-five whistles of one type only, shall be packed in an intermediate folding paperboard box.

Packing. Five-hundred whistles of one type only, packaged as specified, shall be packed in a fiberboard box conforming to style RSC-L, grade 275 of PPP-B-636. The box shall be closed in accordance with the appendix of PPP-B-636.

Palletization. Boxes shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means C and D, or film bonding means F or G. Pallet pattern shall be in accordance with the appendix of MIL-STD-147.

Marking. Marking shall be in accordance with MIL-STD-129.

Source of Government Documents. Copies of Military and Federal documents are available from:

Standardization Documents Order Desk
Bldg. 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

Sources of Nongovernment Documents.

ANSI/ASQC Z1.4 - Sampling Procedures and Tables For Inspection By Attributes

(Applications for copies should be addressed to American National Standards Institute, 1430 Broadway, New York, NY 10018-3308.)

Custodians:
Army - GL
Navy - NU
Air Force - 99


Review Activities:
Army - MD
Navy - MC
Air Force - 82, 45


Civil Agency Coordinating Activity:
GSA - FSS

Preparing Activity:
DLA - CT


Project No. 8465-0107

Source: https://assist.dla.mil - Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

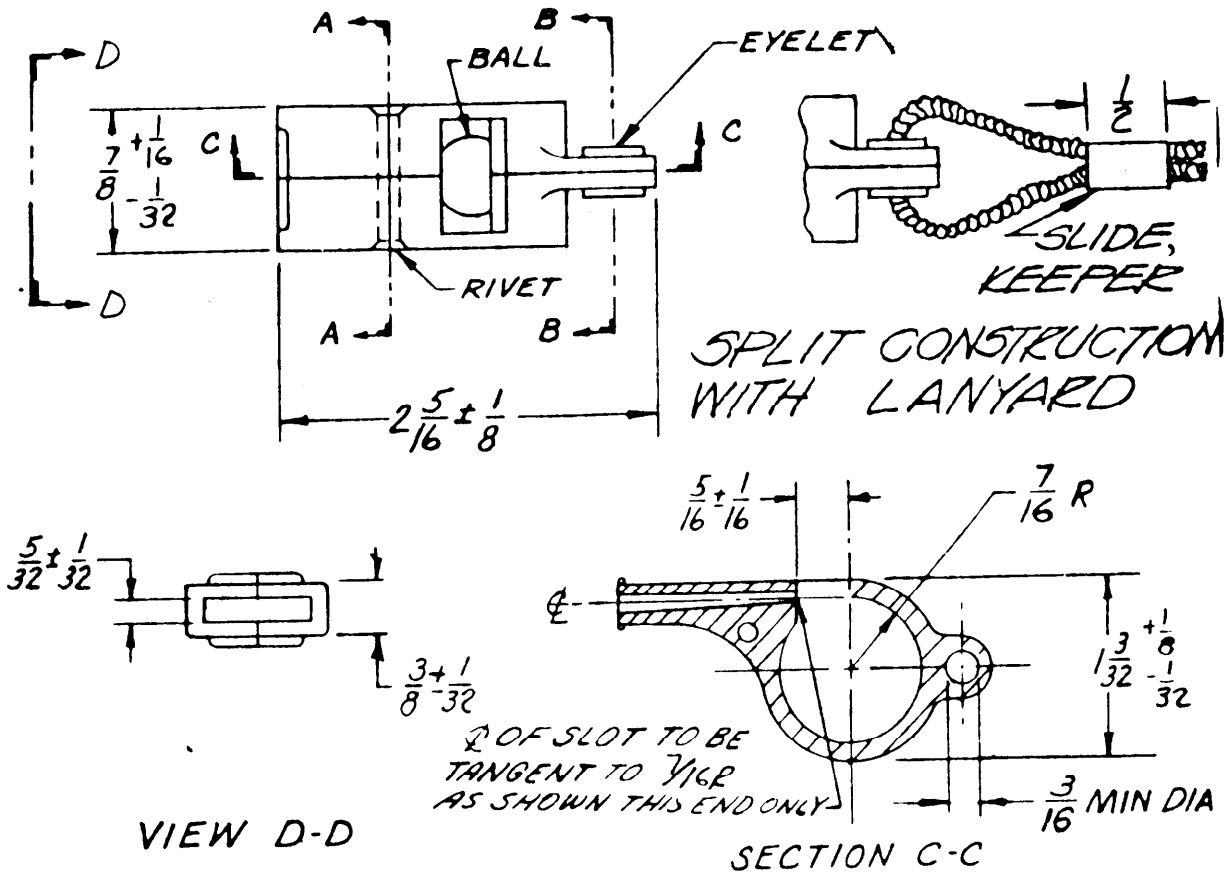

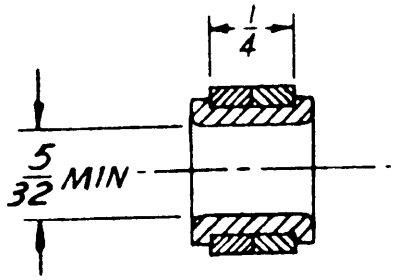

SECTION B-B




NOTES:
1. HOLE, CSK BOTH ENDS FOR 1/8 DIA RIVET
2. THE RIVET SHALL BE PEENED IN SUCH A MANNER THAT IT SHALL NOT COMPLETELY FILL IN THE COUNTERSUNK AREA IN THE PLASTIC

SECTION A-A

NOTE: THE PROJECTION AT THE LIP MOUTH OPENING SHALL BE A MINIMUM OF 3/64 INCH RADIUS.

Figure 1. Whistle, Ball, Plastic Split Construction

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

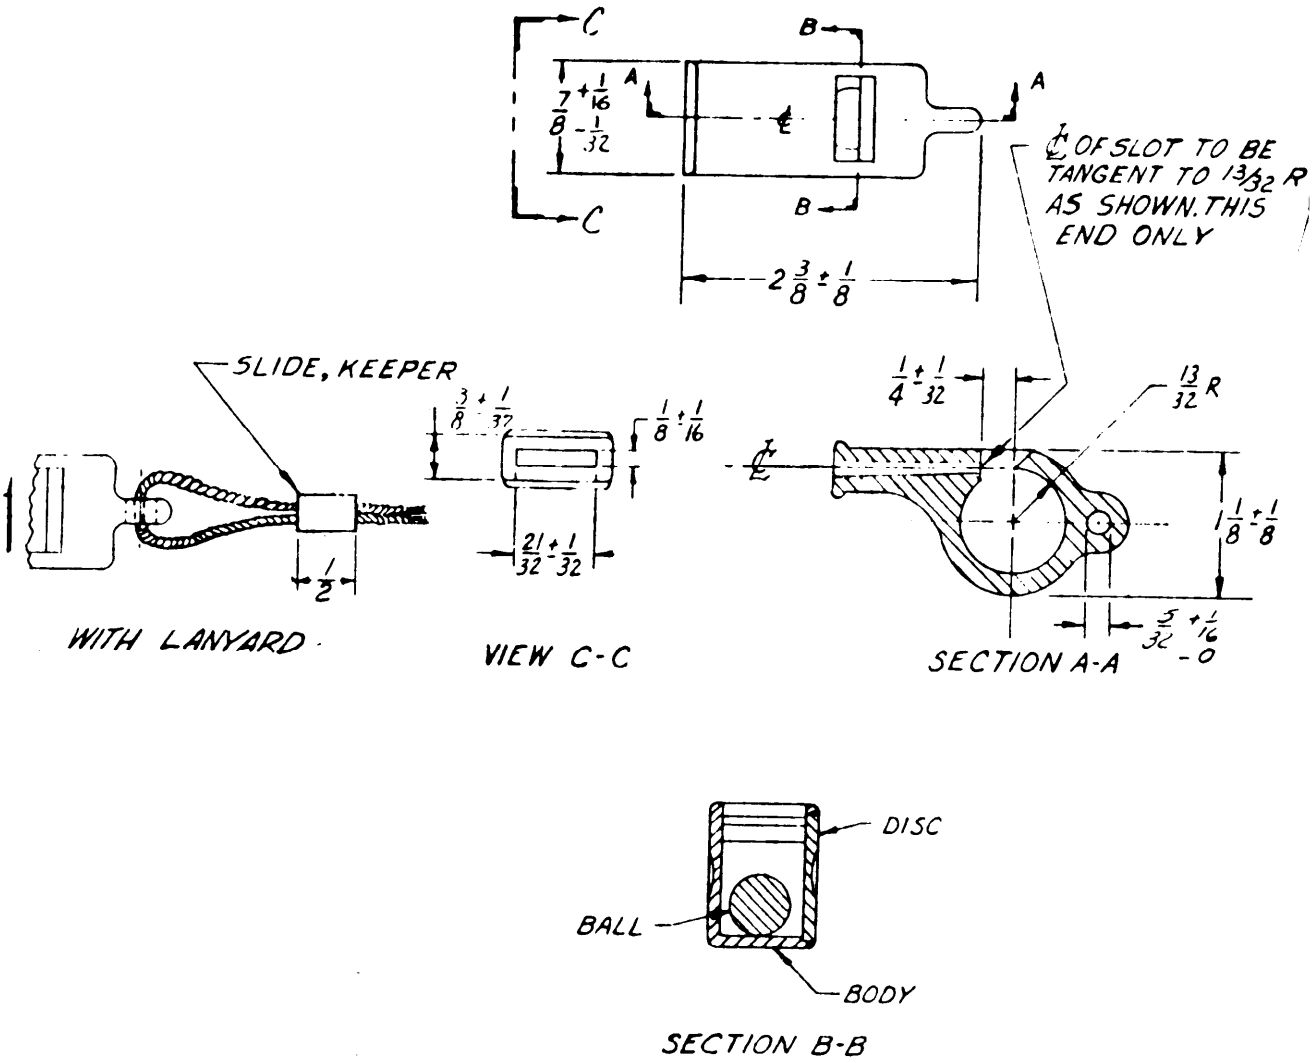

NOTE: THE PROJECTION AT THE LIP MOUTH OPENING SHALL BE A MINIMUM OF 3/64 INCH RADIUS.

Figure 2. Whistle, Ball, Plastic
Solid Construction

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	A-A-55106	92-12-15

3. DOCUMENT TITLE
WHISTLE, BALL, PLASTIC

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)	
Defense Personnel Support Center ATTN: DPSC-FSSD (12-3-D)	(1) Commercial 215-737-8105	(2) AUTOVON 444-8105
c. ADDRESS (Include Zip Code) 2800 South 20th Street P. O. Box 8419 Philadelphia, Pennsylvania 19101-8419	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

DD Form 1426, OCT 89 *Previous editions are obsolete.* 198-29

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.