
MILITARY SPECIFICATION SHEET

METER, TIME TOTALIZING, MINIATURE, DIGITAL, 28 VOLTS DC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the meter described herein shall consist of this document and the issue in effect of specification MIL-M-7793.

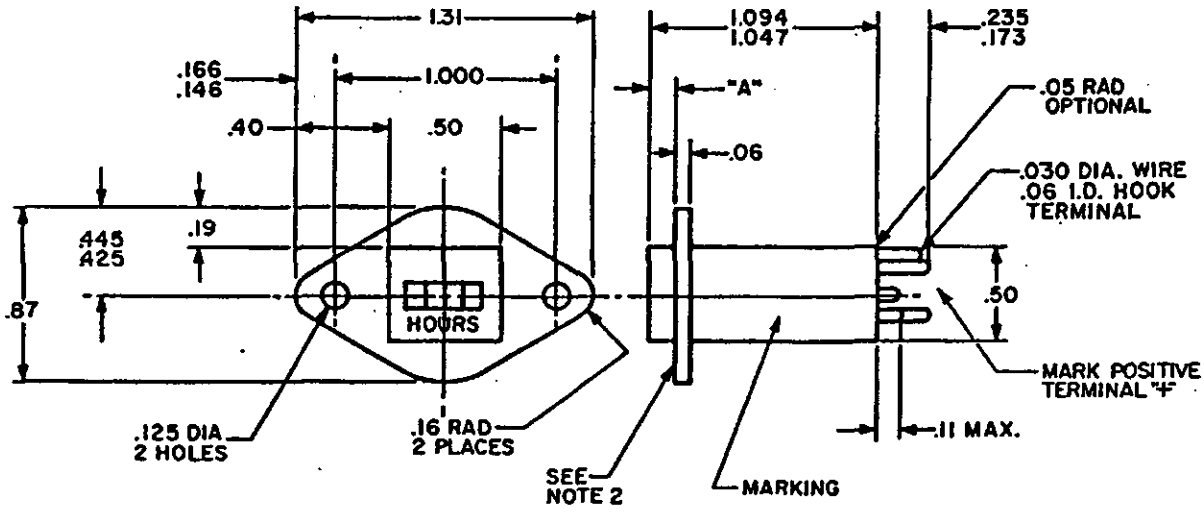

NOTE: For dimension "A" see Table I.

FIGURE 1.

REQUIREMENTS:

1. Dimensions and configuration: see Figure 1 and Table I. All dimensions are in inches. Unless otherwise specified, tolerances are ±.02 for two-place decimals and ±.015 for three-place decimals.

2. Mounting flange: Meters furnished per Figure 1 must be tin plated on front surface of mounting flange in accordance with MIL-T-10727 to provide an electrical ground for the case. Meters may also be furnished with no flange, or with flange split mounting in accordance with MS3345.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:56Z
Check the source to verify that this is the current version before use.

REQUIREMENTS (Continued):

3. Power consumption at nominal voltage shall not exceed 85 milliwatts (average).

4. Input voltage range shall be from 10 volts to 34 volts.

5. Accuracy: ±0.1% over the temperature range of -65° to +125°C and the voltage range from 10 volts to 34 volts.

6. Weight shall not exceed 0.6 ounce with flange.

7. Meter must operate satisfactorily and maintain accuracy of ±0.1% when subjected to the ripple requirements of paragraph 5.2.2, 5.2.2.1 and Figure 7 of MIL-STD-704.

8. No temporary or permanent degradation shall be produced in the meter if the input voltage should increase to the maximum values shown in MIL-STD-704, Figure 17 and Figure 9, Curve 1, (600 volts and 80 volts respectively).

9. Total readout of the meters shall be 9999 hours.

Qualification tests will be conducted per MIL-M-7793, except that voltage, temperature and accuracy shall be as specified herein.

TABLE I.

MILITARY NUMBER	FLANGE DATA DIM A ±.015	MILITARY NUMBER	FLANGE DATA DIM A ±.015
M7793/1-001	Adjustable per MS3345-2	M7793/1-015	.375
		-016	.406
-002	No flange	-017	.438
-003	.000 (Flush)	-018	.469
-004	.031	-019	.500
-005	.062	-020	.531
-006	.094	-021	.562
-007	.125	-022	.594
-008	.156	-023	.625
-009	.188	-024	.656
-010	.218	-025	.688
-011	.250	-026	.719
-012	.281	-027	.750
-013	.312	-028	.781
-014	.344		

Custodians:
Navy-AS
Army-AR
Air Force-99

Preparing Activity
Navy-AS
(Proj. No. 6645-0338)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:56Z
Check the source to verify that this is the current version before use.