INCH-POUND
MIL-DTL-7793/3B
19 October 2012
SUPERSEDING
MIL-M-7793/3A
15 September 1988

DETAIL SPECIFICATION SHEET

METER, TIME TOTALIZING, MINIATURE, DIGITAL, 115 V, 60 Hz, SQUARE

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

Reactivated after 19 October 2012 and may be used for new and existing designs and acquisitions.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-7793.

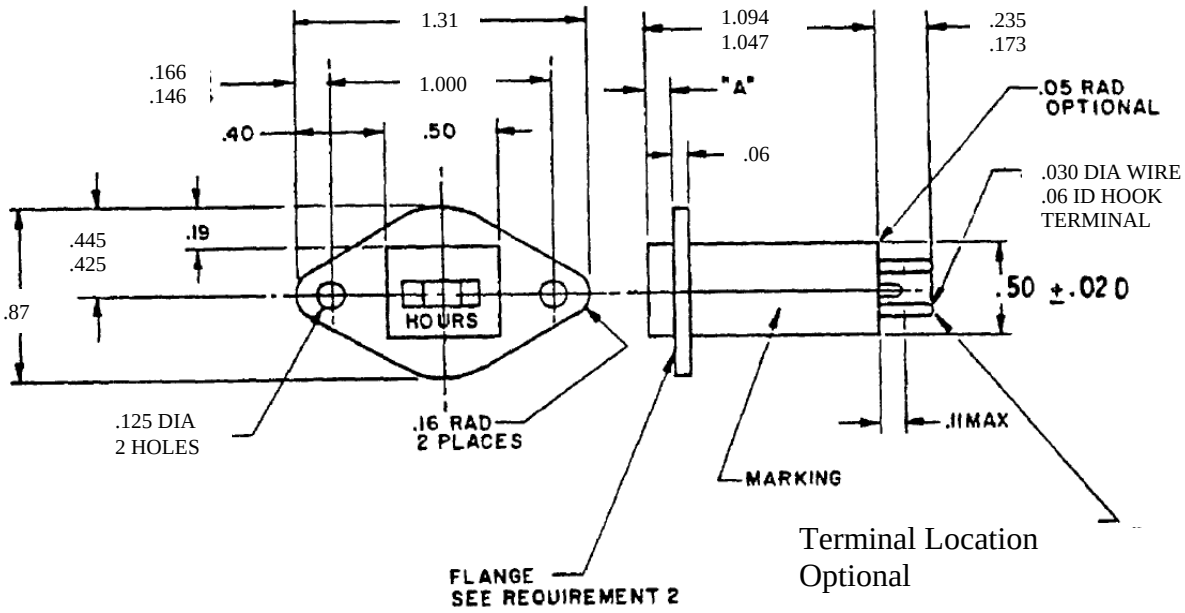

FIGURE 1. Meter configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:57Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Dimensions. Dimensions are in inches. Unless otherwise specified, tolerances are ±.02 for two-place decimals and ±.015 for three-place decimals.

2. Mounting flange. Meters with fixed flanges shall be tin plated on the front surface of the mounting flange in accordance with ASTM-B545 to provide an electrical ground for the case. In accordance with Table I, meters may be furnished with no flange or with adjustable split mount flanges in accordance with MS3345-2.

3. Life accuracy. Meter accuracy shall be ±0.1 percent from -85 to 257° F (-65 to 125° C) and 100 to 130 VAC at 60 Hz.

4. Frequency rating. The meter shall operate satisfactorily and maintain accurately the life accuracy limits as specified above over the frequency range of 50 to 70 Hz (see Note 1).

5. Power consumption. The average power consumption at 115 volts alternating current (VAC), 60 Hz shall not exceed 0.3W.

6. Operating temperature range. The operating temperature range shall be from -85 to 257° F (-65 to 125° C).

7. Time range. Total readout of the meters shall be 9999 hours.

8. Transient protection. No temporary or permanent degradation shall be produced in the meter if the input voltage should increase to 180V rms at 50 to 70 Hz for a period of 150 milliseconds maximum.

9. Voltage range. The operating voltage shall be from 100 to 130 VAC.

10. Weight. Weight shall be not greater than 0.6 ounce with flange

11. Dielectric strength test voltages. The dielectric test voltages shall be 350 V root mean square (rms) at altitude specified in MIL-DTL-7793 and 600 V rms at room ambient temperature (approximately 25º C) and pressure.

12. Qualification tests. Qualification tests shall be conducted in accordance with MIL-DTL-7793, except that the life accuracy, dielectric strength test voltages, operating temperature range, dielectric strength test voltages and life accuracy shall be as specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:57Z
Check the source to verify that this is the current version before use.

NOTE:

1. Accuracy is degraded at the same percent as the percentage change in the input frequency range from 60 Hz, plus the specified accuracy tolerance.

TABLE I. Dimension A of flange on figure 1.

Military Part Number	Flange Data Dim A ±.015	Military Part Number	Flange Data Dim A ±.015
M7793/3-001	Adjustable per MS3345-1	M7793/3-015	.375
M7793/3-002	No Flange	M7793/3-016	.406
M7793/3-003	.000 (Flush)	M7793/3-017	.438
M7793/3-004	.031	M7793/3-018	.469
M7793/3-005	.062	M7793/3-019	.500
M7793/3-006	.094	M7793/3-020	.531
M7793/3-007	.125	M7793/3-021	.562
M7793/3-008	.156	M7793/3-022	.594
M7793/3-009	.188	M7793/3-023	.625
M7793/3-010	.218	M7793/3-024	.656
M7793/3-011	.250	M7793/3-025	.688
M7793/3-012	.281	M7793/3-026	.719
M7793/3-013	.312	M7793/3-027	.750
M7793/3-014	.344	M7793/3-028	.781

13. Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-7793, this specification sheet references MS3345 and ASTM-B545.

Custodians:
Army - AR
Navy - AS
Air Force - 99

Preparing activity:
Navy - AS
(Project 6645-2012-005)

Review activity:
DLA – GS1

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:57Z
Check the source to verify that this is the current version before use.