INCH-POUND
MIL-DTL-7793/5B
19 October 2012
SUPERSEDING
MIL-M-7793/5A
15 September 1988

DETAIL SPECIFICATION SHEET

METER, TIME TOTALIZING, MINIATURE, DIGITAL, 28 VDC

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

Reactivated after 19 October 2012 and may be
used for new and existing designs and acquisitions.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-7793.

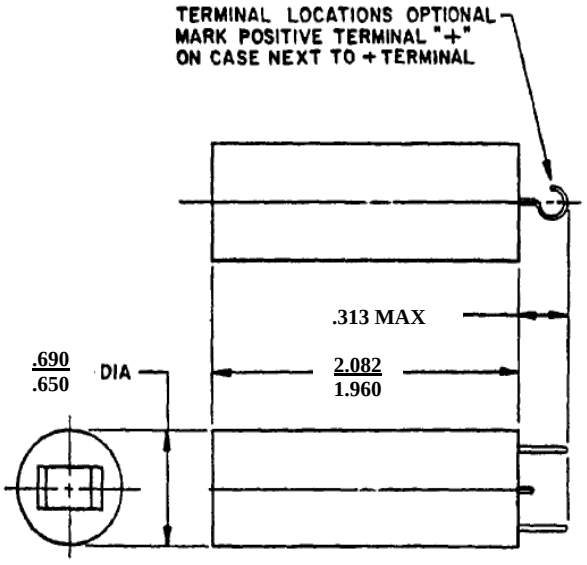


FIGURE 1. M7793/5-001 (without flange).

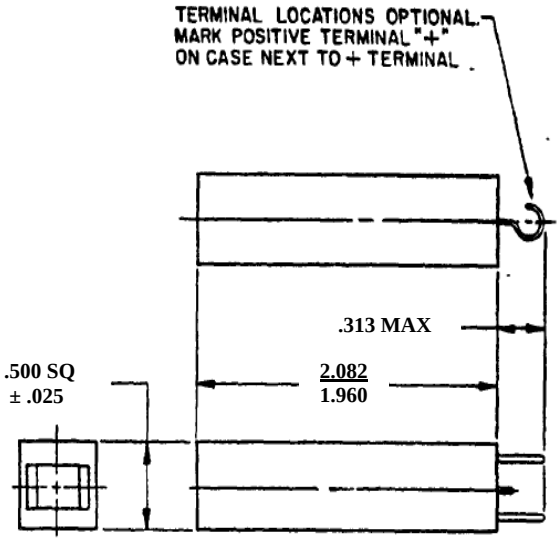


FIGURE 2. M7793/5-002 (without flange).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:57Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Dimensions. All dimensions are in inches. Unless otherwise specified, tolerances shall be ±.015.

2. Part numbers. The part number shall designate a round or a square meter and the associated mounting flange to be supplied packaged together:

Part Number	Meter Shape	Flange
M7793/5-001	Round	MS3345-1
M7793/5-002	Square	MS3345-2

3. Life accuracy. Meter accuracy shall be ±1.0 percent from 10 to 34 VDC -65 to 125° C.

4. Power consumption. The average power consumption at 28 volts direct current (VDC) shall not exceed 1.0 W.

5. Operating temperature range. The operating temperature range shall be from -55º C to +100º C.

6. Time range. Total readout of the meters shall be 9999 hours.

7. Transient protection. No temporary or permanent degradation shall be produced in the meter for the input voltage and time values shown on figure 3 herein (80V transients).

7.1 Transient generation. The meter shall not produce transients that exceed the limits on figure 3 herein (80 V transients).

8. Voltage range. The operating voltage range shall be from 10 to 34 VDC.

9. Weight. The weight of the meter shall not exceed 2.0 ounces with the MS3345 flange attached.

10. Dielectric strength test voltages. The dielectric test voltages shall be 350 V root mean square (rms) at altitude specified in MIL-DTL-7793 and 600 V rms at room ambient temperature (approximately +25º C) and pressure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:57Z
Check the source to verify that this is the current version before use.

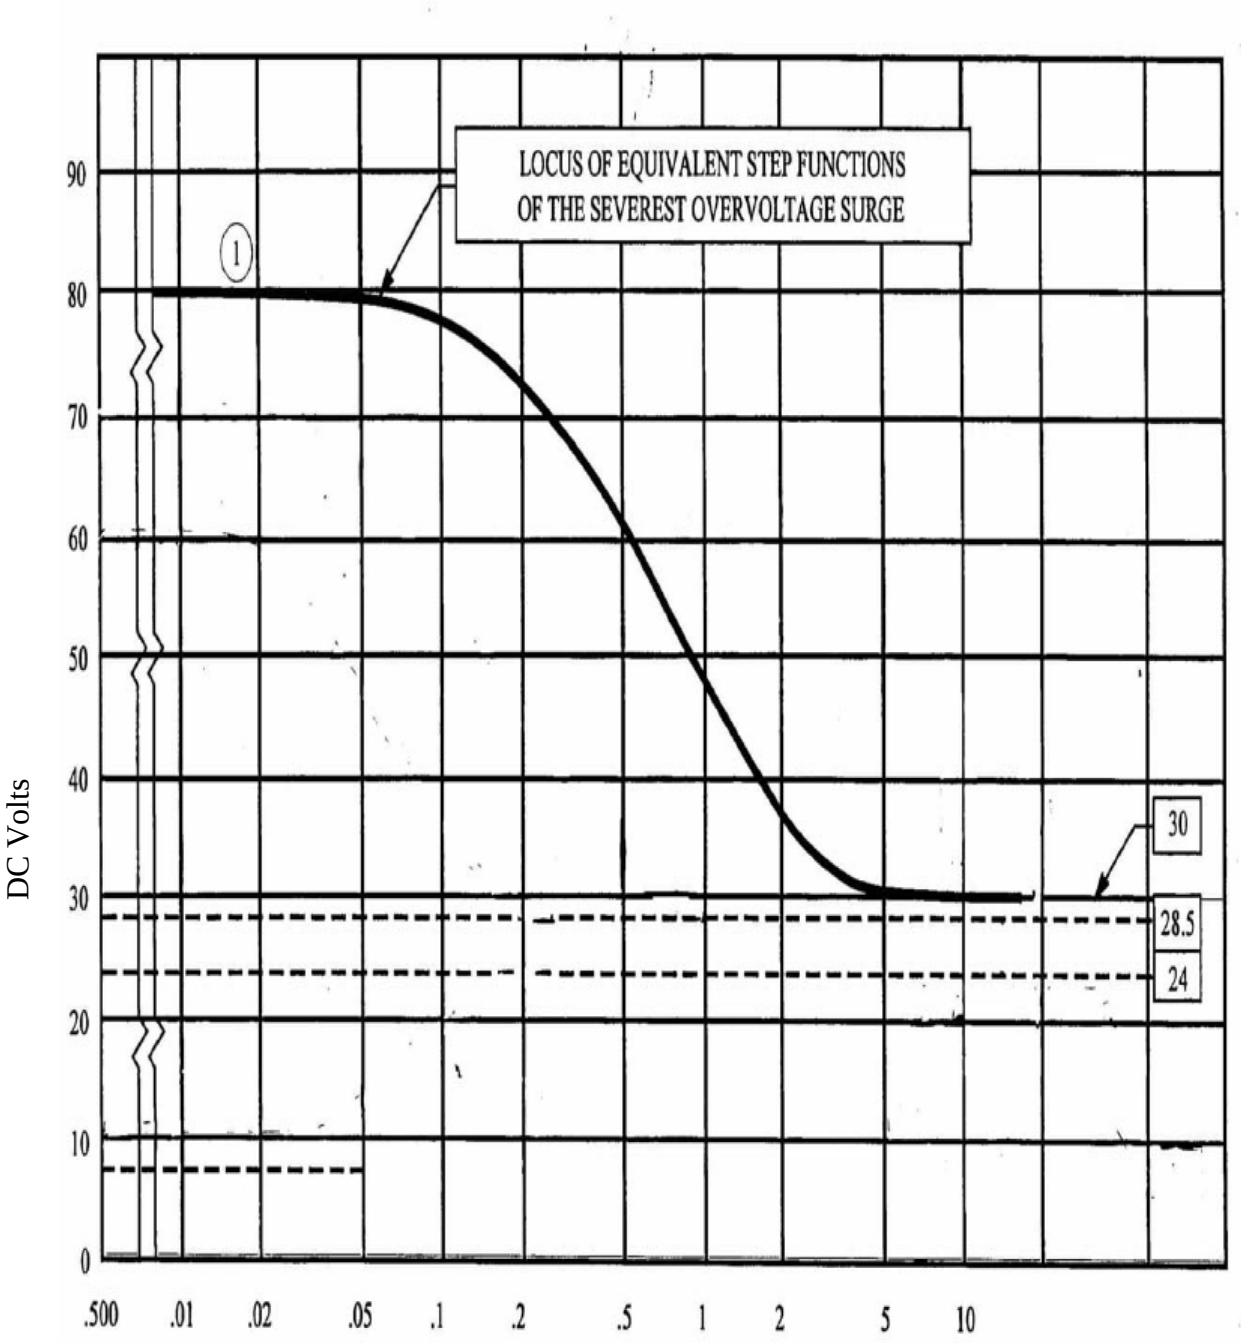


FIGURE 3. Transient surge step function loci limits.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:57Z
Check the source to verify that this is the current version before use.

NOTES:

1. M7793/5-001 supersedes MS17321-9.
2. M7793/5-002 supersedes MS17321-10.

Referenced documents. In addition to MIL-DTL-7793, this specification sheet references MS3345.

11. Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - AR
Navy - AS
Air Force - 99

Preparing activity:
Navy - AS
(Project 6645-2012-007)

Review activity:
DLA - GS1

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:57Z
Check the source to verify that this is the current version before use.