MILITARY SPECIFICATION SHEET


CONNECTORS, PLUGS, ELECTRICAL, COAXIAL, RADIO FREQUENCY, SERIES QSC (CABLED, PIN CONTACT, CLASS 2)

INACTIVE FOR NEW DESIGN AFTER 3 October 1986

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the connectors described herein shall consist of this specification and the latest issue of MIL-C-39012.

MARKING IMPLEMENTATION DATE, CATEGORY B, SEE TABLE III

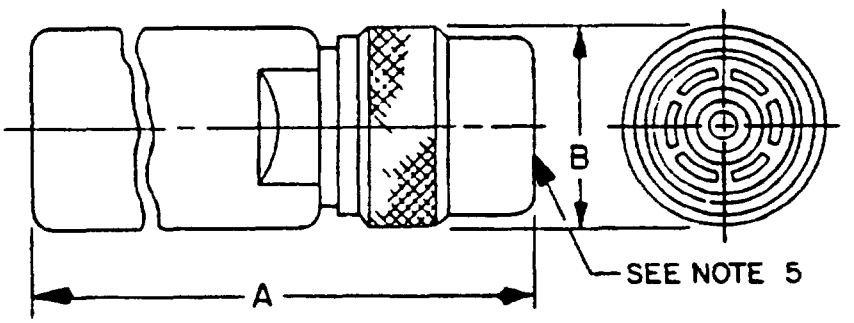

NOTES:
1. Dimension B is the largest overall diameter of the connector.
2. For dimensions A and B see table I and II
3. Wrench flat to accommodate standard wrench per FED-STD-H28, appendix 10.
4. Dimension A defines the overall length of connector when assembled to cable.
5. Series QSC, pin contact interface per MIL-STD-348.

FIGURE 1. General configuration.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:02Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers, usage cross-reference, and basic overall dimensions.

Dash no. 1/ 4/ 5/	Applicable cable no. ≡	Dimensions	Inches-millimeters maximum 2/
CATEGORY A - FIELD SERVICEABLE (NO SPECIAL TOOLS REQUIRED)			
0001	M17/2-RG006∆ M17/112-RG304∂ M17/171-00001ø M17/73-RG212* M17/162-00001ø	A B	1.609 (40.87) .781 (19.84)
0002	M17/74-RG213 M17/163-00001ø M17/75-RG214* M17/164-00001ø M17/77-RG216∆ RG225∂	A B	1.609 (40.87) .781 (19.84)
0003	M17/78-RG217* M17/165-00001ø	A B	1.875 (47.63) .891 (22.63)
0004	M17/72-RG211* M17/161-00001ø	A B	2.250 (57.15) 1.328 (33.73)
0005	M17/79-RG218* M17/166-00001ø	A B	2.250 (57.15) 1.328 (33.73)
CATEGORY C - FIELD REPLACEABLE (MIL-C-22520/5-01 BASIC CRIMP TOOL) 3/			
0013	M17/112-RG304*@≠ M17/171-00001≠ø	A B	2.000 (50.80) .766 (19.46)
0014	M17/73-RG212*≠ M17/162-00001≠ø	A B	2.000 (50.80) .766 (19.46)
0015	M17/74-RG213*∢ M17/153-00001ø∢	A B	2.000 (50.80) .766 (19.46)
0016	M17/75-RG214*∢ M17/164-00001ø∢	A B	2.000 (50.80) .766 (19.46)
0017	RG225*@∢	A B	2.000 (50.80) .766 (19.46)
0018	M17/6-RG011*∆∢	A B	2.000 (50.80) .766 (19.46)
0019	M17/65-RG165*@∢ M17/159-00001ø∢	A B	2.000 (50.80) .766 (19.46)

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:02Z
Check the source to verify that this is the current version before use.

1/ Typical mating connectors for each dash number are those connectors of MIL-C-39012/64 which are of the same category and utilize the same cable.

2/ Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm. Millimeters are in parentheses.

3/ Category C connectors are assembled by means of the applicable crimping tool per MIL-C-22520 to the specified cable stripping in accordance with figure 2.

4/ These connectors shall be furnished with noncaptive center contacts by 1 January 1985.

5/ Inactive for new design. Not for Air Force or Navy use.

≠ The RG cables are specified with the basic number. The latest version of each cable shall be applicable.

* Cable to be used when performing tests requiring cable except as in notes @ and Δ.

@ Cable to be used for the +200°C thermal shock tests.


Δ These are not 50 ohm cables, therefore, when attached to specified connectors, VSWR, RF leakage and insertion loss are not applicable.

≠ M22520/5-35 Closure A or M22520/5-55 Closure A

≤ M22520/5-61

ø Caution is directed to the application of this cable above 400 MHz. Attenuation is tested only at 400 MHz. SRL and power handling capabilities are not stipulated herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:02Z
Check the source to verify that this is the current version before use.

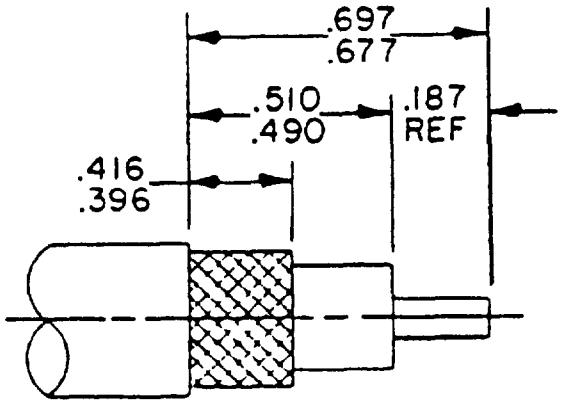

Inches	mm
.187	4.75
.396	10.06
.416	10.57
.490	12.45
.510	12.95
.677	17.20
.697	17.70

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 2. Recommended cable stripping dimensions for category C connectors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:02Z
Check the source to verify that this is the current version before use.

ENGINEERING DATA:

Nominal impedance: 50 ohms.

Frequency range. 0 to 11,000 MHz.

Voltage rating: 1,500 volts rms maximum working voltage at sea level.

Temperature rating: -65°C to +165°C.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Force to engage and disengage:

Longitudinal force - Not applicable.

Torque - 2-1/2 inch-pounds maximum.

Coupling proof torque: 15 inch-pounds minimum.

Inspection conditions. 6 to 10 inch-pounds.

6 to 10 inch-pounds.

Mating characteristics:

See MIL-STD-348.

Outer contact:

Test ring ID - .411 maximum. 16 microinches.

Insertion force: 7 pounds maximum when inserted a minimum of .125.

Contacts with slotted members: Shall contact a .419 minimum diameter ring within .031 of their tip ends.

Hermetic seal· Not applicable.

Leakage (pressurized connectors): Not applicable.

Insulation resistance: Method 302 of MIL-STD-202, test condition B. 5,000 megohms minimum.

Center contact retention - 6 pounds minimum.

Resistance to test prod damage. Not applicable.

Corrosion (salt spray): Method 101 of MIL-STD-202, test condition B.

Voltage standing wave ratio (VSWR)· From 500 to 11,000 MHz, or approximately 80 percent of upper cutoff frequency of the cable, whichever is lower. 1.30 maximum.

Swept frequency VSWR test setup:

Item 6 - VSWR shall be less than 1.015 + .005 F (F in GHz).

Item 16 - VSWR shall be less than 1.015 + .005 F (F in GHz).

Second step of VSWR checkout procedure - VSWR shall be less than 1.045 + .015 F (F in GHz).

Group B inspection - VSWR shall be less than 1.01 +.01 F (F in GHz).

Group C inspection - VSWR shall not exceed 1.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:02Z
Check the source to verify that this is the current version before use.

Connector durability·

Insertion and withdrawal force 500 cycles minimum at 12 cycles/minute maximum. The mating force shall not diminish by more than 10 percent.

Contact resistance: In milliohms maximum.

	Initial	After environment
Center contact:	1.0	1.5
Outer contact:	.20	Not applicable
Braid to body:	.05	Not applicable

Dielectric withstanding voltage: Method 301 of MIL-STD-202. 4,000 volts rms at sea level.

Vibration, high frequency: Method 204 of MIL-STD-202, test condition B.

Shock: Method 213 of MIL-STD-202, test condition G.

Acceleration - 50 G's at 11 ms.

Thermal shock Method 107 of MIL-STD-202, test condition B, except test high temperature shall be +85°C. High temperature shall be +200°C for connectors using +200°C cables (see table I and II).

Moisture resistance. Method 106 of MIL-STD-202. No measurements at high humidity. Insulation resistance shall be at least 200 megohms within 5 minutes after removal from humidity.

Corona level.

Altitude - 70,000 feet.

Voltage - 750 volts minimum.

RF high potential withstanding voltage:

Voltage and frequency - 2,500 volts rms at 5 MHz.

Leakage current - Not applicable.

Cable retention force. 75 pounds minimum.

Coupling mechanism retention force: 100 pounds minimum.

RF leakage -90 dB minimum, tested at a frequency between 2 and 3 GHz.

Insertion loss: 0.15 dB maximum at 10 GHz.

Qualification not required.

Part number: M39012/63 (dash number from table I or "B" number from table II).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:02Z
Check the source to verify that this is the current version before use.

TABLE II. Category B-nonfield replaceable (special tools may be required).

NOT FOR AIR FORCE OR NAVY USE. FOR OEM USE ONLY

M39012/63B 1/ 3/ 4/	Applicable cable no. ≡	Dimensions	Inches-millimeters maximum 2/
0006	M17/112-RG304*@ M17/171-00001ø	A B	2.000 (50.80) .766 (19.46)
0007	M17/73-RG212* M17/162-00001ø	A B	2.000 (50.80) .766 (19.46)
0008	M17/74-RG213* M17/163-00001ø	A B	2.000 (50.80) .766 (19.46)
0009	M17/75-RG214* M17/164-00001ø	A B	2.000 (50.80) .766 (19.46)
0010	RG225*J	A B	2.000 (50.80) .766 (19.46)
0011	M17/6-RG011*Δ	A B	2.000 (50.80) .766 (19.46)
0012	M17/65-RG165*@ M17/159-00001ø	A B	2.000 (50.80) .766 (19.46)

1/ Typical mating connectors for each dash number are those connectors of MIL-C-39012/64 which are of the same category and utilize the same cable.

2/ Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm. Millimeters are in parentheses.

3/ These connectors shall be furnished with noncaptive center contacts.

4/ Inactive for new design.

≡ The RG cables are specified with the basic number. The latest version of each cable shall be applicable.

* Cable to be used when performing tests requiring cable except as in notes @ and Δ.

@ Cable to be used for the +200°C thermal shock tests.

Δ These are not 50 ohm cables, therefore, when attached to specified connectors, VSWR, RF leakage and insertion loss are not applicable.

ø Caution is directed to the application of this cable above 400 MHz. Attenuation is tested only at 400 MHz. SRL and power handling capabilities are not stipulated herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:02Z
Check the source to verify that this is the current version before use.

TABLE III. Cross-reference of part numbers.

Part number 1/ M39012/53B	Superseded part number M39012/63-
0006	0006
0007	0007
0008	0008
0009	0009
0010	0010
0011	0011
0012	0012

1/ The new "B" part numbers will be required marking 6 months after the date of this specification. The previous part number may be used in the interim.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - MI, EA
Navy - SH
Air Force - 11, 17, 80, 99
DLA - ES

User activities:
Army - AT, AV
Navy - AS, MC, OS
Air Force - 19

Preparing activity:
Army - CR

Agent:
DLA - ES

(Project 5935-3518-22)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:02Z
Check the source to verify that this is the current version before use.