Inch-Pound

MIL-A-70833 (AR)
15 April 1990

MILITARY SPECIFICATION

AUTOMATIC TANK TARGET: 11784501

This specification is approved for use within the US Army Armament, Munitions and Chemical Command, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification establishes requirements for the automatic tank target assembly of the Target Holding Mechanism/Tank Gunnery (THM/TG) unit.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

MILITARY

MIL-F-13926	- Fire Control Materiel, General Specification Governing the Manufacture and Inspection of.
MIL-S-45743	- Soldering, Manual Type, High Reliability Electrical and Electronic Equipment.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document, should be addressed to: Commander U.S. Army ARDEC, ATTN: SMCAR-BAC-S, Picatinny Arsenal, New Jersey 07806-5000 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 6920

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

MIL-S-46844	- Soldering Bath Soldering of Printed Wiring Assemblies.
MIL-E-70694	- Electronic Control Unit.
MIL-R-70834	- Receiver, Channel X: 11784801.
MIL-T-70835	- Transmitter, Radio: 11784701.

STANDARDS

MILITARY

MIL-STD-109	- Quality Assurance Terms and Definitions.
MIL-STD-454	- Standard General Requirements for Electronic Equipment.
MIL-STD-810	- Environmental Test Methods and Engineering Guidelines.

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Bldg. 4D, 700 Robbins Avenue, Philadelphia, PA, 19111-5094.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

DRAWINGS (See 6.4)

U.S. ARMY ARMAMENT RESEARCH, DEVELOPMENT AND ENGINEERING CENTER (ARDEC)

11784501	- Automatic Tank Target.

SPECIAL PACKAGING INSTRUCTIONS

P11784501	- Special Packaging Instruction for Automatic Tank Target.

(Copies of drawings, publications and other Government documents required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:30Z
Check the source to verify that this is the currentversion before use.

2.2 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 General description. The automatic tank target assembly consists of an electrical and hydraulic unit which rotates a drive shaft through an angular displacement of 90 degrees that raises and lowers an armored vehicle target. An electronic control unit provides on site front panel controls for on/off mode operations and hit sensitivity selection. The electronic control unit operates the target mechanism on site or remotely through the radio receiver and controls the hit sensor sensitivity, target response to hits, visual hit indicator lamp (VHIL) and gunfire simulator (GUFS). Power is provided by a 12 volt lead acid battery with two power cable connections through the battery box assembly to the automatic tank target assembly.

3.2 Fabrication. The automatic tank target assembly shall be manufactured in accordance with drawing 11784501 and Military Specifications MIL-F-13926 and MIL-STD-454. The electronic control unit shall comply with Military Specification MIL-E-70694. The channel X receiver shall comply with Military Specification MIL-R-70834 and receive radio commands from transmitter per Military Specification MIL-T-70835.

3.2.1 Materials. Materials shall be in accordance with the applicable drawings and specifications.

3.2.2 Components and assemblies. The components and assemblies shall comply with all requirements specified in this specification and on drawing 11784501, and all associated drawings, and with all requirements specified in applicable specifications and standards.

3.3 Functions.

3.3.1 Commands. The automatic tank target assembly shall, through its electronic control unit and radio receiver, execute commands to raise and lower targets and activate the VHIL and GUFS.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:30Z
Check the source to verify that this is the current version before use.

3.3.2 Mechanism control. The mechanism shall be remotely controlled and shall respond as follows:

a. Upon receiving a remote raise or lower command signal the mechanism shall move the target to the position commanded. The mechanism shall not respond in any manner if commanded to a position that it is already in.

b. The mode of operation shall be selectable directly on the electronic control unit by a rotary switch. This rotary switch shall serve as an on/off switch. At position 0 all electrical power shall be removed from the electronic control unit. At position 1, the target shall be raised and lowered by remote command per 3.3.2.c and hits on the target shall have no effect. At position 2, the target shall be raised and lowered by remote command per 3.3.2.c and a hit on the target when raised will lower target and it will stay lowered until another raise remote signal is received. At position 3, the target shall be raised and lowered by remote command per 3.3.2.c and a hit on the target will lower the target, delay 11 $\pm$ 1 seconds, and then automatically raise the target until another hit occurs and causes it to repeat the above operation. At positions 4, 5 and 6 the VHIL will illuminate when the target is hit. Modes 4, 5 and 6 are the same as modes 1, 2 and 3 respectively except for VHIL operation.

c. Remote signal to raise or lower the target shall be a 10.6 to 12.0 volts dc remote pulse equal to or greater than 25 ms in duration. Target shall be raised when signal is applied to plug P1, connector D and target shall be lowered when signal is applied to plug P1, connector F.

d. A hit sensor signal of 12 volts indicating a hit has occurred shall be received through the electronic control unit connectors as follows:

Hit Sensor	Plug	Connector Pin
1	ST-5	A and B
2	ST-6	A and B
3	ST-7	A and B
4	ST-8	A and B

3.3.3 Gunfire simulator control (GUFS). The target device shall operate the gunfire simulator and fire a flash or smoke charge when a 9.3-13.6 Vdc pulse (50 msec duration minimum)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

signal is received on pin I, J or N on the GUFS input connector indicating a target hit has occurred in any rotary switch position from 1 to 6.

3.4 Performance requirements.

3.4.1 Output drive.

3.4.1.1 Position. The automatic tank target assembly during operation shall raise a target in accordance with 3.4.1.3 ninety plus or minus five degrees (90 ± 5 degrees) from the horizontal position to the vertical position.

3.4.1.2 Cycling time. The automatic tank target assembly during operation shall raise a target in accordance with 3.4.1.3 in less than eight seconds and lower a target within eight seconds, maximum.

3.4.1.3 Target size and weight. The automatic tank target assembly shall be capable of raising and lowering a target 8.0 ± 0.1 feet high by 12.0 ± 0.1 feet wide by 1.0 ± 0.1 inches thick and weighing 350 ± 10% pounds maximum.

3.4.2 Hydraulic requirements.

3.4.2.1 Oil tank capacity. The automatic tank target hydraulic assembly shall have an oil tank capacity of 2.3 ± 0.1 pints.

3.4.2.2 Oil pump/motor current. The automatic tank target hydraulic oil pump/motor current draw shall not exceed 150 amp.

3.4.2.3 Oil pump pressure. The automatic tank target hydraulic operational oil pump pressure shall not exceed 2000 psi.

3.4.2.4 Inlet oil pressure. The automatic tank target hydraulic inlet oil pressure shall not exceed 2000 psi.

3.4.3 Battery requirements.

3.4.3.1 Battery voltage. The automatic tank target battery input voltage shall be 10.70-12.75 volts dc and shall not be less than 10.5 volts dc during operation.

3.5 Environmental requirements.

3.5.1 Temperature.

3.5.1.1 Operating. The automatic tank target assembly shall meet the requirements of 3.3 and 3.4 when stabilized thermally at -25 degrees F and +125 degrees F.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

3.5.1.2 Non-operating (storage). The automatic tank target assembly when subjected to at least four hours at each temperature extreme of -40 degrees F and +160 degrees F shall meet the requirements of 3.3 and 3.4 when returned to and thermally stabilized at ambient temperature (+60 degrees F to +90 degrees F).

3.5.2 Vibration. The automatic tank target assembly shall meet the requirements of 3.3 and 3.4 after being subjected to Method 514.4 of MIL-STD-810 for one hour of random vibration.

3.5.3 Shock. The automatic tank target assembly shall meet the requirements of 3.3 and 3.4 after being subjected to mechanical shock during cycling in accordance with Method 516.4 of MIL-STD-810.

3.5.4 Upweight. The automatic tank target assembly shall meet the requirements of 3.3 and 3.4 when weights are used to simulate a continuous 25 MPH horizontal wind directed perpendicular to the target board.

3.5.5 Immersion (non-operating). The automatic tank target assembly case shall show no evidence of internal moisture after being subjected to at least two hours of immersion in water per MIL-STD-810, Method 512.3.

3.6 First article inspection. When specified in the contract or purchase order, a sample shall be subjected to first article inspection in accordance with the technical provisions herein. (See 4.2)

3.7 Workmanship. The workmanship requirements of MIL-STD-454, MIL-F-13926, MIL-S-45743 and MIL-S-46844 shall apply.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:30Z
Check the source to verify that this is the current version before use.

4.1.1 Responsibility for compliance. All items must meet all requirements of section 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 General provisions. The component and subassembly inspection requirements of MIL-F-13926 form a part of the quality assurance provisions of this specification. Definitions of quality assurance terms shall be as listed in MIL-STD-109.

4.2 First article (initial production) submission. The requirement for first article approval and the responsibility (Government or contractor) for the first article testing shall be as specified in the contract. The sample for first article approval tests shall consist of three items manufactured in the same manner, using the same materials, equipment, processes, and procedures as used in regular production. All parts and materials, including packaging and packing, shall be obtained from the same source of supply as used in regular production.

4.2.1 Rejection. If any assembly, component or test specimen fails to comply with any of the applicable requirements, the first article sample shall be rejected. The Government reserves the right to terminate its inspection upon any failure of any assembly, component, or test specimen in the sample to comply with any of the stated requirements. In the event of rejection the Government reserves the right to require the contractor to take corrective action and submit a new first article quantity.

4.2.2 Government testing. When the Government is responsible for conducting first article approval tests, the contractor, prior to submitting the sample to the Government, shall inspect the sample to ensure that it conforms to all the requirements, Table I and II herein and submit a record of this inspection with the sample, including certification of conformance for materials.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:30Z
Check the source to verify that this is the currentversion before use.

4.2.3 Contractor testing. When the contractor is responsible for conducting first article approval tests, the sample shall be inspected by the contractor for all the requirements of the contract. The sample and a record of this inspection, including certification for materials, shall be submitted to the Government for approval. The Government reserves the right to witness the contractor's inspection.

4.3 Inspection provisions.

4.3.1 Components and subassemblies. All components and subassemblies shall be inspected in accordance with the inspection provisions contained in Quality Assurance Provisions listed in the technical data package (TDP). In the absence of a QAP, the applicable quality assurance provision of MIL-STD-454 and MIL-F-13926 shall apply.

4.3.2 Final acceptance inspection. Subsequent to first article approval, examination and tests related to Section 3 herein shall be performed on a single defect (individual characteristic) basis in accordance with the sampling plans specified in Table I herein. Examinations and tests for packaging and marking shall be in accordance with Section 5 herein. The tabulated classification of defects in Table I shall constitute the minimum inspection to be performed by the supplier after first article approval and prior to Government acceptance or rejection by item or lot.

4.3.3 Acceptance and rejection. Rejected lots shall be screened for all defective characteristics. Removal or correction of defective units and resubmittal of rejected lots shall be in accor'ance with the contract.

4.3.3.1 Special sampling. One target holding mechanism assembly shall be selected at random by a Government representative as a control sample from each 50 produced or from each month's production, whichever occurs first. The control sample shall meet the requirements and tests in Table II.

4.3.3.2 Failure of sample. If any item of the special sample fails to meet the specified test requirements, acceptance of the product shall be suspended by Government until necessary corrections have been made by the contractor and a resubmitted sample has been approved (see 4.3.3).

4.4 Inspection equipment. Except as otherwise provided for by the contract, the contractor shall supply and maintain inspection equipment in accordance with the applicable requirements of the contractor. Prior to acceptance, inspection equipment designs shall be submitted and approved by the Government. (See 6.3)

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:30Z
Check the source to verify that this is the currentversion before use.

4.4.1 Government furnished inspection equipment. Where the contract provides for Government furnished test equipment, supply and maintenance of test equipment shall be in accordance with the applicable requirements of the contract.

4.4.2 Contractor furnished inspection equipment.

4.4.2.1 Government design. Unless otherwise specified in the contract, all inspection equipment specified by drawing number in specifications or QAP forming a part of the contract shall be supplied by the contractor in accordance with applicable technical data listed in the TDP.

4.4.2.2 Contractor design. The contractor shall design and supply inspection equipment compatible with the "Methods of Inspection" specified in 4.5 of this specification and with the component inspection procedures specified in "Examination" and "Test Facilities" requirements of MIL-F-13926. Since tolerance of test equipment is normally considered to be within 10 percent of the product tolerance for which it is intended, this inherent error in the test equipment design must be considered as part of the prescribed product tolerance limit. Thus, concept, construction, materials, dimensions, and tolerances used in the design of test equipment will reliably indicate acceptability of a product which does not exceed 90 percent of the prescribed tolerance limit and permit positive rejection when nonconforming. Construction shall be such as to facilitate routine calibration of test equipment.

TABLE I. Classification of defects.
(100 percent inspection)

CHARACTERISTIC	REQUIREMENT	TEST PROCEDURES
CRITICAL:	None	
MAJOR:		
101 Function	3.3	4.6
102 Performance	3.4	4.5.4
103 Workmanship	3.7	Visual
MINOR:	None	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

TABLE II. Special sampling

CONTROL TEST	REQUIREMENT	TEST PROCEDURES
201 Automatic tank target assembly	3.4	4.5.4.1
202 Remote control operation	3.3.2	4.6.3
203 Bad hit sensors	3.3.2	4.6.3.5 thru 4.6.3.18
204 Vibration (non-operating)	3.5.2	4.5.3.3
205 Temperature (operating)	3.5.1.1	4.5.2, 4.5.2.2
206 Shock	3.5.3	4.5.3.4
207 Upweighted test	3.5.4	4.5.3.5
208 Immersion test	3.5.6	4.5.3.6

4.5 Methods of inspection.

4.5.1 Environment. Environment tests shall be conducted in accordance with the general requirements and test methods of MIL-STD-810 unless otherwise specified herein. Testing equipment used in environmental tests shall be in accordance with "Test Facilities and Apparatus" requirements of MIL-STD-810.

4.5.2 Operating.

4.5.2.1 Low temperature. Test shall be performed as specified in MIL-STD-810, Method 502.3, Procedure II after temperature stabilization for eight hours at -25 degrees F. The assembly shall be operationally checked as specified in 4.5.4 and 4.6.3 to determine compliance with 3.3 and 3.4.

4.5.2.2 High temperature. Test shall be performed as specified in MIL-STD-810, Method 501.3, Procedure II after temperature stabilization for eight hours at +125 degrees F. The assembly shall be operationally checked as specified in 4.5.4 and 4.6.3 to determine compliance with 3.3 and 3.4.

4.5.3 Non-operating.

4.5.3.1 Low temperature. Test shall be performed as specified in MIL-STD-810, Method 502.3, Procedure I, Storage. After temperature stabilization for four hours at -40 degrees F, the temperature shall be maintained for four additional hours. The temperature shall subsequently be returned to ambient and stabilized for four hours. Then the assembly shall be operationally checked as specified in 4.5.4 and 4.6.3 to determine compliance with 3.3 and 3.4.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:30Z
Check the source to verify that this is the currentversion before use.

4.5.3.2 High temperature. Test shall be performed as specified in MIL-STD-810, Method 501.3, Procedure I, Storage. After temperature stabilization for four hours at +160 degrees F, the temperature shall be maintained for four (4) additional hours. The temperature shall subsequently be returned to ambient and stabilized for four hours. Then the assembly shall be operationally checked as specified in 4.5.4 and 4.6.3 to determine compliance with 3.3 and 3.4.

4.5.3.3 Vibration. Test shall be performed as specified in MIL-STD-810, Method 514.4, Procedure I, Storage using figure 514.4-1 test for one hour along the vertical axis. After vibration, the assembly shall be operationally checked as specified in 4.5.4 and 4.6.3 to determine compliance with 3.3 and 3.4.

4.5.3.4 Shock. Test shall be performed as specified in MIL-STD-810, Method 516.4 Procedure IV, Table 516.4-II. After the shock impulses, the assembly shall be operationally checked as specified in 4.5.4 and 4.6.3 to determine compliance with 3.3 and 3.4.

4.5.3.5 Upweight. Test shall be performed with weights used to simulate a continuous 25 MPH horizontal wind force directed perpendicular to the target board. The target holding mechanism assembly shall then be operationally checked as specified in 4.5.4 and 4.6.3 to determine compliance with 3.3 and 3.4. Stabilizer bars are to be out to prevent the target from tipping.

4.5.3.6 Immersion test. Test shall be performed on the automatic tank target case as specified in MIL-STD-810, Method 512.3. The case, and battery box (with battery box pressure relief valve replaced with a sealed plug), shall be immersed in water and subjected to a positive pressure equivalent to a three foot head of water for a two hour $\pm$ five minute duration. After completion of the test, the target shall meet the requirements of 3.5.5.

4.5.4 Performance tests.

4.5.4.1 Target size and weight. The automatic tank target assembly shall be interfaced with the appropriate simulations as in 4.6.

4.5.4.2 Output drive and hydraulic tests. System shall perform as specified in the procedures below utilizing target per 3.4.1.3 to verify the following requirements. Should unit fail to pass any of the following requirements, that unit shall be rejected.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:30Z
Check the source to verify that this is the currentversion before use.

4.5.4.2.1 Position. Measure 90 degree angle using standard measuring equipment to determine compliance with requirement 3.4.1.1.

4.5.4.2.2 Cycling time. Measure raising time using standard measuring equipment to determine compliance with requirement 3.4.1.2.

4.5.4.2.3 Cycling time. Measure lowering time using standard measuring equipment to determine compliance with requirement 3.4.1.2.

4.5.4.2.4 Oil tank capacity. Measure tank capacity using standard measuring equipment to determine compliance with requirement 3.4.2.1.

4.5.4.2.5 Oil pump/motor current. Measure oil pump/motor current using standard measuring equipment to determine compliance with requirement 3.4.2.2.

4.5.4.2.6 Oil pump pressure. Measure oil pump pressure using standard measuring equipment to determine compliance with requirement 3.4.2.3.

4.5.4.2.7 Inlet oil pressure. Measure inlet oil pressure using standard measuring equipment to determine compliance with requirement 3.4.2.4.

4.5.4.2.8 Battery voltage. Measure battery voltage using standard measuring equipment to determine compliance with requirement 3.4.3.1.

4.6 Function control test procedure.

4.6.1 Equipment. To be designed in accordance with 4.4 and to comply with 3.3, 4.6.3. and Figure 1.

a. Visual Hit Indicator Lamp Simulator (VHILS)
b. Target Load Simulator (TLS)
c. Power Cycle (PC)
d. Target Arm Simulator (TAS)
e. GUFS Simulator (GS)
f. Smoke Scorer Simulator (SSS)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

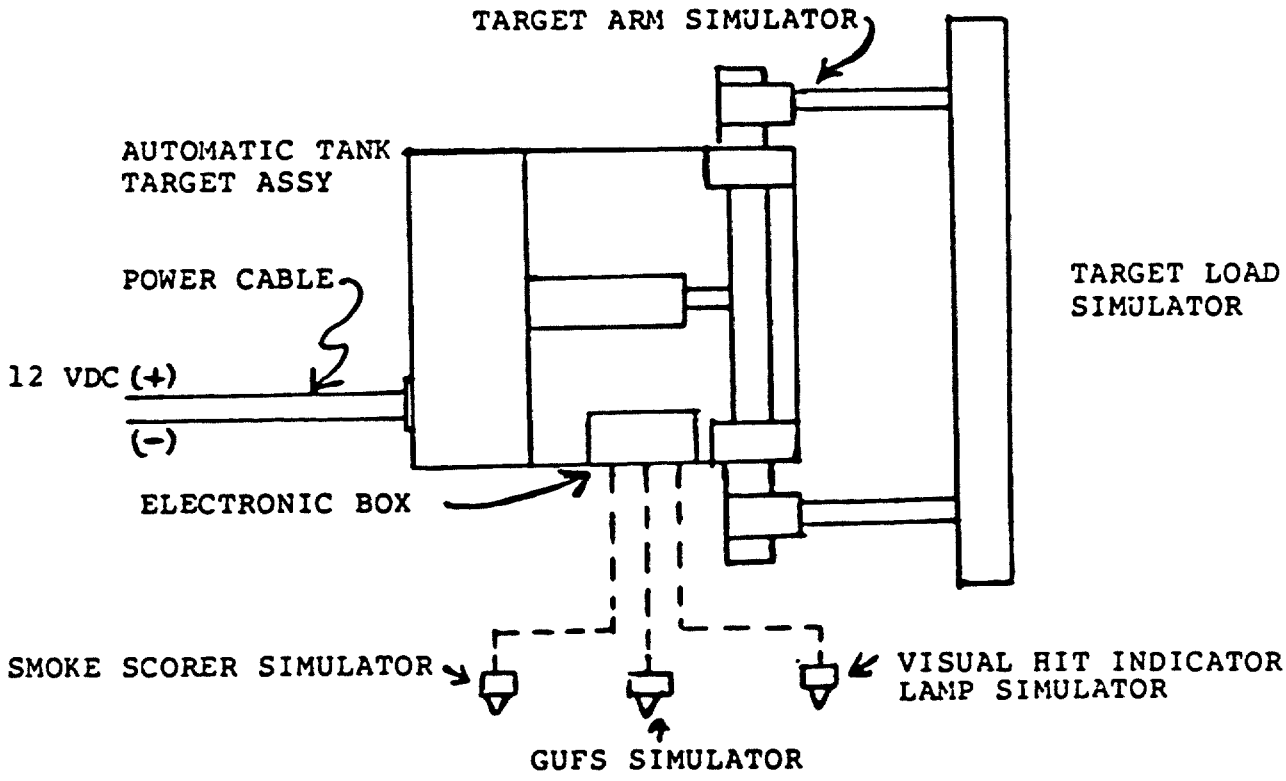


Figure 1. THM/TG overall assembly.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:30Z
Check the source to verify that this is the currentversion before use.

4.6.2 Simulated test set up. Test set up to simulate the following functions in 4.6.3.

4.6.3 Procedure.

4.6.3.1 Power supply. The BLACK and RED power cables should plug into the 12V dc lead acid battery supply.

4.6.3.2 Position zero. Electronic box function switch should be on the "0" (zero) position.

4.6.3.3 Position one. Put the electronic box function switch on position one.

a. Operate the electronic box test switch momentarily to the up position. Observe that the target simulator raises to the up position and stops within ± 5 degrees of the vertical up position (90 degrees).

b. Tap each of the four hit sensors. Observe that the smoke scorer simulator lamp lights momentarily for each tap. The target simulator should remain in the up position.

c. Operate the electronic box test switch momentarily to the down position. Observe that the target simulator lowers to the down position.

d. Operate the radio transmitter and observe that the target simulator raises and lowers per 3.3.2.c.

4.6.3.4 Position two. Put the electronic box function switch on #2 position.

a. Operate the electronic box test switch momentarily to the up position. Observe that the target simulator raises to the up position and stops within ± 5 degrees of the up position (90 degrees).

b. Tap one of the four hit sensors. Observe that the smoke scorer simulator lamp lights momentarily. The target simulator should lower to the down position.

c. Operate the radio transmitter and observe that the target simulator raises and lowers per 3.3.2.c.

4.6.3.5 Position three. Put the electronic box function switch on #3 position.

a. Operate the electronic box test switch momentarily to the up position. Observe that the target simulator raises to the up position and stops within ± 5 degrees of the up position (90 degrees).

Source: https://assist.dla.mil -- Downloaded: 20260410-26T04:30Z
Check the source to verify that this is the current version before use.

b. Tap one of the four hit sensors. Observe that the smoke scorer simulator lights momentarily. The target simulator should lower to the down position, delay 10 to 12 seconds, then raise to the up position.

c. Operate the electronic box test switch momentarily to the down position. Observe that the target simulator lowers to the down position.

d. Operate the radio transmitter and observe that the target simulator raises and lowers per 3.3.2.c.

4.6.3.6 Position four. Put the electronic box function switch on position #4.

a. Operate the electronic box test switch momentarily to the up position. Observe that the target simulator raises to the up position and stops within ± 5 degrees of the up position (90 degrees).

b. Tap each of the four hit sensors. Observe that the smoke scorer simulator lamp lights momentarily for each tap. The visual hit indicator lamp simulator lights momentarily. The target simulators should remain in the up position.

c. Operate the electronic box test switch momentarily to the down position. Observe that the target simulator lowers to the down position.

d. Operate the radio transmitter and observe that the target simulator raises and lowers per 3.3.2.c.

4.6.3.7 Position five. Put the electronic box function switch on position #5.

a. Operate the electronic box test switch momentarily to the up position. Observe that the target simulator raises to the up position and stops within ± 5 degrees of the up position (90 degrees).

b. Tap one of the four hit sensors. Observe that the smoke scorer simulator lamp and visual hit indicator simulator lamp light momentarily. The target simulator should lower to the down position.

c. Operate the radio transmitter and observe that the target simulator raises and lowers per 3.3.2.c.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:30Z
Check the source to verify that this is the current version before use.

4.6.3.8 Position six. Put the electronic box function switch on position #6.

a. Operate the electronic box test switch momentarily to the up position. Observe that the target simulator raises to the up position and stops within ± 5 degrees of the up position (90 degrees).

b. Tap one of the four hit sensors. Observe that the smoke scorer simulator lamp and visual hit indacator simulator lamp light momentarily. The target simulator should lower to the down position, delay 10 to 12 seconds, then raise to the up position.

c. Operate the electronic box test switch momentarily to the down position. Observe that the target simulator lowers to the down position.

d. Operate the radio transmitter and observe that the target simulator raises and lowers per 3.3.2.c.

5. PACKAGING

5.1 General. Preservation, packaging, packing and marking shall be in accordance with special packaging instruction P11784501.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. This specification details the specific requirements for design, performance, quality assurance, and testing for the automatic tank target assembly. The tank target assembly will be used as part of the Tank Holding Mechanism/Tank Gunnery (THM/TG) and will support live fire armor weapons training and qualification programs. These systems will provide training in identifying and firing on simulated stationary armored vehicles during training exercises.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:30Z
Check the source to verify that this is the currentversion before use.

6.2 Acquisition requirements. Procurement documents should specify the following:

6.2.1 Procurement requirements.

a. Title, number and date of this specification.

b. Quantity required and delivery schedules.

c. Place of inspection if not at place of manufacture.

d. Instructions for shipment of production lot samples.

e. Provision for preparation for delivery if required for indefinite storage of inter-plant shipment.

f. Provision for the supply, maintenance, and disposition of test equipment for acceptance inspection process.

g. Procuring activity designation assembly number(s) and nomenclature(s).

h. Serialization requirements, if applicable.

i. Packaging requirements, if other than specified in Section 5.

j. Certificates of conformance for each lot or shipment of product.

6.3 Submission of contractor inspection equipment designs for approval. Submit two copies of design as required to: Commander, U.S. Army ARDEC, ATTN: AMSMC-QAF-I (D), Picatinny Arsenal, NJ 07806-5000. This address will be specified in the Contract Data Requirements List, DD Form 1423 in the contract. Unless otherwise specified, data item DI-R-1714 will apply.

6.4 Drawings. Drawings listed in Section 2 of this specification under the heading US Army Armament Research, Development and Engineering Center (ARDEC) may also include drawings prepared by and identified as US Army Armament Research and Development Command (ARRADCOM), Edgewood Arsenal, Frankford Arsenal, Rock Island Arsenal, or Picatinny Arsenal drawings. Technical data originally prepared by these activities is now under the cognizance of ARDEC.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:30Z
Check the source to verify that this is the current version before use.

6.5 Definitions.

6.5.1 Trainers. Training device terms are defined in MIL-HDBK-220. Other definitions, if required, will be furnished upon written request to the Procuring Contracting Officer.

6.5.2 Contractor. Unless otherwise specified, the word Contractor used throughout this specification shall mean any supplier or producer of items or material to the Government. This shall include commercial contractors, sub-contractors, Government Owned-Contractor Operated (GOCO), and Government Owned-Goverment Operated (GOGO) plants.

6.5.3 Technical data package. A technical description of an item adequate for use in procurement. The description defines the required design configuration and assures adequacy of item performance. It consists of all applicable technical data such as plans, drawings, and associated lists, specifications, standards, models, performance requirements, quality assurance provisions and packaging data.

6.6 Subject term (keyword) listing.

a. Target Holding Mechanism/Tank Gunnery (THM/TG).
b. Gunfire Simulator (GUFS).
c. Visual Hit Indicator Lamp (VHIL).

Custodian:
Army-AR

Preparing activity:
Army-AR

(Project 6920-A015)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-A-70833 (AR)	15 April 1990

3. DOCUMENT TITLE

AUTOMATIC TANK TARGET: 11784501

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)	
US Army ARDEC Standardization & Specification Office	(1) Commercial (201) 724-6674	(2) AUTOVON 880-6674
c. ADDRESS (Include Zip Code) ATTN: SMCAR-BAC-S/Bldg 6 Picatinny Arsenal, NJ 07806-5000	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil - Downloaded: 2026Ø10-26T04:30Z
Check the source to verify that this is the current version before use.