INCH-POUND

MIL-B-71003 (AR)
10 JUNE 1991

MILITARY SPECIFICATION

Battery Eliminator Assy: 12934455

This specification is approved for use within the U.S. Army Armament, Munitions and Chemical Command, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification establishes requirements for the Battery Eliminator Assembly of the Target Holding Mechanism/Tank Gunnery (THM/TG) unit used as a part of the Remote Target System (RETS).

2. APPLICABLE DOCUMENTS

2.1 Government documents

2.1.1 Specifications, standards and handbooks. The following specifications, standards and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standaards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

MILITARY

MIL-F-13926	-	Fire Control Material, General Specification Governing the Manufacture and Inspection of
MIL-T-70700	-	Target Holding Mechanism Assembly: 9375764

STANDARDS

FEDERAL

FED-STD-101	-	Federal Test Methods Standards

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, U.S. Army ARDEC, ATTN: SMCAR-BAC-S, Picatinny Arsenal, New Jersey 07806-5000 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A

FSC 6130

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:31Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-STD-109 - Quality Assurance Terms and Definitions

MIL-STD-454 - Standard General Requirements for Electronic Equipment

MIL-STD-781 - Reliability Design Qualification and Production Acceptance Tests

MIL-STD-810 - Environmental Test Methods and Engineering Guidelines

MIL-STD-2000 - Standard Requirements for Soldering Electrical and Electronic Assemblies

MILITARY

HANDBOOKS

MIL-HDBK-220 - Glossary of Training Device Terms

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Bldg. 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

DRAWINGS (SEE 6.4)

US ARMY, ARMAMENT RESEARCH, DEVELOPMENT AND ENGINEERING CENTER (ARDEC)

12934455 - Battery Eliminator Assembly

SPECIAL PACKAGING INSTRUCTIONS

PS12934455 - Special Packaging Instructions for Battery Eliminator Assembly

PS12934465 - Special Packaging Instructions for Transformer Assembly, Battery Eliminator

(Copies of drawings, publications, and other Government documents required by the contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:31Z
Check the source to verify that this is the current version before use.

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein the text of this specification, shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 General description. The Battery Eliminator set includes a Battery Eliminator Assembly and three cable assemblies. Electrical connections are made via connectors (5) mounted on two sides of the enclosure. Connections are made through 5 cable assemblies used to interface the Battery Eliminator Assembly to facility 220/240 VAC power, the THM/TG plus and minus 12 VDC inputs, and the THM/TG ECU control and power inputs. When integrated at a RETS range site the Battery Eliminator set will provide a THM/TG target assembly with a power source (see Figure 1), that in previous installations was provided by a 12-VDC lead acid battery.

3.1.1 Fabrication. The Battery Eliminator Assembly shall be manufactured in accordance with Drawing 12934455 and Military Specifications MIL-F-13926 and MIL-STD-454.

3.1.2 Materials. Materials shall be in accordance with the applicable drawings and specifications.

3.1.3 Components and Assemblies. The components and assemblies shall comply with all requirements specified in this drawings and on Drawing 12934455, and all associated drawings, and with all requirements specified in applicable specifications and standards.

3.2 Functions.

3.2.1 Output Voltages. The Battery Eliminator Assembly converts facility input power to two independent DC output power sources, as shown below.

a.	12 VDC unregulated	200 AMP NOMINAL
b.	12 VDC regulated	0.5 AMP NOMINAL

3.3 Performance requirements. The Battery Eliminator Assembly shall be capable of operating from a single phase input power source providing 198 to 264 VAC, 50 or 60 Hz. The DC output voltages shall be as follows:

3.3.1 Regulated 12 VDC. At 198 to 264 VAC, 50 or 60 Hz input with a load of 24 ±1.0 ohms connected between the output voltage terminals of J1 Pin B(+) and J1 Pin A(-) the output voltage shall be 10.55 ±0.5 VDC with a maximum AC component of 250 mVpp.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:31Z
Check the source to verify that this is the current version before use.

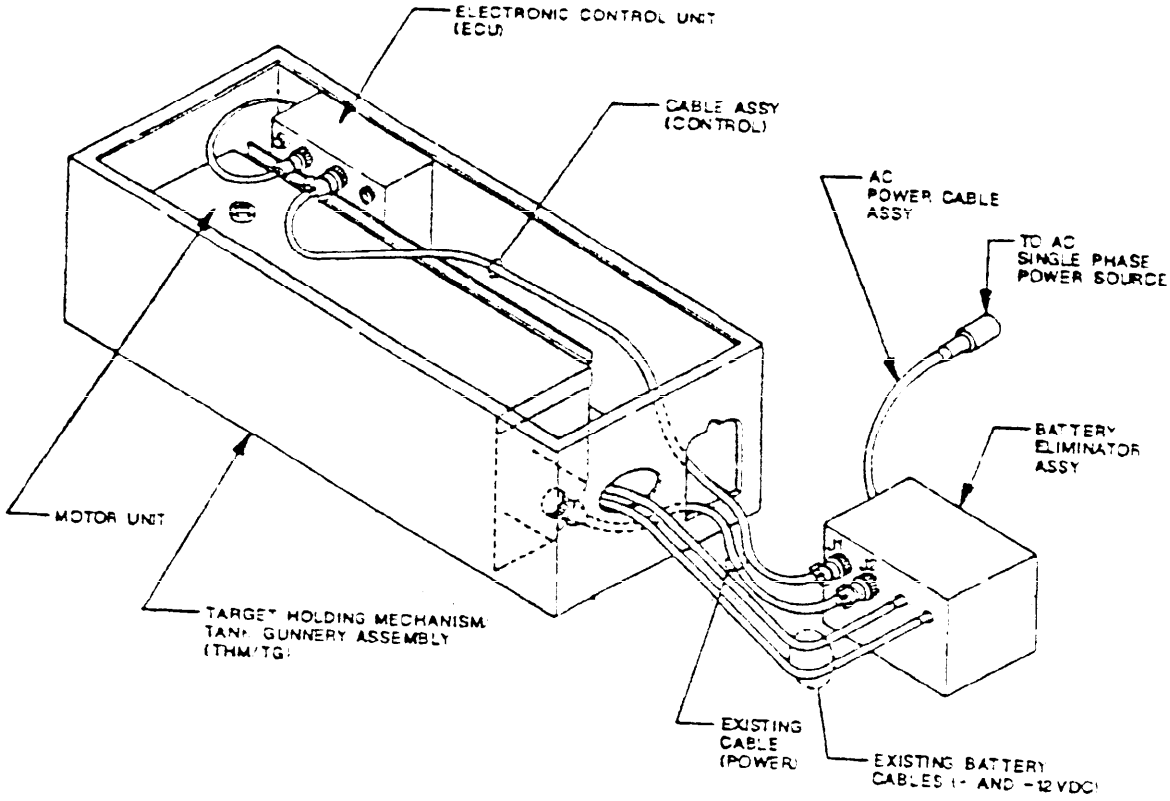


FIGURE 1. Battery Eliminator Assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:31Z
Check the source to verify that this is the current version before use.

tions may be accepted on the contract or purchase order provided all visible

3.3.2 Unregulated 12 VDC. At 240 VAC, 60 Hz input and a 60 ±5 milliohms load connected between P2 (- BLK) and P1 (+ RED) the output voltage shall not be less than 7.5 VDC nor greater than 11.5 VDC. For input voltages different than 240 VAC, the output voltage shall be proportionately greater or less than the stated values over the 198 to 264 VAC range.

Table I. Battery Eliminator Assembly Pin Functions.

	CONN	PIN	FUNCTION
TO THM/TG	P1	RED	+12VDC (unregulated)
	P2	BLACK	12VDC RETURN (unregulated)
TO ECU OF THM/TG	J1	A	Return (Regulated)
		B	+12VDC (Regulated)
		C	+12VDC (Regulated)
		D	Return (Regulated)
		E	Motor Relay Coil
		F	Down Solenoid
		G	Up Solenoid
TO MOTOR UNIT OF THM/TG	J2	A	Return
		B	UNUSED
		C	UNUSED
		D	Return
		E	Motor Relay Coil
		F	Down Solenoid
		G	Up Solenoid
TO GFE POWER	J3	A	230 VAC
		B	230 VAC
		C	GND
		D	UNUSED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:31Z
Check the source to verify that this is the current version before use.

3.4 Environmental and reliability requirements.

3.4.1 Temperature.

3.4.1.1 Operating. The Battery Eliminator Assembly shall meet the requirements of 3.3 when stabilized thermally at -25 deg. F and +110 deg. F.

3.4.1.2 Non-Operating (Storage). The Battery Eliminator Assembly shall meet the requirements of 3.3 after being subjected to at least two (2) hours at each temperature extreme of -28 deg. F and +145 deg. F.

3.4.2 Vibration (Non-Operating). The Battery Eliminator Assembly shall meet the requirements of 3.3 after being subjected to the vibration test in accordance with 4.7.2.9.

3.4.3 Electrostatic Discharge (Non-Operating). The Battery Eliminator Assembly shall meet the requirements of 3.3 after being subjected to electrostatic discharges to connectors, switches, and frame. Electrostatic discharge test in accordance with 4.7.2.6.

3.4.4 Packaging Test (Non-Operating). The Battery Eliminator Assembly shall meet the requirements of 3.3 and shall not sustain damage after being subjected to a packaged item drop test in accordance with 4.7.2.10.

3.4.5 Reliability (Operating). The Battery Eliminator Assembly when operated at the specified loads in accordance with 3.3 shall exhibit a specified Mean Cycle Between Failure (MCBF) of 1500 cycles, with a minimum acceptable MCBF of 750 cycles. The Battery Eliminator Assembly shall be tested in accordance with Test Plan VIIIC of MIL-STD-781. A cycle shall be defined as raising and lowering a THM/TG target. The target may consist of any of the following:

a. A plywood form 8 feet by 12 feet by 1 inch thick weighing 350 ±10 pounds
b. An equivalent target simulating the physical weight load
c. Use of electrical loads as specified with paragraphs 4.7.1.1 and 4.7.1.2

3.4.6 Low Pressure. The low pressure test shall be performed in accordance with paragraph 4.7.2.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:31Z
Check the source to verify that this is the current version before use.

3.4.6.1 Operating. The Battery Eliminator Assembly shall meet the requirements of 3.3 when subjected to a pressure of 16.9 in. Hg (15,000 feet altitude).

3.4.6.2 Non-Operating. The Battery Eliminator Assembly shall meet the requirements of 3.3 after being subjected to a pressure for one hour of 5.5 in. Hg (40,000 feet altitude) when returned to ambient conditions.

3.4.7 Solar Radiation (Operating). The Battery Eliminator Assembly shall meet the requirements of 3.3 when subjected to the solar radiation test in accordance with 4.7.2.3.

3.4.8 Salt Fog (Non-Operating). The Battery Eliminator Assembly shall meet the requirements of 3.3 after being subjected to the salt fog test in accordance with 4.7.2.7.

3.4.9 Rain Test (Non-Operating). The Battery Eliminator Assembly shall meet the requirements of 3.3 after being subjected to the rain test in accordance with 4.7.2.4.

3.4.10 Humidity (Operating). The Battery Eliminator Assembly shall meet the requirements of 3.3 when subjected to the humidity test in accordance with 4.7.2.5.

3.4.11 Sand and Dust (Non-Operating). The Battery Eliminator Assembly shall meet the requirements of 3.3 after being subjected to the sand and dust test in accordance with 4.7.2.8.

3.5 First Article Inspection. When specified in the contract or purchase order, a sample shall be subjected to first article inspection in accordance with the technical provisions herein. (See 4.2)

3.6 Workmanship. The workmanship requirements of MIL-F-13926, and applicable requirements for MIL-STD-454 shall apply.

3.7 Soldering. All soldering shall be in accordance with the general requirements of MIL-STD-2000 in addition to detail requirement (Task)F of paragraph 1.2 of MIL-STD-2000.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:31Z
Check the source to verify that this is the current version before use.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5 and all applicable drawings. The inspections set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 General provisions. The component and subassembly inspection requirements of MIL-F-13926 form a part of the quality assurance provisions of this specification. Reference shall be made to MIL-STD-109 to define quality assurance terms used herein.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).
c. Special sampling inspection (see 4.5).

4.2.1 Inspection conditions. Unless otherwise specified, all examinations and tests shall be conducted at the following standard ambient conditions:

a.	Temperature	+50 deg to +90 deg F.
b.	Relative humidity	90% RH Max.
c.	Pressure	28 to 32 inches of Hg.

4.3 First article inspection.

4.3.1 First article submission. The contractor shall submit a first article sample as designated by the contracting officer consisting of three Battery Eliminator Assemblies plus three each of all items covered by QAP for inspection in accordance with 4.3.2.

4.3.2 Inspections to be performed. First article assemblies, components and test specimens may be subjected by the Government to any or all of the examinations and tests specified in Table II (Functional Test), Table III (Special Sampling) and Table IV (Additional first article tests) herein and to any or all requirements of the applicable drawings.

4.3.3 Rejection. If any assembly, component or test specimen fails to comply with any of the applicable requirements, the first article sample shall be rejected. The Government reserves the right to terminate its inspection upon any failure of any of the stated requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:31Z
Check the source to verify that this is the current version before use.

4.4 Quality conformance inspection.

4.4.1 Inspection lot formation. The term "inspection lot" is defined as a homogeneous collection of units of product from which a representative sample is drawn or which is inspected 100 percent to determine conformance with applicable requirements. Units of product selected for inspection shall represent only the inspection lot from which they are drawn and shall not be construed to represent any prior or subsequent quantities presented for inspection. Homogeneity shall be considered to exist provided the inspection lot has been produced by one manufacturer, in one unchanged process, using the same materials and methods, in accordance with the same drawing revisions, same specifications and same specification revisions. All material submitted for inspection in accordance with this specification shall comply with the homogeneity criteria specified herein, regardless of the type of inspection procedure which is being applied to determine conformance with requirements.

4.4.2.1 Components and Subassemblies. All components and subassemblies shall be inspected in accordance with the inspection provisions contained in Quality Assurance Provisions (QAP) listed in the technical data package (TDP). In the absence of a QAP, the applicable quality assurance provision of MIL-STD-454 and MIL-F-13926 shall apply. Environmental testing of special samples per MIL-STD-810 need not be performed unless required by contract or ordering document. If specified, special sample testing will be in accordance with Table III.

4.4.2.2 Final acceptance inspection. Subsequent to first article approval, examination and tests related to Section 3 herein shall be performed on a single defect (individual characteristic) basis in accordance with the sampling plans specified in 4.4.2.3 herein. Examination and test for packaging and marking shall be in accordance waith and Section 5 herein. The tabulated classification of defects in 4.4.2.3 shall constitute the minimum inspection to be performed by the contractor after first article approval and prior to Government acceptance or rejection by item or lot.

4.4.2.3 Functional tests. The tests in Table II shall be performed on a 100% basis.

4.5 Special sampling. Three (3) Battery eliminator assemblies shall be selected at random as samples from each 150 produced, or from each month's production, whichever occurs first. Each sample shall meet the requirements and tests in Table II and Table III after being subjected to Table IV testing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:31Z
Check the source to verify that this is the current version before use.

TABLE II. Functional test.
(100% Inspection)

CHARACTERISTIC	REQUIREMENT	TEST PROCEDURES
Critical:	None	N/A
Major:		
101. Performance	3.3	4.7.1.1, 4.7.1.2
Minor:		
201. Workmanship	3.6	Visual

TABLE III. Special Sampling inspection.
(When Required by Contract)

SPECIAL TEST	REQUIREMENT	TEST PROCEDURES
Critical:	None	N/A
Major:		
101. Performance	3.3	4.7.1.1 and 4.7.1.2
102. Temperature (Operating)	3.4.1.1	4.7.2.1
Minor:	None	N/A

Table IV. Additional first article tests.

CHARACTERISTIC TEST	REQUIREMENT	TEST PROCEDURES
Critical:	None	N/A
Major:		
101. Output Voltage	3.3	4.7.1.1, 4.7.1.2
102. Environmental/ Reliability	3.4	4.7.2
103. Design Construction	3.1	4.3
104. Packaging/ Packing Marking	5.1	4.7.2.10
Minor: None	None	N/A

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:31Z
Check the source to verify that this is the current version before use.

4.6 Inspection equipment.

4.6.1 Government-furnished inspection equipment. Where the contract provides for Government-furnished test equipment, supply and maintenance of test equipment shall be in accordance with the applicable requirements of MIL-I-45607.

4.6.2 Contractor-furnished inspection equipment.

4.6.2.1 Government design. Unless otherwise specified in the contract, all inspection equiipment identified by drawing number in specifications or QAPs forming a part of the contract will be supplied by the contractor in accordance with the design specified. The contractor may, however, propose alternatives to Government designs for approval in accordance waith 6.3.

4.6.2.2 Contractor design. The contractor shall design and supply inspection equipment compatible with the "Methods of Inspection" specified in 4.7 of this specification and with the component inspection procedures specified in "Examination" and "Test Facilities" requirements of MIL-F-13926 whenever Government designs are not specified (see 4.6.2.1). Since tolerance of test equipment is normally considered to be within 10 percent of the product tolerance for which it is intended, this inherent error in the test equipment design must be considered as part of the prescribed product tolerance limit. Thus, concept, construction, materials, dimensions, and tolerances used in the design of test equipment shall be so selected and controlled as to; ensure that the test equipment will reliably indicate acceptability of a product which does not exceed 90 percent of the prescribed tolerance limit and permit positive rejection when nonconforming. Construction shall be such as to facilitate routine calibration of test equipment. Contractor inspection equipment designs shall be submitted for approval in accordance with 6.3.

4.6.2.3 Test equipment. In conjunction with 4.6.2.1 and 4.6.2.2 the test equipment required shall be used in the performance of the applicable test methods and procedures as specified in 4.7.

4.7 Methods of inspection.

4.7.1 Operating Test.

4.7.1.1 12 VDC (Unregulated). To verify compliance with the requirements of paragraph 3.3.2 connect a load resistor bank (2500 W min) across P1 and P2 to load the Battery Eliminator Assembly with 60 ±5 milliohms with 240 +5 VAC applied. If the voltage across the P1 and P2 terminals is not within the requirements of 3.3.2 the unit shall be rejected. The output voltage may be verified with any input voltage between 198 to 264 VAC 50/60 Hz; however, the output voltage range shall be allowed to vary with the input voltage.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:31Z
Check the source to verify that this is the current version before use.

4.7.1.2 12 VDC (Regulated). To verify compliance with the requirements of paragraph 3.3.1 connect a load resistor bank (10 W min) across J1 Pin B (+) and J1 Pin A (-) to load the output to 24 ±1 ohm. If the voltage across the load is not 10.55 ±0.5 VDC with a maximum AC component of 250 mVpp at 240 ±5 VAC input voltage the unit shall be rejected.

4.7.2 Environment. Environment tests shall be conducted in accordance with the general requirements and test methods of MIL-STD-810 unless otherwise specified herein.

4.7.2.1 High-Low Temperature Test. Perform the high and low temperature test in accordance with MIL-STD-810, method 501 "Basic Hot", 502 "Basic Cold", Procedures I and II. The temperature tolerance shall be +5 deg.F (2.8 deg.C). Humidity shall be ±10 percent of stated value. Install test article in the test chamber. Install temperature sensor on the test article. Connect all test cables to the test article and perform operating test. Turn off all power to the test article. Increase chamber temperature at 10 deg.C/minute (18 deg.F) to 145 deg.F. Maintain this temperature and a relative humidity of 15 percent for 48 hours. Reduce chamber temperature to 110 deg.F, stabilize test article temperature, and perform operating test. Turn off all power to the test article. Reduce chamber temperature to -28 deg.F, maintain this level for 24 hours. Increase chamber temperature to -25 deg.F, stabilize test article temperature, and perform operating test. Return chamber temperature, and perform operating test.

4.7.2.2 Low Pressure Test. Perform the low pressure test in accordance with MIL-STD-810, Method 500, procedure II, in the following manner: Install test article in test chamber. Connect all test equipment to the test article; perform operating test of 4.7.1. Turn off all power to the test article; reduce chamber pressure at a rate of 1.7 in. Hg/minutes to 16.9 in. Hg (15,000 feet). Maintain this pressure for one hour. Perform operating of 4.7.1 test. Turn off all power to test article, reduce chamber pressure at a rate of 1.7 in. Hg/minute to 5.5 in. Hg (40,000 feet). Maintain this pressure for one hour. Return chamber pressure to ambient at a rate of 1.7 in. Hg/minute. Perform operating test 4.7.1.

4.7.2.3 Solar Radiation Test. Install test article in the test chamber, connect all test equipment to the test article. Install temperature sensor(s) on test article. Perform operating test of 4.7.1 as specified. Turn off all power to the test article. Conduct the test in accordance with MIL-STD-810, Procedure I, Method 505 (cycling for heat effects) for three continuous 24-hour cycles, Exception: Relative humidity within the test chamber need not be controlled to the limits established in Table 505.2-I of method 505. The actual relative humidity in the chamber may be established by the facility climate control system wherein the solar radiation chamber is located. Perform an operating test as specified in 4.7.1 at 15 hours of the third 24-hour cycle. At the conclusion of the third cycle, return the test article to ambient conditions and perform operating test of 4.7.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:31Z
Check the source to verify that this is the current version before use.

4.7.2.4 Rain Test. Install the test article into the test chamber; connect test equipment to the test article. Perform operating test of 4.7.1. Turn off all power to the test article. Subject the test article to the blowing rain test, Method 506, Procedure I of MIL-STD-810. Inspect for water penetration as required by the Standard, then perform operating test of 4.7.1.

Rain:	5 ±1 inches hour
Wind Velocity:	35 MPH

4.7.2.5 Humidity Test. Perform the following humidity test in accordance with MIL-STD-810, Method 507, Procedure I, for non-hazardous items. The tolerance on temperature shall be ±5 deg.F (2.8 deg.C). Humidity tolerance shall be ±10 percent. Install test article in chamber and perform operating test. Dry the article for 24 hours at 129 deg.F, followed by a 24-hour period at 73 deg.F and 50 ±10 percent relative humidity. Perform the required operating test at the end of this second 24-hour period. Turn off all power to the test article. Increase the test chamber temperature to 88 deg.F and relative humidity to 88 percent. As soon as the chamber is stabilized, begin temperature-humidity cycling. The cycles shall be as described for Procedure I, Method 507 (natural cycles) of MIL-STD-810. Begin with cycle 1, and consecutively run cycle 1-cycle 2-cycle 3 three times in succession for a total of nine cycles. Perform operating test for the equipment during the 14th to 16th hour of each third cycle. Following completion of cycling, condition the article for 24 hours at 73 deg.F at 10 percent relative humidity. Following this conditioning period, perform the required operating test.

4.7.2.6 Electrostatic Discharge Test. To verify compliance with the requirement of paragraph 3.4.3, perform the following test: Apply an electrostatic discharge 15 KV on a 100 pFD ±5 percent capacitor through a 1500 ±5 percent ohm non-inductive resistor to each connector, circuit breaker, and frame. After application of the electrostatic discharge to all of these areas, the device shall be examined for damage and then functionally tested as specified in paragraphs 4.5.1.1 and 4.5.1.2. No damage or degradation of performance is allowable.

4.7.2.7 Salt Fog Test. Perform the required operating test of 4.7.1. Be certain all unused connectors have their protective covers installed, and place the test article in the test chamber. Expose the test article as required by Procedure I, Method 509, of MIL-STD-810. Following the drying period specified in MIL-STD-810, perform the required operating test of 4.7.1. No performance degradation is permitted.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:31Z
Check the source to verify that this is the current version before use.

4.7.2.8 Sand and Dust Test. Install test article in test chamber and perform the required operating test of 4.7.1. Turn off all power to the test article. Be certain all unused connectors or receptables have protective covers in place. Expose the test article to the sand and dust environment. The environment and apparatus shall be as specified in MIL-STD-810, Method 510, Procedure I. The test shall be conducted in three steps as follows:

a.	Step 1	Chamber temperature:	73 deg.F
		Relative humidity:	Less than 30 percent
		Air velocity:	1750 ±250 ft/min.
		Dust concentration:	0.3 ±0.2 grams/ft3
		Duration:	6 hours
		Test article non-operating	
b.	Step 2	Chamber temperature:	145 deg.F
		Air Velocity:	300 ±200 ft/min.
		Dust concentration:	No dust
		Duration:	16 hours
		Test article non-operating	
c.	Step 3	Chamber temperature	145 deg.F
		Air velocity:	1750 ±250 ft/min.
		Dust concentration:	0.3 ±0.2 grams/ft3
		Duration:	6 hours
		Test article non-operating	

Following step 3, return test article to ambient conditions and perform the operating test of 4.7.1.

4.7.2.9 Vibration (Common Carrier Transport). To verify conformance with paragraph 3.4.2. Perform operating test of 4.7.1; remove Transformer Assembly and then package the test article as prescribed by Special Packaging Instructions PS12934455. Perform the vibration test required by MIL-STD-810, Method 514, Procedure I (Common Carrier Transport). The test article shall be vibrated for 60 minutes in each major axis per figures 514-1 through 514-3 of Method 514, Procedure I. Step 6 shall be omitted. Following exposure to the environment, open the package and inspect the test article for damage, loose components, etc. Perform operating test of 4.7.1.

4.7.2.10 Packaging Test. Package the test article in accordance with PS12934455. Subject the packaged item to the free-fall drop test per FED-STD-101, Method 500, procedure A, from a height of 21 inches. Following the test, open the package, inspect the test article for damage, and perform the operating test of 4.7.1.

4.8 Soldering. Soldering processes shall be inspected by certified inspectors to the requirements and acceptance criteria of MIL-STD-2000 as specified in 3.7.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:31Z
Check the source to verify that this is the current version before use.

5.0 PACKAGING

5.1 General. Preservation, packaging, packing and marking shall be in accordance with Special Packaging Instructions PS12934355.

6.0 NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. This specification details the specific requirements for design, performance, quality assurance, and testing for the Battery Eliminator Assembly. The Battery Eliminator Assembly will be used as part of the Tank Holding/Tank Gunnery (THM/TG) and will support live fire armor weapons training and qualification programs. These systems will provide training in identifying and firing on simulated stationary armored vehicles during training exercises.

6.2 Acquisition requirements. Procurement documents should specify the following:

6.2.1 PROCUREMENT REQUIREMENTS

a. Title, number, and revision of this specification.

b. Quantity required and delivery schedules.

c. Place of inspection if not at place of manufacture.

d. Special requirements such as first article or environmental testing of control samples in accordance with MIL-F-13926, Section 4.

e. Instructions for shipment of production lot samples.

f. Provision for preparation for delivery if required for indefinite storage of inter-plant shipment.

g. Provision for the supply, maintenance, and disposition of test equipment for acceptance inspection process.

h. Procuring activity designation assembly number(s) and nomenclature(s).

i. Serialization requirements, if applicable.

j. Packaging requirements, if other than specified in Section 5.

k. Certificates of conformance for each lot or shipment or product.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:31Z
Check the source to verify that this is the current version before use.

6.3 Submission of contractor inspection equipment designs for approval. Submit two copies of designs as required to: Commander, U.S. Army, ARDEC, ATTN: AMSMC-QAF-I (D), Picatinny Arsenal, NJ 07806-5000. This address will be specified on the Contract Data Requirements List, DD Form 1423 in the contract. Unless otherwise specified, data item DI-R-1714 will apply.

6.4 Drawings. Drawings listed in Section 2 of this specification under the heading U.S. Army, Armament Research, Development and Engineering Center (ARDEC) may also include drawings prepared by and identified as U.S. Army, Armament Research and Development Command (ARRADCOM), Edgewood Arsenal, Frankford Arsenal, Rock Island Arsenal, or Picatinny Arsenal drawings. Technical data originally prepared by these activities is now under the cognizance of ARDEC.

6.5 Definitions.

6.5.1 Trainers. Training device terms are defined in MIL-HDBK-220. Other definitions, if required, will be furnished upon written request to the Procuring Contracting Officer.

6.5.2 Contractor. Unless otherwise specified, the word Contractor used throughout this specification shall mean any supplier or producer of items or material to the Government. This shall include commercial contractors, subcontractors, Government Owned-Contractor Operated (GOCO), and Government-Owned Government-Operated (GOGO) plants.

6.5.3 Technical Data Package. A technical description of an item adequate for use in procurement. The description defines the required design configuration and assures adequacy of item performance. It consists of all applicable technical data such as plans, drawings, associated lists, specifications, standards, models, performance requirements, quality assurance provisions and packaging data.

6.6 Subject term (key word) listing.

a. Target Holding Mechanism/Tank Gunnery (THM/TG).
b. Remote Target System (RETS).
c. Electronic Control Unit (ECU).

Custodian
Army-AR

Preparing Activity:
ARMY-AR

(Project 6130-A325)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:31Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-B-71003 (AR)	10 June 1991

3. DOCUMENT TITLE

BATTERY ELIMINATOR ASSEMBLY: 12934455

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets if needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)	
US ARMY ARDEC STANDARDIZATION OFFICE	(1) Commercial (201) 724-6662	(2) AUTOVON 880-6662
ADDRESS (Include Zip Code) ATTN: SMCAR-BAC-S PICATINNY ARSENAL, NJ 07806-5000	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

DD Form 1426, OCT 89 *Previous editions are obsolete.* 198/290

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:31Z
Check the source to verify that this is the current version before use.