MIL-F-64042A (AR)
6 June 1986
SUPERSEDING
MIL-F-64042 (AR)
27 December 1983

MILITARY SPECIFICATION

FUZE, MT, SQ, M577A1
LOADING, ASSEMBLING, PACKING AND METAL PARTS, AND FUZE, MT, SQ, M582A1 METAL PARTS

This specification is approved for use within the US Army Armament, Munitions and Chemical Command, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the parts, loading, assembling and packing for the Fuze, Mechanical Time and Superquick, M577A1, and parts for the Fuze, Mechanical Time and Superquick, M582A1.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. Unless otherwise specified, the following specifications, standards, and handbooks of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

QQ-N-290 - Nickel Plating (Electrodeposited)

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, U.S. Army Armament Research, Development and Engineering Center, Attn: AMSMC-QA, Dover, New Jersey 07801-5001 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A
FSC 1390
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-T-12879 - Treatments, Chemical, Prepaint and Corrosion Inhibitive, for Zinc Surfaces
MIL-A-48078 - Ammunition, Standard Quality Assurance Provisions, General Specification for
MIL-P-60412 - Packaging, Packing and Marking for Shipment of Artillery Type and Rocket Fuzes, General Specification for

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-331 - Fuze and Fuze Components, Environmental and Performance Tests for
MIL-STD-414 - Sampling Procedures and Tables for Inspection by Variables for Percent Defective
MIL-STD-1235 -Single and Multi Level Continuous Sampling Procedures and Tables for Inspection by Attributes

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein.

DRAWINGS

US Army Armament Research and Development Center

9352381 - Fuze, Mechanical Time and Superquick, M577A1
9352382 - Fuze, Mechanical Time and Superquick, M582A1, Less Booster
8595509 - Cup, Booster
8595510 - Pellet, Booster
9297939 - Spotting Charge, Model APG-2
8861213 - Box, Wirebound, Packing Ammunition for Artillery or Rocket Fuzes
8864492 - Box, Ammo, Metal, for Artillery Type and Rocket Fuzes

2.1.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Material. Materials shall be in accordance with applicable drawings and specifications.

3.2 Parts and assemblies. The parts and assemblies shall comply with all requirements specified on the Drawings (dwg. 9352381, 9352382) and with all requirements specified in applicable specifications.

3.3 Workmanship. All parts shall be fabricated and finished in a thorough, workmanlike manner and all manufacturing, processing and assembly operations shall be correctly performed. The parts shall be clean and free of burrs, sharp edges, unblended radii, surface defects, cracks, chips, dirt, grease and oil (except where specifically required), rust and other foreign matter. The cleaning method used shall not be injurious to any part, nor shall the parts be contaminated by the cleaning agent. All required markings shall be neat, legible and sharply defined. The surfaces of Interlock Detent Assembly, SSD (dwg. 9362843), Detent, Interlock, SSD (dwg. 9236547), and Detent, Spin, SSD (dwg. 9236550) shall be as specified on the applicable drawing.

3.4 Jolt and jumble. The fuze shall comply with the requirements of MIL-STD-331, Tests 101.2, Procedure II and Test 102.1.

3.5 Transportation vibration. The fuze shall comply with the requirements of MIL-STD-331, Test 401, Procedure II.

3.6 Twelve meter drop. The fuze shall comply with the requirements of MIL-STD-331, Test 103.2, Procedure III.

3.7 Waterproofness. The fuze assembly shall comply with the requirements of MIL-STD-331, Test 108, except that the duration of immersion shall be five (5) minutes and the pressure shall be three (3) psi gauge.

3.8 Arming and non-arming

3.8.1 Safe separation device. The detents in the safe separation device shall release the rotor when rotated at a speed of 1800 - 25 rpm and shall not release the rotor when rotated at a speed of 1000 + 25 rpm. The rotor shall arm and lock in the armed position within the time limit of .89 seconds to 1.62 seconds when rotated at 1800 - 25 rpm.

3.8.2 Trigger. The spin detent in the trigger shall release the firing arm assembly when rotated at a speed of 2000 rpm, minimum and shall not release the firing arm assembly when rotated at a speed of 1000 + 25 RPM.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

3.9 Functioning and non-functioning

3.9.1 Trigger (see dwg. 9352387). The firing arm assembly shall not allow the safety plate assembly to release the firing pin when the following pin is at a radius of 0.630 inches maximum, but shall allow the safety plate assembly to release the firing pin when the following pin is at a radius of 0.680 inches minimum. The firing arm assembly shall not allow the safe separation release lever to release the interlock detent when the following pin is at a radius of 0.566 inches maximum, but shall allow the safe separation release lever to release the interlock detent when the following pin is at a radius of 0.596 inches minimum.

3.9.2 Timer. The spin detent in the timer shall not release the balance wheel when rotated at a speed of 1000 + 25 rpm, but shall release the balance wheel when rotated at a speed of 2000 - 25 rpm.

3.10 Counter wheel transfer. The counter wheels shall move and transfer movement freely and smoothly with no evidence of skipping throughout its entire setting range when rotated through the #3 wheel.

3.11 Ballistic performance.

3.11.1 Premature burst (see 6.3). The fuze shall not premature in the gun bore or in flight prior to the preset time.

3.11.2 Setting. The fuze shall be capable of being positioned to any setting from the shipping position to a setting of 200 seconds and maintain that setting or be reset.

3.11.3 Ballistic functioning (see 6.4)

3.11.3.1 Target impact non-function distance. The fuze, when set PD (see 6.5), shall not cause the projectile to function upon impact of the PD element when fired in the 105MM, M103 Tube, Charge 7 at a six (6) inch thick plywood target located 150 - 5 feet from the muzzle of the weapon.

3.11.3.2 Target impact function distance. The fuze, when set PD, shall cause the projectile to function upon impact of the PD element when fired in the 155MM, M1 Tube, Charge 1 at a six (6) inch thick plywood target located 820 - 5 feet from the muzzle of the weapon.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

3.11.3.3 Mechanical time functioning. The fuze, when set in the time mode, shall cause the projectile to function airburst within the following upper (UL) and lower (LL) time limits:

Set time (Sec)	Function time limits (Sec)
15	LL = 14.61 UL = 15.39
50	LL = 49.55 UL = 50.45
75	LL = 74.41 UL = 75.59

3.11.3.4 Extreme temperature functioning. The fuze, when set in the time mode, shall cause the projectile to function airburst within the following upper (UL) and lower (LL) time limits:

Set time (Sec)	Function time limits (Sec)
25	LL = 24.61 UL = 25.39
50	LL = 49.50 UL = 50.50

3.12 Setback pins. Setback pins shall be capable of operating freely while being depressed and returning to their initial positions. When fully depressed, they shall not interfere with the operation of spin detents in the fuze.

3.13 Timer beat rate. The timer assembly shall have a beat rate that falls within the limits of 80.74 $\pm$ .10 beats per second at an amplitude of 115° min.

3.14 Ogive air leakage. The ogive assembly, with the setting key, setting key ring and applicable grease, shall exhibit no pressure change when the body opening is sealed and the assembly is held in an evacuated state for one minute.

3.15 Marking. The SSD Assembly (see dwg. 9362838), and the Three Module Assembly (see dwg. 9352384), after undergoing critical classifed tests, shall be marked as specified in 5.2 using mechanized equipment (preferably automated) in accordance with 4.4.4.

3.16 Die castings. The die castings shall be of uniform quality, free of voids, cracks, blow holes and porosity and shrinkage defects. All flash must be completely removed from parting lines, internal and external profiles, cored holes and ejector pin marks. All waste material remaining from gates must be removed. The castings must be dry, clean and free from chips. All unfilled castings shall be rejected.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

3.16.1 Porosity, general. Porosity shall not be allowed on any unmachined functional surface. Maximum single pore size on a machined surface shall not exceed 1/8 inch in any direction on a functional surface and 3/16 inch on a non-functioned surface except as noted in 3.16.2. Porosity shall not reduce a machined functional surface to less than 67% min. of its ideal surface or as noted in 3.16.2. Porosity that alters the configuration of any drawing feature shall not be allowed.

3.16.2 Porosity, specific. Porosity shall be no worse than that depicted in Figures 1 and 2.

3.16.3 Reusable scrap. No scrap shall be used other than sprues, gates and rejected die castings of the particular material required by the item print and produced in the manufacturer's plant, when the material is a zinc alloy. The material used shall be free from finishes, lubricants, cleaning agents and any other substance which may contaminate the material of the product. No aluminum scrap of any kind shall be reused.

3.17 First article inspection. This specification contains technical provisions for first article inspection. Requirements for the submission of first article samples by the contractor shall be as specified in the contract.


3.18 Rotor, SSD (see Dwg. 11786092). The rotor teeth shall not fracture when a load as specified on the applicable drawing is applied.

3.19 Sleeve (see dwg. 9352376). The sleeve shall not fracture when a load as specified on the applicable drawing is applied.

3.20 Spacer, trigger (see dwg. 9352377). The Spacer, Trigger shall not fracture when a load as specified on the applicable drawing is applied.

3.21 First article. When specified, a sample shall be subjected to first article inspection (see 4.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

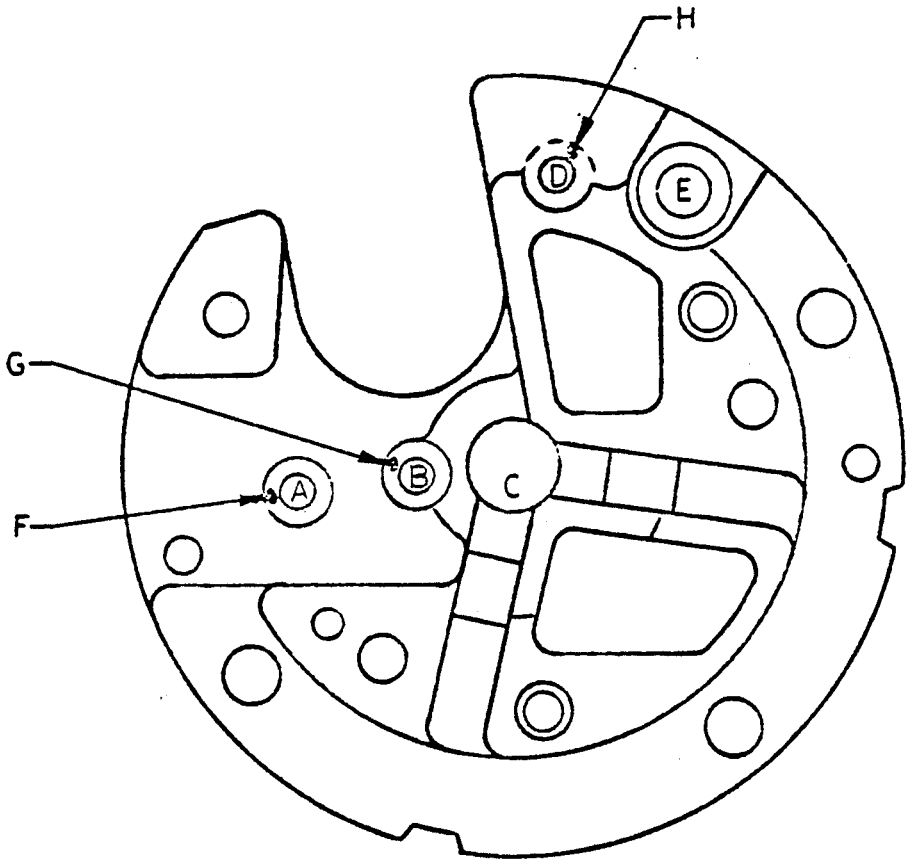


Trigger Spacer

FEATURE	MAX SINGLE PORE SIZE IN ANY DIRECTION (INCHES)	MIN REMAINING IDEAL SURFACE (%)
HOLE A	.02	90
HOLE B	.02	90
HOLE C	.10	80
HOLE D	.02	90
HOLE E	.10	80
SURFACE F	.02	80
SURFACE G	.02	80
SURFACE H	.02	80

FIGURE 1. Porosity guide.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

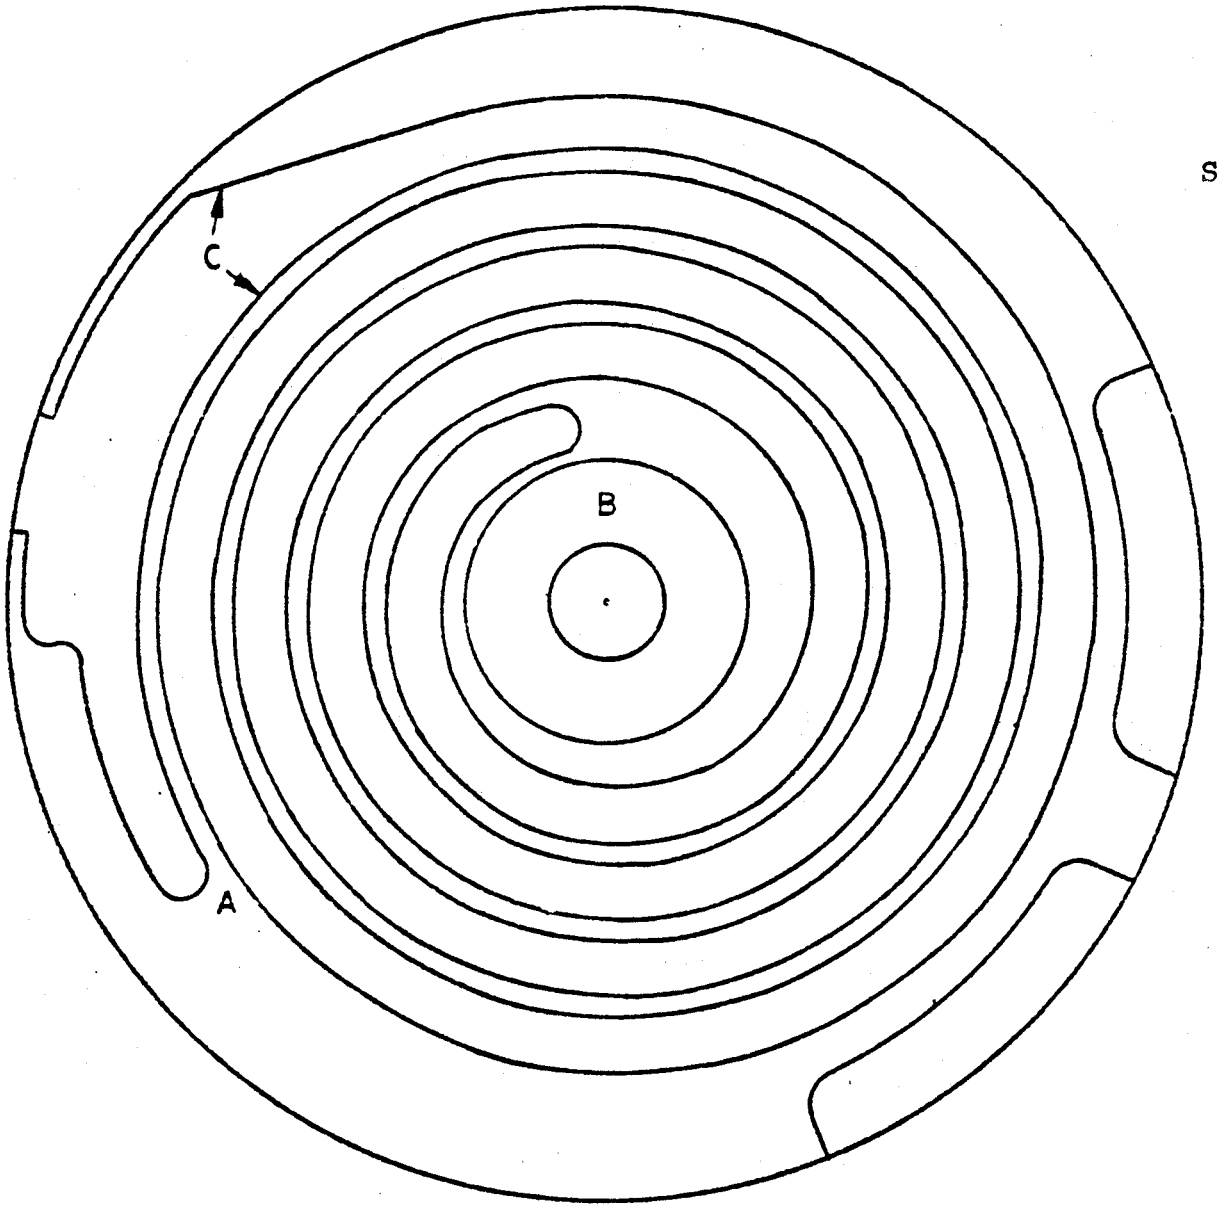

SURFACE A = NO POROSITY PERMITTED

SURFACE B = NO POROSITY PERMITTED

SURFACE C = NO POROSITY PERMITTED

FIGURE 2. Porosity guide.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISONS

4.1 Responsibility for inspection and standard quality assurance provisions. Unless otherwise specified herein or in the contract, the provisions of MIL-A-48078 shall apply and are hereby made a part of this detail specification.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First Article Inspection. (see 4.3).

b. Quality Conformance Inspection. (see 4.4).

4.3 First article inspection.

4.3.1 Submission. The contractor shall submit a first article sample as designated by the Contracting Officer for evaluation in accordance with the provision of 4.3.2. The first article sample shall consist of the items listed below in the sample quantities as indicated. In addition, when items are fabricated from die cast components ten (10) components from each mold cavity shall be included in the first article sample. The components shall bear a mark which indentifies the component with its individual cavity. The mark shall be located on a nonfunctional surface where subsequent machining operations will not obliterate the mark. The three module assembly (dwg 9352384) used only for first article examinations and tests, shall be loaded with inert detonators. These items shall be clearly and indelibly marked by the word "inert" on two visible surfaces located 180° apart. They will not be used for any testing that requires the functioning of the detonators:

Part Description	Drawing	Quantity
Setting Gear & Pinion Assembly	9236484	80
Pinion, Escapement, SSD	9236538	30
Detent, Interlock, SSD	9236547	45
Detent, Spin, SSD	9236550	45
Body Counter	9236575	See Table I
Wheel, No. 3, Counter	9236579	30
Pinion, Counter	9236580	See Table I
Pinion, Setting	9236590	30
Gear, Setting	9236591	30
Spring, Setback	9236599	80
Pin, Setback	9236600	30
Firing Arm Assembly, Trigger	9236609	80
Spring, Torsion, Trigger	9236610	80
Shaft, Firing Arm, Trigger	9236611	30
Detent Assembly, Trigger	9236614	80

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

Part Description	Drawing	Quantity
Rotor, Detent, Trigger	9236615	30
Plate, Safety, Trigger	9236618	30
Shaft, Safety Plate, Trigger	9236619	30
Safe Separation Release Assembly, Trigger	9236620	80
Shaft, Release, Trigger	9236622	30
Spring, Firing Pin, Trigger	9236624	80
Plate No. 1, Timer	9236636	30
Setting Ring Gear Assembly, Timer	9236640	80
Balance Staff & Pin Assembly, Timer	9236648	80
Detent, Spin, Timer	9236657	See Table I
Plate, No. 2, Timer	9236659	30
Lever Assembly, Timer	9236661	80
Lever Staff Assembly, Timer	9236663	80
Pallet Support & Pin Assembly, Timer	9236665	80
Plate No. 4 & Bearing, Assembly, Timer	9236668	80
Plate No. 4, Timer	9236669	30
Bearing, Timer	9236670	30
Escape Wheel & Pinion Assembly, Timer	9236672	80
Pinion, Escape, Timer	9236673	30
Wheel, Escape, Timer	9236674	30
Gear No. 1 & Pinion Assembly, Timer	9236675	30
Pinion, No. 1, Timer	9236677	30
Gear No. 2 & Pinion Assembly, Timer	9236678	80
Pinion, No. 2, Timer	9236680	30
Plate, No. 6, Timer	9236681	30
Housing, Barrel, Timer	9236688	30
Screw, Machine, Fillister Head, Timer	9236689	30
Timing Scroll Assembly, Timer	9236690	80
Ring Gear, Support & Shaft Assembly, Timer	9236691	30
Ring Gear & Support Assembly, Timer	9236692	80
Gear, Ring, Timer	9236694	30
Shaft, Ring Gear, Timer	9236695	30
Mainspring & Barrel Assembly, Timer	9236697	80
Setback Pin Assembly, Timer	9236702	30
Pin, Setback, Timer	9236703	30
Spring, Setback, Timer	9236705	80
Ring Gear, Support & Shaft Assembly, Timer	9236708	80
Timer Assembly	9236711	80
Plate No. 1, Assembly, Timer	9236712	80
Tube, Hairspring, Timer	9236713	30
Support & Pivot Assembly, Timer	9236714	80
Support, End, Timer	9236715	30
Balance Wheel, Staff & Hairspring Assembly, Timer	9236718	40
Balance Wheel Assembly, Timer	9236720	80
Scroll, Timing, Timer	9271993	30

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

Part Description	Drawing	Quantity
Body Assembly	9352371	80
Body	9352372	30
Ogive	9352373	30
Key, Setting	9352374	30
Leaf Spring	9352375	80
Sleeve	9352376	30
Spacer, Trigger	9352377	30
Plate, Top, Trigger	9352378	30
Plate, Bottom, Trigger	9352379	30
Fuze, Mechanical Time and Superquick M577A1/M582A1 (Prior to Assembly into Body)	9352381/9352382	30
Fuze, Mechanical Time and Superquick M577A1/M582A1	9352381/9352382	126
Three Module Assembly	9352384	80
Counter Assembly	9352385	80
Trigger Assembly	9352387	30
Ogive Assembly	9362837	80
Safe Separation Device Assembly (SSD)	9362838	30
Safe Separation Device Loaded Assembly	9362839	80
Interlock Detent Assembly, SSD	9362843	80
Pin, Interlock, SSD	9362844	30
Spacer and Plate Assembly, SSD	9362845	30
Plate, Top, SSD	9362846	30
Spacer, SSD	9362847	See Table I
Spacer Assembly, Trigger	9362848	80
Firing Safety Plate Assembly, Trigger	9362849	80
Pin, Firing, Trigger	9362850	30
Pinion, SSD	9381646	30
Gear and Pinion Assembly, SSD	9381647	80
Timer Housing Assembly	9392482	40
Rotor Assembly, SSD	11786090	80
Shaft, Rotor, SSD	11786091	30
Rotor, SSD	11786092	30
Escapement Wheel Assembly, SSD	11786093	80
Lever Assembly, SSD	11786095	45
Shaft, Lever, SSD	11786096	30
Lever, SSD	11786097	30

4.3.2 Inspections to be performed. See MIL-A-48078 and Table I specified herein.

4.3.3 Rejection. See MIL-A-48078

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

TABLE I. First article inspection

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 18		DRAWING NUMBER / NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Setting Gear & Pinion Assembly (Dwg 9236484)				
	15 lb Push-Off Load on Staking	80	-	3.2	4.5.1.c
	Pinion, Escapement, SSD (Dwg 9236538)				
	Examination for Defects	30	-	3.2	4.4.2.3
	Detent, Interlock, SSD (Dwg 9236547)				
	40 lb Load on Detent Nib	45*	-	3.2	4.5.1.m
	Detent, Spin, SSD (Dwg 9236550)				
	40 lb Load On Detent Nib	45*	-	3.2	4.5.1.n
	Body, Counter (Dwg 9236575)				
	Die Casting Defects	**	-	3.2 & 3.16	4.4.2.6
	Wheel, No. 3, Counter (Dwg 9236579)				
	Examination for Defects	30	-	3.2	4.4.2.7
	Pinion, Counter (Dwg 9236580)				
	Die Casting Defects	**	-	3.16	4.4.2.8

NOTES: *Destructive Test
**Ten (10) samples from each mold cavity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

TABLE I. First article inspection

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 2 OF 18		DRAWING NUMBER / NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Pinion, Setting (Dwg 9236590) Examination for Defects	30	-	3.2	4.4.2.9
	Gear Setting (Dwg 9236591) Examination for Defects	30	-	3.2	4.4.2.10
	Spring, Setback (Dwg 9236599) Load Test	80	-	3.2	4.5.3.a
	Pin, Setback (Dwg 9236600) Examination for Defects	30	-	3.2	4.4.2.12
	Firing Arm Assembly, Trigger (Dwg 9236609) 15 lb Push Off Load on Staking	80	-	3.2	4.5.1.p
	Spring, Torsion, Trigger (Dwg 9236610) Torque Test	80	-	3.2	4.5.3.b
	Shaft, Firing Arm, Trigger (Dwg 9236611) Examination for Defects	30	-	3.2	4.4.2.15

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

TABLE I. First article inspection

CLASSIFICATION OF DEFECTS & TESTS MIL-F-64042A (AR)

PARAGRAPH	TITLE		SHEET 3 OF 18		DRAWING NUMBER / NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Detent Assembly, Trigger (Dwg 9236614)				
	15 lb Push Off on Staking	80	-	3.2	4.5.1.q
	Rotor, Detent, Trigger (Dwg 9236615)				
	Examination for Defects	30	-	3.2	4.4.2.17
	Plate, Safety, Trigger (Dwg 9236618)				
	Examination for Defects	30	-	3.2	4.4.2.18
	Shaft, Safety Plate, Trigger (Dwg 9236619)				
	Examination for Defects	30	-	3.2	4.4.2.19
	Safe Separation Release Assembly, Trigger (Dwg 9236620)				
	10 lb Push Off Load on Staking	80	-	3.2	4.5.1.s
	Shaft, Release, Trigger (Dwg 9236622)				
	Examination for Defects	30	-	3.2	4.4.2.21

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

TABLE I. First article inspection

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE		SHEET 4 OF 18		DRAWING NUMBER / NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Spring, Firing Pin, Trigger (Dwg 9236624)				
	Load Test	80	-	3.2	4.5.3.c
	Plate, No. 1, Timer (Dwg 9236636)				
	Examination for Defects	30	-	3.2	4.4.2.23
	Setting Ring Gear Assembly, Timer (Dwg 9236640)				
	5 lb Axial Unseating Load on Pin	80	-	3.2	4.5.1.x
	Balance Staff & Pin Assembly, Timer (Dwg 9236648)				
	Examination for Defects	30	-	3.2	4.4.2.25
	1.5 lb Axial Unseating Load on Pins	80	-	3.2	4.5.1.z
	Detent, Spin, Timer (Dwg 9236657)				
	Die Casting Defects	**	-	3.16	4.4.2.26
	Plate No. 2, Timer (Dwg 9236659)				
	Examination for Defects	30	-	3.2	4.4.2.27

NOTES: **Ten (10) samples from each mold cavity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

TABLE I. First article inspection

CLASSIFICATION OF DEFECTS & TESTS MIL-F-64042A (AR)

PARAGRAPH	TITLE		SHEET 5 OF 18		DRAWING NUMBER / NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Lever Assembly, Timer (Dwg 9236661)				
	2 lb Push Off Load on Staking	80	-	3.2	4.5.1.aa
	Lever Staff Assembly, Timer (Dwg 9236663)				
	1 lb Axial Unseating, Load	80	-	3.2	4.5.1.ab
	Pallet Support & Pin Assembly, Timer (Dwg 9236665)				
	Examination for Defects	30	-	3.2	4.4.2.30
	3 lb Push Off Load on Pin	80	-	3.2	4.5.1.ac
	Plate No. 4 & Bearing Assembly, Timer (Dwg 9236668)				
	Examination for Defects	30	-	3.2	4.4.2.31
	2 lb Push Off Load on Bearing	80	-	3.2	4.5.1.ad
	Plate No. 4. Timer (Dwg 9236669)				
	Examination for Defects	30	-	3.2	4.4.2.32
	Bearing, Timer (Dwg 9236670)				
	Examination for Defects	30	-	3.2	4.4.2.33

NOTES:

AMSMC Form 1570, 1 Feb 85 Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

TABLE I. First article inspection

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE		SHEET 6 OF 18		DRAWING NUMBER / NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Escape Wheel & Pinion Assembly, Timer (Dwg 9236672)				
	Examination for Defects	30	-	3.2	4.4.2.34
	10 lb Push Off Load	80	-	3.2	4.5.1.ae
	Pinion, Escape, Timer (Dwg 9236673)				
	Examination for Defects	30	-	3.2	4.4.2.35
	Wheel, Escape, Timer (Dwg 9236674)				
	Examination for Defects	30	-	3.2	4.4.2.36
	Gear No. 1 & Pinion Assembly, Timer (Dwg 9236675)				
	Examination for Defects	30	-	3.2	4.4.2.37
	12 lb Push Off Load on Staking	80	-	3.2	4.5.1.af
	Pinion No. 1, Timer (Dwg 9236677)				
	Examination for Defects	30	-	3.2	4.4.2.38
	Gear No. 2 & Pinion Assembly, Timer (Dwg 9236678)				
	Examination for Defects	30	-	3.2	4.4.2.39
	10 lb Push Off Load on Staking	80	-	3.2	4.5.1.ag

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

TABLE I. First article inspection

CLASSIFICATION OF DEFECTS & TESTS MIL-F-64042A (AR)

PARAGRAPH	TITLE		SHEET 7 OF 18		DRAWING NUMBER / NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Pinion, No. 2, Timer (Dwg 9236680)				
	Examination for Defects	30	-	3.2	4.4.2.40
	Plate No. 6, Timer (Dwg 9236681)				
	Examination for Defects	30	-	3.2	4.4.2.41
	Housing, Barrel, Timer (Dwg 9236688)				
	Examination for Defects	30	-	3.2	4.4.2.42
	Screw, Machine, Fillister Head, Timer (Dwg 9236689)				
	Examination for Defects	30	-	3.2	4.4.2.43
	Timing Scroll Assembly, Timer (Dwg 9236690)				
	Examination for Defects	30	-	3.2	4.4.2.44
	15 lb Push Off Load on Ring Gear Support & Shaft Assembly	80	-	3.2	4.5.1.ah
	2 lb Torque on Ring Gear & Scroll	80	-	3.2	4.5.2.e
	Ring Gear, Support & Shaft Assembly, Timer (Dwg 9236691)				
	Examination for Defects	30	-	3.2	4.4.2.45

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

TABLE I. First article inspection

CLASSIFICATION OF DEFECTS & TESTS MIL-F-64042A (AR)

PARAGRAPH	TITLE		SHEET 8 OF 18		DRAWING NUMBER / NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Ring Gear & Support Assembly, Timer (Dwg 9236692)				
	5 lb Pull Off Load on Gear	80	-	3.2	4.5.1.ai
	Gear, Ring, Timer (Dwg 9236694)				
	Examination for Defects	30	-	3.2	4.4.2.47
	Shaft, Ring Gear, Timer (Dwg 9236695)				
	Examination for Defects	30	-	3.2	4.4.2.48
	Mainspring & Barrel Assembly, Timer (Dwg 9236697)				
	Maximum & Minimum Torque	80	-	3.2	4.5.3.d
	Setback Pin Assembly, Timer (Dwg 9236702)				
	Examination for Defects	30	-	3.2	4.4.2.50
	Pin, Setback, Timer (Dwg 9236703)				
	Examination for Defects	30	-	3.2	4.4.2.51
	Spring, Setback, Timer (Dwg 9236705)				
	Load Test	80	-	3.2	4.5.3.e

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

TABLE I. First article inspection

CLASSIFICATION OF DEFECTS & TESTS MIL-F-64042A (AR)

PARAGRAPH	TITLE		SHEET 9 OF 18		DRAWING NUMBER / NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Ring, Gear, Support & Shaft Assembly, Timer (Dwg 9236708)				
	Examination for Defects	30	-	3.2	4.4.2.53
	5 lb Pull Off Load on Gear	80	-	3.2	4.5.1.ai
	Timer Assembly (Dwg 9236711)				
	Examination for Defects	30	-	3.2	4.4.2.54
	Timer Functioning Test	80	-	3.9.2	4.5.9
	Timer Non-Functioning Test	80	-	3.9.2	4.5.10
	Setback Pin Arming Test	80	-	3.12	4.5.11
	Timer Beat Rate & Amplitude	80	-	3.13	4.5.13
	9 lb Axial Load	40*	-	3.2	4.5.1.w
	Plate No. 1 Assembly, Timer (Dwg 9236712)				
	Examination for Defects	30	-	3.2	4.4.2.55
	50 in. lb Torque Load on Ring Gear Assembly	80	-	3.2	4.5.2.d
	5 lb Axial Unseating Load on Bushing	80	-	3.2	4.5.1.u
	5 lb Axial Unseating Load on Spin Detent Pivot Pin	80	-	3.2	4.5.1.t
	40 lb Axial Unseating Load on Dowel Pins	80	-	3.2	4.5.1.v

NOTES:
*Destructive Test

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

TABLE I. First article inspection

MIL-F-64042A (AR)

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 10 OF 18		DRAWING NUMBER / NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Tube, Hairspring, Timer (Dwg 9236713)				
	Examination for Defects	30	-	3.2	4.4.2.56
	Support & Pivot Assembly, Timer (Dwg 9236714)				
	Examination for Defects	30	-	3.2	4.4.2.57
	3.0 in. lb Torque on Hairspring Pivot	80	-	3.2	4.5.2.g
	15 lb Axial Load on Hairspring Pivot	80	-	3.2	4.5.1.aj
	Support, End, Timer (Dwg 9236715)				
	Examination for Defects	30	-	3.2	4.4.2.58
	Balance Wheel, Staff & Hairspring, Assembly, Timer (Dwg 9236718)				
	Examination for Defects	30	-	3.2	4.4.2.59
	9 lb Axial Load on Hairspring Pivot	40*	-	3.2	4.5.1.y
	Balance Wheel Assembly, Timer (Dwg 9236720)				
	4 oz Axial Push Off Load on Balance Wheel	80	-	3.2	4.5.1.a
	6 lb Axial Unseating Load on Lower Hairspring Pivot	40*	-	3.2	4.5.1.b

NOTES: *Destructive Test

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

TABLE I. First article inspection

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE		SHEET 11 OF 18		DRAWING NUMBER / NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Scroll, Timing, Timer (Dwg 9271993)				
	Examination for Defects	30	-	3.2	4.4.2.61
	Die Casting Defects	**	-	3.16	4.4.2.61
	Body Assembly (Dwg 9352371)				
	5 lb Push Out Load on Lead	80	-	3.2	4.5.1.d
	Body (Dwg 9352372)				
	Examination for Defects	30	-	3.2	4.4.2.63
	Ogive (Dwg 9352373)				
	Examination for Defects				
	Die Casting Defects	30 **	-	3.2 & 3.16	4.4.2.64
	Key, Setting (dwg 9352374)				
	Die Casting Defects	**	-	3.2 & 3.16	4.4.2.65
	Leaf Spring (Dwg 9352375)				
	Load Test	80	-	3.2	4.5.3.f

NOTES: **Ten (10) samples from each mold cavity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

TABLE I. First article inspection

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 12 OF 18		DRAWING NUMBER / NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Sleeve (Dwg 9352376)				
	Examination for Defects	30	-	3.2	4.4.2.67
	Die Casting Defects	**	-	3.2 & 3.16	4.4.2.67
	Load Test	10*	-	3.19	4.5.22
	Spacer, Trigger (Dwg 9352377)				
	Examination for Defects	30	-	3.2	4.4.2.68
	Die Casting Defects	**	-	3.2 & 3.16	4.4.2.68
	Load Test	10*	-	3.20	4.5.23
	Plate, Top, Trigger (Dwg 9352378)				
	Examination for Defects	30	-	3.2	4.4.2.69
	Plate, Bottom, Trigger (Dwg 9352379)				
	Examination for Defects	30	-	3.2	4.4.2.70

NOTES:
* Destructive Test
** Ten (10) samples from each mold cavity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

TABLE I. First article inspection

CLASSIFICATION OF DEFECTS & TESTS MIL-F-64042A (AR)

PARAGRAPH CATEGORY	TITLE / EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	SHEET 13 OF 18 DRAWING NUMBER NEXT HIGHER ASSEMBLY PARAGRAPH REFERENCE /INSPECTION METHOD
	Fuze, Mechanical Time & Superquick M577A1/M582A1 (Prior to Assembly into Body) (Dwg 9352381/9352382)				
	Examination for Defects	30	-	3.2 & 3.15	4.4.2.71
	Fuze, Mechanical Time & Superquick M577A1/M582A1 (Dwg 9352381/9352382)				
	Examination for Defects	126	-	3.2	4.4.2.72
	Setting Test	126	-	3.2	4.5.2.a
	Jolt & Jumble Test	12*	-	3.4	4.5.16
	Transportation Vibration Test	35*	-	3.5	4.5.17
	Twelve Meter Drop Test	10*	-	3.6	4.5.18
	Waterproofness Test	4*	-	3.7	4.5.20
	Ballistic Performance Test:				
	A. Ballistic Impact Non-Function	15a*	-	3.11.3.1	4.5.21.1
	B. Ballistic Impact Functioning	15*	-	3.11.3.2	4.5.21.2
	C. Mechanical Time Functioning	40b*	-	3.11.3.3	4.5.21
	D. Extreme Temperature Functioning	20*	-	3.11.3.4	4.5.21

NOTES: a. Transportation vibrated test samples
b. Includes 10 transportation vibrated test samples.
*Destructive Test

AMSMC Form 1570, 1 Feb 85 Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

TABLE I. First article inspection

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 14 OF 18		DRAWING NUMBER / NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Three Module Assembly (Dwg 9352382)				
	Examination for Defects	80	-	3.2	4.4.2.74
	10 + 4 in. lb. Grip Ring Torque	80	-	3.2	4.5.2.c
	4.5 min. in. lb. Grip Ring Torque	80	-	3.2	4.5.2.b
	Tumbler Stop	80	-	3.2	4.5.2.f
	Trigger Setback Pin Arming	80	-	3.12	4.5.14
	Counter Assembly (Dwg 9352385)				
	Examination for Defects	30	-	3.2	4.4.2.75
	Counter Wheel Transfer	80	-	3.10	4.5.12
	5 lb. Push-Off on Retaining Ring	50	-	3.2	4.5.1.o
	Trigger Assembly (Dwg 9352387)				
	Examination for Defects	30	-	3.2	4.4.2.76
	2000 RPM Detent Release	30	-	3.2	4.5.6
	1000 RPM Detent Non-release	30	-	3.2	4.5.7
	Sequential Trigger Function	30	-	3.2	4.5.8

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

TABLE I. First article inspection

CLASSIFICATION OF DEFECTS & TESTS MIL-F-64042A (AR)

PARAGRAPH	TITLE		SHEET 15 OF 18		DRAWING NUMBER / NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Ogive Assembly (Dwg 9362837)				
	65 lb. Push-out Load on Window	40*	-	3.2	4.5.1.e
	Air Leakage	80	-	3.14	4.5.15
	Safe Separation Device Assembly (Dwg 9362838)				
	Examination for Defects	30	-	3.2	4.4.2.78
	Non Arming Spin Test	30	-	3.8.1	4.5.5
	Time to Arm, Min	30	-	3.8.1	4.5.4
	Time to Arm, Max	30	-	3.8.1	4.5.4
	Safe Separation Device Loaded Assembly (Dwg 9362839)				
	Examination for Defects	30	-	3.2	4.4.2.79
	3 lb. Axial Unseating Load on Detonator	80	-	3.2	4.5.1.f
	Interlock Detent Assembly, SSD (Dwg 9362843)				
	Examination for Defects	30	-	3.2	4.4.2.80
	31 lb. Cantilever Load on Pin	40*	-	3.2	4.5.1.k
	5 lb. Axial Load on Interlock Pin	80	-	3.2	4.5.1.l

NOTES:
*Destructive Test

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

TABLE I. First article inspection

CLASSIFICATION OF DEFECTS & TESTS MIL-F-64042A (AR)

PARAGRAPH CATEGORY	TITLE / EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	DRAWING NUMBER / NEXT HIGHER ASSEMBLY / PARAGRAPH REFERENCE /INSPECTION METHOD
	SHEET 16 OF 18				
	Pin, Interlock, SSD (Dwg 9362844)				
	Examination for Defects	30	-	3.2	4.4.2.81
	Spacer & Plate Assembly, SSD (Dwg 9362845)				
	Examination for Defects	30	-	3.2	4.4.2.82
	Plate, Top, SSD (Dwg 9362846)				
	Examination for Defects	30	-	3.2	4.4.2.83
	Spacer, SSD (Dwg 9362847)				
	Die Casting Defect	**		3.2 & 3.16	4.4.2.84
	Spacer Assembly, Trigger (Dwg 9362848)				
	Examination for Defects	30	-	3.2	4.4.2.85
	Firing Safety Plate Assembly, Trigger (Dwg 9362849)				
	Examination for Defects	30	-	3.2	4.4.2.86
	25 lb. Push Off Load on Staking	80	-	3.2	4.5.1.r

NOTES: ** Ten (10) samples from each mold cavity.

AMSMC Form 1570, 1 Feb 85 Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

TABLE I. First article inspection

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH CATEGORY	TITLE / EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	SHEET 17 OF 18 — DRAWING NUMBER / NEXT HIGHER ASSEMBLY — PARAGRAPH REFERENCE /INSPECTION METHOD
	Pin, Firing, Trigger (Dwg 9362850)				
	Examination for Defects	30	-	3.2	4.4.2.87
	Pinion, SSD (Dwg 9381646)				
	Examination for Defects	30	-	3.2	4.4.2.88
	Gear & Pinion Assembly, SSD (Dwg 9381647)				
	Examination for Defects	30	-	3.2	4.4.2.89
	12 lb. Push Off on Staking	80	-	3.2	4.5.1.h
	Timer Housing Assembly (Dwg 9392482)				
	Examination for Defects	30	-	3.2	4.4.2.90
	80 lb. Axial Unseating Load	40*	-	3.2	4.5.1.ak
	Rotor Assembly, SSD (Dwg 11786090)				
	5 lb. Axial Load on Shaft	80	-	3.2	4.5.1.g
	Shaft, Rotor, SSD (Dwg 11786091)				
	Examination for Defects	30	-	3.2	4.4.2.92

NOTES: *Destructive Test

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

TABLE I. First article inspection

CLASSIFICATION OF DEFECTS & TESTS MIL-F-64042A (AR)

PARAGRAPH	TITLE		SHEET 18 OF 18		DRAWING NUMBER / NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Rotor, SSD (Dwg 11786092)				
	Die Casting Defect	**	-	3.16	4.4.2.93
	Torque on Rotor Teeth	10*	-	3.18	4.5.19
	Escapement Wheel Assembly, SSD (Dwg 11786093)				
	Examination for Defects	80	-	3.2	4.4.2.94
	10 lb Push Off Load	80	-	3.2	4.5.1.i
	Lever Assembly, SSD (Dwg 11786095)				
	Examination for Defects	40	-	3.2	4.4.2.95
	20 lb Axial Unseating Load on Shaft	40*	-	3.2	4.5.1.j
	Shaft, Lever, SSD (Dwg 11786096)				
	Examination for Defects	30	-	3.2	4.4.2.96
	Lever, SSD (Dwg 11786097)				
	Examination for Defects	30	-	3.2	4.4.2.97

NOTES:
*Destructive Test
**Ten (10) samples from each mold cavity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

4.4 Quality conformance inspection

4.4.1 Inspection lot formation. Inspection lots shall comply with the lot formation provision of MIL-A-48078. In addition, each lot shall contain:

a. Leads of one lot interfix from one manufacturer.

b. M94 detonators of one lot interfix from one manufacturer.

c. Safe separation devices of one lot interfix from one manufacturer.

d. Timers of one lot interfix from one manufacturer.

4.4.2 Examintion. See MIL-A-48078.

a. Sampling plans. Unless otherwise specified in the Classification of Defects and Test Tables, sampling plans for Major and Minor defects shall be in accordance with MIL-STD-105, Inspection Level II or MIL-STD-1235, Inspection Level II, where applicable.

b. Special plan. Where Level I of MIL-STD-105 is noted in the following tables, and selected, the sampling plan specified herein shall apply. Whenever Level I is used, the required number of units of product, in the sample to be selected and inspected per lot, shall be grouped into five (5) units of product sub-samples. When a multiple cavity mold or die is used in the fabrication of molded, cast or stamped components, the selected sub-sample shall represent all mold cavities or dies being used (this may mean increasing the sub-sample size; for computations the sub-sample shall remain at (5). Identification of the cavity or die shall be by cavity or die mark. The number of sub-samples required shall be divided into the estimated lot size to obtain the interval between selection of sub-samples. The sub-samples shall then be selected and inspected systematically starting with the first five (5) items produced. The lot size shall not exceed its estimate by more than ten percent. The last five (5) units of product manufactured for the lot shall also be inspected (see lot formation requirements in 4.4.1). The inspection records for the lot shall be annotated, as a minimum, with the lot number, start and completion dates, the estimated and actual lot sizes, the computed interval, the number of cavities, the results of each sub-sample inspection and the total cumulative results. When multiple cavities or dies are used, the sub-sample and total results shall be so listed as to identify each cavity or die.
This plan may be used only when machining operations, subsequent to part removal from the cavity, are not necessary to produce a completed part. If subsequent machining operations are to be performed, then 4.4.2.a applies.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.1	Cup, Booster				8595509
					NEXT HIGHER ASSEMBLY 9352382
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Pitch diameter of thread		0.40%	3.2	Gage
102	Minor diameter of thread		0.40%	3.2	Gage
103	Cup cracked or otherwise damaged		0.40%	3.2	Visual
104	Inside depth, max.		0.40%	3.2	Gage
105	Thickness of cup at bottom		0.40%	3.2	Gage
106	Outside diameter, max.		0.65%	3.2	Gage
Minor					
201	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.2	Setting Gear and Pinion Assembly				9236484
					NEXT HIGHER ASSEMBLY 9392482
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major 101	15 lb. push off load on staking	a	0.40%	3.2	4.5.1.c
Minor 201	Evidence of poor workmanship		1.0%	3.3	Visual w/aid A (see 6.12)

NOTES: a. Non-destructive test

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.3	Pinion, Escapement, SSD	1 OF 1	9236538
			NEXT HIGHER ASSEMBLY: 11786093

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Diameter of pivots, min.		0.40%	3.2	Gage
102	Pivot length, max.		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		1.0%	3.3	Visual w/aid B (see 6.12)

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.4	Detent, Interlock, SSD	1 OF 1	9236547
			NEXT HIGHER ASSEMBLY: 9236546

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major 101	40 lb. load on detent nib	a	0.40%	3.2	4.5.1.m
Minor 201	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES:

a. Destructive test

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.5	Detent, Interlock, SSD		9236550
			NEXT HIGHER ASSEMBLY 9236549

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major 101	40 lb. load on detent nib	a	0.40%	3.2	4.5.1.n
Minor 201	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES:

a. Destructive test

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.6	Body, Counter				9236575
					NEXT HIGHER ASSEMBLY 9352386
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Die casting defect	10	a	3.16	Visual w/aid C (see 6.12)
Minor					
201	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES:

a. Reject the lot if one (1) or more defective units are found.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9236579
4.4.2.7	Wheel, No. 3, Counter				NEXT HIGHER ASSEMBLY 9352385
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	True position of numbers		0.40%	3.2	Gage
102	True position of saw teeth minor diameter		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES: Level I of MIL-STD-105 may be used with special plan in 4.4.2.

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.8	Counter, Pinion	1 OF 1	9236580
			NEXT HIGHER ASSEMBLY 9352385

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major 101	Die casting defect	10	a	3.16	Visual w/aid C (see 6.12)
Minor 201	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES: Level I of MIL-STD-105 may be used with special plan in 4.4.2.
a. Reject the lot if one (1) or more defective units are found.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.9	Pinion, Setting	1 OF 1	9236591
			NEXT HIGHER ASSEMBLY: 9236484

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Total composite error		0.40%	3.2	Gage
102	Tooth to tooth composite error		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		1.0%	3.3	Visual w/aid A (see 6.12)

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE	SHEET	OF	DRAWING NUMBER
4.4.2.10	Pinion, Setting	1	1	9236590
				NEXT HIGHER ASSEMBLY 9236484

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Total composite error		0.40%	3.2	Gage
102	Tooth to tooth composite error		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		1.0%	3.3	Visual w/aid A (see 6.12)

NOTES:
Level I of MIL-STD-105 may be used with special plan in 4.4.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.11	Spring, Setback	1 OF 1	9236599
			NEXT HIGHER ASSEMBLY: 9352384

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major 101	Load test	a, b	0.40%	3.2	4.5.3.a
Minor 201	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES:
a. Non-destructive test
b. Reduced sampling is not permitted.

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.12	Pin, Setback	1 OF 1	9236600
			NEXT HIGHER ASSEMBLY: 9352384

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Inside diameter, min.		0.40%	3.2	Gage
102	Height of inside diameter, min.		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.13	Firing Arm Assembly, Trigger				9236609
					NEXT HIGHER ASSEMBLY 9352387
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major 101	15 lb. push off load on staking	a	0.40%	3.2	4.5.1.p
Minor 201	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES:
a. Non-destructive test

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.14	Spring, Torsion, Trigger				9236610
					NEXT HIGHER ASSEMBLY
					9236609
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major 101	Torque test	a, b	0.40%	3.2	4.5.3.b
Minor 201	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES:
a. Non-destructive test
b. Reduced sampling is not permitted.

AMSMC Form 1570, 1 Feb 85 Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9236611
4.4.2.15	Shaft, Firing Arm, Trigger				NEXT HIGHER ASSEMBLY 9236609
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Diameter of pivots, min.		0.40%	3.2	Gage
102	Total length without pivots, min.		0.40%	3.2	Gage
103	Height of pivots, max.		0.40%	3.2	Gage
104	Height of shaft body below slot		0.65%	3.2	Gage
Minor					
201	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.16	Detent Assembly, Trigger		9236614
			NEXT HIGHER ASSEMBLY 9352387

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major 101	15 lb. push off load on staking	a	0.40%	3.2	4.5.1.q
Minor 201	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES:
a. Non-destructive

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.17	Rotor, Detent, Trigger				9236615
					NEXT HIGHER ASSEMBLY 9236614
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major 101	Height of upper pivot, max.		0.40%	3.2	Gage
Minor 201	Evidence of poor workmanship		1.0%	3.3	Visual w/aid A (see 6.12)

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.18	Plate, Safety, Trigger				9236618
					NEXT HIGHER ASSEMBLY 9362849
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major 101	Length of step along restraining edge min.		0.40%	3.2	Gage
Minor 201	Evidence of poor workmanship		1.0%	3.3	Visual w/aid A (see 6.12)

NOTES:

AMSMC Form 1570, 1 Feb 85 Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.19	Shaft, Safety Plate, Trigger				9236619
					NEXT HIGHER ASSEMBLY 9362849
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Height of lower pivot, max.		0.40%	3.2	Gage
102	Height of plate seat diameter, min.		0.65%	3.2	Gage
Minor					
201	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE	SHEET	OF	DRAWING NUMBER
4.4.2.20	Safe Separation Release Assembly, Trigger	1	1	9236620
				NEXT HIGHER ASSEMBLY: 9352387

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major 101	10 lb. push off load on staking	a	0.40%	3.2	4.5.1.s
Minor 201	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES: a. Non destructive test

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.21	Shaft, Release, Trigger				9236622
					NEXT HIGHER ASSEMBLY
					9236620
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Diameter of pivots, min.		0.40%	3.2	Gage
102	Finish above specified		0.40%	3.2	Gage
103	Height of lower pivot		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.22	Spring, Firing Pin, Trigger				9236624
					NEXT HIGHER ASSEMBLY 9352387
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major 101	Load test	a, b	0.40%	3.2	4.5.3.c
Minor 201	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES: a. Non destructive test
b. Reduced sampling not permitted

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.23	Plate, No. 1, Timer				9236636
					NEXT HIGHER ASSEMBLY 9236712
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Height from bottom to wheel surface, min.		0.40%	3.2	Gage
102	Pitch diameter of thread, max.		0.40%	3.2	Gage
103	Diameter of tube hole, max.		0.40%	3.2	Gage
104	Height from bottom to ring gear seat, min.		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85 Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.24	Setting Ring Gear Assembly, Timer		9236640
			NEXT HIGHER ASSEMBLY 9236712

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major 101	5 lb. axial unsetting load on pin	a	0.40%	3.2	4.5.1.x
Minor 201	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES:

a. Non destructive test

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.25	Balance Staff and Pin Assembly, Timer				9236648
					NEXT HIGHER ASSEMBLY 9236720
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Height of pins from staff surface, min.		0.40%	3.2	Gage
102	1.5 lb. axial unseating load on pins	a	0.40%	3.2	4.5.1.z
Minor					
201	Evidence of poor workmanship		1.0%	3.3	Visual w/aid A (see 6.12)

NOTES:
a. Non destructive test

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.26	Detent, Spin, Timer				9236657
					NEXT HIGHER ASSEMBLY 9236656
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major 101	Die casting defect	10	a	3.16	Visual w/aid C (see 6.12)
Minor 201	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES: a. Reject the lot if one (1) or more defective units are found.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE		SHEET	DRAWING NUMBER
4.4.2.27	Plate, No. 2, Timer		1 OF 1	9236659
				NEXT HIGHER ASSEMBLY: 9236711

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	True position of location pin slot		0.40%	3.2	Gage
102	True position of lever pivot hole		0.40%	3.2	Gage
103	Diameter of lever pivot hole, max.		0.40%	3.2	Gage
104	Diameter of location pin hole, max.		0.40%	3.2	Gage
105	Width of location pin slot, max.		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES: a. Level I of MIL-STD-105 may be used with the special plan in 4.4.2.

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.28	Lever Assembly, Timer				9236661
					NEXT HIGHER ASSEMBLY 9236711
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major 101	2 lb. push off load on staking	a	0.40%	3.2	4.5.1.aa
Minor 201	Evidence of poor workmanship		1.0%	3.3	Visual w/aid B (see 6.12)

NOTES: a. Non destructive test

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE	SHEET	OF	DRAWING NUMBER
4.4.2.29	Lever Staff Assembly, Timer	1	1	9236663
				NEXT HIGHER ASSEMBLY: 9236661

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major 101	1 lb axial unseating load	a	0.40%	3.2	4.5.1.ab
Minor 201	Evidence of poor workmanship		1.0%	3.3	Visual w/aid C (see 6.12)

NOTES:
a. Non destructive test

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.30	Pallet Support and Pin Assembly, Timer		9236665
			NEXT HIGHER ASSEMBLY 9236661

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Distance from lever seat to end of pin min.		0.40%	3.2	Gage
102	3 lb. push off load on pin	a	0.40%	3.2	4.5.1.ac
Minor					
201	Evidence of poor workmanship		1.0%	3.3	Visual w/aid C (see 6.12)

NOTES: a. Non destructive test

AMSMC Form 1570, 1 Feb 85 Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE	SHEET	OF	DRAWING NUMBER
4.4.2.31	Plate No. 4, and Bearing Assembly Timer	1	1	9236668
				NEXT HIGHER ASSEMBLY 9236711

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	2 lb. push off load on bearing	a	0.40%	3.2	4.5.1.ad
102	Gap between bearing and plate		0.40%	3.2	Visual w/aid C (see 6.12)
Minor					
201	Evidence of poor workmanship		1.0%	3.3	Visual w/aid C (see 6.12)

NOTES: a. Non destructive test

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.32	Plate No. 4, Timer				9236669
					NEXT HIGHER ASSEMBLY 9236668
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	True position of gear & pinion No. 2 pivot hole		0.40%	3.2	Gage
102	True position of gear and pinion No. 1 pivot hole		0.40%	3.2	Gage
103	True position of lever pivot hole		0.40%	3.2	Gage
104	True position of location pin slot		0.40%	3.2	Gage
105	True position of location pin hole		0.40%	3.2	Gage
106	Diameter of lever hole		0.40%	3.2	Gage
107	Diameter of gear & pinion No. 2 pivot hole, max.		0.40%	3.2	Gage
108	Diameter of gear & pinion No. 1 pivot hole, max.		0.40%	3.2	Gage
109	Diameter of location pin hole, max.		0.40%	3.2	Gage
110	Width of location pin slot, max.		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.33	Bearing, Timer				9236670
					NEXT HIGHER ASSEMBLY 9236668
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major 101	Minor inside diameter, max.		0.40%	3.2	Gage
Minor 201	Evidence of poor workmanship		1.0%	3.3	Visual w/aid C (see 6.12)

NOTES:

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE	SHEET	OF	DRAWING NUMBER
4.4.2.34	Escape Wheel and Pinion Assembly, Timer	1	1	9236672
				NEXT HIGHER ASSEMBLY: 9236711

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Runout of wheel major diameter to shaft		0.40%	3.2	Gage
102	Runout of wheel to shaft		0.40%	3.2	Gage
103	10 lb. push off load	a	0.40%	3.2	4.5.1.ae
104	Adhesion of plating (when applicable)	b		3.2	
Minor					
201	Evidence of poor workmanship		1.0%	3.3	Visual w/aid A (see 6.12)

NOTES: a. Non destructive test
b. Acceptace criteria, sampling and test method shall be as specified in Fed Spec QQ-N-290.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.35	Pinion, Escape, Timer				9236673
					NEXT HIGHER ASSEMBLY 9236672
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Diameter of pivots, min.		0.40%	3.2	Gage
102	Tolerance zone around teeth		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		1.0%	3.3	Visual w/aid B (see 6.12)

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.36	Wheel, Escape, Timer				9236674
					NEXT HIGHER ASSEMBLY 9236672
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major 101	Damaged or missing tooth		0.40%	3.2	Visual w/aid A (see 6.12)
Minor 201	Evidence of poor workmanship		1.0%	3.3	Visual w/aid B (see 6.12)

NOTES:
a. Level I of MIL-STD-105 may be used with the special plan in 4.4.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.37	Gear No. 1 and Pinion Assembly, Timer				9236675
					NEXT HIGHER ASSEMBLY
					9236711
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Runout of gear to shaft		0.40%	3.2	Gage
102	Runout of gear major diameter to shaft		0.40%	3.2	Gage
103	12 lb. push off load staking	a	0.40%	3.2	4.5.1.af
Minor					
201	Evidence of poor workmanship		1.0%	3.3	Visual w/aid A (see 6.12)

NOTES: a. Non destructive test

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.38	Pinion, No. 1, Timer				9236677
					NEXT HIGHER ASSEMBLY
					9236675
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Diameter of pivots, min.		0.40%	3.2	Gage
102	Tolerance zone around pinion teeth		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		1.0%	3.3	Visual w/aid B (see 6.12)

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.39	Gear No. 2 and Pinion Assembly, Timer				9236678
					NEXT HIGHER ASSEMBLY 9236711
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Runout of gear to shaft		0.40%	3.2	Gage
102	Runout of gear major diameter to shaft		0.40%	3.2	Gage
103	10 lb. push off load on staking	a	0.40%	3.2	4.5.1.ag
Minor					
201	Evidence of poor workmanship		1.0%	3.3	Visual w/aid A (see 6.12)

NOTES: a. Non destructive test

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.40	Pinion, No. 2, Timer				9236680
					NEXT HIGHER ASSEMBLY
					9236678
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Diameter of upper pivot, min.		0.40%	3.2	Gage
102	Diameter of lower pivot, min.		0.40%	3.2	Gage
103	Tolerance zone around pinion teeth		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		1.0%	3.3	Visual w/aid B (see 6.12)

NOTES:

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.41	Plate, No. 6, Timer				9236681
					NEXT HIGHER ASSEMBLY 9236711
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Diameter of location pin hole, max.		0.40%	3.2	Gage
102	Width of location pin slot, max.		0.40%	3.2	Gage
103	Diameter of gear & pinion No. 2 hole, max.		0.40%	3.2	Gage
104	Diameter of gear & pinion No. 1 hole, max.		0.40%	3.2	Gage
105	Diameter of escapement hole, max.		0.40%	3.2	Gage
106	Diameter of ring gear pivot hole, max.		0.40%	3.2	Gage
107	True position of tumbler slots		0.40%	3.2	Gage
108	True position of location pin hole		0.40%	3.2	Gage
109	True position of location pin slot		0.40%	3.2	Gage
110	True position of gear & pinion No. 2 pivot hole		0.40%	3.2	Gage
111	True position of gear & pinion O. 1 pivot hole		0.40%	3.2	Gage
112	Length of minor outside diameter, max.		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.42	Housing, Barrel, Timer				9236688
					NEXT HIGHER ASSEMBLY 9236711
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Depth of barrel diameter, min.		0.40%	3.2	Gage
102	Outside diameter, min.		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.43	Screw, Machine, Fillister Head, Timer				9236689
					NEXT HIGHER ASSEMBLY 9236711
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Thread pitch diameter, min.		0.65%	3.2	Gage
102	Thread major diameter, min.		0.65%	3.2	Gage
Minor					
201	Distance to head, min.		1.0%	3.2	Gage
202	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.44	Timing Scroll Assembly, Timer				9236690
					NEXT HIGHER ASSEMBLY 9236711
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	15 lb. push off load on ring gear support and shaft assembly	a	0.40%	3.2	4.5.1.ah
102	Perpendicularity of ring gear to shaft		0.40%	3.2	Gage
103	Height from bottom of scroll to top of boss seat on shaft		0.40%	3.2	Gage
104	2 in. lb. torque on ring gear and scroll	a	0.40%	3.2	4.5.2.e
Minor					
201	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES: a. Non destructive test

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.45	Ring Gear, Support and Shaft Assembly, Timer				9236691
					NEXT HIGHER ASSEMBLY 9236690
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	True position of gear minor diameter		0.40%	3.2	Gage
102	Distance from top of ring gear to bottom of upper shaft pivot, max.		0.65%	3.2	Gage
Minor					
201	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.46	Ring Gear and Support Assembly, Timer				9236692
					NEXT HIGHER ASSEMBLY
					9236691
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major 101	5 lb. pull load on gear	a	0.40%	3.2	4.5.1.ai
Minor 201	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES:
a. Non destructive test

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.47	Gear, Ring, Timer				9236694
					NEXT HIGHER ASSEMBLY 9236692
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major 101	Tooth to tooth composite error		0.40%	3.2	Gage
Minor 201	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES:

a. Level I of MIL-STD-105 may be used in accordance with special plan in 4.4.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.48	Shaft, Ring Gear, Timer	1 OF 1	9236695
			NEXT HIGHER ASSEMBLY: 9236691

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Height of upper pivot, max.		0.40%	3.2	Gage
102	True position of scroll diameter		0.40%	3.2	Gage
103	Height from support seat to lower pivot end		0.40%	3.2	Gage
104	Diameter of pivots, min.		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.49	Mainspring and Barrel Assembly, Timer				9236697
					NEXT HIGHER ASSEMBLY 9236690
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major 101	Maximum & minimum torque	a	0.40%	3.2	4.5.3.d
Minor 201	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES: a. Non destructive test

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.50	Setback Pin Assembly, Timer				9236702
					NEXT HIGHER ASSEMBLY
					9236711
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Depth of inside diameter		0.40%	3.2	Gage
102	Staking missing		0.40%	3.2	Visual
Minor					
201	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.51	Pin, Setback, Timer				9236703
					NEXT HIGHER ASSEMBLY 9236702
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major 101	Inside diameter, min.		0.40%	3.2	Gage
Minor 201	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.52	Spring, Setback, Timer		9236705
			NEXT HIGHER ASSEMBLY 9236711

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major 101	Load test	a	0.40%	3.2	4.5.3.e
Minor 201	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES:

a. Non destructive test

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.53	Ring Gear, Support and Shaft Assembly, Timer				9236708
					NEXT HIGHER ASSEMBLY 9236690
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	True position of gear minor diameter		0.40%	3.2	Gage
102	5 lbs. pull off load on gear	a	0.40%	3.2	4.5.1.ai
103	Distance from top of ring gear to bottom of upper shaft pivot, max.		0.65%	3.2	Gage
Minor					
201	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES:

a. Non destructive

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.54	Timer Assembly				9236711
					NEXT HIGHER ASSEMBLY 9236718
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Limits of angle between tumbler and scroll exit port		0.40%	3.2	Gage
102	Balance wheel not detented in proper position and setback detent not restraining spin detent		0.40%	3.2	Visual
103	Mainspring not wound as indicated		0.40%	3.2	Manual
104	Mainspring barrel stakes missing or insufficient		0.40%	3.2	Visual
105	Timer function test	a	100%	3.9.2	4.5.9
106	Timer non-function test	a	100%	3.9.2	4.5.10
107	Setback pin arming test	a	100%	3.12	4.5.11
108	Timer beat rate and amplitude	a	100%	3.13	4.5.13
109	Expansion plug above flush		0.40%	3.2	Visual
110	Protective cap missing		0.65%	3.2	Visual
111	9 lb. axial load	b	c	3.2	4.4.3.4
Minor					
201	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES:
a. Non destructive
b. Destructive test, see para 4.4.3.4 for applicable sampling plan.
c. Reject timer assembly inspection lot if one (1) or more defective units are found.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE	SHEET	OF	DRAWING NUMBER
4.4.2.55	Plate No. 1 Assembly, Timer	1	1	9236712
				NEXT HIGHER ASSEMBLY 9236711

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	True position of balance wheel, staff and hairspring assembly		0.40%	3.2	Gage
102	50 in. lb. torque load on ring gear assembly	a	0.40%	3.2	4.5.2.d
103	5 lb. axial unseating load on spin detent pivot pin	a	0.40%	3.2	4.5.1.t
104	5 lb. axial unseating load on bushing	a	0.40%	3.2	4.5.1.u
105	40 lb. axial unseating load on dowel pins	a	0.40%	3.2	4.5.1.v
106	Balance wheel outside tolerance zone	a	0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES:

a. Non destructive test

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.56	Tube, Hairspring, Timer				9236713
					NEXT HIGHER ASSEMBLY
					9236712
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major 101	Diameter of knurl, min.		0.40%	3.2	Gage
Minor 201	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.57	Support and Pivot Assembly, Timer				9236714
					NEXT HIGHER ASSEMBLY 9236712
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	3.0 in. lb. torque on hairspring pivot	a	0.40%	3.2	4.5.2.g
102	15 lb. axial load on hairspring, pivot	a	0.40%	3.2	4.5.1.aj
103	Inside diameter of pivot after staking, min.		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES:

a. Non destructive test

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.58	Support, End, Timer				9236715
					NEXT HIGHER ASSEMBLY 9236714
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major 101	Tube diameter, min.		0.40%	3.2	Gage
Minor 201	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.59	Balance Wheel, Staff and Hairspring Assembly Timer				9236718
					NEXT HIGHER ASSEMBLY 9236712
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major 101	Balance wheel outside tolerance zone		0.40%	3.2	Gage
Minor 201	Evidence of poor workmanship		1.0%	3.3	Visual w/aid A (see 6.12)

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.60	Balance Wheel Assembly				9236720
					NEXT HIGHER ASSEMBLY 9236718
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	4 oz. axial push off load on balance wheel	a	0.40%	3.2	4.5.1.a
102	6 lb. axial unseating load on lower hairspring pivot	b	0.40%	3.2	4.5.1.b
Minor					
201	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES: a. Non destructive test
b. Destructive test

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.61	Scroll, Timing, Timer		9271993
			NEXT HIGHER ASSEMBLY
			9236690

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical					
1	Discontinuity or crack in spiral wall		100%	3.2	Visual w/aid A (see 6.12)
Major					
101	Die casting defect	10	a	3.16	Visual w/aid C (see 6.12)
102	Depth of grooves, min.		0.40%	3.2	Gage
103	Height of lower contact surface, min.		0.40%	3.2	Gage
104	Width of groove at location 1		0.40%	3.2	Gage
105	True position of groove at location 1		0.40%	3.2	Gage
106	Width of groove at location 3		0.40%	3.2	Gage
107	Major diameter, max.		0.40%	3.2	Gage
108	Width of groove at location 6		0.40%	3.2	Gage
109	True position of groove at location 3		0.40%	3.2	Gage
110	True position of groove at location 6		0.40%	3.2	Gage
111	True position of major diameter		0.65%	3.2	Gage
Minor					
201	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES: a. Reject the lot if one (1) or more defective units are found.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.62	Body Assembly				9352371
					NEXT HIGHER ASSEMBLY
					9352381/9352382
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major 101	5 lb. push out load on lead	a	0.40%	3.2	4.5.1.d
Minor 201	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES:
a. Non destructive test

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.63	Body				9352372
					NEXT HIGHER ASSEMBLY
					9352371
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Major diameter of small outside thread		0.40%	3.2	Gage
102	Pitch diameter of small outside thread		0.40%	3.14	Gage
103	Major diameter of large outside thread		0.40%	3.2	Gage
104	Pitch diameter of large outside thread		0.40%	3.2	Gage
105	SSD interface diameter, min.		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.64	Ogive	1 OF 1	9352373
			NEXT HIGHER ASSEMBLY 9362837

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Length between wrench slots, max.		0.40%	3.2	Gage
102	Die casting defects	10	a	3.2 & 3.16	Visual w/aid C (see 6.12)
Minor					
201	Ogive profile		1.0%	3.2	Gage
202	Evidence of poor workmanship		1.0%	3.3	Visual
203b	Salt Spray Test				

NOTES:
a. Reject the lot if one (1) or more defective units are found.
b. Acceptance criteria, sampling plan and test method shall be as specified in MIL-T-12879 or equivalent written process control procedure which has design agency approval.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.65	Key, Setting				9352374
					NEXT HIGHER ASSEMBLY
					9352381/9352382
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Die casting defects	10	a	3.2 & 3.16	Visual w/aid C (see 6.12)
Minor					
201	Evidence of poor workmanship		1.0%	3.3	Visual
202b	Salt Spray Test				

NOTES: a. Reject the lot if one (1) or more defective units are found.
b. Acceptance criteria, sampling plan and test method shall be as specified in MIL-T-12879 or equivalent written process control procedure which has design agency approval.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.66	Leaf Spring				9352375
					NEXT HIGHER ASSEMBLY
					9352381/9352382
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major 101	Load test	a,b	0.40%	3.2	4.5.3.f
Minor 201	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES:
a. Non destructive test
b. Reduced sampling is not permitted.

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.67	Sleeve				9352376
					NEXT HIGHER ASSEMBLY 9352384
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Barrel diameter, max.		0.40%	3.2	Gage
102	Scroll diameter, min.		0.40%	3.2	Gage
103	True position of scroll diameter		0.40%	3.2	Gage
104	Diameter of trigger location pin holes, max.		0.40%	3.2	Gage
105	True position of trigger location pin holes		0.40%	3.2	Gage
106	Depth of release slot, min.		0.40%	3.2	Gage
107	Diameter of snap ring slot, min.		0.65%	3.2	Gage
108	Height of scroll diameter, max.		0.65%	3.2	Gage
109	Die casting defects	10	a	3.2 & 3.16	Visual w/aid C (see 6.12)
110	Load test	10b	a	3.19	4.5.22
Minor					
201	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES:
a. Reject the lot if one (1) or more defective units are found.
b. Destructive test

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.68	Spacer, Trigger	1 OF 1	9352377
			NEXT HIGHER ASSEMBLY: 9362848

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	True position of safety plate pivot hole		0.40%	3.2	Gage
102	True position of release lever pivot hole		0.40%	3.2	Gage
103	Diameter of safety plate pivot hole, max.		0.40%	3.2	Gage
104	Diameter of release lever pivot hole, max.		0.40%	3.2	Gage
105	Die casting defects	10	b	3.2 & 3.16	Visual w/aid C (see 6.12)
106	Load test	10a	b	3.20	4.5.23
Minor					
201	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES:
a. Destructive test
b. Reject the lot if one (1) or more defective units are found.
c. Alternative "Compressive Load Test" may be performed in lieu of Inspections 105 and 106. See para. 4.4.2.76 Trigger Assembly

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.69	Plate, Top, Trigger		9352378
			NEXT HIGHER ASSEMBLY 9352387

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Diameter of firing arm pivot, hole max.		0.40%	3.2	Gage
102	Diameter of scroll pivot hole, max.		0.40%	3.2	Gage
103	True position of location pin slot		0.40%	3.2	Gage
104	True position of hole "Y"		0.40%	3.2	Gage
105	True position of scroll pivot hole		0.40%	3.2	Gage
106	Diameter of location pin hole, max.		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES:
a. Alternative "compressive load test" may be performed in lieu of above inspections, see paragraph 4.4.2.76, Trigger Assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.70	Plate, Bottom Trigger	1 OF 1	9352379
			NEXT HIGHER ASSEMBLY 9352387

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Diameter of location pin hole, max.		0.40%	3.2	Gage
102	Diameter of firing arm pivot hole, max.		0.40%	3.2	Gage
103	True position of location pin slot		0.40%	3.2	Gage
104	True position of release lever pivot hole		0.40%	3.2	Gage
105	True position of safety plate pivot hole		0.40%	3.2	Gage
106	True position of firing arm shaft pivot hole		0.40%	3.2	Gage
107	Diameter of safety plate pivot hole, max.		0.40%	3.2	Gage
108	Diameter of release level pivot hole, max.		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES: Alternative "compressive load test" may be performed in lieu of above inspections, see paragraph 4.4.2.76, Trigger Assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.71	Fuze, Mechanical Time and Superquick, M577A1/M582A1 (Prior to Assembly into the Body)	1 OF 1	9352381/9352382
			NEXT HIGHER ASSEMBLY: Final

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical					
1	Marking missing from major flat on SSD diameter		100%	3.15	Visual
2	Marking missing from outside diameter of trigger spacer in area of setback pin cavity		100%	3.15	Visual
3	SSD interlock pin not engaged in trigger release lever		100%	3.15	Visual
Major					
101	Trigger not in unfired position		100%	3.2	Visual
Minor					
201	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.72	Fuze, Mechanical Time and Superquick, M577A1/M582A1	1 OF 1	9352381/9352382
			NEXT HIGHER ASSEMBLY: Final

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Hairline and numbers not visible through window		0.40%	3.2	Visual
102	Setting test	a	0.40%	3.2	4.5.2.a
103	Fuze not set on shipping position		0.40%	3.2	Visual
104	Height from bottom of fuze to bottom of ogive		100%	3.2	Gage
105	Adhesive missing on indicated surfaces		0.65%	3.2	Visual
Minor					
201	Evidence of poor workmanship		1.0%	3.3	Visual
202	Marking incorrect or unreadable		1.0%	3.2	Visual

NOTES:

a. Non destructive test

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.73	Fuze, Mechanical Time and Superquick, M577A1/M582A1 Destructive Lot Acceptance Test	1 OF 3	9352381/9352382
			NEXT HIGHER ASSEMBLY: Final

CATEGORY		EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical						
		Jolt and Jumble Test:	f	-	3.4	4.5.16
	1	a. Functioning of explosive element				
	2	b. SSD rotor gear not located and locked in the safe positon by both spin and interlock detent				
	3	c. Trigger setback pin and spin detent not secure and in the safe position				
	4	d. SSD spin detent broken and the interlock pin not secure and restrained by the trigger release lever.				
	5	e. Trigger firing arm assembly not secure and restrained by the release lever				
	6	Transportation Vibration Test	g	-	3.5	4.5.17
	7	Twelve Meter Drop Test	10	h	3.6	4.4.3.3, 4.5.18
		Ballistic Performance Test:				
	8	a. Ballistic impact non-functioning	10.a		3.11.3.1	4.5.21.1
	9	b. Premature	70.b		3.11.1	4.5.21
Special						
	a	Jolt and Jumble f. Any part broken or damaged except for critical defect above	f	-	3.4.	4.5.16

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.73	Fuze, Mechanical Time and Superquick, M577A1/M582A1 Destructive Lot Acceptance Test	2 OF 3	9352381/9352382
			NEXT HIGHER ASSEMBLY: Final

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Major					
101	Water Proofness Test	4	h	3.7	4.4.3.5, 4.5.20
	Ballistic Performance Test				
102	c. Ballistic impact functioning	10	-	3.11.3.2	4.5.21.2
103	d. Group reliability	50c	-	3.11.3.3	4.5.21
104	e. Estimated percent defective	50d	-	3.11.3.3	4.5.21
105	f. Off times	50d	i	3.11.3.3	4.5.21
106	g. Fuze setting	70b	i	3.11.2	4.5.21
107	h. Total duds	60e	-	3.11.3	4.5.21
Info					
300	ICM Ballistic Mechanical Time Test	10	-	-	4.5.21.6

NOTES:

a. Samples for this test are transportation vibrated fuzes from Category 6. The sample size shall be as specified in Table V.

b. Samples for this test are those fuzes subject to ballistic impact non-functioning, ballistic impact functioning, mechanical time, and extreme temperature test. The sample size shall be as specified in Table V.

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	OF	DRAWING NUMBER
4.4.2.73	Fuze, Mechanical Time and Superquick, M577A1/M582A1 Destructive Lot Acceptance Test	3	3	9352381/9352382
				NEXT HIGHER ASSEMBLY: Final

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	c. Samples for this test are those fuzes subjected to mechanical time and extreme temperature test. The sample size shall be as specified in Table V, and shall include 10 transportation vibrated fuzes from Category 2. d. Samples are the samples from Category 103. e. Samples for this test are those fuzes subjected to ballistic impact functioning, mechanical time, and extreme temperature test. The sample size shall be as specified in Table V. f. Sample size shall be as specified in 4.4.3.1. g. Sample size shall be as specified in 4.3.3.2. h. Reject the lot if one (1) or more defective units are found.				

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.74	Three Module & Assembly	1 OF 2	9352384
			NEXT HIGHER ASSEMBLY: 9352381/9352382

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical					
1	Setback detent does not hold spin detent in position to lock the trigger in the unfired position		100%	3.2	Visual/Manual
2	SSD release lever missing or not restrained by firing arm shaft in unfired position		100%	3.2	Visual
Major					
101	Timer housing stakes missing or insecure		0.40%	3.2	Visual/Manual
102	Setback retainer stakes missing or insecure		0.40%	3.2	Visual/Manual
103	Zero setting improper		0.40%	3.2	Visual
104	Trigger assembly not in unfired position		0.40%	3.2	Visual
105	Grease missing in setback pin cavity		0.40%	3.2	Visual
106	Position of tumblers incorrect		0.40%	3.2	Visual
107	Skirt crimps missing or insecure		0.40%	3.2	Visual/Manual
108	10 + 4.0 in.-lb. grip ring torque	a	0.40%	3.2	4.5.2.c

NOTES: a. Non destructive test

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET 2 OF 2	DRAWING NUMBER
4.4.2.74	Three Module & Assembly		9352384
			NEXT HIGHER ASSEMBLY 9352381/9352382

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
109	4.5.min. in.-lb. setting torque	a	0.40%	3.2	4.5.2.b
110	Tumbler stop	a	0.40%	3.2	4.5.2.f
111	Trigger setback pin arming		0.40%	3.12	4.5.14
112	True position of hairline		0.40%	3.12	Gage
113	Gap between trigger and sleeve		0.65%	3.2	Visual
Minor 201	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES: a. Non destructive test

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

MIL-F-64042A (AR)

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.75	Counter Assembly	1 OF 1	9352385
			NEXT HIGHER ASSEMBLY 9352384

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical					
1	Counter Wheel Transfer	a	100%	3.10	4.5.12
Major					
101	5 lb. push off on retaining ring	a	0.40%	3.2	4.5.1.o
102	Hairline not stationary with respect to body and in excess of allowable tolerances		0.40%	3.2	Manual
103	Index lines missing or unreadable		0.40%	3.2	Visual
Minor					
201	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES: a. Non destructive test

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.76	Trigger Assembly	1 OF 1	9362827
			NEXT HIGHER ASSEMBLY: 9352381/9352382

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical					
1	Height of firing pin from top plate		100%	3.2	Gage
Major					
101	Rivets above flush		0.40%	3.2	Visual
102	Torsion spring not prewound		0.40%	3.2	Manual
103b	2000 RPM Detent Release	a	100%	3.8.2	4.5.6
104b	1000 RPM Detent Non-Release	a	100%	3.8.2	4.5.7
105b	Sequential Trigger Function	a	100%	3.9.1	4.5.8
Minor					
201	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES: a. Non-destructive test

b. If the tests of 103, 104 and 105 are performed while the trigger assembly is under the compressive load stipulated on the drawing, then the inspections noted in paragraphs 4.4.2.68 and those required by paragraphs 4.4.2.69 and 4.4.2.70 may be omitted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE	SHEET	OF	DRAWING NUMBER
4.4.2.77	Ogive Assembly	1	1	9362837
				NEXT HIGHER ASSEMBLY: 9352381/9352382

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	65 lb. push out load on window	a, c	0.40%	3.2	4.5.1.e
102	Air leakage	b	0.40%	3.14	4.5.15
Minor					
201	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES: NOTES: a. Destructive test
b. Non destructive test
c. Samples for this test may be those samples subjected to the air leak test per CD 102.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.78	Safe Separation Device Assembly	1 OF 1	9362838
			NEXT HIGHER ASSEMBLY: 9352381/9352382

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical					
1	Rotor not fully detented by both detents in safe position		100%	3.2	Visual
2	Non-arming spin test	a	100%	3.8.1	4.5.5
3	Time-to-arm, min.	a	100%	3.8.1	4.5.4
Major					
101	Time-to-arm, max.	a	100%	3.8.1	4.5.4
Minor					
201	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES:

a. Non destructive test

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.79	SSD Loaded Assembly				9362839
					NEXT HIGHER ASSEMBLY 9362838
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Detonator inverted		0.40%	3.2	Visual
102	3 lb. axial unseating load on detonator	a	0.40%	3.2	4.5.1.f
Minor					
201	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES: a. Non destructive test

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.80	Interlock Detent Assembly, SSD				9362843
					NEXT HIGHER ASSEMBLY 9362842
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	True position of interlock pin		0.40%	3.2	Gage
102	31 lb. cantilever load on pin	a	0.40%	3.2	4.5.1.k
103	5 lb. axial load on interlock pin	b	0.40%	3.2	4.5.1.1
Minor					
201	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES:
a. Destructive test
b. Non destructive test

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.81	Pin, Interlock, SSD				9362844
					NEXT HIGHER ASSEMBLY 9362843
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major 101	Release lever interface diameter, min.		0.40%	3.2	Gage
Minor 201	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE	SHEET	OF	DRAWING NUMBER
4.4.2.82	Spacer & Plate Assembly, SSD	1	1	9362845
				NEXT HIGHER ASSEMBLY 9362840

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major 101	Rotor lock does not return to dimension indicated after being depressed to surface "x".		0.40%	3.2	Gage
Minor 201	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.83	Plate, Top SSD	1 OF 1	9362846
			NEXT HIGHER ASSEMBLY: 9362845

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Diameter of trigger location pin holes, max.		0.40%	3.2	Gage
102	True position of trigger location pin holes		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES: Level I of MIL-STD-105 may be used in accordance with special plan in 4.4.2.

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.84	Spacer, SSD		9362847
			NEXT HIGHER ASSEMBLY 9362845

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major 101	Die casting defects	10	a	3.2 & 3.16	Visual w/aid C (see 6.12)
Minor 201	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES: a. Reject the lot if one (1) or more defective units are found.

AMSMC Form 1570, 1 Feb 85 Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	OF	DRAWING NUMBER
4.4.2.85	Spacer Assembly, Trigger	1	1	9362848
				NEXT HIGHER ASSEMBLY: 9352387

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	True position of bottom pins		0.40%	3.2	Gage
102	Height of bottom pins above spacer surface		0.65%	3.2	Gage
Minor					
201	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE	SHEET	OF	DRAWING NUMBER
4.4.2.86	Firing Safety Plate Assembly, Trigger	1	1	9362849
				NEXT HIGHER ASSEMBLY: 9352387

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Perpendicularity of plate to shaft		0.40%	3.2	Gage
102	25 lb. push off load on staking	a	0.40%	3.2	4.5.1.r
Minor					
201	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES:

a. Non destructive test

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.87	Pin, Firing, Trigger	1 OF 1	9362850
			NEXT HIGHER ASSEMBLY 9352387

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Profile of point		0.40%	3.2	Gage
102	Surface finish incorrect		0.40%	3.2	Gage w/aid C (see 6.12)
103	Length of firing pin point, min. & max.		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		1.0%	3.3	Visual w/aid A (see 6.12)

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.88	Pinion, SSD				9381646
					NEXT HIGHER ASSEMBLY 9381647
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Diameter of pivots, min.		0.40%	3.2	Gage
102	Pivot length, max.		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		1.0%	3.3	Visual w/aid A (see 6.12)

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.89	Gear and Pinion Assembly, SSD	1 OF 1	9381647
			NEXT HIGHER ASSEMBLY 9362840

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical 1	Stake missing or incomplete		100%	3.2	Visual w/aid A (see 6.12)
Major 101	12 lb. push off on staking	a	0.40%	3.2	4.5.1.h
Minor 201	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES:
a. Non destructive test

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.90	Timer Housing Assembly	1 OF 1	9392482
			NEXT HIGHER ASSEMBLY: 9352384

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical					
1	Setting gears and pinions missing or deformed		100%	3.2	Visual
Major					
101	80 lb. axial unseating load	a	0.40%	3.2	4.5.1.ak
102	Rivets above flush		0.65%	3.2	Visual
Minor					
201	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES: a. Destructive test

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.91	Rotor Assembly, SSD				11786090
					NEXT HIGHER ASSEMBLY 9362840
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major 101	5 lb. axial load on shaft	a	0.40%	3.2	4.5.1.g
Minor 201	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES: a. Non destructive test

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.92	Shaft, Rotor, SSD				11786091
					NEXT HIGHER ASSEMBLY 11786090
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Length of upper pivot, max.		0.40%	3.2	Gage
102	Length of rotor diameter and lower pivot max.		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 11786092
4.4.2.93	Rotor, SSD				NEXT HIGHER ASSEMBLY 11786090
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Die casting defect	10	a	3.16	Visual w/aid C (see 6.12)
102	Torque on rotor teeth	10b	a	3.18	4.5.22
Minor					
201	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES:
a. Reject the lot if one (1) or more defective units are found
b. Destructive test

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.94	Escapement Wheel Assembly, SSD				11786093
					NEXT HIGHER ASSEMBLY 9362840
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical 1	Stake missing or insufficient		100%	3.2	Visual w/aid A (see 6.12)
Major 101	10 lb. push off load on staking	a	0.40%	3.2	4.5.1.i
Minor 201	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES:
a. Non destructive test

AMSMC Form 1570, 1 Feb 85 Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	OF	DRAWING NUMBER
4.4.2.95	Lever Assembly	1	1	11786095
				NEXT HIGHER ASSEMBLY 9362840

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	20 lb. axial unseating load on shaft	a	0.40%	3.2	4.5.1.j
102	Stakes missing or insufficient		0.40%	3.2	Visual w/aid A (see 6.12)
Minor					
201	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES:
a. Destructive test

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.96	Shaft, Lever, SSD	1 OF 1	11786096
			NEXT HIGHER ASSEMBLY: 11786095

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Pivot diameters, min.		0.40%	3.2	Gage
102	Pivot lengths, max.		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		1.0%	3.3	Visual w/aid A (see 6.12)

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-64042A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.97	Lever, SSD				11786097
					NEXT HIGHER ASSEMBLY 11786095
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major 101	Profile incorrect		0.40%	3.2	Gage
Minor 201	Evidence of poor workmanship		1.0%	3.3	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

4.4.3 Testing

4.4.3.1 Jolt and jumble

4.4.3.1.1 Initial production lots. Beginning with the first lot produced and continuing until six consecutive lots have complied with the acceptance criteria specified herein, a sample of twelve (12) loaded fuze assemblies set in the shipping position shall be randomly selected from each lot and subjected to the Jolt and Jumble test specified in 4.5.16. If one or more assemblies are classed defective, the lot shall be rejected.

4.4.3.1.2 Subsequent production lots. After six consecutive lots have complied with the criteria specified in 4.4.3.1.1, a sample of six (6) loaded fuze assemblies shall be randomly selected from each of the subsequent lots and tested as specified above. If one or more fuzes are classed defective, the lot shall be rejected and sampling and testing procedures shall revert to those specified in 4.4.3.1.1 until six additional consecutive lots have again been accepted.

4.4.3.2 Transportation vibration. A sample of thirty-five (35) loaded fuze assemblies set in the shipping position shall be randomly selected from each lot and subjected to the Transportation Vibration test specified in 4.5.17. If any fuze is found to be defective, the lot shall be rejected. If the fuzes are not found to be defective, the remaining twenty-five (25) units shall be forwarded to the proving grounds for ballistic testing in accordance with 4.4.3.6. When the ballistic test is accomplished in accordance with 4.4.3.6.2, thirty (30) samples shall be used in lieu of thiry-five (35) with twenty (20) going to the proving grounds in lieu of twenty-five (25).

4.4.3.3 Twelve meter drop. Beginning with the first article sample and the first lot produced and continuing until three (3) additional consecutive production lots have complied with the acceptance criteria specified herein, a sample as specified in 4.4.2.73 shall be randomly selected from each lot and subjected to the tests as specified in 4.5.18. If one or more assemblies are found defective, the lot shall be rejected. After three consecutive lots are found acceptable, the test shall be discontinued. A first article sample shall be submitted, when necessary, as required by 4.3.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

4.4.3.4 Axial load test. The Timer Hairspring and Timer Support and Pivot Assembly samples selected for the axial load test shall be randomly selected from each batch used to assemble the Timer Assembly inspection lot. One sample shall be welded at the beginning of the Timer Assembly inspection lot manufacturing period, two samples shall be welded at random times during the period. The samples shall contain the number of welds specified on drawing 9236711 and shall be welded on the equipment used to manufacture the Timer Assembly inspection lot using the same equipment parameters (tip, frequency, pressure and energy). The equipment parameters used during an inspection lot manufacturing period shall be recorded. If prior to welding the required number of test samples, the inspection lot manufacturing period is interrupted and can not be continued on the same equipment with the same parameters. Timer Assemblies shall be selected from the inspection lot as test samples. The last Timer Assembly of the inspection lot manufacturing period shall be selected and, if necessary, Timer Assemblies shall be randomly selected from the same period. A Timer Assembly inspection lot shall consist of a maximum of two (2) hours production and manufactured on the same equipment and the same equipment parameters.

4.4.3.5 Waterproofness. From each lot produced, a sample as specified in 4.4.2.73 shall be randomly selected and subjected to the Waterproofness test specified in 4.5.20. If one or more assemblies are classed defective, the lot shall be rejected.

4.4.3.6 Ballistic performance.

4.4.3.6.1 Initial production lots. Beginning with the first article sample, following with the first lot produced and continuing until three consecutive lots have complied with the acceptance criteria specified herein, ninety (90) loaded fuze assemblies (25 of which are TV samples from 4.4.3.2) shall be randomly selected from each lot and tested as specified in 4.5.21. If one or more of the following defect criteria are found, the lot shall be rejected.

a. Premature Burst - Any premature burst (see 6.3).

b. Point Detonating Dud - More than one point detonating dud (see 6.5) in the functioning test.

c. Time Dud - More than two time duds (see 6.6) in any one phase of the extreme temperature tests or the mechanical time test.

d. Function - Any function (see 6.4) in the non-function test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

e. Off Time - Any early burst off time (EOF) or more than one late burst off time (see 6.8) in the entire ballistic test.

f. Total Duds - More than four (4) duds in the entire ballistic test.

g. Setting - More than one fuze which cannot be set to the time required by the ballistic test.

h. Failure to meet the time limits in 3.11.3 by an estimated lot percent defective greater than the appropriate value given below:

SAMPLE SIZE (see 6.7)	MAXIMUM ALLOWABLE PERCENT DEFECT
10	1.300
9	1.250
8	1.189
7	1.063
20	1.335
19	1.341
18	1.279
17	1.295
16	1.319
15	1.344

4.4.3.6.2 Subsequent production lot. After three consecutive lots have complied with the criteria in 4.4.3.6.1, a sample as specified in 4.4.2.73 shall be randomly selected from each subsequent lot and tested as specified in 4.5.21. If one or more of the defect criteria in 4.4.3.6.1 are found, the lot shall be rejected and the testing and sampling procedures shall revert to those specifed in 4.4.3.6.1.

4.4.4 Inspection equipment. The equipment required to perform the examinations and tests prescribed herein is described in the "Paragraph Reference/Inspection Method" column in the table starting with paragraph 4.4.2.1. The contractor shall submit for approval equipment designs in accordance with the terms of the contract. See Section 6 of MIL-A-48078 and Section 6 herein.

4.5 Methods of inspection

a. On all tests, spins shall be applied for five (5) seconds minimum, and peak loads shall be applied for one tenth (0.10) of a second minimum, unless otherwise specified in the test. No known defective parts or assemblies shall be placed in any lot after the following tests are performed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

b. When more than one type of test is indicated for one part or assembly, it is not necessary to use a separate part or assembly for each type of test. The tests indicated for one drawing number may be performed on one each of every part or assembly submitted for testing in accordance with the sample size listed for the test. Thus, if Test A is performed once on each of eighty (80) samples, Test B, which requires twenty-five (25) samples, extracted from the eighty (80) may be used for Test A. In order to minimize the number of samples required and scrapped, all destructive tests indicated for one drawing number shall be performed on the same samples. Thus, if Test B above is a destructive test and another destructive test (Test C requiring twenty-five (25) samples) is to be performed, then Test C shall be performed once on each of the twenty-five (25) samples selected for Test B. Care should be exercised in the performance of tests and development of test equipment to prevent damage to other components or interfaces. Such damage may invalidate subsequent tests to be performed on the part or assembly, or may cause a non-destructive test to be, in actuality, destructive. Should any conflicts arise concerning the above, the Government technical agency shall be contacted for solution. Additional samples may be required.

4.5.1 Linear load test. Any assembly in which the part or assembly on which the load is applied or is intended to be tested moves, deforms, becomes loose or detaches from its mated part or assembly, shall be classed defective. Any additional defect criteria or qualifications to the above shall be stated in the Remarks column in the following table and denoted by an asterisk (*). The first item stated in the Test column is the part or assembly which is to have the load applied. The second item indicated is the assembly on which the first item is tested. The drawing for the second item (number indicated) contains the note requirement for the test. Unless otherwise noted in the table, on each test the only part or assembly that is allowed freedom of movement is the first item in the Test column and those indicated in the Load & Application column. Sampling shall be conducted in accordance with MIL-STD-105D, Special Inspection Level S-3 at the specified AQL. However, where permissible, reduced inspection shall not be instituted unless authorized by the Design Technical Agency. Request for switching from normal to reduced inspection along with supporting data shall be submitted to US Army Armament Research and Development Command, ATTN: AMSMC-QAR-Q (D), Dover, New Jersey 07801-5001.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

TABLE II. Linear load test.

Test	Orientation	Load & Application	Remarks
a. Balance Wheel; Balance Wheel Assembly (dwg. 9236720)		4 Oz. Min., Axial Unseating as per dwg.	*Movement with respect to Balance Staff Assembly
b. Lower Hairspring Pivot Balance Wheel Assembly (dwg. 9236720)		6 Lb. Min., Axial Unseating as per dwg.	*End of Hairspring Pivot to Balance Staff Dimension not met
c. Setting Pinion; Setting Gear and Pinion Assembly (dwg. 9236484)		15 Lb. Min., Push Off as per dwg.	
d. Lead; Body Assembly (dwg. 9352371)		5 Lb. Min., Axial Push Out as per dwg.	*Stake and Lead not flush to below flush with applicable surface
e. Window; Ogive Assembly (dwg. 9362837)		65 Lb. Push Out as per dwg.	
f. Detonator; S.S.D. Loaded Assembly (dwg. 9362839)		3.00 + .25 Lb., Axial Unseating as per dwg.	
g. Rotor Shaft; Rotor Assembly (dwg. 11786090)		5 Lb. Min., Axial Load as per dwg.	*Relative motion between rotor and shaft

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

TABLE II. Linear load test - Continued.

Test	Orientation	Load & Application	Remarks
h. Gear; Gear and Pinion Assembly (dwg. 9381647)		12 Lb. Min., Push Off as per dwg.	
i. Escape Wheel; Escapement Wheel Assembly (dwg. 11786093)		10.0 Lb. Min., Push Off as per dwg.	
j. Shaft; Lever Assembly (dwg. 11786095)		20 Lb. Min., Axial Unseating as per dwg.	Parts may deform provided relative movement between shaft and lever does not occur
k. Interlock Pin; Interlock Detent Assembly (dwg. 9362843)		36.0 Lb., Cantilever as per dwg.	Movement of pin with respect to detent allowed. *Detent and pin do not maintain secure engagement. Note 6 of dwg. 9236546 not met after test load is removed
l. Interlock Pin; Interlock Detent Assembly (dwg. 9362843)	Interlock Pin down below Detent	5.0 Lb. Min., Axial Unseating down on Interlock Pin	
m. Interlock Detent Nib; Interlock Detent (dwg. 9236547)		40 Lb. Min., as per dwg.	*Evidence of Cracking or Fracturing
n. Detent Nib; Spin Detent (dwg. 9236550)		40 Lb. Min., as per dwg.	*Evidence of Cracking or Fracturing

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

TABLE II. Linear load test - Continued.

Test	Orientation	Load & Application	Remarks
o. Retaining Ring; Counter Assembly (dwg. 9352385)	Counter Base up and Washer on bottom	5 Lb. Min., Push Off up through Wheels and Tab on Retaining Ring	
p. Firing Arm; Firing Arm Assembly (dwg. 9236609)		15 Lb. Min., Push Off as per dwg.	
q. Detent Lever; Detent Assembly (dwg. 9236614)		15 Lb. Min., Push Off as per dwg.	
r. Plate; Firing Safety Plate Assembly (dwg. (9362849)		25 Lb. Min., Push Off as per dwg.	
s. Lever; S.S.D. Release Assembly (dwg. 9236620)		10 Lb. Min., Push Off as per dwg.	
t. Spin Detent Pivot Pin; Plate No. 1 Assembly (dwg. 9236712)		5 Lb. Min., Axial Unseating as per dwg.	Plate No. 1 Assembly less Ring Gear Assembly. *Pin end to Plate No. 1 Bottom Surface Dimension not met

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

TABLE II. Linear load test - Continued.

Test	Orientation	Load & Application	Remarks
u. Bushing; Plate No. 1 Assembly (dwg. 9236712)		5 Lb. Min., Axial Unseating as per dwg.	Plate No. 1 Assembly less Hairspring Tube, Balance Wheel Assembly and Intermediate Support *Bushing to Plate No. 1 Dimension not met
v. Dowel Pins; Plate No. 1 Assembly (dwg. 9236712)		40 Lb. Min., Axial Unseating as per dwg.	Plate No. 1 Assembly less Ring Gear Assembly Both Pins. *Plate No. 1 to end of Pin Dimension not met
w. Balance Wheel, Staff and Hairspring Assembly; Plate No. 1 Assembly (dwg. 9236712)		6 Lb. Min., Pull Out as per dwg. or 9 lb. min. axial load per dwg.	After clamping with Outboard Support Sleeve. *Top of Balance Staff to Plate No. 1 Dimension not met
x. Pin; Setting Ring Gear Assembly (dwg. 9236640)		5.0 Lb. Min., Axial Unseating as per dwg.	*Gear to end of Pin Dimension not met
y. Hairspring Pivots; Balance Wheel, Staff and Hairspring Assembly (dwg. 9236718)	Hairspring and Pivots vertical and clamped twice around the Hairspring Diameter. One Clamp above or below the other.	9 Lb. Min., Pull Out attached to lower Clamp	The Hairspring and Pivots shall be allowed to move axially in the Clamps. The top clamp is fixed; the lower clamp is free to move. The Clamps shall not allow the Pivots to pass through them. *Relative movement between the pivots and the hairspring

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

TABLE II. Linear load test - Continued.

Test	Orientation	Load & Application	Remarks
z. Pins; Balance Staff and Pin Assembly (dwg. 9236648)		1.5 Lb. Min., Axial Unseating as per dwg.	*End of pin to Balance Staff Dimension not met. Both pins
aa. Supports and Staff Lever Assembly (dwg. 9236661)		2 Lb. Min., Push Off as per dwg.	*Dimensions of Lever Assembly altered
ab. Pin; Lever Staff Assembly (dwg. 9236663)		1.0 Lb. Min., Axial Unseating as per dwg.	*End of Pin to Staff Dimension not met
ac. Pin; Pallet Support and Pin Assembly (dwg. 9236665)		3.0 Lb. Min., Push Off as per dwg.	*End of Pin to Support Dimension not met
ad. Bearing; Plate No. 4 and Bearing Assembly (dwg. 9236668)		2 Lb. Min., Push Off as per dwg.	*Gap between Bearing and Plate
ae. Escape Wheel; Escape Wheel and Pinion Assembly (dwg. 9236672)		10 Lb. Min., Push Off as per dwg.	
af. Gear; Gear No. 1 and Pinion Assembly (dwg. 9236675		12 Lb. Min., Push Off as per dwg.	
ag. Gear; Gear No. 2 and Pinion Assembly (dwg. 9236678)		10 Lb. Min., Push Off as per dwg.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

TABLE II. Linear load test - Continued.

Test	Orientation	Load & Application	Remarks
ah. Ring Gear, Support and Shaft Assembly; Timing Scroll Assembly (dwg. 9236690)		15 Lb. Min., Push Off as per dwg.	*Scroll to Shaft Major Diameter Dimension not met
ai. Gear; Ring Gear and Support Assembly (dwg. 9236692) Or ring gear, support and shaft assembly, timer (dwg. 9236708)	Ring Gear up above support	5 Lb. Min., Axial Pull Off up on Ring Gear	*Top of Ring Gear to Bottom of Support Max. Dimension not met
aj. Pivot, support and pivot assembly, timer (dwg. 9236714)		15 Lb. Min., Axial Unseating as per dwg.	
ak. Plate, Bearing (dwg. 9236593) and Timer Housing Assembly (dwg. 9392482)		80 Lb. Min., Axial Unseating Load as per dwg.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

4.5.2 Torque load tests. Any part or assembly that does not meet the requirements as stated in the following table and the indicated drawing shall be classed defective. The first item stated in the Test column is the part or assembly to which the load is applied. The second item indicated is the assembly on which the first item is tested. The drawing for the second item (number indicated) contains the note requirement for the test. Unless otherwise noted in the table, on each test the only part or assembly that is allowed freedom of movement is the first item in the Test column and those indicated in the Load & Application column. Sampling shall be conducted in accordance with MIL-STD-105D, Special Inspection Level S-3 at the specified AQL. However, where permissible, reduced inspection shall not be instituted unless authorized by the Design Technical Agency. Request for switching from normal to reduced inspection along with supporting data shall be submitted to US Army Armament Research and Development Command, ATTN: AMSMC-QAR-Q (D), Dover, New Jersey 07801-5001.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

TABLE III. Torque load tests.

Test	Orientation	Load & Application	Remarks
a. Setting Test through Setting Key Assembly Fuze, MT, SQ, M577A1/ M582A1 (dwg. 9352381/ 9352382)	Nose up & accessible	Any applied torque as per dwg.	Fuze does not read 60.0 seconds when read to the near 0.1 seconds after torque is removed
b. Grip Rings; Three Module Assembly (dwg. 9352384)	Grip Rings & Setting Shaft accessible	4.5 In.-Lb. Min direction of in-creasing time	Counter turns
c. Grip Rings; Three Module Assembly (dwg. 9352384)	Grip Rings & Setting Shaft accessible.	10.0 + 4.0 In.-Lb. as per dwg.	Grip Rings do not slip.
d. Ring Gear Assembly; Plate No. 1 Assembly (dwg. 9236712)	Hairspring Tube up above Plate No. 1	50 In.-Ib. Min., Direction arbitrary	Ring Gear Assembly moves, deforms, becomes loose or detaches from Plate No. 1 Assembly
e. Ring Gear; Timing Scroll Assembly (dwg. 9236690)	Ring Gear side up. Scroll locked	2.0 In.-Lb. Min., on Ring Gear. Direction arbitrary	Any part of the Timing Scroll Assembly moves, deforms, becomes loose or detaches. The Main Spring and Barrel Housing is excluded from the above as per dwg.
f. Grip Rings; Three Module Assembly (dwg. 9352384)	Grip rings accessible Firing Arm and timing scroll area visible		Stop not encountered as per dwg. Firing arm contacts end of slot in timing scroll. Setting changes when torque is applied as per dwg.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

TABLE III. Torque load tests - Continued.

	Test	Orientation	Load & Application	Remarks
g.	Pivot, Support Pivot Assembly Timer (dwg. 9236714)	Support locked and pivot accessible	3.0 In.-Lb. Min. on pivot, direction arbitrary	Pivot moves, deforms, breakes or detaches

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

4.5.3 Spring test. Any spring which does not yield the required results as indicated in the following table and indicated drawings, shall be classed defective.

TABLE IV. Spring load test.

Part	Orientation	Initial Position	1st Position	1st Yield.	2nd Position	2nd Yield
a. Setback Spring (dwg. 9236599)	Either end up	Compresed to solid height	Compressed height of .270 In.	.127 lb. Max.	Compressed height of .390 In.	.090 Lb. Min.
b. Torsion Spring (dwg. 9236610)	Band End fixed and straight and mobile	Loaded beyond Final Position	As per dwg. Final Position	.15 In.-lb Max.	As per dwg. Initial Position	.07 In.-Lb. Min
c. Firing Pin Spring (dwg. 9236624)	Either end up	Compressed to solid height	Compressed height of .36 In.	9.0 Lb. Max.	Compressed height of .52 In.	3.0 Lb. Min.
d. Mainspring; Mainspring and Barrel Assembly (dwg. 9236697)	Barrel stationary	8 1/4 turns min. toward full wind	7 3/4 ± 1/4 turns toward full wind	34 In.-Oz. Max.	3 3/4 ± 1/4 turns toward full wind	22 In.-Oz. Min
e. Setback Spring (dwg. 9236705)	Either end up	Compressed to solid height	Compressed to height of .270 In.	.063 -.010 Lbs.	Compressed to height of .390 In.	.044-.010 Lbs.
f. Leaf Spring (dwg. 9352375)	Either side up	Compressed to solid height	Compressed to height of .045 in.	4.8 lbs. max.	Compressed to height of .095 in.	1.1 lbs. min.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

4.5.4 Time-to-arm, SSD assembly. The completed SSD assembly in its non-armed position shall be placed in a suitable test fixture with the spin detents locked in place. The fixture shall rotate the S.S.D. to a speed of 1800-25 rpm and cause the release of the spin detents. The equipment shall determine that the S.S.D. has armed within the time limits specified in 3.8.1. The armed position is indicated by the presence of the detonator in the center hole. Any assembly that does not comply with the requirements of 3.8.1 shall be classed defective as follows:

a. Critical Defect - Those units arming faster than the specified lower time limit.

b. Major Defect - Those units unarmed, partially armed, armed after the upper time limit has been exceeded or not locked in the armed position.

All assemblies shall be returned to the non-armed position and the accepted ones shall then be subjected to the non-arming test specified in 4.5.5.

4.5.5 Non-arming test; SSD assembly. The S.S.D. Assemblies from the Time-To-Arm test specified in 4.5.4, in the non-armed position, shall be placed in a suitable test fixture. The fixture shall rotate the S.S.D. to a speed of 1000 + 25 rpm. The fixture shall determine that the S.S.D. has remained in the non-armed position. The non-armed position is indicated by both detent nibs being engaged in their respective rotor slots and no evidence of the detonator in the center hole. Any assembly that does not comply with the requirements of 3.8.1 shall be classed defective, Assemblies that pass this test shall have an indelible mark placed upon the major flat of the S.S.D. diameter as the S.S.D exits the equipment.

4.5.6 Two-thousand RPM detent release test; trigger assembly. The trigger assembly shall be placed in a suitable test fixture. The firing pin shall be in its cocked position and the firing arm assembly lever shall be restrained by the detent shaft prior to the test. The test fixture shall rotate the trigger assembly to 2000 - 25 rpm. Any trigger assembly that does not comply with the requirements of 3.8.2 shall be classed defective. Assemblies which pass this test shall then be re-cocked and subjected to the Non-Release test specified in 4.5.7.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

4.5.7 One-thousand RPM detent non-release test; trigger assembly. The trigger assemblies from the 2000 RPM Release Test specified in 4.5.6 shall be placed in a suitable test fixture. The firing pin shall be in the cocked position and the firing arm assembly lever shall be restrained by the detent shaft prior to the test. The test fixture shall rotate the trigger assembly to 1000 + 25 rpm. Any trigger assembly that does not comply with the requirements of 3.8.2 shall be classed defective.

4.5.8 Sequential trigger function test; trigger assembly. The trigger assemblies shall be placed in a suitable test fixture with the firing pin in the cocked position and the detent assembly in the armed position. The safe separation release assembly and the safety plate assembly shall be restrained from functioning by the firing arm assembly shaft. The fixture shall hold the following pin at a radius of less than .566 inches. The fixture shall then move the following pin to the positions below and observations for compliance with 3.9.1 shall be made at each position:

a. 0.566 inch radius, max.
b. 0.596 inch radius, min.
c. 0.630 inch radius, max.
d. 0.680 inch radius, min.

Any assembly that does not comply with all of the requirements in 3.9.1 shall be classed defective. All assemblies that pass this test shall be placed in the safe and unfired position.

4.5.9 Timer function. The timer assembly shall be placed in a suitable test fixture with the setback detent depressed in such a manner as not to interfere with the operation of the spin detent and balance wheel. The assembly shall then be rotated at a speed of 2000 - 25 rpm. The spin detent shall move, allowing the balance wheel freedom of movement. Any assembly that does not comply with the requirements specified in 3.9.2 shall be classed defective. Assemblies which pass this test shall be reset and used to conduct the Timer Non-Function test specified in 4.5.10.

4.5.10 Timer non-function. The timer assemblies from the Timer Function test specified in 4.5.9, with the spin detent locking the balance wheel, shall be placed in a suitable test fixture with the setback detent depressed in such a manner as not to interfere with the operation of the spin detent and balance wheel. The assembly

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

shall then be rotated at a speed of 1000 + 25 rpm. The spin detent shall remain in position detenting the balance wheel. Any assembly that does not comply with the requirements specified in 3.9.2 shall be classed defective.

4.5.11 Setback pin arming test; timer assembly. The timer assembly shall be placed in a suitable test fixture. A load shall be placed on the pin in a downward direction until the pin has reached its maximum depth and then unloaded to allow it to rise. Any assembly with a pin that does not comply with the requirements specified in 3.12 shall be classed defective.

4.5.12 Counter wheel transfer test; counter assembly. The counter assembly shall be placed in a suitable test fixture. The No. 3 wheel shall be rotated in the direction of increasing time, through 200 digits and returned to the start point. Any assembly that does not comply with the requirements specified in 3.10 shall be classed defective.

4.5.13 Timer beat rate; timer assembly. The timer assembly shall be placed in a suitable test fixture. The spin detent and setback detent shall be manually subverted and the timer allowed to operate. The fixture shall record the beat rate and amplitude of the balance wheel in the timer over a time duration of 50+10 sec. Any assembly that does not comply with the requirements specified in 3.13 shall be classed defective. Assemblies which pass the test shall be returned to the non-function position.

4.5.14 Trigger setback pin arming test; three module assembly. The inert three module assembly, less the grease in the setback detent cavity, shall be placed in a suitable test fixture with the setback detent in the trigger assembly in an accessible position. A load shall be placed on the setback pin in the direction shown by the arrow on the drawing. The detent pin shall be depressed flush to below flush with the applicable surface indicated on the drawing and allowed to return to its original position when the load is removed. Any assembly in which the pin does not comply with the requirements of 3.12 shall be classed defective. All assemblies which pass this test shall have an indelible mark signifying acceptance placed on the outside diameter of the trigger spacer in the area of the setback pin cavity as the part exits the equipment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

4.5.15 Air leakage; ogive assembly with setting key, setting key ring and applicable grease. The ogive assembly shall be placed in a suitable test fixture that will keep the setting key in a position that simulates its normal position in a fuze during the test operation. The assembly, with the body opening sealed, shall be evacuated to a vacuum pressure of 20 inches Hg min., and recorded. The assembly shall be held in an evacuated state for one minute. Those assemblies which do not meet the requirements of 3.14 shall be classed defective.

4.5.16 Jolt and jumble test. The loaded fuze assemblies shall be subjected to the Jolt test in accordance with MIL-STD-331, Test 101.2, Procedure II. Immediately following the completion of the Jolt test, the fuzes shall be subjected to the Jumble test in accordance with MIL-STD-331, Test 102.1. After the Jumble test, the fuzes shall be disassembled to determine compliance with MIL-STD-331. As a minimum inspection requirement, the following criteria shall be used:

a. No part of the explosive train has functioned.

b. The rotor in the safe separation device shall be located and locked in the safe position by both spin detents.

c. The setback and spin detents in the trigger shall be secure and in the safe position.

d. The safe separation device spin detent shall not be broken and the interlock pin shall be secure and restrained by the release lever in the trigger.

e. The trigger firing arm assembly shall be secure and in the safe position and shall restrain the release lever.

f. If there is no visible damage or irregularity after the test, then the fuze shall be capable of being positioned from the shipping position to a setting of 60 seconds and be reset to the shipping position freely and smoothly with no evidence of skipping throughout the setting.

Any fuze that does not comply with the requirements of 3.4 and the defect criteria stated herein, shall be classed defective.

4.5.17 Transportation vibration test. The loaded fuze assemblies shall be subjected to the Transportation Vibration test in accordance with MIL-STD-331, Test 401, Procedure II. After this test, ten (10) fuzes from the sample shall be randomly selected and disassembled to determine that the fuze is safe. As a minimum inspection requirement, the criteria in 4.5.16 shall be used. Any fuze that does not comply with the requirements of 3.5 or the criteria referenced herein, shall be classed defective.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

4.5.18 Twelve meter drop test. The loaded fuze assemblies shall be placed in an ammunition box (dwg. 8864492), and the boxes shall then be packed in a wirebound box (dwg. 8861213) and subjected to the Twelve Meter Drop Test in accordance with MIL-STD-331, Test 103.2, Procedure III. The fuzes shall be positioned within the box and the boxes oriented as shown in Figure 3. Dummy or inert fuzes shall be used to fill out the ammunition box. After the test the fuzes shall be examined to determine compliance with paragraph 3.6. As a minimum inspection requirement, the criteria of 4.5.16 shall be used and no explosive element shall initiate. Any fuze that does not comply with the requirements of 3.6 or the criteria referenced herein, shall be classed defective.


4.5.19 Torque of rotor teeth. The rotor shall be placed in a suitable test fixture and the torque specified on the drawing shall be applied. After the test, the rotor teeth shall be examined for compliance with the requirements of 3.18.

4.5.20 Waterproofness. The loaded fuze assemblies shall be subjected to the waterproofness test in accordance with MIL-STD-331, Test 108, except as provided in paragraph 3.7. After this test, the fuzes shall be disassembled and examined under the ultra-violet light to determine compliance with 3.7. Any assembly that does not comply with the requirements specified in 3.7 shall be classified defective.

4.5.21 Ballistic performance. The fuze assemblies used in the following tests shall be fired with booster pellets (dwg. 8595510) and booster cups (dwg. 8595509) as indicated in Table V and the applicable following paragraph after being assembled to the projectile indicated. All fuzes shall be x-rayed and the x-ray films reviewed to assure that the fuzes are safe to fire prior to test. The x-ray films shall demonstrate that the setback pin disc and the SSD rotor gear are in their proper prosition. Copper crusher gages (2) shall be used to measure maximum weapon chamber pressure of each fuze fired.

4.5.21.1 Impact non-function distance. The T.V. preconditioned fuzes shall be fired at a 6 inch thick plywood screen adequately supported and placed 150 - 5 feet away from the muzzle of the weapon. Any fuze that does not comply with the requirements of 3.11.3.1 shall be classed premature (see 6.3). Observation of impact non-functioning is required and shall be noted on the ballistic records.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

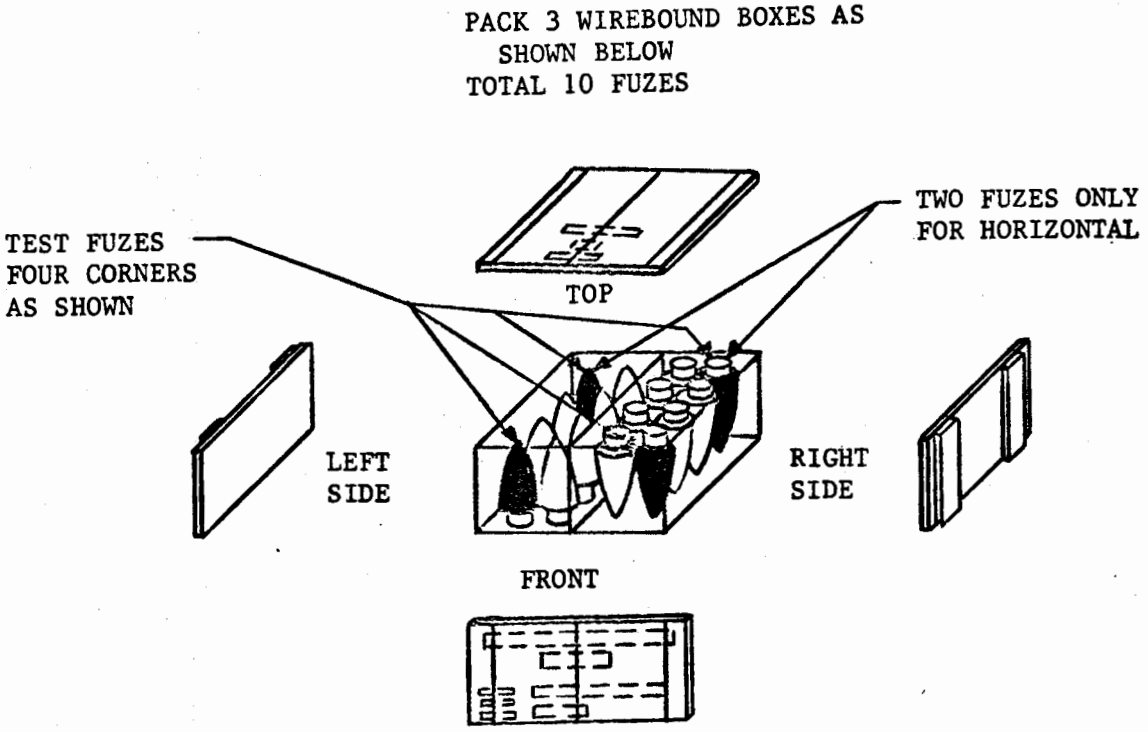

DROP WIREBOUND BOXES IN THE THREE ORIENTATIONS SHOWN.

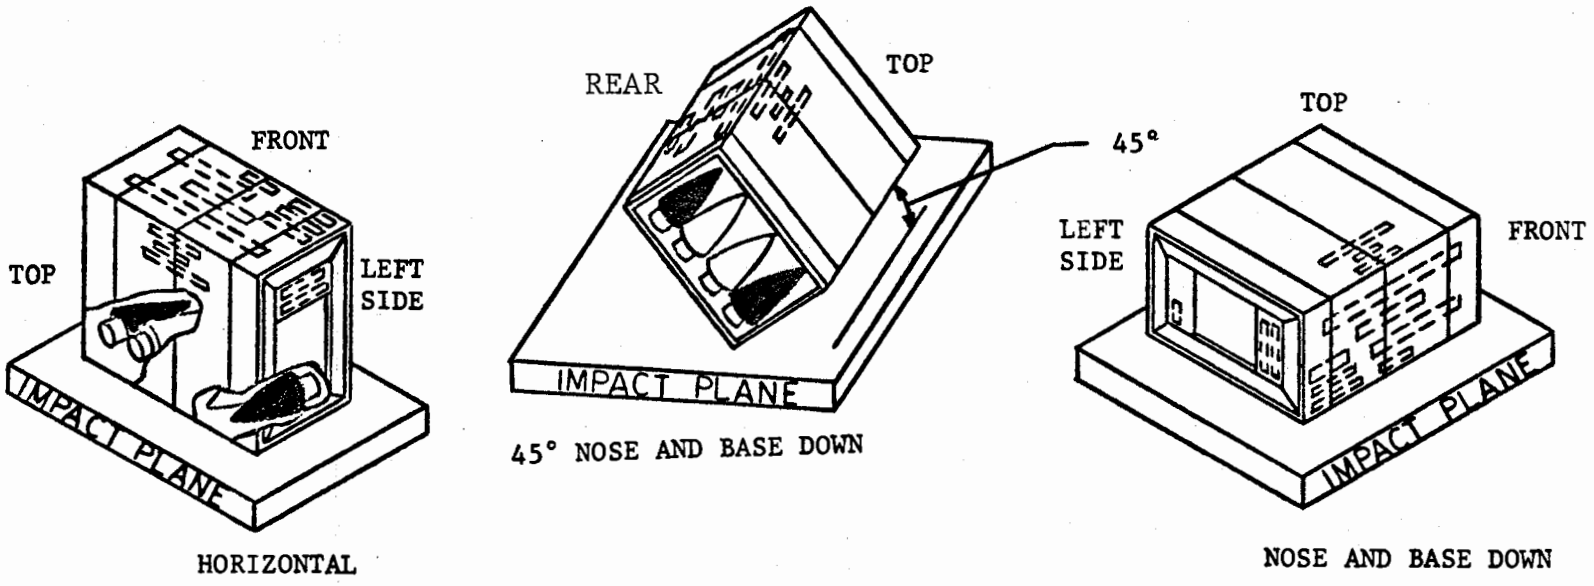


FIGURE 3. M577A1/M582A1 12 Meter drop package procedure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

TABLE V. Ballistic performance.

TEST	WEAPON	TUBE	PROJECTILE	CHANGE ZONE	SETTING	TEMPERATURE	SAMPLE a SIZE	SAMPLE b SIZE
Non-Function[e]	105MM	M103 or M102	M1	7	PD	70°±10°F	15[c]	10[c]
Function[e]	155MM	M1	M107	1	PD	70°±10°F	15	10[c]
Mechanical Time[d]	155MM	M185	M107	8	50.0 Sec.	70°±10°F		
	155MM	M185	M107	8	75.0 Sec.	70°±10°F	10	10
	105MM	M103	M1	7	50.0 Sec.	70°±10°F	10	20
	8 Inch	M2	M106	1	15.0 Sec.	70°±10°F	10	
Extreme[d] Temperature	105MM	M103 or M102	M1	7	50.0 Sec.	+145°F	10	-
	8 Inch	M2	M106	1	25.0 Sec.	-35°F	10	10
Info	155MM	M185	M483A1	M119	82.0 Sec.	70°±10°F	10[f]	10[f]
				Series				

NOTES:

a. For First Article and three consecutive acceptable lots (See 4.4.3.6.1).

b. For subsequent lots after "a" above (See 4.4.3.6.2).

c. Transportation Vibration samples.

d. The Quadrant Elevation (QE and Height of Burst (HOB) shall be as specified in 6.10. All rounds fired shall use Spotting Charge, Model APG-2 (9297939).

e. The Spotting Charge above shall not be used.

f. Five (5) rounds to be fired with explusion charge and five (5) rounds with registration charge.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

4.5.21.2 Impact function distance. The fuzes shall be fired at a 6 inch thick plywood screen adequately supported and placed 820 - 5 feet away from the muzzle of the gun. Any fuze which does not comply with the requirements of 3.11.3.2 shall be classed a point detonating dud (see 6.5). Closed circuit video coverage shall be employed to observe fuze functioning beyond the screen. Any fuze functioning beyond the screen shall be referred to AMSMC-QAM (R). Observation of impact functioning and non-functioning is required and shall be noted on the ballistic records.

4.5.21.3 Mechanical time function. The fuze assembly shall be set and fired for airburst functioning. All fuze settings shall be photographed utilizing an instant, self processing camera. Three independent infrared sensing chronograph systems will be used to measure time to burst. The times shall be recorded from the chronograph counters to four decimal places. The three recorded time values for each round are averaged and the average is rounded to the nearest 0.001 second using the method prescribed by the American Society for Testing Materials and recorded. If one time value is lost or is determined to be invalid (see 4.5.21.3.1), the remaining two values are used. If a round fails to function in flight, observations shall be made to determine if the round functions on impact. All defects shall be recorded. A back-up system of electric clocks or stopwatches shall also be employed and their measurements recorded to the nearest 0.01 second; these times will not be used in computations. Any fuze which does not airburst function shall be classed a time dud (see 6.6).

4.5.21.3.1 Lost time. When a fuze is fired for an airburst function and is observed to have functioned, but a chronograph system used to determine the elapsed time to function fails for any reason to record the appropriate value, then an entry of lost time shall be used instead of any recorded value. The round shall be considered lost when the above occurs for 2 or more chronograph systems. When any chronograph reading differs by more than ten (10) milliseconds from another chronograph reading, which is the closest of the remaining two to the first reading, the first reading shall be considered lost. The other two readings shall be averaged. When no two readings agree, then all readings shall be considered lost.

4.5.21.3.2 Lot percent defective. The time values obtained by the chronograph systems shall be used to calculate the estimate of lot percent defective. Where at least two chronograph systems provide a time value, the average shall be taken as the individual fuze value. The estimate of the lot percent defective shall be calculated using the method prescribed in MIL-STD-414, Example B3. For sample sizes 8 through 9 and 16 through 19 the estimated lot percent defective value shall be determined by interpolation between the values given in Table B5, MIL-STD-414 for sample sizes 7 and 10 and 15 and 20, respectively. All appropriate time values obtained for each airburst functioning phases shall be used in the initial calculation of the sample mean $\bar{x}$ and standard deviation (s).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

4.5.21.3.3 Off time (see 6.8). When the fuzes in a test group are fired for air-burst functioning and the elapsed times to function are greater than the time expressed by t - (4 + .06t), where t is set time, then the following table shall be used to determine off times:

Setting (sec.)	Early off time (sec.)	Late off time (sec.)
15	14.00 or less	16.00 or more
25	23.50 or less	26.50 or more
50	47.50 or less	52.50 or more
75	72.00 or less	78.00 or more

When an off time is recorded on the ballistic records, it shall be annotated as EOF for an early burst off time or LOF for a late burst off time.

4.5.21.3.4 Outliers (see 6.9). When the estimated percent defective is not within the specified limits, a search for outliers should be made. The averaged chronograph readings less off times should be arranged in ascending or descending order and the suspect value (either the highest) (X_n) or lowest (X_1) chosen. The values should then be operated by the following appropriate formula to determine the outlier statistic:

	Suspect value	
Sample Size	Highest	Lowest
7	$(X_n - X_{n-1})/(X_n - X_1)$	$(X_2 - X_1)/(X_n - X_1)$
8 - 10	$(X_n - X_{n-1})/(X_n - X_2)$	$(X_2 - X_1)/(X_{n-1} - X_1)$
15 - 20	$(X_n - X_{n-2})/(X_n - X_3)$	$(X_3 - X_1)/(X_{n-2} - X_1)$

If the value obtained from the appropriate formula above is greater than the appropriate value in Table VI, then the suspect value can be considered an outlier and eliminated.

TABLE VI. Outlier table.

N	MAXIMUM ALLOWABLE OUTLIER STATISTIC
7	.507
8	.554
9	.512
10	.477
15	.525
16	.507
17	.490
18	.475
19	.462
20	.450

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

If the value obtained from the appropriate formula is less than or equal to, the appropriate value in Table VI, then the value shall be retained. If either the highest or lowest value is chosen as the suspect value and found not to be an outlier, then the other value may be tested. If the other value is found to be an outlier, then it may be rejected. There shall be only one outlier rejected per test group, with an allowable total of three (3) in the entire ballistic test. After the outlier is rejected, a new mean time and standard deviation shall be calculated. The new values shall comply with the requirements stated in 3.11.3.

4.5.21.4 Extreme temperature. The temperature conditioned fuze assembly shall be set and fired for airburst functioning. Data shall be accumulated as specified in 4.5.21.3 The requirements of 3.11.3.4 apply.

4.5.21.4.1 Temperature condition. The round with the fuze assembled to it shall be placed in a temperature conditioning chamber. With the round in the chamber, start the test at ambient temperature. The chamber shall then be maintained at +70°F±10°F, 145°F=5°F, -35°F+5°F of the specified temperature (see Table V). After a steady-state temperature condition is reached, the fuze shall be saturated for twenty-four (24) hours minimum at that temperature.

4.5.21.5 Dud recovery. For informational purposes only, efforts shall be made to recover all duds encountered during the ballistic test excluding those fuzes fired in the non-function test. These recovered fuzes are to be held for analysis by ARDC.

4.5.21.6 Improved conventional munitions ballistic mecahnical time test (information only). The fuzes shall be assembled to the M483A1 projectile. Five projectiles shall contain inert cargo and contain an expulsion charge. Five projectiles shall be inert loaded and contain a self registration charge. The projectiles shall be fired from the M185 cannon using the M119 series propelling charge. An 82 second fuze time setting shall be used and the fuze time of function or failure to function shall be recorded. The test method for measuring fuze time shall be the same as paragraph 4.5.21.3.

4.5.22 Load test of sleeve. The sleeve shall be assembled as shown on Drawing 9362801 then placed in a suitable test fixture and the load specified on Drawing 9352376 shall be applied at a deflection rate of less than 0.100 inches per second.

4.5.23 Load test of trigger spacer. The Spacer, Trigger shall be assembled as shown on Drawing 9362801 then placed in a suitable test fixture and the load specified on Drawing 9352377 shall be applied at a deflection rate of less than 0.100 inches per second.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging, packing and marking. Packaging, packing and marking shall be in accordance with the requirements and inspection procedures specified in MIL-P-60412, except that the air leakage test (Para. 4.3.3.1) will not be performed.

5.2 Automated (mechanized) marking of SSD's and three module assemblies. The SSD and Three Module Assembly, upon exiting the test equipment, shall be indelibly marked as specified in 4.5.5 and 4.5.14.

6. NOTES

6.1 Ordering data. See MIL-A-48078

6.2 Inspection Equipment Designs. See MIL-A-48078 (AR). Required equipment designs shall be submitted for approval to Commander, US Army Armament Research and Development Command; ATTN: AMSMC-QAR-I (D), Dover, New Jersey 07801-5001.

6.3 Premature burst. A malfunction in which a fuze functions before safe separation. In the Point Detonating (PD) mode, safe separation is defined by the minimum arming distance per 3.11.3.1. In the Mechanical Time (MT) mode, safe separation is defined by the equation t - (4 + 0.06t.) where t is the set time.

6.4 Ballistic function. A function is evidenced by the detonation of the projectile specified in 4.5.21.

6.5 Point detonating dud. A fuze which does not function on impact when intended. A point detonating setting is indicated by a counter position of ◀98.

6.6 Time dud. When a fuze is set to function in air and fails to function as intended, it shall be considered a time dud. This is independent of whether or not the fuze functions upon subsequent impact.

6.7 Required number of data points. The number of readings (N) to be used as a basis for the estimated percent defective shall be no less than fifteen (15) for a sample group of twenty (20) or seven (7) for a sample group of ten (10). The number of readings used as a basis shall exclude time duds, off times, outliers and lost times. If there are insufficient rounds in any group, it is the Government's option to require additional rounds to be fired under the conditions of the group, until sufficient in accordance with the above.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

6.8 Off time. A fuze function time which has a high probability of falling outside the sample population limits, thereby reducing the effectiveness of group functioning.

6.9 Outlier. An outlier is a fuze whose averaged chronograph reading does not fall within the fuze function time limits and is statistically different from the other values of the sample.

6.10 QE and HOB. The QE and HOB to be used in the Ballistic test shall fall within the following ranges for the applicable weapon system:

Weapon	Zone	Setting	QE (mils)	HOB (meters)
105MM, M103	7	50.0	800-1000	600-2600
155MM, M185	8	50.0	600- 800	950-4100
155MM, M185	8	75.0	1000-1200	1200-3900
8 Inch, M2	1	15.0	600- 800	900-1500
8 Inch, M2	1	25.0	700- 800	750-1200

6.11 Figures. The figures presented in this specification are for use as pictorial aids; they are not to be construed as representing contractual, rigid configurations.

6.12 Inspections w/aid. Aid is defined as specified below. Where surface finishes are to be inspected, the gage used for surface comparisons shall be viewed under the same magnification as the sample being inspected.

a. Aid A - 2 1/2X

b. Aid B - 4X

c. Aid C - 7X

6.13 Submission of first article samples. Instructions as to the location for the evaluation of first article samples shall be obtained from the Contracting Officer.

6.14 Drawings. Drawings listed in Section 2 of this specification under the heading US Army Armament Research and Development Center (ARDC) may also include drawings prepared by and identified as Edgewood Arsenal, Frankford Arsenal, Rock Island Arsenal, Picatinny Arsenal, or US Army Research and Development Command (ARRADCOM) Drawings. Technical data originally prepared by these activities is now under the cognizance of ARDC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

6.15 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to previous issue due to the extensiveness of the changes.

6.16 Subject term (key word) listing.

Fuze, Mechanical Time
Fuze, Artillery
Fuze, Mechanical Time and Point Detonating
Fuze, Projectile
Fuze, Artillery Projectile
Fuze, Ammunition
Fuze, Artillery Ammunition

Custodian:
Army-AR

Preparing activity:
Army-AR

(Project 1390-A469)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

COMMANDER
US ARMY ARMAMENT RSCH DEV & ENGR CENTER
ATTN: SMCAR-QA
DOVER, NJ 07801 5001

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:28Z
Check the source to verify that this is the current version before use.