INCH-POUND
MIL-P-70854 (AR)
10 March 1992

MILITARY SPECIFICATION

PRINTED WIRING BOARD ASSEMBLY, CVKI INTERFACE, SPECIFICATION FOR

This specification is approved for use by the U.S. Army Armament, Munitions and Chemical Command and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification establishes the requirements for manufacture, inspection, packaging and acceptance of the Printed Wiring Board Assembly (PWBA), CVKI Interface, part number 11749384.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander U.S. Army ARDEC, ATTN: SMCAR-BAC-S, Picatinny Arsenal, New Jersey 07806-5000 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 1265

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards and handbooks. The following specifications, standards and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

MILITARY

MIL-F-13926	-	Fire Control Materiel Manufacture and Inspection of, General Specification for
MIL-I-45607	-	Inspection Equipment, Acquisition, Maintenance and Disposition of
MIL-W-63150	-	Weapons and Support Materiel, Standard Quality Assurance Provisions for

STANDARDS

MILITARY

MIL-STD-129	-	Marking for Shipment and Storage
MIL-STD-454	-	Standard General Requirements for Electronic Equipment
MIL-STD-810	-	Environmental Test Methods
MIL-STD-1686	-	Electrostatic Discharge Control Program for Protection of Electrical and Electronic Parts, Assemblies and Equipment (Excluding electrically initiated explosive devices)
MIL-STD-1695	-	Environments, Working, Minimum Standards for
MIL-STD-2000	-	Standard Requirements for Soldered Electrical and Electronic Assemblies
MIL-STD-45662	-	Calibration System's Requirements

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

HANDBOOK

MILITARY

DoD-HBK-263 - Electrostatic Discharge Control Handbook for Protection of Electrical and Electronic Parts, Assemblies and Equipment (Excluding electrically initiated explosive devices) METRIC

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from: Standardization Documents Order Desk, Bldg. 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

U.S. ARMY ARMAMENT RESEARCH, DEVELOPMENT AND ENGINEERING CENTER.

PRODUCT DRAWINGS (CAGE CODE 19200)

11749384	-	Printed Wiring Board Assy, CVKI Interface
11749386	-	Schematic Diagram, CVKI Interface

PACKAGING DATA SHEET (CAGE CODE 19200)

SPI-P11749384	-	Printed Wiring Board Assy, CVKI Interface

(Copies of other Government documents, drawings and publications required by the contractor in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Item description. The CVKI interface board contains hard wired logic circuitry, two control transistors, an operational amplifier, a relay and an audio output transformer. Signals are received from the microprocessor PWB which represent a near miss, a hit, a kill which is called lite, and a horn signal. By processing these signals, the CVKI interface board generates command signals which are fed by cable to the remote combat vehicle kill indicator (CVKI). In addition, an audio signal is generated which may be inserted into the vehicle's intercom system to signal near miss, hit or kill.

3.2 First article. When specified (see 6.4), a sample shall be subjected to first article inspection in accordance with 4.4.

3.3 Environmental stress screen (ESS). All assemblies shall be subjected to an environmental stress screen prior to conformal coating consisting of temperature cycling and soaking between the temperatures -35°C and +63°C. After exposure to ESS, the characteristics of 3.4 shall not be degraded.

3.4 Characteristics.

3.4.1 Operating conditions. The operating conditions shall be in accordance with Table I, measured under quiescent conditions (unit not firing). For terminal and component designations called out in this specification, see drawing 11749386, Schematic Diagram, CVKI Interface.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.


TABLE I. Operating Conditions.

Parameter	Terminal	Minimum	Nominal	Maximum	Unit
Ambient Temperature		-32	25	63	°C
Input (+) Power	58 6, 72	4.0 7.0	4.5 9.0	6.0 12.0	Vdc Vdc
Return (-) Power	31-38				
Input Current	58 6, 72	0.5 3.0	1.5 4.5	2.0 7.0	mA mA

3.4.2 Performance. Unless otherwise specified, the PWBA shall meet the requirements of this specification under the following conditions:

a.	Temperature	25°±10°C (77°±18°F)
b.	Relative humidity	50±30 %
c.	Barometric pressure	725+50, -75mm Hg (28.5+2.0, -3.0 inches Hg)
d.	Input power and loads	See Figure 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

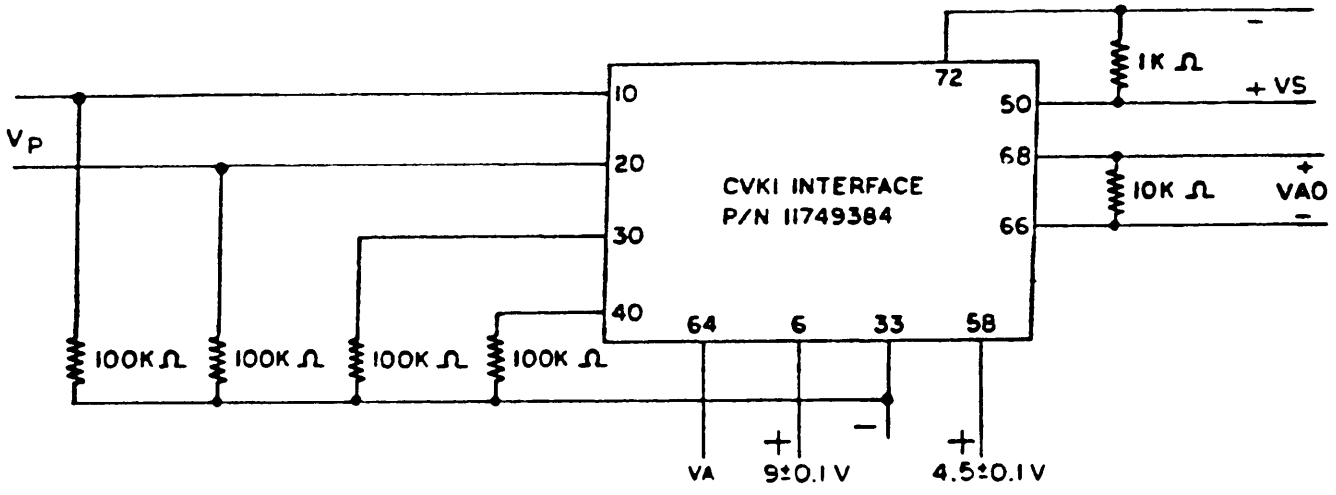

VA - 4v P-P 3 KHz SQUARE WAVE
ALL RESISTORS 1/4 W. ± 5 %

FIGURE 1. CVKI Interface PWBA Power Source and Loads.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

3.4.2.1 Current drain. Following application of power to terminals 6(+), 58(+) and 33(-), the PWBA current drain shall be no more than 2.0 mA at terminal 58 and no more than 7.0 mA at terminal 6.

3.4.2.2 Audio mode. With power applied to terminals 6(+), 58(+) and 33(-), terminals 30 and 58 connected, and a 4V peak-to-peak 3KHz square wave applied to terminal 64 relative to ground, the voltage at terminal 50 relative to terminal 72 shall be zero to 0.4v lower and the audio mode signal across terminals 68 and 66 shall be a 2V peak-to-peak (minimum) 3KHz signal.

3.4.2.3 Kill mode. With power applied to terminals 6(+), 58(+) and 33(-), terminals 40 and 58 connected, and a 4v peak-to-peak 3 kHz square wave applied to terminal 64 relative to ground, the kill mode signal across terminals 50 and 72 (V_s) shall be as in Figure 2 and across terminals 68 and 66 (V_{AO}) shall be a 0.12V peak-to-peak (maximum) 3 KHz signal.

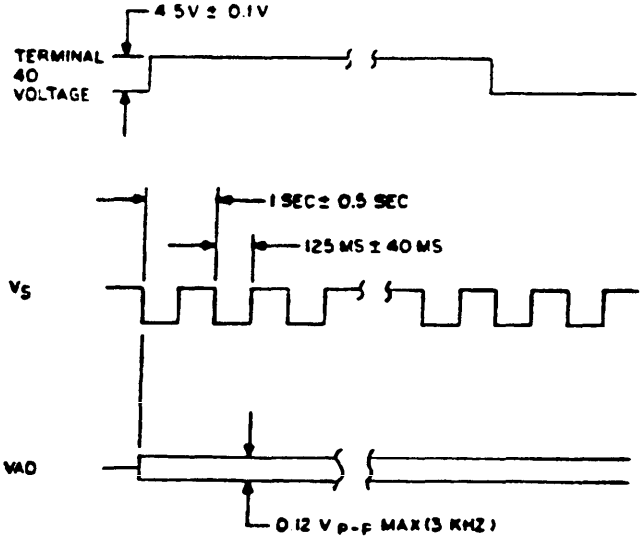


Figure 2. CVKI Interface Kill Waveform.

3.4.2.4 Near miss mode. With power applied to terminals 6(+), 58(+) and 33(-), a 10±1 us 5v pulse applied to terminal 10 (V_p), and a 4v peak-to-peak 3KHz square wave applied to terminal 64 relative to ground, the near miss mode signal at terminals 50 and 72 (V_s), and 68 and 66 (V_{AO}) shall be as in Figure 3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

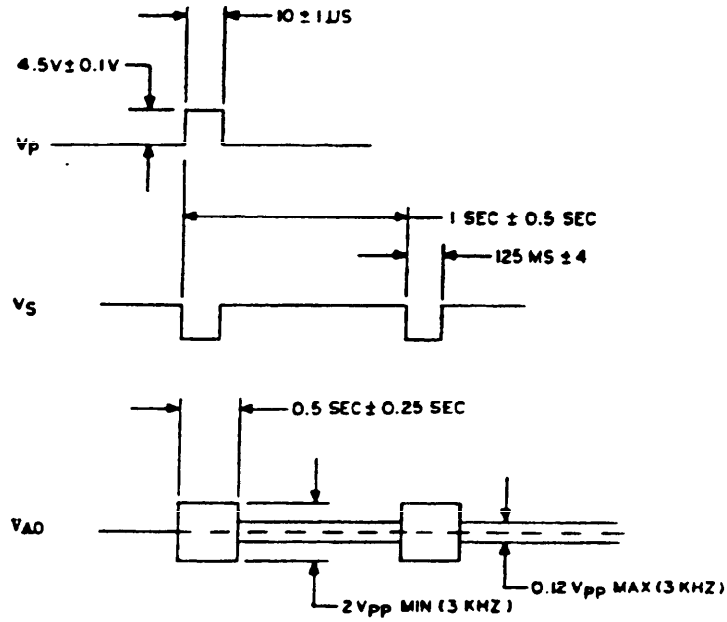


Figure 3. CVKI Interface Near Miss Waveform.

3.4.2.5 Hit mode. With power applied to terminals 6(+), 58(+) and 33(-), a 10±1 us 5v pulse applied to terminal 20 (V_p), and a 4v peak-to-peak 3KHz square wave applied to terminal 64 relative to ground, the hit mode signal at terminals 50 and 72 (V_s), and 68 and 66 (V_{AO}) shall be as in Figure 4.

3.4.3 Environmental requirements. Unless otherwise specified the assembly shall be subject to the following environmental conditions and meet the stated requirements.

3.4.3.1 High temperature. The assembly shall not be damaged and shall meet the performance requirements of 3.4.2. when exposed to and after the following.

3.4.3.1.1 Operating temperature. The assembly shall operate up to a temperature of +63°C (+145°F) after exposure to 63°C for 4 hours.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

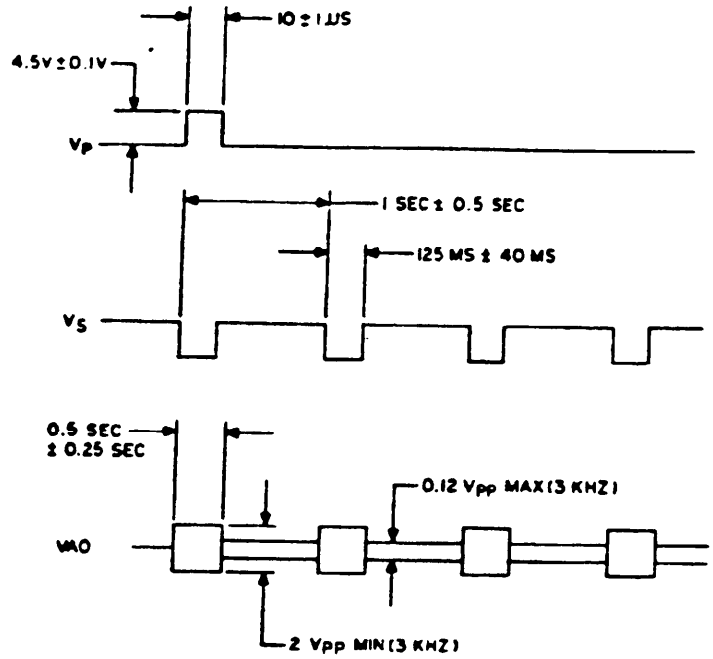


Figure 4. CVKI Interface Hit Waveform.

3.4.3.2 Low temperature. The assembly shall not be damaged and shall meet the performance requirements of 3.4.2 when exposed to and after the following.

3.4.3.2.1 Operating temperature. The assembly shall operate down to a temperature of -31.7°C (-25°F) after exposure at -31.7°C for 4 hours.

3.4.3.2.2 Storage temperature. The assembly shall operate after exposure to a temperature of -34.4°C (-30°F) for a period of 24 hours.

3.4.3.3 Shock. The assembly shall meet the performance requirements of 3.4.2 after shocks with a nominal level of 40 g's terminal peak and nominal duration of 11 milliseconds as shown in Figure 5. Apply three shocks (18 total) in each direction of the three mutually perpendicular axes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

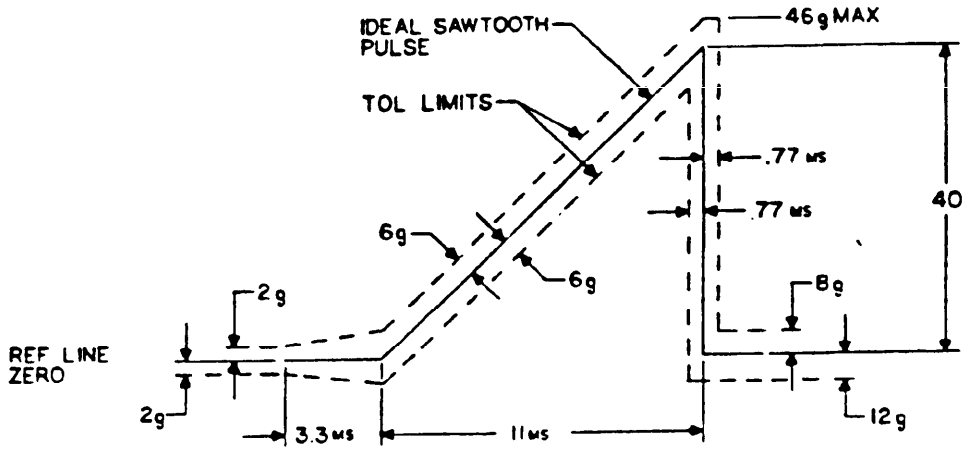


FIGURE 5. Shock Pulse.

3.4.3.4 Vibration. The assembly shall meet the performance requirements of 3.4.2 after sinusoidal vibrations of frequency and amplitude given below and in Figure 6 on three mutually perpendicular axes. Total duration shall be 60 minutes per axis.

Frequency	Amplitude	Sweep rate
7-30 Hz	±1.5 g	7-500-7 Hz
30-50 Hz	0.033" DA	in 15 minutes
50-500 Hz	±4.2 g	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

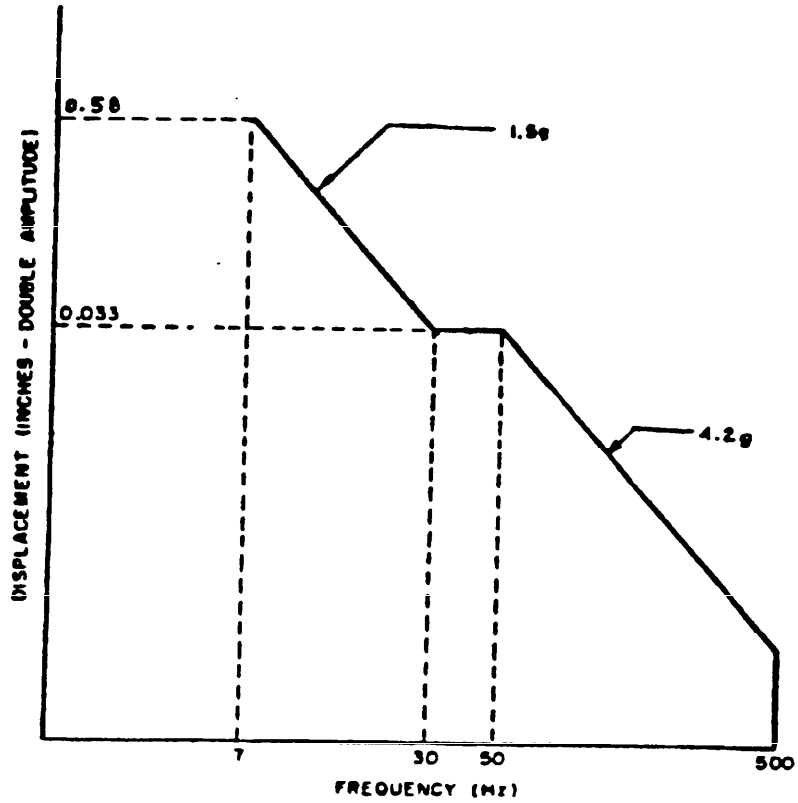


FIGURE 6. Vibration Test.

3.5 Design and construction. The PWBA shall be fabricated and assembled in accordance with drawings, parts lists, and other documents specified on drawing 11749384. The PWBA shall be manufactured and tested in a working environment in accordance with Table I, work area 5 of MIL-STD-1695.

3.5.1 Standards of manufacture. Handling of Electrostatic Sensitive Parts. This equipment contains semiconductor devices such as CMOS, mosfets, and microelectronic devices which may be degraded or damaged by an inadvertent discharge of static electricity. To prevent damage to these components, the supplier shall provide for adequate handling procedures and equipment in accordance with MIL-STD-1686 and DoD-HBK-263.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

3.5.2 Soldering. Soldering shall be in accordance with the general requirements of section 4 of MIL-STD-2000.

3.5.3 Workmanship. General workmanship shall be in accordance with requirement 9 of MIL-STD-454.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.4).

b. Environmental Stress Screen (see 4.5).

c. Quality conformance inspection (see 4.6).

d. Packaging inspection (see 4.6.4).

4.3 Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with the working

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

environment specified in 3.5 and at standard ambient conditions defined in 3.4.2 using the methods of 4.8 and 4.9.

4.4 First article inspection.

4.4.1 Sample. The contractor shall submit a first article sample as designated by the Contracting Officer for evaluation in accordance with provisions of 4.4.2. The first article sample shall consist of three printed wiring board assemblies.

4.4.2 Inspections to be performed. First article inspections are listed in Tables II and III. Each first article sample unit shall be inspected in accordance with the Table II before being subjected to the environmental tests in Table III in the sequence listed. As determined by the Government, the first article assemblies may be subjected to any or all of the examinations and tests specified in this detail specification and be inspected for compliance with any or all requirements of the applicable drawings.

4.4.3 Rejection. If any assembly fails to comply with any of the applicable requirements, the first article sample shall be rejected. The Government reserves the right to terminate inspection upon any failure of any assembly to comply with any of the requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

TABLE II. Examinations and Performance Tests. 1/ 2/

Class	Characteristics	Requirements Paragraph	Test/ inspection Method	First Article Sample Size	Quality 3/ Conformance Inspection Sample Size/ Acceptance Criteria
101	Current Drain	3.4.2.1	4.8.1.1	3	32/Acc-0,Rej-1
102	Audio Mode	3.4.2.2	4.8.1.2	3	32/Acc-0,Rej-1
103	Kill Mode	3.4.2.3	4.8.1.3	3	32/Acc-0,Rej-1
104	Near Miss Mode	3.4.2.4	4.8.1.4	3	32/Acc-0,Rej-1
105	Hit Mode	3.4.2.5	4.8.1.5	3	32/Acc-0,Rej-1
201	Workmanship	3.5.3	Visual	3	32/Acc-0,Rej-1
202	Soldering 4/	3.5.2	Visual	3	125/Acc-0,Rej-1
203	Conformal Coating	3.5	Visual	3	125/Acc-0,Rej-1
204	Dim Characteristics	3.5	SME 5/	3	125/Acc-0,Rej-1
205	Comp Orientation	3.5	Visual	3	125/Acc-0,Rej-1
206	Comp and Board Identification	3.5	Visual	3	125/Acc-0,[illegible] -1

NOTES:
1/ ESS testing per 4.5 is required for all deliverable units.
2/ 200 class (minor characteristics) examinations required prior to 100 class (major characteristics) performance tests.
3/ For lot sizes less than 32 or 125 as listed, 100% inspection is required (see 4.6.5).
4/ Check before conformal coating is applied.
5/ Standard Measuring Equipment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

TABLE III. Environmental Tests.

Class	Characteristic	Requirements Paragraph	Test Paragraph	First Article Sample Size	Quality Conformance Inspection Sample Size/ Acceptance Criteria
106	High temp	3.4.3.1	4.9.1	3	1/Acc-0, Rej-1
107	Low temp	3.4.3.2	4.9.2	3	1/Acc-0, Rej-1
108	Shock	3.4.3.3	4.9.3	3	1/
109	Vibration	3.4.3.4	4.9.4	3	1/

NOTE:
1/ Not required for quality conformance inspection.

4.5 Environmental stress screen. An environmental stress screening program shall be established. All units shall be subject to a thermal stress screen in accordance with Table IV and the procedure below.

TABLE IV. ESS Temperature Cycling Requirements.

Low Temp	High Temp	Rate Change	Power	Monitor	Cycles/Group A Test
-34.4°C	+63°C	15°C/minute	Off	No	20/Failure Free Additional Cycle

4.5.1 Conformal coating. Thermal stress screening shall be performed prior to conformal coating unless another method is approved by the Government.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

4.5.2 Chamber temperature. Chamber temperature cycling shall be from -34.4°C to +63°C (-30°F to +145°F) and the duration of one cycle to be 8 minutes up and 8 minutes down plus 4 minutes dwell at high temperature and 4 minutes at low temperature for a total cycle duration of 24 minutes. The units shall begin and end the cycles at ambient temperature (see Figure 7).

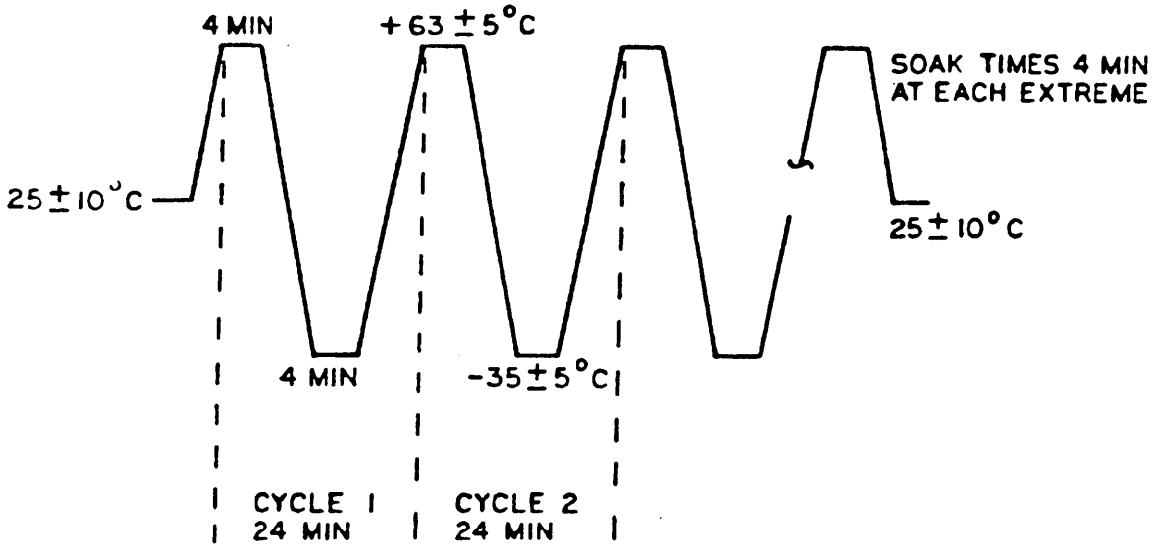


FIGURE 7. Environmental Stress Screen Temperature Profile.

4.5.3 Cycle frequency. A total of twenty temperature cycles are to be imposed on each unit.

4.5.4 Temperature cycles. Temperature cycling of all units shall be conducted with units nonoperating and without power (static).

4.5.5 Test requirements. After the thermal stress screen, the units shall meet the Group A tests (4.6.2). If a unit is rejected, the unit shall be repaired for the failure (if possible) and be put through one additional of ESS. The unit shall then undergo and pass Group A tests.

4.6 Quality conformance inspection. Quality conformance inspection requirements are defined in 4.6.2 and 4.6.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

4.6.1 Inspection lot formation. The term "inspection lot" is defined as a homogeneous collection of units of product from which a representative sample is drawn of which is inspected 100 percent to determine conformance with applicable requirements. Units of product selected for inspection shall represent only the inspection lot from which they are drawn and shall not be construed to represent any prior of subsequent quantities presented for inspection. Homogeneity shall be considered to exist provided the inspection lot has been produced by one manufacturer, in one unchanged process, using the same materials and methods, in accordance with the same drawings, same drawing revisions, same specifications and same specification revisions. All material submitted for inspection in accordance with this specification shall comply with the homogeneity criteria specified herein, regardless of the type of inspection procedure which is being applied to determine conformance with requirements.

4.6.2 Group A tests. Group A tests consist of examinations and performance tests listed in Table II in the quantities specified.

4.6.3 Group B tests. Group B tests shall consist of the tests indicated in Table III and shall be conducted on one sample unit per inspection lot which has been subjected to, and passed, Group A tests (see 4.6.2).

4.6.4 Inspection of packaging. The sampling and inspection of the preservation, packing, and container marking shall verify that the units are packaged in accordance with the requirements of 5.1. During the period of first article inspection, one additional unit, packaged in accordance with 5.1, shall be examined to the requirements for quality conformance inspection listed below. Failure of packaging shall be cause for rejection of packaging. Two units per lot shall be examined for the following:

a. Verify that the outside bag is marked in accordance with MIL-STD-129 and is properly closed.

b. Verify that sleeve is around box and that foam properly surrounds inner bag.

c. Verify that the inner bag is properly sealed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

d. Verify that the unit is not damaged after the removal of all packaging materials.

4.6.5 Failure of sample. Should any one sample fail to meet any of the specified examinations and test requirements, acceptance of the product shall be suspended by the Government until necessary corrections to all production since the last test as well as to current production has been accomplished in accordance with the provisions of the contract (see 6.7).

4.7 Inspection equipment.

4.7.1 Government-furnished inspection equipment. Where the contract provides for Government-furnished test equipment, supply and maintenance of test equipment shall be in accordance with the applicable requirements of MIL-I-45607 and MIL-W-63150.

4.7.2 Contractor-furnished inspection equipment.

4.7.2.1 Government design. Unless otherwise specified in the contract, all inspection equipment identified by drawing number in specifications or QAP/QARs forming a part of the contract shall be supplied by the contractor in accordance with the design specified. The contractor may, however, propose alternatives to Government designs (see 6.3).

4.7.2.2 Contractor design. The contractor shall design and supply inspection equipment compatible with the Methods of Inspection specified in 4.8 and 4.9 of this specification and with the component inspection procedures specified in Examination and Test Facilities requirements of MIL-F-13926, whenever Government designs are not specified (see 4.7.2.1). Since tolerance of test equipment is normally considered to be within ten percent of product tolerance for which it is intended, this inherent error in the test equipment design must be considered as part of the prescribed product tolerance limit. Thus, concept, construction, materials, dimensions and tolerances used in the design of test equipment shall be so selected and controlled as to ensure that the test equipment will reliably indicate acceptability of a product which does not exceed 90 percent of the prescribed tolerance limit and permit positive rejection when nonconforming. Construction shall be such as to facilitate routine calibration of test equipment. When specified in contract or purchase order, the contractor shall submit inspection equipment designs for government review and evaluation (see 6.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

4.7.2.3 Test equipment. In conjunction with 4.7.2.1 and 4.7.2.2, the test equipment listed in Table V (Test equipment list) shall be used in the performance of the applicable test methods and procedures as specified in 4.8.

TABLE V. Test Equipment List. 1/

Power Supplies (DC)	Standard - capable of providing levels and limits stated in 4.8.1.
DC Voltmeter/Multimeter	Standard - capable of measuring voltages stated in 4.8.1.
Ammeter/Multimeter	Standard - capable of measuring currents stated in 4.8.1.
Pulse Generator	Standard - capable of providing pulses stated in 4.8.1.
Dual Channel Oscilloscope	Standard - capable of reading signals stated in 4.8.1.
Square Wave Generator	Standard - capable of providing signals stated in 4.8.1.

NOTE:
1/ Must be calibrated to the requirements of MIL-STD-45662 prior to use.

4.8 Methods of inspection. Unless otherwise specified in the contract, the following procedures shall be utilized to conduct specified tests. If the contractor chooses to use alternate test procedures, a detailed description of the set-up and procedure shall be submitted to the Government procuring agency for approval prior to use (see 4.7.2.2).

4.8.1 Performance tests. The following tests and examinations shall be performed to demonstrate compliance with 3.4.2. The PWBA shall be connected to the circuit specified in Figure 8. Set the square wave generator to produce 3KHz $\pm$ 100 Hz, 4v peak-to-peak signal (V_A). Set the pulse generator to produce a 10$\pm$1 us wide, 5$\pm$0.25v amplitude pulse (V_P) as in Figures 3 and 4. Apply power by turning ON S1 and S2 and leaving

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

on until all tests have been completed. All other switches shall be as shown in Figure 8 unless otherwise specified in 4.8.1.1 through 4.8.1.5.

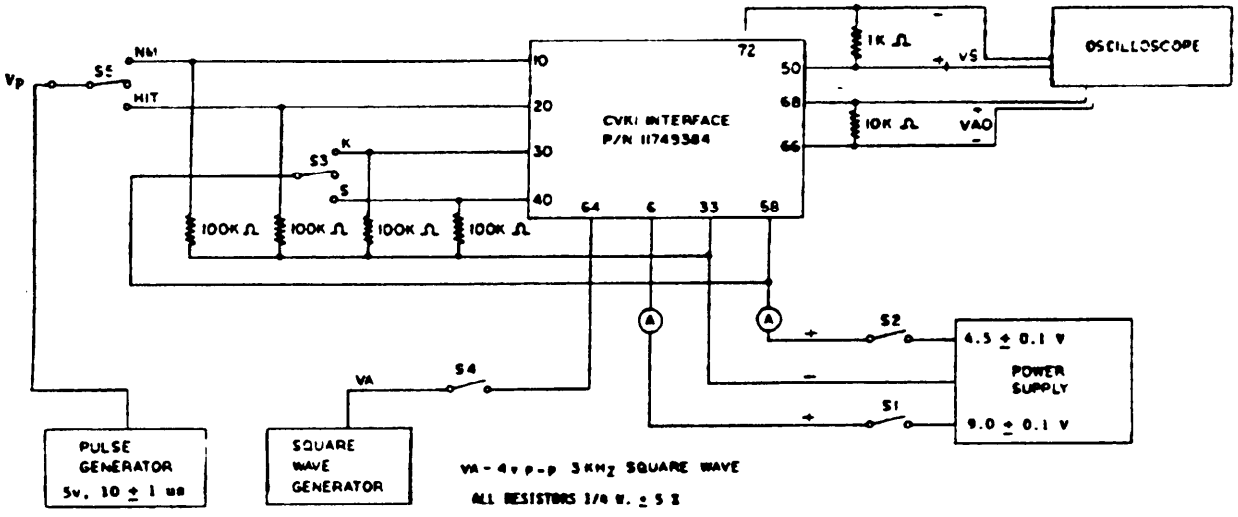


FIGURE 8. Test Circuit for CVKI Interface.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

4.8.1.1 Current drain. Turn ON S1 and S2 and verify the current drain requirements of 3.4.2.1.

4.8.1.2 Audio mode. With S3 in position K and S4 turned ON, verify the oscilloscope measurements across terminals 50 and 72 and across terminals 68 and 66 meet the audio mode requirements of 3.4.2.2.

4.8.1.3 Kill mode. With S3 in position S and S4 turned ON, verify the oscilloscope measurements across terminals 50 and 72 and across terinals 68 and 66 meet the kill mode requirements of 3.4.2.3.

4.8.1.4 Near miss mode. With S5 in position NM and S4 turned ON, verify the oscilloscope measurements across terminals 50 and 72 and across terminals 68 and 66 meet the near miss mode requirements of 3.4.2.4.

4.8.1.5 Hit mode. With S5 in position HIT and S4 turned ON, verify the oscilloscope measurements across terminals 50 and 72 and across terminals 68 and 66 meet the hit mode requirements of 3.4.2.5.

4.9 Environmental tests.

a. Unless otherwise specified, environmental tests shall be conducted in accordance with the test conditions and general test performance guidance of MIL-STD-810. Test facilities, chambers, and apparatus used in conducting the test required by this specification shall be capable of meeting the conditions specified.

b. Where necessary in the following tests, it shall be permissible to temporarily open chamber doors to permit access to and manipulation of test equipment and sample.

4.9.1 High temperature. This satisfies the storage and operating conditions of high temperature requirements as specified in 3.4.3.

4.9.1.1 Storage and operating. The assembly shall be tested in accordance with MIL-STD-810, Method 501 using the following procedure:

a. Step 1 - Place the test item, configured for high temperature test, into the temperature chamber.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

b. Step 2 - Raise the internal temperature to 63°C (145°F).

c. Step 3 - Maintain the internal chamber temperature for a period of 4 hours while insuring the relative humidity is not in excess of 15 percent.

d. Step 4 - Operate the test item until the item is stabilized and perform the tests required in 4.8.1.

e. Step 5 - Return the test item, nonoperating, to standard ambient condition and stabilize.

f. Step 6 - Visually inspect for physical damage and in the absence of physical damage, perform the tests required in 4.8.1.

4.9.2 Low temperature. This satisfies the storage and operating conditions of low temperature requirements as specified in 3.4.3.

4.9.2.1 Storage and operating. The assembly shall be tested in accordance with MIL-STD-810, Method 502 using the following procedure:

a. Step 1 - Place the test item, configured for low temperature test, into the temperature chamber.

b. Step 2 - Lower the internal chamber temperature to -34.4°C (-30°F) and maintain for a period of 24 hours after stabilization.

c. Step 3 - Adjust the internal chamber temperature to -31.7°C (-25°F) and maintain until temperature stabilization of the test item is reached.

d. Step 4 - Operate the test item until the item is stabilized and perform the tests required in 4.8.1.

e. Step 5 - Return the test item, nonoperating, to standard ambient conditions and stabilize.

f. Step 6 - Visually inspect for physical damage and in the absence of physical damage, perform the tests required in 4.8.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

4.9.3 Shock. The assembly, when mounted on a fixture that simulates its next higher assembly (see Figure 9), shall be tested in accordance with MIL-STD-810, Method 516.3, Section II, Procedure I, with the following modifications:

a. Step 3 - the assembly shall be in a non-operational mode.

b. The step 3 test transient shall be in accordance with 3.4.3.3.

c. Step 5 - the assembly inspection and functional verification shall not be conducted until shock has been completed in all three axes.

d. After shock testing the assembly shall not be damaged and shall be subjected to the performance tests specified in 4.8.1.

4.9.4 Vibration. The assembly, when mounted on a fixture that simulates its next higher assembly (see Figure 9), shall be tested in accordance with MIL-STD-810, Method 514.3, Section II, Procedure I, for a duration of 60 minutes with the following modifications:

a. Step 4 - mount the test item on vibration equipment.

b. Step 5 - expose the assembly to test level and durations as specified in 3.4.3.4.

c. Step 6 - does not apply.

d. Step 7 - the assembly inspection and functional verification shall not be conducted until vibration has been completed in all three axes.

e. After vibration testing the assembly shall not be damaged and shall be subjected to the performance tests specified in 4.8.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

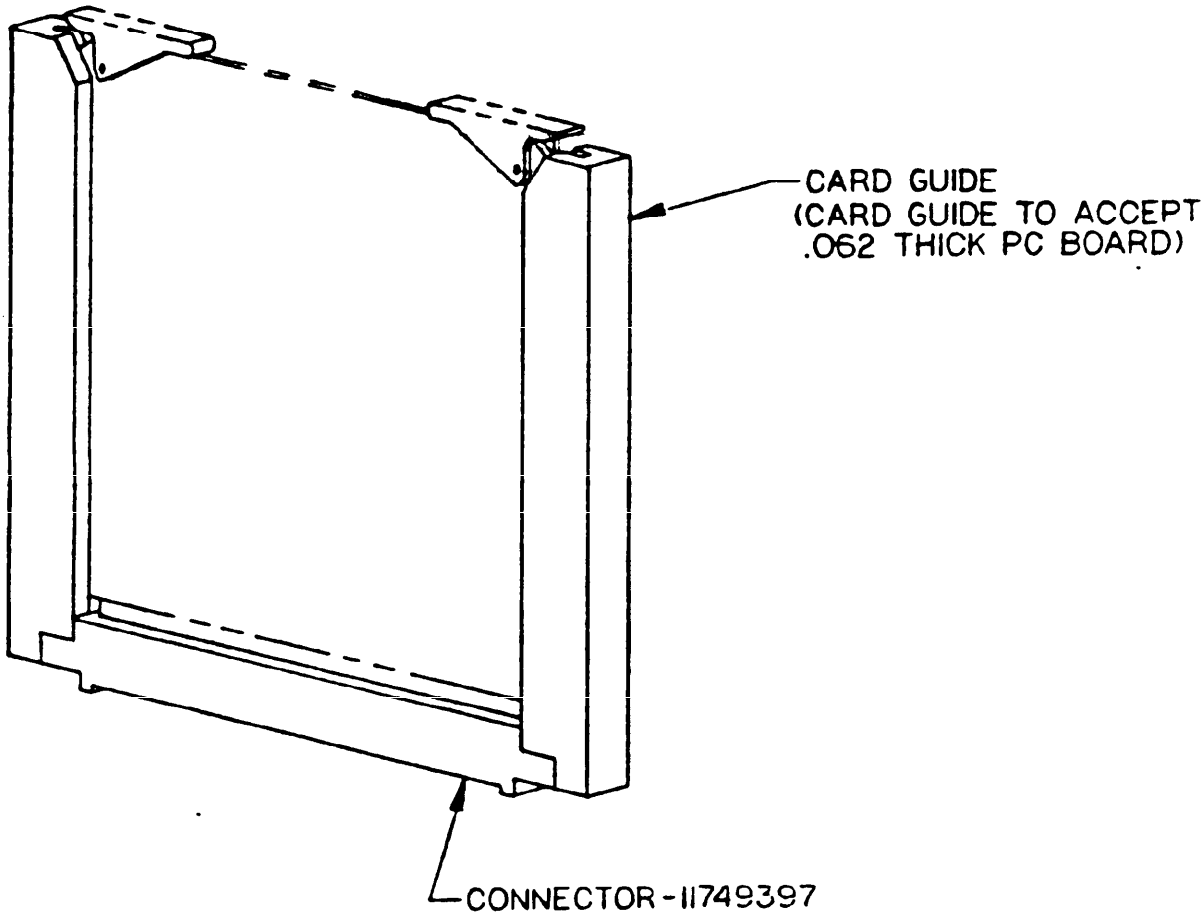


FIGURE 9. Mounting Configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

4.10 Certifications. Certification shall be provided that all units have been produced in accordance with the requirements of 3.5 and packaged in accordance with the requirements of 5.1.

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with SPI-P11749384. The level of protection shall be A, B, or C, as defined by the procurement document.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The CVKI Interface Printed Wiring Board Assembly is part of the Multiple Integrated Laser Engagement System.

6.2 Acquisition requirements. Acquisition documents shall specify the following:

a. Title, number and date of this specification (see page 1).

b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1)

c. Special tests and examinations required (see 4.2); the type of inspection required; and the activity responsible for testing, and its facility (see 4.1).

d. Whether a first article sample is required (see 3.2), and if so, pertinent details (see 4.4) including disposition of the first article sample.

e. Certification of conformance for each lot or shipment of product.

f. Whether Government-Loaned Property (Government Furnished inspection/test equipment) is available or will the contractor be required to furnish inspection equipment (see 4.7).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

g. Applicable level(s) of preservation, packaging, packing and marking instructions (see 5.1).

6.3 Submission of contractor inspection equipment designs for approval. Unless otherwise specified, submit two copies of designs as required to: Commander, U.S. Army AMCCOM, ATTN: SMCAR-QAF-I, Picatinny Arsenal, NJ 07806-5000. This address will be specified on the Contract Data Requirements List, DD Form 1423, in the contract. The letter of submittal shall specify, the contractor; contract number; title, number and revision of this specification; item nomenclature; classification of defect and test paragraph.

6.4 Definitions.

6.4.1 Hit. Successful transmission of the weapon simulator kill code that results in a "hit" on the target, but that does not "kill" the target. An audio alarm at the target signifies the hit.

6.4.2 Kill. Successful transmission of the weapon simulator kill code that results in the deactivation of or "kill" of the target. An audio alarm at the target signifies the kill.

6.4.3 MILES. Multiple Integrated Laser Engagement System.

6.4.4 Near Miss. Illumination of the target with the near miss laser message resulting in an audio indication to the target that it is under fire.

6.4.5 SME. Standard Measuring Equipment.

6.5 Drawings. Drawings listed in Section 2 of this specification under heading U.S. Army Armament Research, Development and Engineering Center (ARDEC), may also include drawings prepared by, and identified as, U.S. Army Armament Research and Development Command (ARRADCOM), Frankford Arsenal, Rock Island or Picatinny Arsenal drawings. Technical data originally prepared by these activities is now under cognizance of ARDEC.

6.6 Noncompliance. If a sample fails to pass group B inspection, the manufacturer shall notify the qualifying activity and the cognizant inspection activity of such failure and take corrective action on the materials or processes, or both, as warranted, and on all units of product which can be corrected and which were manufactured with essentially the same materials and

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

processes, and which are considered subject to the same failure. Acceptance and shipment of the product shall be discontinued until corrective action, acceptable to the qualifying activity has been taken. After the corrective action has been taken, group B inspection shall be repeated on additional sample units (all tests and examinations, or the test which the original sample failed, at the option of the qualifying activity). Group A inspections may be reinstituted; however, final acceptance and shipment shall be withheld until the group B inspection has shown that the corrective action was successful. In the event of failure after reinspection, information concerning the failure shall be furnished to the cognizant inspection activity and the qualifying activity.

6.7 Subject term (key word) listing.

Fire Control
Multiple Integrated Laser Engagement System
Training Devices

Custodians:
Army - AR

Preparing activity:
Army - AR

(Project 1265-A018)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revisior letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-P-70854 (AR)	10 MARCH 1992

3. DOCUMENT TITLE

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets if needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)	
US ARMY ARDEC STANDARDIZATION OFFICE	(1) Commercial (201) 724-6674	(2) AUTOVON 880-6674
c. ADDRESS (Include Zip Code) ATTN: SMCAR-BAC-S PICATINNY ARSENAL,NJ 07806-5000	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.