INCH-POUND
MIL-P-70879 (AR)
25 September 1991

MILITARY SPECIFICATION

PRINTED WIRING BOARD ASSEMBLY, DECODER-MWLD, SPECIFICATION FOR

This specification is approved for use by the U.S. Army Armament, Munitions and Chemical Command and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification establishes the requirements for manufacture, inspection, packaging and acceptance of the Printed Wiring Board Assembly (PWBA), Decoder-MWLD, part number 9359102.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander U.S. Army ARDEC, ATTN: SMCAR-BAC-S, Picatinny Arsenal, New Jersey 07806-5000 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 1265

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:31Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards and handbooks. The following specifications, standards and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

MILITARY

MIL-F-13926	-	Fire Control Materiel Manufacture and Inspection of, General Specification for
MIL-I-45607	-	Inspection Equipment, Acquisition, Maintenance and Disposition of
MIL-W-63150	-	Weapons and Support Materiel, Standard Quality Assurance Provisions for

STANDARDS

MILITARY

MIL-STD-129	-	Marking for Shipment and Storage
MIL-STD-454	-	Standard General Requirements for Electronic Equipment
MIL-STD-810	-	Environmental Test Methods
MIL-STD-1686	-	Electrostatic Discharge Control Program for Protection of Electrical and Electronic Parts, Assemblies and Equipment (Excluding electrically initiated explosive devices)
MIL-STD-1695	-	Environments, Working, Minimum Standards for
MIL-STD-2000	-	Standard Requirements for Soldered Electrical and Electric Assemblies
MIL-STD-45662	-	Calibration System's Requirements

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:31Z
Check the source to verify that this is the current version before use.

HANDBOOK

MILITARY

DoD-HBK-263 - Electrostatic Discharge Control Handbook for Protection of Electrical and Electronic Parts, Assemblies and Equipment (Excluding electrically initiated explosive devices) METRIC

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from: Standardization Documents Order Desk, Bldg. 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

U.S. ARMY ARMAMENT RESEARCH, DEVELOPMENT AND ENGINEERING CENTER.

PRODUCT DRAWINGS (CAGE CODE 19200)

9359102	-	Printed Wiring Board Assy, Decoder-MWLD
PL9359102	-	Printed Wiring Board Assy, Decoder-MWLD
9359104	-	Schematic Diagram, Decoder-MWLD

PACKAGING DATA SHEET (CAGE CODE 19200)

SPI-P9359102	-	Printed Wiring Board Assy, Decoder-MWLD

(Copies of other Government documents, drawings and publications required by the contractor in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:31Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Item description. The Decoder Board contains two custom LSI devices together with associated passive components. It receives input signals through the receiving loop from the preamplifier and threshold circuits, decodes these signals and in the event that a near miss or kill signal is successfully decoded, supplies horn power to sound the appropriate warning. (Continuous for kill; approximately 0.3 sec for near miss).

U1, in addition to its loop receiver and horn control circuits, also provides regulated voltage and power-on-reset (POR) for U2, a custom CMOS circuit.

U2 receives digital input coded signals and generates near miss and kill output signals. It also provides the 48 kHz crystal clock oscillator and logic for the control-key and weapon key functions.

3.1.1 Loop voltage. The resistor R4 on the Decoder board shall be adjusted to provide a reference for the receiving loop signal pulses. Each input pulse at terminals 9 and 10 shall have a corresponding pulse output within 10ms at terminal 11 relative to ground when the input loop signal is referenced properly. With an input pulse of 1.0 $\pm$ 0.1us width, and 160 $\pm$ 10 mV amplitude, the signal at terminal 11 shall be a negative going pulse, from 9V (+0V, -0.6V) to 0V (+0.5V -0V), back to 9V (+0V, -0.6V), with a 10us (-5us, +10us) width.

3.2 First article. When specified (see 6.4), a sample shall be subjected to first article inspection in accordance with 4.4.

3.3 Environmental stress screen (ESS). When specified in the contract (see 6.2), all assemblies shall be subjected to an environmental stress screen prior to conformal coating consisting of temperature cycling and soaking between the temperatures -35°C and +62.8°C. After exposure to ESS in accordance with 4.5, the characteristics of 3.4 shall not be degraded.

3.4 Characteristics.

3.4.1 Operating conditions. The operating conditions shall be in accordance with Table I, measured under quiescent conditions. For terminal and component designations called out in this specification, see drawing 9359104, Schematic Diagram, Decoder-MWLD.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:31Z
Check the source to verify that this is the current version before use.


TABLE I. Operating Conditions.

Parameter	Terminal	Minimum	Nominal	Maximum	Unit
Ambient Temperature		-31.7	25	62.8	°C
Input (+) Power	5,7	6.0	8.0	11.0	Vdc
Return (-) Power	1, 2, 12				
Input Current	5, 7	0.5	1.0	2.0	mA

3.4.2 Performance. Unless otherwise specified, the PWBA shall meet the requirements of this specification under the following conditions:

a. Temperature — 25° ± 10°C (77° ± 18°F)
b. Relative humidity — 50 ± 30 %
c. Barometric pressure — 725 + 50, -75 mm Hg (28.5 + 2.0, -3.0 inches Hg)
d. Input power and loads — See Figure 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:31Z
Check the source to verify that this is the current version before use.

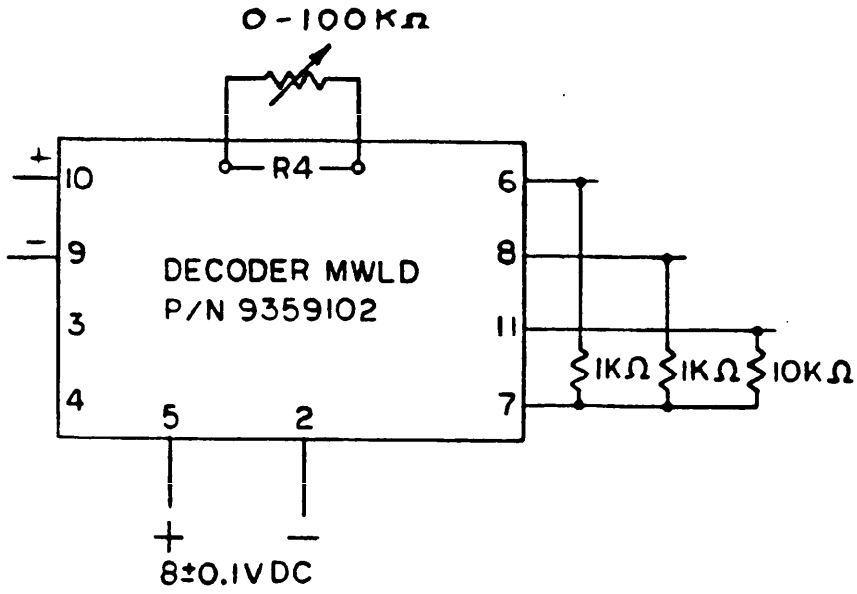

ALL RESISTORS 1/4 W, ± 5 %

FIGURE 1. Decoder-MWLD PWBA Power Source and Loads.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:31Z
Check the source to verify that this is the current version before use.

3.4.2.1 Current drain. With power applied to terminals 5 and 7, the maximum current drain shall be 2.0 mA.

3.4.2.2 Control/weapon key. With power applied, the control key (terminal 3) and weapon key (terminal 4) define the outputs following the timing diagram of Figure 2. Custom LSI chip U2 decodes the control/weapon key signals and sends signals to chip U1 to generate the appropriate output. With terminals 9 and 10 (helmet loop) connected, the voltage at terminals 6 and 8 (horn hi) shall be 0V (+1V, -0V). With terminals 3 and 2 connected the voltage at terminals 6 and 8 shall be 8V (+1V, -2V). With terminals 3 and 2 disconnected the voltage at terminals 6 and 8 shall be 8V (+1V, -2V). With terminals 4 and 2 connected the voltage at terminals 6 and 8 shall be 8V (+1V, -2V). With terminals 4 and 2 disconnected the voltage at terminals 6 and 8 shall be 0V (+1V, -0V). With terminals 3 and 2 connected, the voltage at terminals 6 and 8 shall be 8V (+1V, -2V). With terminals 3 and 2 disconnected the voltage at terminals 6 and 8 shall be 8V (+1V, -2V).

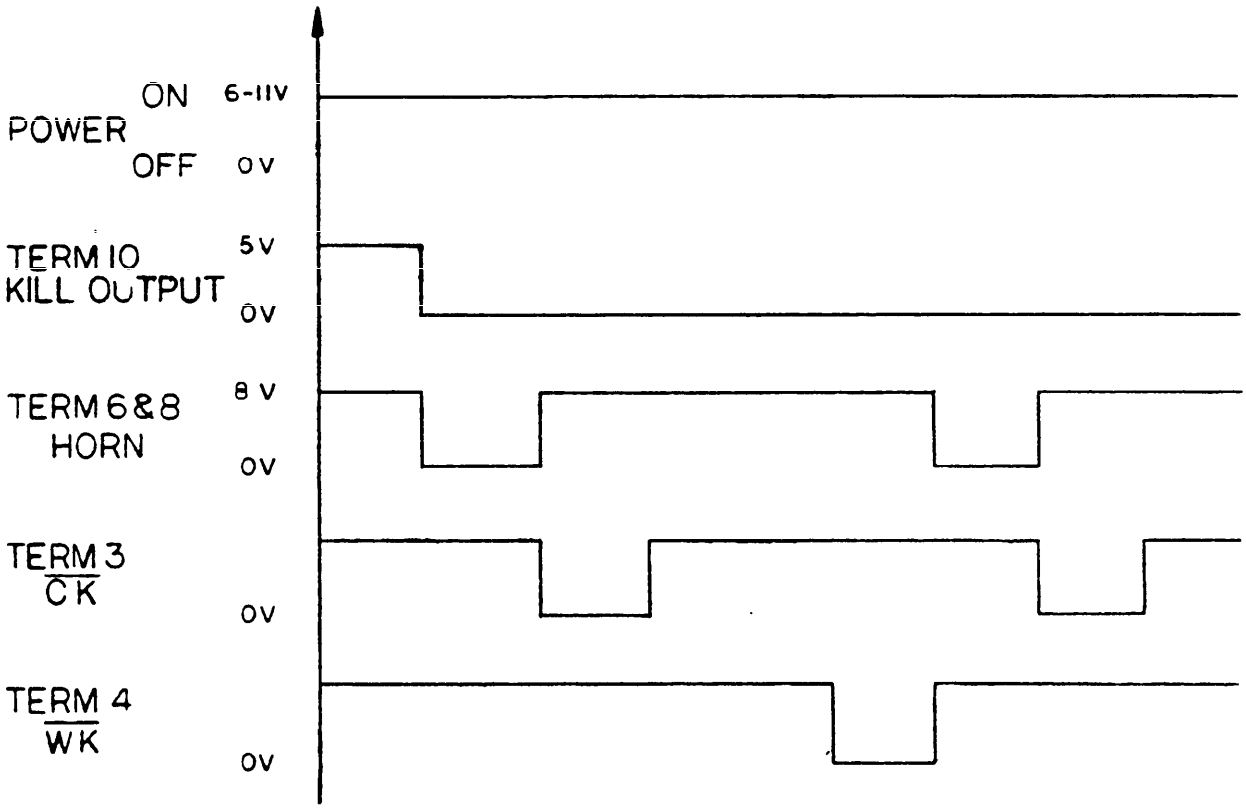


FIGURE 2. Control/Weapon Key Timing Diagram.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:31Z
Check the source to verify that this is the current version before use.

3.4.2.3 Miss. With power applied, and one coax miss code word #29 (see Figure 3) inputted to terminals 9 and 10 at a 200 ± 15mV amplitude, a voltage pulse of 0V (+1V, -0V) shall appear for 300 ms (+300 ms, -100 ms) at terminal 6 and 8 to signify a near miss. Repeat the above procedure with spare miss code word #30 (see Figure 4) and the same results shall occur. Each one (1) time slot in the coded word represents a 150 ± 50 nsec pulse located somewhere in the time slot. The time slots (both 1 and 0) occur at a frequency of 3.000 KHz ± 0.015%. Custom LSI chip U1 decodes the digital signal and generates the output for terminals 6 and 8.

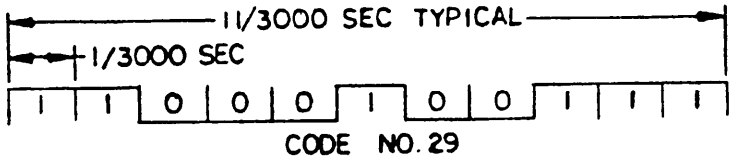


FIGURE 3. COAX Miss Code.

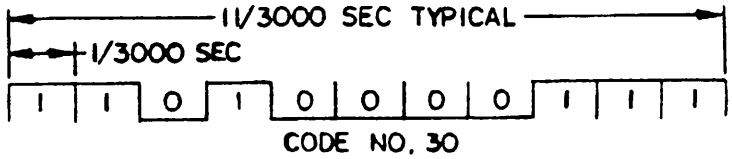


FIGURE 4. Spare Miss Code.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:31Z
Check the source to verify that this is the current version before use.

3.4.2.4 Universal kill. With power applied, and one universal kill code word #00 (see Figure 5) inputted to terminals 9 and 10 at a 200 ± 15mV amplitude, the voltage at terminals 6 and 8 shall then be 0V (+1V, -0V). With terminals 4 and 2 connected the voltage at terminals 6 and 8 shall be 8V (+1V, -2 V). With terminals 4 and 2 disconnected the voltage at terminals 6 and 8 shall be 0V (+1V, -0V). In less than one second after terminals 4 and 2 are disconnected, the voltage at terminals 6 and 8 shall change to 8V (+1V, -2V). Each one (1) time slot in the coded word represents a 150 ± 50 nsec pulse located somewhere in the time slot. The time slots (both 1 and 0) occur at a frequency of 3.000 KHz ± 0.015%. Custom LSI chip U1 decodes the digital signal and generates the output for terminals 6 and 8.

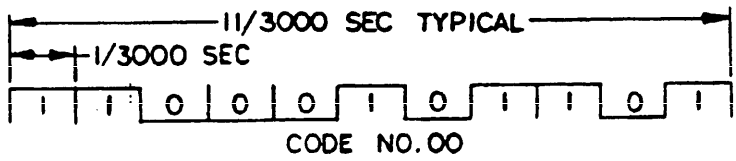


FIGURE 5. Universal Kill Code.

3.4.2.5 Hit. With power applied, and one 25 mm code word #21 (see Figure 6) inputted to termimals 9 and 10 at a 200 ± 15mV amplitude, the voltage at terminals 6 and 8 shall be 0V (+1V,-0V). With terminals 3 and 2 connected, then disconnected, the voltage at terminals 6 and 8 shall be 8V (+1V, -2V) within one second after terminals 3 and 2 are disconnected. Repeat the above with code #21 replaced with each of the following input words: 23 mm code #22 (see Figure 7), 20 mm code #23 (see Figure 8), M2, M85 code #24 (see Figure 9), and M16, M60 code #27 (see Figure 10). The same results as above shall occur for each code word. Each one (1) time slot in the coded word represents a 150 ± 50 nsec pulse located somewhere in the time slot. The time slots (both 1 and 0) occur at a frequency of 3.000 KHz ± 0.015%. Custom LSI chip U1 decodes the digital signal and generates the output for terminals 6 and 8.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:31Z
Check the source to verify that this is the currentversion before use.

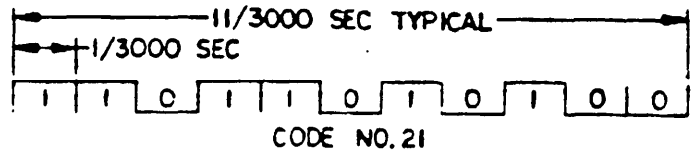


FIGURE 6. Hit (30 mm, 25 mm) Code.

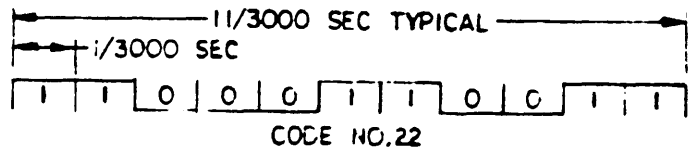


FIGURE 7. Hit (23 mm) Code.

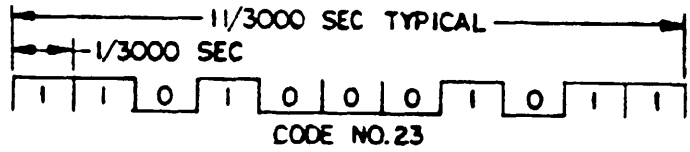


FIGURE 8. Hit (20 mm) Code.

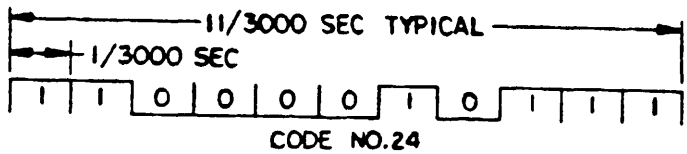


FIGURE 9. Hit (M2, M85) Code.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:31Z
Check the source to verify that this is the current version before use.

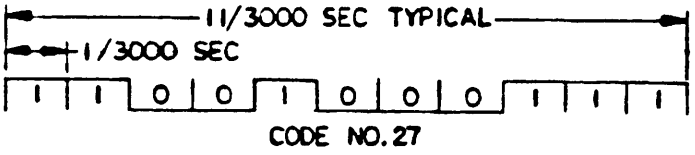


FIGURE 10. Hit (M16, M60) Code.

3.4.3 Environmental requirements. Unless otherwise specified the assembly shall be subject to the following environmental conditions and meet the stated requirements.

3.4.3.1 High temperature. The assembly shall not be damaged and shall meet the performance requirements of 3.4.2. when exposed to and after the following.

3.4.3.1.1 Operating and storage temperature. The assembly shall operate up to a temperature of 62.8°C (+145°F) after exposure at 62.8°C for 4 hours.

3.4.3.2 Low temperature. The assembly shall not be damaged and shall meet the performance requirements of 3.4.2 when exposed to and after the following.

3.4.3.2.1 Operating temperature. The assembly shall operate down to a temperature of -31.7°C (-25°F) after exposure at -31.7°C for 4 hours.

3.4.3.2.2 Storage temperature. The assembly shall operate after exposure to a temperature of -34.4°C (-30°F) for a period of 24 hours.

3.4.3.3 Shock. The assembly shall meet the performance requirements of 3.4.2 after shocks with a nominal level of 40 g's terminal peak and nominal duration of 11 milliseconds as shown in Figure 11. Apply three shocks (18 total) in each direction of the three mutually perpendicular axes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:31Z
Check the source to verify that this is the current version before use.

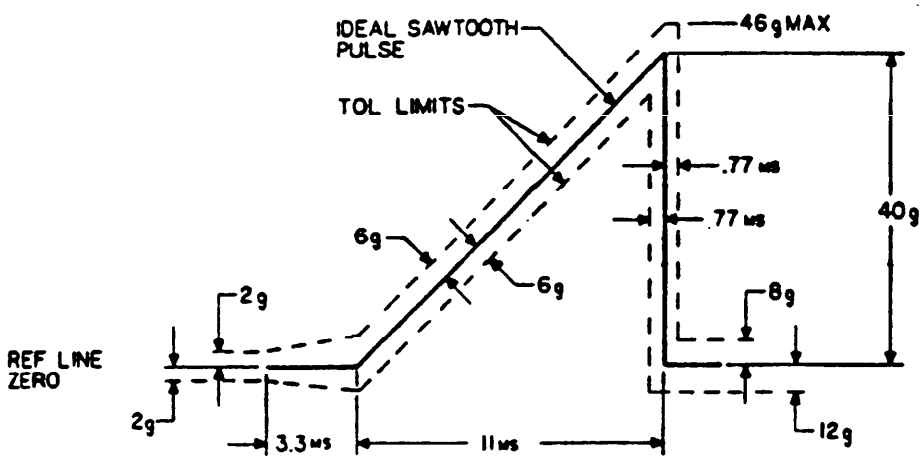


FIGURE 11. Shock Pulse.

3.4.3.4 Vibration. The assembly shall meet the performance requirements of 3.4.2 after sinusoidal vibrations of frequency and amplitude given below and in Figure 12 on three mutually perpendicular axes. Total duration shall be 60 minutes per axis.

Frequency	Amplitude	Sweep rate
7-30 Hz	±1.5 g	7-500-7 Hz
30-50 Hz	0.033" DA	in 15 minutes
50-500 Hz	±4.2 g	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:31Z
Check the source to verify that this is the current version before use.

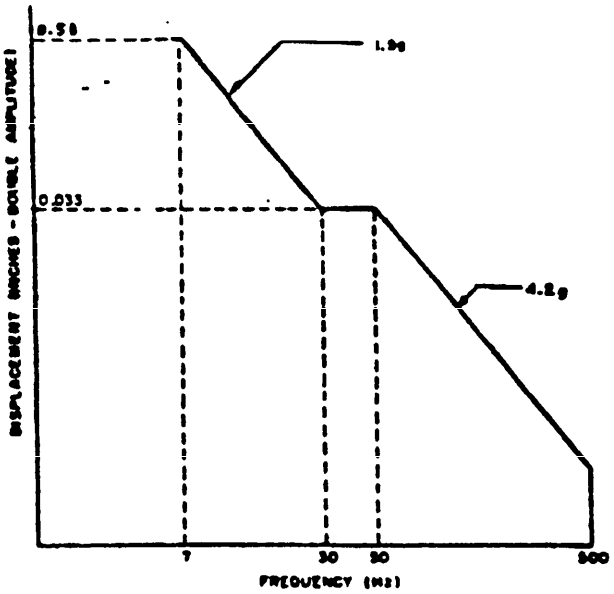


FIGURE 12. Vibration Test.

3.5 Design and construction. The PWBA shall be fabricated and assembled in accordance with drawings, parts lists, and other documents specified on drawing 9359102. The PWBA shall be manufactured and tested in a working environment in accordance with Table I, work area 5 of MIL-STD-1695.

3.5.1 Standards of manufacture. Handling of Electrostatic Sensitive Parts. This equipment contains semiconductor devices such as CMOS, mosfets, and microelectronic devices which may be degraded or damaged by an inadvertent discharge of static electricity. To prevent damage to these components, the supplier shall provide for adequate handling procedures and equipment in accordance with MIL-STD-1686 and DoD-HBK-263.

3.5.2 Soldering. Soldering shall be in accordance with the general requirements of section 4 of MIL-STD-2000.

3.5.3 Workmanship. General workmanship shall be in accordance with requirement 9 of MIL-STD-454.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:31Z
Check the source to verify that this is the current version before use.

contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.4).

b. Environmental stress screen (see 4.5).

c. Quality conformance inspection (see 4.6).

d. Packaging inspection (see 4.6.4).

4.3 Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with the working environment specified in 3.5 and at standard ambient conditions defined in 3.4.2 using the methods of 4.8 and 4.9.

4.4 First article inspection.

4.4.1 Sample. The contractor shall submit a first article sample as designated by the Contracting Officer for evaluation in accordance with provisions of 4.4.2. The first article sample shall consist of three printed wiring board assemblies.

4.4.2 Inspections to be performed. First article inspections are listed in Tables II and III. Each first article sample unit shall be inspected in accordance with the Table II

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:31Z
Check the source to verify that this is the current version before use.

before being subjectd to the environmental tests of Table III in the sequence listed. As determined by the Government, the first article assemblies may be subjected to any or all of the examinations and tests specified in this detail specification and be inspected for compliance with any or all requirements of the applicable drawings.

TABLE II. Examinations and Performance Tests. 1/ 2/

Class	Characteristics	Require-ments Paragraph	Test/ inspec-tion Method	First Article Sample Size	Quality 3/ Conformance Inspection Sample Size/ Accept Criteria
101	Current Drain	3.4.2.1	4.8.2.1	3	32/Acc-0,Rej-1
102	Control/Weapon Key	3.4.2.2	4.8.2.2	3	32/Acc-0,Rej-1
103	Miss	3.4.2.3	4.8.2.3	3	32/Acc-0,Rej-1
104	Universal Kill	3.4.2.4	4.8.2.4	3	32/Acc-0,Rej-1
105	Hit	3.4.2.5	4.8.2.5	3	32/Acc-0,Rej-1
201	Workmanship	3.5.3	Visual	3	125/Acc-0,Rej-1
202	Soldering 4/	3.5.2	Visual	3	125/Acc-0,Rej-1
203	Conformal Coating	3.5	Visual	3	125/Acc-0,Rej-1
204	Dim Character-istics	3.5	SME 5/	3	125/Acc-0,Rej-1
205	Comp Orientation	3.5	Visual	3	125/Acc-0,Rej-1
206	Comp and Board Identification	3.5	Visual	3	125/Acc-0,Rej-1

NOTES:
1/ ESS testing per 4.5 is required for all deliverable units.
2/ 200 class (minor characteristics) examinations required prior to 100 class (major characteristics) performance tests.
3/ For lot sizes less than 32 or 125 as listed, 100% inspection is required (see 4.6.5).
4/ Check before conformal coating is applied.
5/ Standard Measuring Equipment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:31Z
Check the source to verify that this is the current version before use.

TABLE III. Environmental Tests.

Class	Characteristic	Requirements Paragraph	Test Paragraph	First Article Sample Size	Quality Conformance Inspection Sample Size/ Accept Criteria
106	High temp	3.4.3.1	4.9.1	3	1/Acc-0, Rej-1
107	Low temp	3.4.3.2	4.9.2	3	1/Acc-0, Rej-1
108	Shock	3.4.3.3	4.9.3	3	1/
109	Vibration	3.4.3.4	4.9.4	3	1/

NOTE:
1/ Not required for quality conformance inspection.

4.4.3 Rejection. If any assembly fails to comply with any of the applicable requirements, the first article sample shall be rejected. The Government reserves the right to terminate inspection upon any failure of any assembly to comply with any of the requirements.

4.5 Environmental stress screen. An environmental stress screening program shall be established when specified in the contract (see 6.2). All units shall be subjected to a thermal stress screen in accordance with Table IV and the procedure below.

TABLE IV. ESS Temperature Cycling Requirements.

Low Temp	High Temp	Rate Change	Power	Monitor	Cycles/ Group A Test
-34.4°C	+62.8°C	15°C/minute	Off	No	20/Failure Free or Additional Cycle

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:31Z
Check the source to verify that this is the current version before use.

4.5.1 Conformal coating. Thermal stress screening shall be performed prior to conformal coating unless another method is approved by the Government.

4.5.2 Chamber temperature. Chamber temperature cycling shall be from -34.4°C to +62.8°C (-30°F to +145°F) and the duration of one cycle to be 8 minutes up and 8 minutes down plus 4 minutes dwell at high temperature and 4 minutes at low temperature for a total cycle duration of 24 minutes. The units shall begin and end the cycles at ambient temperature (see Figure 13).

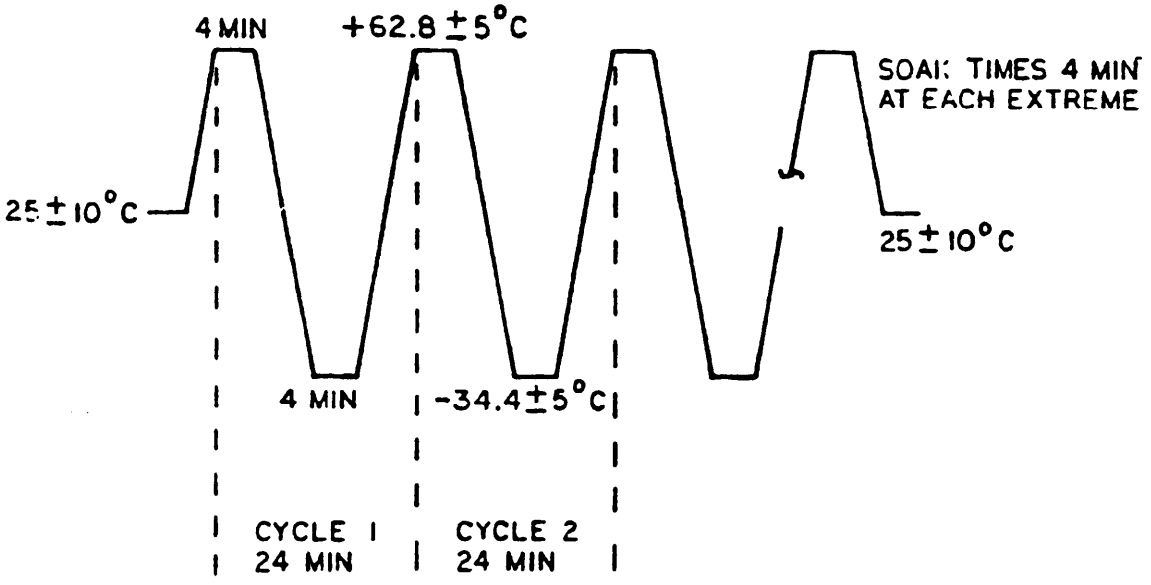


FIGURE 13. Environmental Stress Screen Temperature Profile.

4.5.3 Cycle frequency. A total of twenty temperature cycles are to be imposed on each unit.

4.5.4 Temperature cycles. Temperature cycling shall be conducted with units nonoperating and without power (static).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:31Z
Check the source to verify that this is the current version before use.

4.5.5 Test requirements. After the thermal stress screen, the units shall meet the Group A tests (4.6.2). If a unit is rejected, the unit shall be repaired for the failure (if possible), and be put through one additional cycle of ESS. The unit shall then undergo and pass Group A tests.

4.6 Quality conformance inspection. Quality conformance inspection requirements are defined in 4.6.2 and 4.6.3.

4.6.1 Inspection lot formation. The term "inspection lot" is defined as a homogeneous collection of units of product from which a representative sample is drawn of which is inspected 100 percent to determine conformance with applicable requirements. Units of product selected for inspection shall represent only the inspection lot from which they are drawn and shall not be construed to represent any prior of subsequent quantities presented for inspection. Homogeneity shall be considered to exist provided the inspection lot has been produced by one manufacturer, in one unchanged process, using the same materials and methods, in accordance with the same drawings, same drawing revisions, same specifications and same specification revisions. All material submitted for inspection in accordance with this specification shall comply with the homogeneity criteria specified herein, regardless of the type of inspection procedure which is being applied to determine conformance with requirements.

4.6.2 Group A tests. Group A tests consist of examinations and performance tests listed in Table II in the quantities specified.

4.6.3 Group B tests. Group B tests shall consist of the tests indicated in Table III and shall be conducted on one sample unit per inspection lot which has been subjected to, and passed, Group A tests (see 4.6.2).

4.6.4 Inspection of packaging. The sampling and inspection of the preservation, packing, and container marking shall verify that the units are packaged in accordance with the requirements of 5.1. During the period of first article inspection, one additional unit, packaged in accordance with 5.1, shall be examined to the requirements for quality conformance inspection listed below. Failure of packaging shall be cause for rejection of packaging. Two units per lot shall be examined for the following:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:31Z
Check the source to verify that this is the current version before use.

The right to perform any of the inspections set forth in this

a. Verify that the outside bag is marked in accordance with MIL-STD-129 and is properly closed.

b. Verify that sleeve is around box and that foam properly surrounds inner bag.

c. Verify that the inner bag is properly sealed.

d. Verify that the unit is not damaged after the removal of all packaging materials.

4.6.5 Failure of sample. Should any one sample fail to meet any of the specified examinations and test requirements, acceptance of the product shall be suspended by the Government until necessary corrections to all production since the last test as well as to current production has been accomplished in accordance with the provisions of the contract (see 6.7).

4.7 Inspection equipment.

4.7.1 Government-furnished inspection equipment. Where the contract provides for Government-furnished test equipment, supply and maintenance of test equipment shall be in accordance with the applicable requirements of MIL-I-45607 and MIL-W-63150.

4.7.2 Contractor-furnished inspection equipment.

4.7.2.1 Government design. Unless otherwise specified in the contract, all inspection equipment identified by drawing number in specifications or QAP/QARs forming a part of the contract shall be supplied by the contractor in accordance with the design specified. The contractor may, however, propose alternatives to Government designs (see 6.3).

4.7.2.2 Contractor design. The contractor shall design and supply inspection equipment compatible with the Methods of Inspection specified in 4.8 and 4.9 of this specification and with the component inspection procedures specified in Examination and Test Facilities requirements of MIL-F-13926, whenever Government designs are not specified (see 4.7.2.1). Since tolerance of test equipment is normally considered to be within ten percent of product tolerance for which it is intended, this inherent error in the test equipment design must be considered as part of the prescribed product tolerance limit. Thus, concept, construction, materials, dimensions and tolerances used in the design of test equipment shall be so selected and controlled as to ensure that the test equipment will reliably indicate

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:31Z
Check the source to verify that this is the current version before use.

acceptability of a product which does not exceed 90 percent of the prescribed tolerance limit and permit positive rejection when nonconforming. Construction shall be such as to facilitate routine calibration of test equipment. When specified in contract or purchase order, the contractor shall submit inspection equipment designs for government review and evaluation (see 6.3).

4.7.2.3 Test equipment. In conjunction with 4.7.2.1 and 4.7.2.2, the test equipment listed in Table V (Test equipment list) shall be used in the performance of the applicable test methods and procedures as specified in 4.8.

TABLE V. Test Equipment List. 1/

Power Supplies (DC)	Standard - capable of providing levels and limits stated in 4.8.
DC Voltmeter/Multimeter	Standard - capable of measuring voltages stated in 4.8.
Ammeter/Multimeter	Standard - capable of measuring currents stated in 4.8.2.
Pulse Generator	HP 8011A or Equivalent - capable of providing pulses stated in 4.8.
Data Generator	HP 8018A or Equivalent - capable of providing data streams stated in 4.8.2.
Digitizing Oscilloscope	HP54100D or Equivalent - capable of measuring and storing signals stated in 4.8.

NOTE:
1/ Must be calibrated to the requirements of MIL-STD-45662 prior to use.

4.8 Methods of inspection. Unless otherwise specified in the contract, the following procedures shall be utilized to conduct specified tests. If the contractor chooses to use alternate test procedures, a detailed description of the set-up and procedure shall be submitted to the Government procuring agency for approval prior to use (see 4.7.2.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:31Z
Check the source to verify that this is the current version before use.

4.8.1 Loop voltage. To obtain the proper reference for the loop voltage, perform the following procedure to identify resistor R4. Place the PWBA into the circuit specified in Figure 14, turn on the pulse generator and set it to produce pulses specified in 3.1.1 at a 100 Hz frequency. Turn on the digital oscilloscope, set S3 to position 3, turn ON S2, set S4 to position 2, set S5 to position 2, adjust R4 to meet the requirements of 3.1.1, verify the parameters of the output pulses and then replace R4 with a fixed ± 5% resistor.

4.8.2 Performance tests. The following tests and examinations shall be performed to demonstrate compliance with 3.4.2. The PWBA shall be connected to the circuit specified in Figure 14. Apply power by turning ON S2 and leaving on until all tests have been completed. All other switches shall be as shown in Figure 14 prior to each test specified in 4.8.2.1 through 4.8.2.5.

4.8.2.1 Current drain. Verify that the quiescent current drain meets the requirements of 3.4.2.1.

4.8.2.2 Control/weapon key. To verify the control/weapon key requirements of 3.4.2.2, set S4 to position 1, set S5 to position 1, then check the voltage readings at S3 in positions 1 and 2 before proceeding. Set S1 to position 1, and check the voltage readings at S3 in positions 1 and 2. Set S1 to position 2 and check the voltage readings at S3 in positions 1 and 2. Set S1 to position 3 and check the voltage readings at S3 in positions 1 and 2. Set S1 to position 2 and check the voltage readings at S3 in positions 1 and 2. Set S1 to position 1, and check the voltage readings at S3 in positions 1 and 2. Set S1 to position 2 and check the voltage readings at S3 in positions 1 and 2.

4.8.2.3 Miss. To verify the miss requirements of 3.4.2.3, turn on the data generator and digital oscilloscope, set the bits and the bit rate for code #29, set S4 to position 3, and set S5 to position 2. Send the coded word from the data generator, store the first second of the voltages at S3 in position 1 with the digital oscilloscope and verify the requirements. Repeat with S3 set to position 2. Repeat the above for code #30.

Source: https://assist.dla.mil -- Downloaded: 20260-26T04:31Z
Check the source to verify that this is the current version before use.

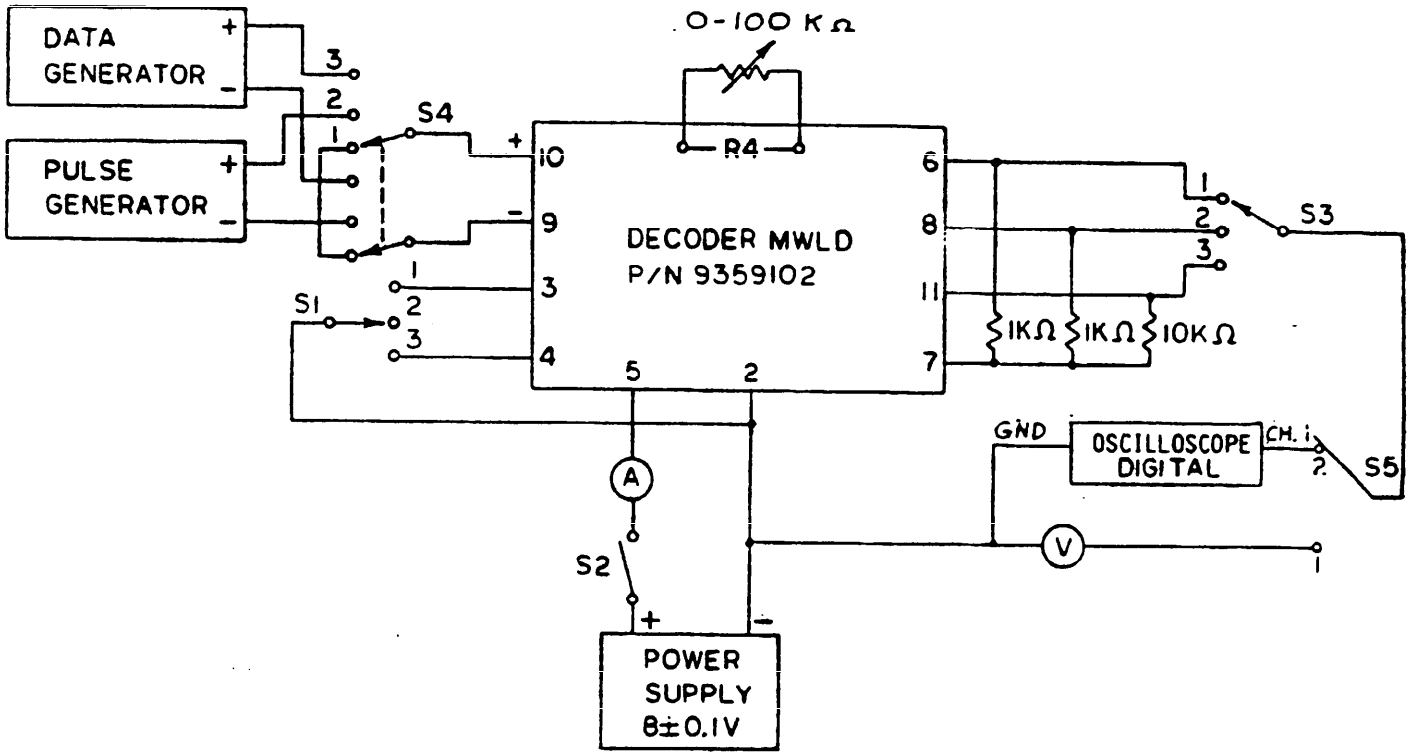


FIGURE 14. Test Circuit for Decoder-MWLD.

4.8.2.4 Universal kill. To verify the universal kill requirements of 3.4.2.4, turn on the data generator and digital oscilloscope, set the bits and bit rate for code #00, set S4 to position 3, set S5 to position 1, send the word and read the

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:31Z
Check the source to verify that this is the current version before use.

voltages at S3 in positions 1 and 2. Set S1 to position 3 and read the voltages at S3 in positions 1 and 2. Set S5 to position 2, set S1 to position 2, store the first second of the voltages at S3 in position 1, with the digital oscilloscope, and verify the requirements. Repeat the above procedure when S5 was set to position 2, but with S3 set to position 2.

4.8.2.5 Hit. To verify the hit requirements of 3.4.2.5, turn on the data generator and digital oscilloscope, set the bits and bit rate for code #21, set S4 to position 3, and set S5 to position 1. Send the word and read the voltages at S3 in positions 1 and 2. Set S5 to position 2, set S1 to position 1, store the first second of the voltage at S3 in position 1 after S1 is moved to position 2, with the digital oscilloscope, and verify the requirements. Repeat the above procedure when S5 was set to position 2, but with S3 set to position 2. Replace code #21 with the following hit codes: #22, #23, #24 and #27, and repeat the above test for each hit code.

4.9 Environmental tests.

a. Unless otherwise specified, environmental tests shall be conducted in accordance with the test conditions and general test performance guidance of MIL-STD-810. Test facilities, chambers and apparatus used in conducting the tests required by this specification shall be capable of meeting the conditions specified.

b. Where necessary in the following tests, it shall be permissible to temporarily open chamber doors to permit access to and manipulation of test equipment and sample.

4.9.1 High temperature. This satisfies the storage and operating conditions of high temperature requirements as specified in 3.4.3.

4.9.1.1 Storage and operating. The assembly shall be tested in accordance with MIL-STD-810, Method 501 using the following procedure:

a. Step 1 - Place the test item, configured for high temperature test, into the temperature chamber.

b. Step 2 - Raise the internal temperature to 62.8°C (145°F).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:31Z
Check the source to verify that this is the current version before use.

c. Step 3 - Maintain the internal chamber temperature for a period of 4 hours while insuring the relative humidity is not in excess of 15 percent.

d. Step 4 - Operate the test item until the item is stabilized and perform the tests required in 4.8.2.

e. Step 5 - Return the test item, nonoperating, to standard ambient condition and stabilize.

f. Step 6 - Visually inspect for physical damage and in the absence of physical damage, perform the tests required in 4.8.2.

4.9.2 Low temperature. This satisfies the storage and operating conditions of low temperature requirements as specified in 3.4.3.

4.9.2.1 Storage and operating. The assembly shall be tested in accordance with MIL-STD-810, Method 502 using the following procedure:

a. Step 1 - Place the test item, configured for low temperature test, into the temperature chamber.

b. Step 2 - Lower the internal chamber temperature to -34.4°C (-30°F) and maintain for a period of 24 hours after stabilization.

c. Step 3 - Adjust the internal chamber temperature to -31.7°C (-25°F) and maintain until temperature stabilization of the test item is reached.

d. Step 4 - Operate the test item until the item is stabilized and perform the tests required in 4.8.2.

e. Step 5 - Return the test item, nonoperating, to standard ambient conditions and stabilize.

f. Step 6 - Visually inspect for physical damage, and in the absence of physical damage, perform the tests required in 4.8.2.

4.9.3 Shock. The assembly, when mounted on a fixture that simulates its next higher assembly (see Figure 15), shall be tested in accordance with MIL-STD-810, Method 516.3, Section II, Procedure I, with the following modifications:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:31Z
Check the source to verify that this is the current version before use.

a. Step 3 - the assembly shall be in a non-operational mode.

b. The step 3 test transient shall be in accordance with 3.4.3.3.

c. Step 5 - the assembly inspection and functional verification shall not be conducted until shock has been completed in all three axes.

d. After shock testing the assembly shall not be damaged and shall be subjected to the performance tests specified in 4.8.2.

4.9.4 Vibration. The assembly, when mounted on a fixture that simulates its next higher assembly (see Figure 15), shall be tested in accordance with MIL-STD-810, Method 514.3, Section II, Procedure I, for a duration of 60 minutes per axis with the following modifications:

a. Step 4 - mount the test item on vibration equipment.

b. Step 5 - expose the assembly to test level and durations as specified in 3.4.3.4.

c. Step 6 - does not apply.

d. Step 7 - the assembly inspection and functional verification shall not be conducted until vibration has been completed in all three axes.

e. After vibration testing the assembly shall not be damaged and shall be subjected to the performance tests specified in 4.8.2.

4.10 Certifications. Certification shall be provided that all units have been produced in accordance with the requirements of 3.5 and packaged in accordance with the requirements of 5.1.

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with SPI-P9359102. The level of protection shall be A, B, or C, as defined by the procurement document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:31Z
Check the source to verify that this is the current version before use.

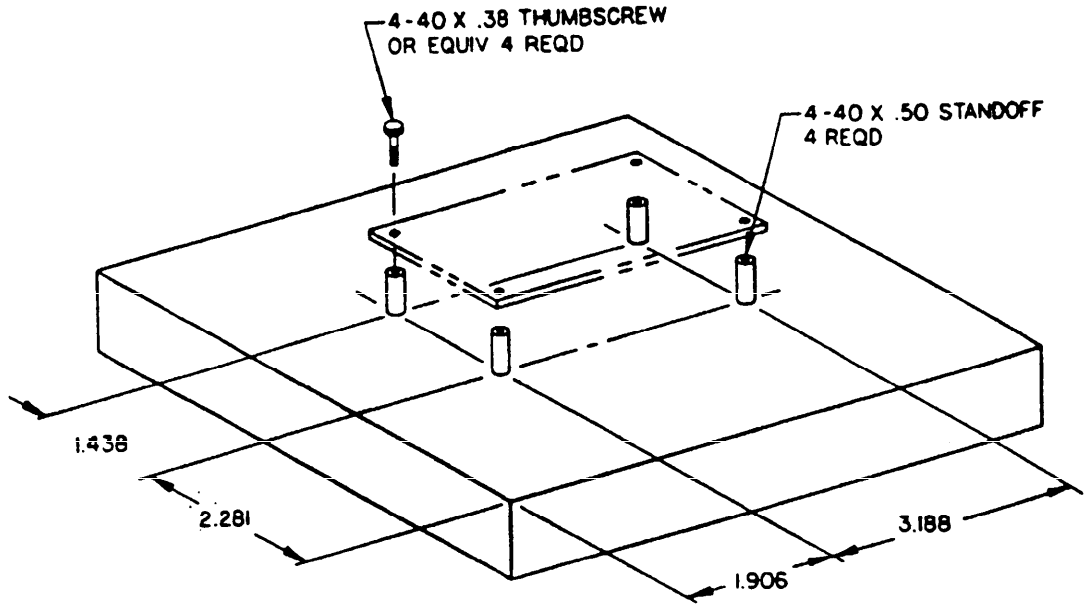


FIGURE 15. Mounting Configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:31Z
Check the source to verify that this is the current version before use.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The Decoder-MWLD PWBA is part of the Multiple Integrated Laser Engagement System.

6.2 Acquisition requirements. Acquisition documents shall specify the following:

a. Title, number and date of this specification (see page 1).

b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1).

c. Special tests and examinations required (see 4.2); the type of inspection required; and the activity responsible for testing, and its facility (see 4.1).

d. Whether a first article sample is required (see 3.2), and if so, pertinent details (see 4.4) including disposition of the first article sample.

e. Certification of conformance for each lot or shipment of product.

f. Whether Government-Loaned Property (Government Furnished inspection/test equipment) is available or will the contractor be required to furnish inspection equipment (see 4.7).

g. Applicable level(s) of preservation, packaging, packing and marking instructions (see 5.1).

6.3 Submission of contractor inspection equipment designs for approval. Unless otherwise specified, submit two copies of designs as required to: Commander, U.S. Army AMCCOM, ATTN: AMSMC-QAF- I, Picatinny Arsenal, NJ 07806-5000. This address will be specified on the Contract Data Requirements List, DD Form 1423 in the contrat. The letter of submittal shall specify, the contractor; contract number; title, number and revision of this specification; item nomenclature; classification of defect and test paragraph.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:31Z
Check the source to verify that this is the currentversion before use.

6.4 Definitions.

6.4.1 Kill. Successful transmission of the weapon simulator kill code that results in the deactivation of or "kill" of the target. An audio alarm at the target signifies the kill.

6.4.2 MILES. Multiple Integrated Laser Engagement System.

6.4.3 SME. Standard Measuring Equipment.

6.4.4 MWLD. Man Worn Laser Detector.

6.5 Drawings. Drawings listed in Section 2 of this specification under heading U.S. Army Armament Research, Development and Engineering Center (ARDEC), may also include drawings prepared by, and identified as, U.S. Army Armament Research and Development Command (ARRADCOM), Frankford Arsenal, Rock Island or Picatinny Arsenal drawings. Technical data originally prepared by these activities is now under cognizance of ARDEC.

6.6 Noncompliance. If a sample fails to pass group B inspection, the manufacturer shall notify the qualifying activity and the cognizant inspection activity of such failure and take corrective action on the materials or processes, or both, as warranted, and on all units of product which can be corrected and which were manufactured with essentially the same materials and processes, and which are considered subject to the same failure. Acceptance and shipment of the product shall be discontinued until corrective action, acceptable to the qualifying activity has been taken. After the corrective action has been taken, group B inspection shall be repeated on additional sample units (all tests and examinations, or the test which the original sample failed, at the option of the qualifying activity). Group A inspections may be reinstituted; however, final acceptance and shipment shall be withheld until the group B inspection has shown that the corrective action was successful. In the event of failure after reinspection, information concerning the failure shall be furnished to the cognizant inspection activity and the qualifying activity.

6.7 Subject term (key word) listing.

Fire Control
Training Devices

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:31Z
Check the source to verify that this is the current version before use.

Custodians:
Army - AR

Preparing activity:
Army - AR

(Project 1265-A037)

User activities:
Army - MR
Navy - CG, MC
Air Force - 90

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:31Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-P-70879 (AR)	25 SEPTEMBER 1991

3. DOCUMENT TITLE
PRINTED WIRING BOARD ASSEMBLY, DECODER-MWLD, SPECIFICATION FOR

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets if needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)	
US ARMY ARDEC STANDARDIZATION OFFICE	(1) Commercial (201) 724-6674	(2) AUTOVON 880-6674
c. ADDRESS (Include Zip Code) ATTN: SMCAR-BAC-S PICATINNY ARSENAL,NJ 07806-5000	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:31Z
Check the source to verify that this is the current version before use.