[INCH-POUND]
A-A-2861
January 21, 1994

COMMERCIAL ITEM DESCRIPTION

CABINET, TOOL, MOBILE

The General Services Administration has authorized the use of this Commercial Item Description as a replacement for Type II, Style A, and Style B, of Federal Specification AA-C-45C.

1. SCOPE

1.1 Scope This commercial item description covers the requirements for hand-push/pull mobile tool cabinets with wheels and casters for rolling the cabinet and tools to the job.

2. CLASSIFICATION

2.1 Classification This commercial item description covers the Type II, Four-wheel type, and shall be of the following styles:

Style A - With drawers and lower compartment.
Style B - With all drawers and no compartment.

3. SALIENT CHARACTERISTICS

3.1 Design and dimensions The mobile tool cabinets shall be designed for storing and transporting various powered and non-powered hand tools within a building or shop, and shall consist of various quantity of drawers and

"Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to General Services Administration 1500 East Bannister Road, Kansas City Mo. 64131-3088

FSC 5140

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.

compartments, as specified by the style and illustrations provided in this commercial item description, and shall be in a container (shell) mounted on wheels and casters. Cabinet shall have a handle on one or both sides for pushing or pulling the cabinet. Cabinet shall be equipped with two rigid non-locking casters and two swivel casters provided with brakes for locking the caster wheels. Each caster shall have a minimum load capacity rating of 200 pounds. The wheels shall be a minimum of 5 inches in diameter by 1 1/4 inches wide , semi-pneumatic or solid rubber tires, or polypropylene tires and ball or roller bearings in the axle portion of the caster. The tool cabinet sizes shall be in accordance with the dimensions specified for that style and as designated on the appropriate figure for that style. All dimensions shown are in inches. Tolerances shall be in accordance with standard commercial practice.

3.1.1 Construction The tool cabinet shall be suitable for industrial use. The side walls shall be of double-wall construction from top to bottom with a void between the walls and be attached to the bottom panel or at a minimum the double wall construction shall extend through the compartment storage area. The cabinets shall be made, of quality commercial sheet steel of adequate gage, and reinforced where required, for the tool cabinet to withstand the load test and roll test set forth in paragraphs 4.4.1 and 4.4.2 . The front side of container shall provide access to the drawers and compartments. An integral lock (or locks) with two keys shall be provided to lock all drawers and compartments. All locks on all cabinets furnished in lots of 300 or less shall be keyed differently. The drawers are to be constructed so that when open, all contents in the drawer are visible.

3.1.2 Finish Surfaces not chemically treated or plated to resist corrosion shall have a durable baked enamel or epoxy plastic finish. Unless a particular color is specified in the contract, the color of the enamel shall be commercial red.

3.2 Style A. Style A tool cabinets shall contain a quantity of drawers in the top portion of the container as required by the appropriate figure, and shall contain a compartment in the lower portion of the container. The minimum depth of the cabinet shall be 17 inches. The drawer front side and cabinet dimensions shall be shown in the appropriate figures specified (see 6.1). Tool cabinet shall be furnished with panel(s) to secure and enclose the compartment and/or the compartment and the drawer section. Panel shall be permanently attached to the cabinet. When the tool cabinet is unlocked, the panel(s) shall be self storing within the container. The panels shall be made of 18 gage sheet steel for 2 piece panels, or 20 gage sheet steel for one piece panel, and fit into the panel opening with no greater than 5/32 inch clearance on all sides and maximum of 7/32 inch clearance on the top of the panel. The panel shall have a means provided so that the panel remains in a closed position after it is unlocked unless intentionally opened.

3.3 Style B. Style B tool cabinets shall be similar to Style A with the exception that Style B will be filled with all drawers, without a compartment, and maybe furnished with or without a panel. Figure 6 of Style B shall have a minimum depth of 17 inches, figure 7 of style B shall have a minimum depth of 20 inches. All drawer quantities, drawer front side and cabinet dimensions are shown on the appropriate figure as specified (see 6.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.

3.4 Regulatory requirements The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

4. QUALITY ASSURANCE PROVISIONS

4.1 Contractor Certification "The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of the Commercial Item Description, and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices. The government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract."

4.2 Responsibility for testing and inspection The contractor is responsible for the performance of all testing and inspection in accordance with this Commercial Item Description. Except as otherwise specified, the contractor may utilize his own or any other facilities suitable for the performance of the testing and inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the testing and inspection set forth in this Commercial Item Description where such testing and inspection is deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2.1 Responsibility for insuring testing and inspection The supplier is responsible for insuring that the product offered meets the requirements and is in accordance with this Commercial Item Description.

4.3 Sampling procedures Sampling procedures shall be in accordance with MIL-STD-105. Data for sampling shall be as follows:

Category-	Testing
Sample unit-	1 ea.
Inspection level-	S-2
Acceptable quality level(AQL)-	4.0
AQL expressed in terms of-	Defects per 100 units
Reference-	4.4 through 4.4.2

4.4 Testing Each sample shall be tested in accordance with 4.4.1 through 4.4.2.

4.4.1 Load test Load test shall consist of two parts to test the load supporting ability of the drawers and compartments. The first part shall consist of applying a ten pound force to the corner of each different size, full width drawers. The load shall be concentrated each time within an area not more than six inches from the front corner of the drawer when the drawer is in a fully opened position. If after the force has been applied and then removed, and there is no sagging of the drawer or twisting to the slides to cause the drawer to bind, part two shall consist of loading all drawers and compartments for preparation for the roll test in 4.4.2 with tools or other weights at the rate of 0.13 pounds per square inch of utile surface area for the full width drawers, and at a rate of 0.07 pounds per square inch of utile surface area for split drawers or other than full width drawers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.

4.4.2 Roll Test After successful completion of the load test, the cabinet shall be subjected to a roll test to further test integrity of construction under mobile conditions. The cabinet (loaded as in 4.4.1) shall be pushed or pulled steadily over a series of boards measuring not less than 1/2 inch thick by 3 inches wide. The boards shall be secured (with the 3 inch dimension down) to a sheet of plywood so that two rows consisting of three boards in each row are formed. The boards shall be positioned parallel along their length dimension and spaced 3 inches apart. The boards in one row shall be staggered with the boards in the second row so that when the wheel on one side of the tool cabinet is dropping off the first board, the wheel on the other side of the tool cabinet is rolling onto the first board of the second row, causing a vibrating, and uneven twisting affect on the tool cabinet. After the cabinet has rolled over all six boards in both the forward and backward direction for at least 20 times forward and 20 times backward, the tool cabinet shall be inspected for integrity of construction. Any defect affecting appearance or serviceability shall be cause for rejection of the sample unit.

5. PACKAGING

5.1 Preservation, packaging, packing, labeling, and marking The preservation, packaging, packing, labeling, and marking shall be as specified in the contract or purchase order.

6. NOTES:

6.1 Acquisition requirements Acquisition requirements must specify the following:

a. Title, number, and date of this document.
b. Style and figure of mobile tool cabinet
c. Preservation, packaging, packing, labeling, and marking required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.

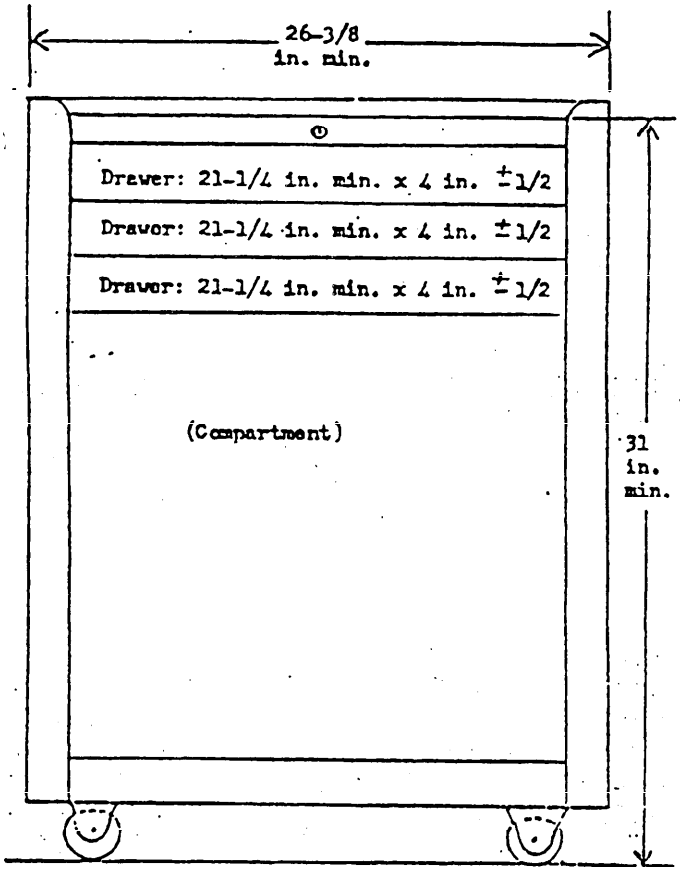


Figure 1. Type II, style A

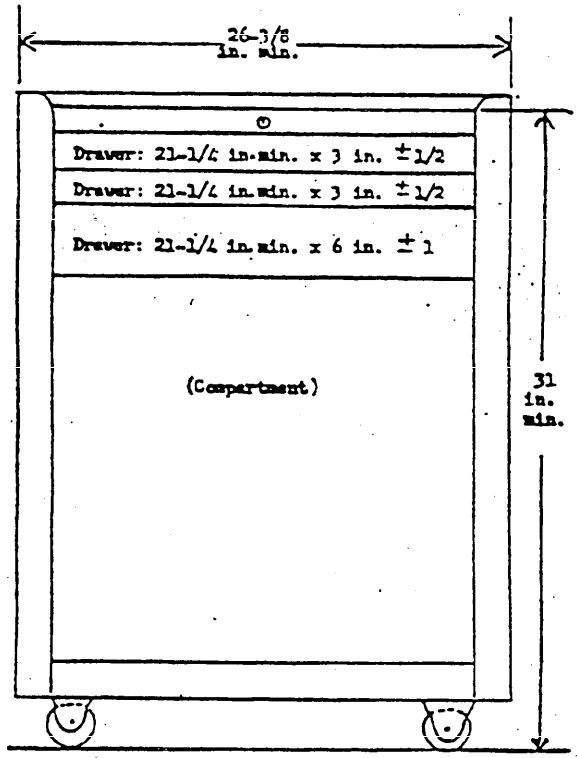


Figure 2. Type II, style A

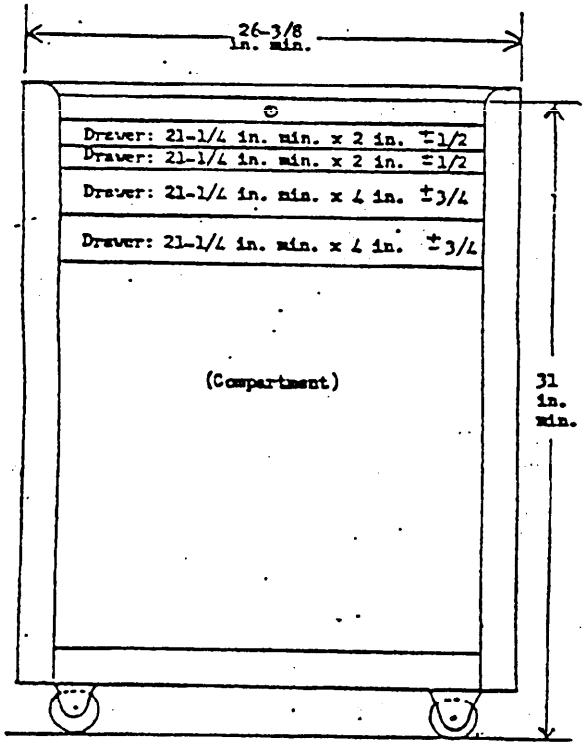


Figure 3. Type II, style A

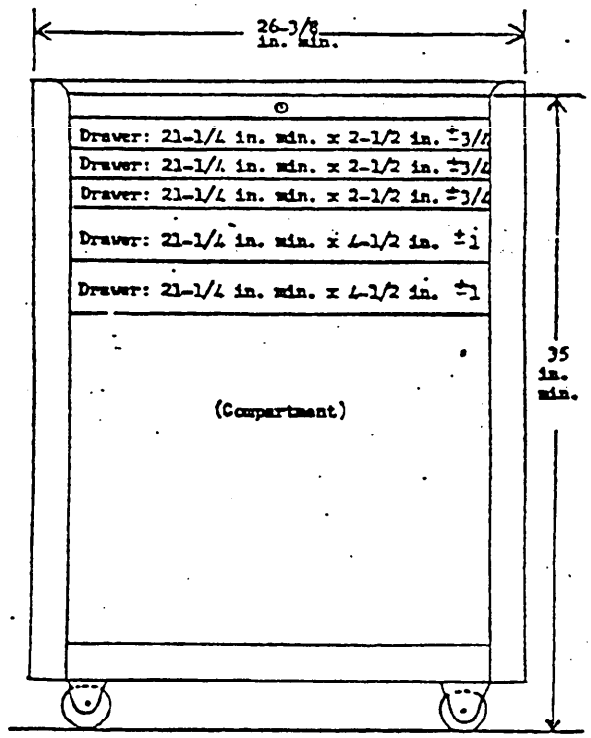


Figure 4. Type II, style A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.

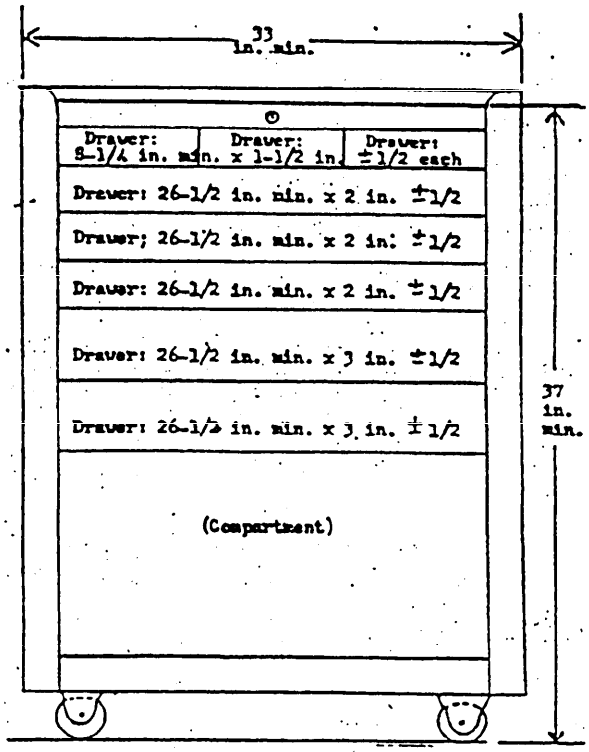


Figure 5. Type II, style A.

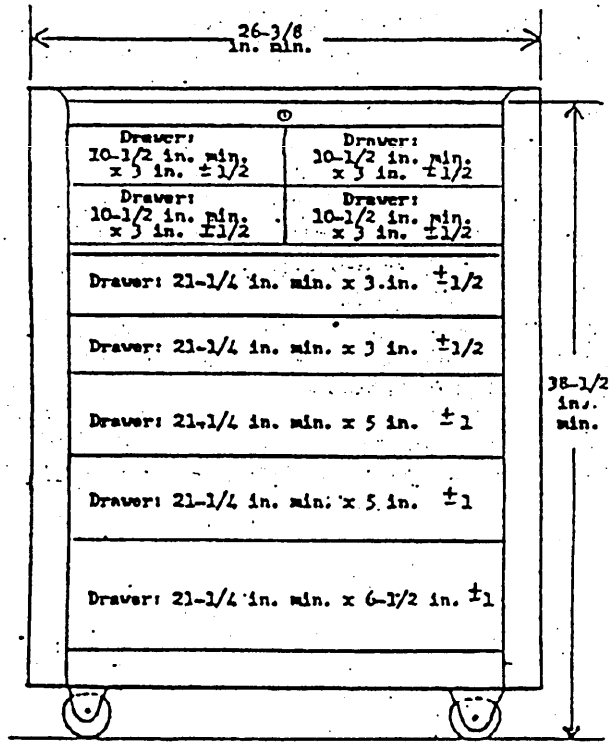


Figure 6. Type II, style B

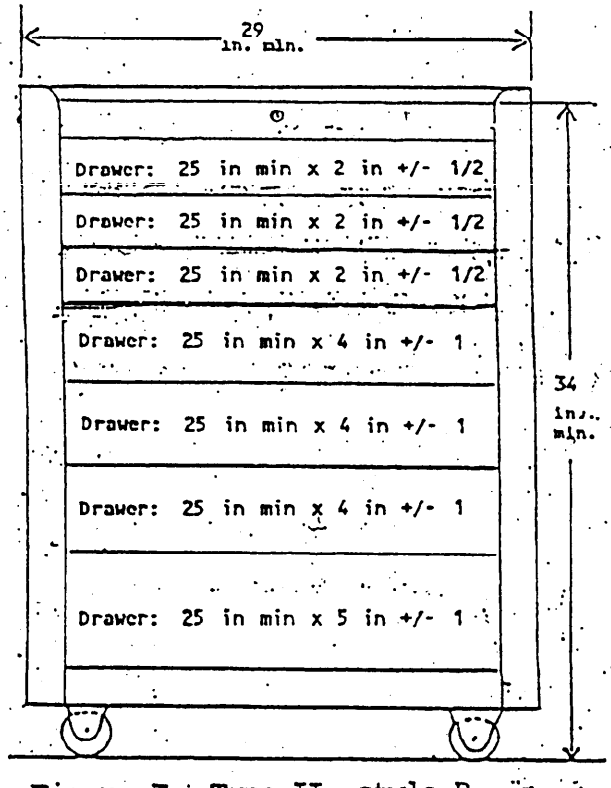


Figure 7. Type II, style B.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.

MILITARY INTEREST

Custodians

Army - GL

Preparing activities

GSA/FSS

Review activities

Navy - SH
Air Force - 99

User activities

Navy - MC

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.