[INCH-POUND]
A-A-52491
April 15, 1994
SUPERSEDING
MS17161C
30 June 1980

COMMERCIAL ITEM DESCRIPTION

BEARING, BALL, THRUST: INCH AND METRIC SIZES, GROOVED RACE SURFACE RIGID OR FLAT SEAT TYPE

The General Services Administration has authorized the use of this commercial item description (CID), for all federal agencies.

1. SCOPE. This CID covers the requirements for a thrust ball bearing, referred to herein as "bearing". It consists of two hardened and ground washers (thrust plates) that enclose a complement of precision ground and lapped balls and. separated by a cage or retainer. The bearing is used to provide axial rigidity and not recommended if radial loading is expected.

2. SALIENT CHARACTERISTICS.

2.1 Materials. Unless otherwise specified herein or in the applicable engineering drawing (AED), the materials used shall be in accordance with the manufacturer's material specifications/drawings. The use of recovered material made in compliance with regulatory requirements is acceptable providing all requirements of this CID are met (see 5.4).

2.1.1 Thrust plates and balls. The material for thrust plates and balls shall be vacuum degassed bearing quality steel.

2.1.2 Heat treatment. The bearing shall be through hardened to Rockwell C-58 to C-66.

Beneficial comments, recommendations, additions, deletions clarifications, etc. and any other data which may improve this document should be sent by letter to: U.S. Army Tank-Automotive Command, ATTN: AMSTA-GDS, Warren, MI 48397-5000.

AMSC N/A FSC 3110

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:10Z
Check the source to verify that this is the current version before use.

2.2 Design and construction. The general design and construction features of the bearing shall be as shown in figure 1. Detailed and specific features and dimensions shall be as specified in the AED.

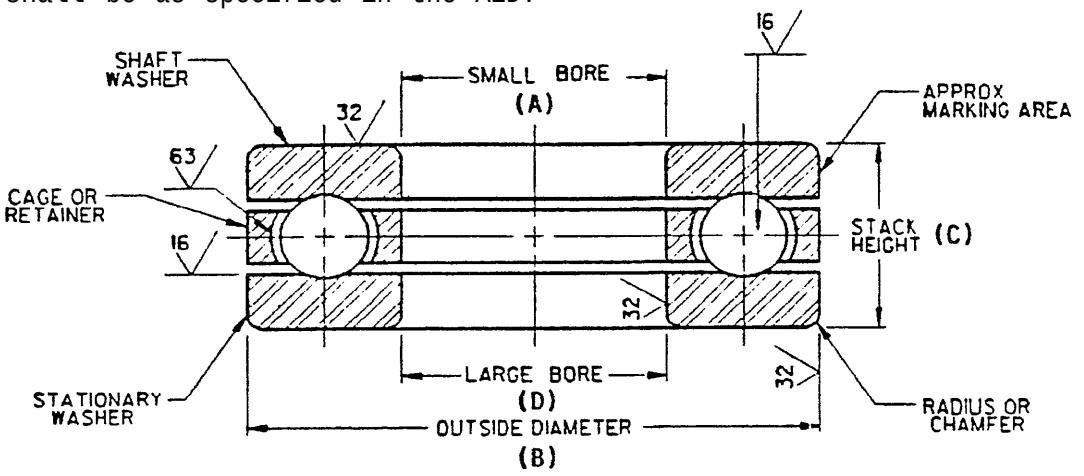


FIGURE 1. Thrust ball bearing.

2.2.1 Size. The size of the bearing and tolerances shall be determined based on specific application requirements and as specified in the bearing AED (see 5.1). Factors such as load, rpm, environmental conditions (e.g. , temperature, humidity) are taken into consideration. The basic empirical formula for bearing load is explained in 5.3.

2.2.1.1 Preferred sizes. Preference shall be given to the sizes listed in table I before preparing an AED (see 5.2).

2.2.2 Radius or chamfer. Bearings must clear the maximum fillet radius of mating shaft or housing. A radius or chamfer (see figure 1), .031 inch minimum, shall be used on the bore or outer diameter.

2.2.3 Surfaces. Surfaces marked $\surd$ in figure 1 shall represent maximum surface roughness in microinch. The ground surfaces shall be free from tool marks, chatter waves, pits, rust, or other injurious defects. Other surfaces shall have a smooth finish, free from scale. The bearings shall be supplied without lubrication, but with a coating of rust preventing film.

2.3 Identification markinas. Identification markinqs shall be in accordance with the AED. Marking shall be permanent and legible and shall include, as a minimum, the AED part number and manufacturer's CAGE code and part number. For bearings conforming to table I the designated part or identification number (PIN) shall be used (see table I and 5.2).

3. QUALITY ASSURANCE PROVISIONS.

3.1 Responsibility for inspection. The contractor is responsible for the performance of all inspections (examinations and tests).

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:10Z
Check the source to verify that this is the current version before use.

3.2 Contractor certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this commercial item description and that the product conforms to the producer's own drawings, specifications, workmanship standards, and quality assurance practices. Items with known defects shall not be submitted for Government acceptance. The Government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

4. PRESERVATION, PACKAGING, PACKING, LABELING, AND MARKING. Preservation, packaging, packing, labeling, and marking for the desired level shall be as specified in the contract (see note 5.1).

5. NOTES. (This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

5.1 Ordering data. Acquisition documents must specify the following:

1. Title, number, and date of this CID or AED, as applicable.
2. PIN or AED part number and quantity required.
3. Selection of applicable level and packaging requirements.

5.2 Cross-reference data. For bearing sizes that previously conformed to MS17161C, the preparation of an AED is not required. Refer to table I for cross-reference of former MS part numbers to CID PIN numbers.

5.3 Bearing load formula. The equivalent thrust load rating (in pounds) for any combination of rotational speed (in rpm) and rating life (in hours) may be found from the following formula:

$$P_A = \frac{100C}{(60\ NH)^{1/3}}$$

Where

P_A = Equivalent Thrust Load Rating
C = Basic Dynamic Load Rating (Pounds)
N = Rotational Speed - (rpm)
H = Rating Life - (Hours)

1. Equivalent thrust load is defined as that constant, central, purely axial load which, if applied to a bearing with rotating shaft washer and stationary housing washer, would give the same life as that which the bearing will attain under the actual conditions of load and rotation.
2. Rating life. is defined as the number of hours at some constant speed that 90% of a group of apparently identical bearings will complete or exceed before the first evidence of fatigue develops.
3. Basic dynamic load rating is defined as that constant, central, thrust load which a group of apparently identical bearings can endure for a rating life of one million revolutions of one of the bearing washers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:10Z
Check the source to verify that this is the current version before use.

TABLE I. Preferred sizes and cross-reference of CID PIN numbers to former MS part numbers.

CID PIN: A52491-	FORMER PART NO. MS17161-	BORE					B		C			R FILLET RADIUS MAX REF	BASIC DYNAMIC LOAD RATINGS POUNDS	BASIC STATIC LOAD RATINGS POUNDS
		A SMALL DIA.		TOLERANCE BORE DIA. (for A&D)	D (MIN) LARGE DIA.		OUTSIDE DIA.	+0 -.002	HEIGHT					
		MM	INCH		MM	INCH	MM	INCH	MM	INCH	TOL ±			
1	1		.3750	-.0000 +.0008		.4063		1.0000		.5313	.005	.030	1220	1500
2	2	10	.3937	-.0004 +.0004	10.2	.4016	30	1.1811	12	.4724	.005	.020	1960	2720
3	3	10	.3937	-.0004 +.0004	10.2	.4016	26	1.0236	12	.4724	.005	.020	1910	2720
4	4	12	.4724	-.0004 +.0004	12.2	.4803	28	1.1024	12	.4724	.005	.020	1650	2500
5	5		.5000	+.004 +.006		.5000		1.2188		.5625	.005	.030	1810	3000
6	6		.5000	-.0000 +.0008		.5313		1.2813		.6250	.005	.030	2370	3500
7	7		.5625	+.004 +.006		.5625		1.2188		.5625	.005	.030	1790	3000
8	8	15	.5906	-.0004 +.0004	15.2	.5985	31	1.2205	12	.4724	.005	.020	1780	3000
9	9	15	.5906	-.0004 +.0004	15.2	.5985	35	1.3780	14	.5512	.005	.020	2260	3550
10	10		.6250	+.004 +.006		.6250		1.3438		.5625	.005	.030	1640	2750
11	11		.6250	-.0000 +.0008		.6563		1.4063		.6250	.005	.030	2250	3550
12	12	18	.7087	-.0004 +.0004	18.2	.7166	35	1.3780	12	.4724	.005	.020	1710	3000
13	13		.7500	+.004 +.006		.7500		1.4688		.5625	.005	.030	1860	3500
14	14		.7500	-.0000 +.0008		.7813		1.5313		.6250	.005	.030	2550	4440
15	15	20	.7874	-.0004 +.0004	20.2	.7953	37	1.4567	12	.4724	.005	.020	1670	3000
16	16	20	.7874	-.0004 +.0004	20.2	.7953	40	1.5748	14	.5512	.005	.020	2790	4880
17	17		.8125	+.004 +.006		.8125		1.4688		.5625	.005	.030	1840	3500
18	18	22	.8661	-.0004 +.0004	22.2	.8740	42	1.6535	14	.5512	.005	.020	2790	5320
19	19		.8750	-.0000 +.0008		.9063		1.6563		.6250	.005	.030	2790	4880
20	20		.8750	+.004 +.006		.8750		1.8438		.6250	.005	.030	2890	5320
21	21		.9375	+.004 +.006		.9375		1.8438		.6250	.005	.030	2870	5320
22	22	25	.9843	-.0004 +.0004	25.2	.9922	45	1.7717	14	.5512	.005	.020	2880	5320
23	23	25	.9843	-.0004 +.0004	25.2	.9922	48	1.8898	15.5	.6103	.005	.020	2880	5770
24	24		1.0000	-.0000 +.0008		1.0313		1.7813		.6250	.005	.030	2870	5270
25	25		1.0000	+.006 +.007		1.0000		1.9688		.6250	.005	.030	2810	5320

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:10Z
Check the source to verify that this is the current version before use.

TABLE I. Preferred sizes and cross-reference of CID PIN numbers to former MS part numbers. (continued)

CID PIN: A52491-	FORMER PART NO. MS17161-	BORE					B		C			R FILLET RADIUS MAX REF	BASIC DYNAMIC LOAD RATINGS POUNDS	BASIC STATIC LOAD RATINGS POUNDS
		A SMALL DIA.		TOLERANCE BORE DIA. (for A&D)	D (MIN) LARGE DIA.		OUTSIDE DIA.	+0 -.002	HEIGHT					
		MM	INCH		MM	INCH	MM	INCH	MM	INCH	TOL ±			
26	26		1.0000	+.005 +.007		1.0000		2.0625		.7500	.005	.030	4200	7630
27	27		1.0625	+.005 +.007		1.0625		1.9688		.6250	.005	.030	2800	5320
28	28		1.1250	+.005 +.007		1.1250		2.1875		.7500	.005	.030	4110	7630
29	29		1.1250	-.0000 +.0008		1.1563		1.9063		.6250	.005	.030	2800	5320
30	30	30	1.1811	-.0004 +.0004	30.2	1.1890	50	1.9685	14	.5512	.005	.020	2920	5770
31	31	30	1.1811	-.0004 +.0004	30.2	1.1890	53	2.0866	15.5	.6103	.005	.020	4740	9710
32	32		1.1875	+.005 +.007		1.1875		2.0938		.6250	.005	.030	3020	6210
33	33		1.2500	+.005 +.007		1.2500		2.3125		.7500	.005	.030	4480	9020
34	34		1.2500	-.0000 +.0008		1.2813		2.0938		.7188	.005	.030	4350	9000
35	35		1.2500	+.005 +.007		1.2500		2.3438		.6250	.005	.030	3350	7540
36	36		1.3125	+.005 +.007		1.3125		2.3438		.6250	.005	.030	3340	7540
37	37		1.3750	+.005 +.007		1.3750		2.4688		.6250	.005	.030	3280	7540
38	38		1.3750	-.0000 +.0008		1.4063		2.2188		.7188	.005	.030	3350	7540
39	39	35	1.3780	-.0005 +.0005	35.2	1.3859	55	2.1654	16	.6299	.005	.020	3350	7920
40	40	35	1.3780	-.0005 +.0005	35.2	1.3859	62	2.4409	18	.7087	.005	.020	4370	9220
41	41		1.5000	+.005 +.007		1.5000		2.5625		.7500	.005	.040	4960	11100
42	42		1.5000	+.005 +.007		1.5000		2.5938		.6250	.005	.040	3340	7990
43	43		1.5000	-.0000 +.0010		1.5313		2.3438		.7188	.005	.040	4370	9710
44	44		1.5625	+.005 +.007		1.5625		2.5625		.7500	.005	.040	3340	7990
45	45		1.5625	+.005 +.007		1.5625		2.5938		.6250	.005	.040	3330	7990
46	46	40	1.5748	-.0005 +.0005	40.2	1.5827	64	2.5197	18	.7087	.005	.020	5010	12000
47	47	40	1.5748	-.0005 +.0005	42	1.6535	60	2.3622	13	.5118	.005	.024	4660	11100
48	48	40	1.5748	-.0005 +.0005	40.2	1.5827	60	2.3622	16	.6299	.005	.020	4660	11100
49	49		1.6250	+.005 +.007		1.6250		2.8125		.8750	.005	.040	6780	15000
50	50		1.6250	+.005 +.007		1.6250		2.9688		.8125	.005	.040	4770	11100

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:10Z
Check the source to verify that this is the current version before use.

TABLE I. Preferred sizes and cross-reference of CID PIN numbers to former MS part numbers. (continued)

CID PIN: A52491-	FORMER PART NO. MS17161-	BORE A SMALL DIA. MM	BORE A SMALL DIA. INCH	BORE TOLERANCE BORE DIA. (for A&D)	BORE D (MIN) LARGE DIA. MM	BORE D (MIN) LARGE DIA. INCH	B OUTSIDE DIA. MM	B OUTSIDE DIA. +0 -.002 INCH	C HEIGHT MM	C HEIGHT INCH	C HEIGHT TOL ±	R FILLET RADIUS MAX REF	BASIC DYNAMIC LOAD RATINGS POUNDS	BASIC STATIC LOAD RATINGS POUNDS
51	51		1.6250	-.0000 +.0010		1.6563		2.4688		.7188	.005	.040	3960	8990
52	52		1.6875	+.005 +.007		1.6875		2.8125		.8750	.005	.040	6750	15000
53	53		1.6875	+.005 +.007		1.6875		2.9688		.8125	.005	.040	4760	11100
54	54		1.7500	+.005 +.007		1.7500		2.9375		.8750	.005	.040	6370	14000
55	55		1.7500	-.0000 +.0010		1.7813		2.6875		.7500	.005	.040	4760	11800
56	56		1.7500	+.005 +.007		1.7500		3.0937		.8125	.005	.040	4690	11100
57	57	45	1.7717	-.0005 +.0005	45.2	1.7796	68	2.6772	16	.6299	.005	.020	4500	11200
58	58	45	1.7717	-.0005 +.0005	47	1.8500	65	2.5591	14	.5512	.005	.024	4500	11200
59	59	45	1.7717	-.0005 +.0005	45.2	1.7796	73	2.8740	22	.8661	.005	.020	7260	17000
60	60		1.8125	+.005 +.007		1.8125		2.9375		.8750	.005	.040	6950	15970
61	61		1.8125	+.005 +.007		1.8125		3.0937		.8125	.005	.040	4680	11100
62	62		1.8750	-.0000 +.0010		1.9063		2.8125		.7500	.005	.040	4460	11080
63	63		1.8750	+.005 +.007		1.8750		3.0625		.8750	.005	.040	5970	13000
64	64		1.8750	+.005 +.007		1.8750		3.2188		.8125	.005	.040	5370	13900
65	65		1.9375	+.005 +.007		1.9375		3.0625		.8750	.005	.040	5940	13000
66	66		1.9375	+.005 +.007		1.9375		3.2188		.8125	.005	.040	5350	13900
67	67	50	1.9685	-.0005 +.0005	50.2	1.9764	74	2.9134	18	.7087	.005	.020	4690	11100
68	68	50	1.9685	- 0005 +.0005	52	2.0470	70	2.7559	14	.5512	.005	.024	——	——
69	69	50	1.9685	-.0005 +.0005	50.2	1.9764	78	3.0709	22	.8661	.005	.020	6540	15000
70	70		2.0000	-.0000 +.0010		2.0313		2.9688		.7500	.005	.040	4660	11100
71	71		2.0000	+.006 +.008		2.0000		3.1875		.8750	.005	.040	6760	16000
72	72		2.0000	+.006 +.008		2.0000		3.3438		.8125	.005	.040	5290	13900
73	73		2.0625	+.006 +.008		2.0625		3.1875		.8750	.005	.060	6740	16000
74	74		2.0625	+.006 +.008		2.0625		3.3438		.8125	.005	.060	5280	13900
75	75		2.1250	+.006 +.008		2.1250		3.3125		.8750	.005	.060	7140	17970

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T09:10Z
Check the source to verify that this is the current version before use.

TABLE I. Preferred sizes and cross-reference of CID PIN numbers to former MS part numbers. (continued)

CID PIN: AS2491-	FORMER PART NO. MS17161-	BORE A SMALL DIA. MM	BORE A SMALL DIA. INCH	BORE TOLERANCE BORE DIA. (for A&D)	BORE D (MIN) LARGE DIA. MM	BORE D (MIN) LARGE DIA. INCH	B OUTSIDE DIA. MM	B OUTSIDE DIA. +0 -.002 INCH	C HEIGHT MM	C HEIGHT INCH	C HEIGHT TOL ±	R FILLET RADIUS MAX REF	BASIC DYNAMIC LOAD RATINGS POUNDS	BASIC STATIC LOAD RATINGS POUNDS
76	76		2.1250	+.006 +.008		2.1250		3.5938		.8125	.005	.060	7090	18000
77	77	55	2.1654	-.0006 +.0006	55.2	2.1733	88	3.4646	24.5	.9646	.005	.020	8580	21700
78	78	55	2.1654	-.0006 +.0006	55.2	2.1733	78	3.0709	18	.7087	.005	.020	5220	14600
79	79		2.1875	+.006 +.008		2.1875		3.3125		.8750	.005	.060	7140	17970
80	80		2.1875	+.006 +.008		2.1875		3.5938		.8125	.005	.060	7070	18000
81	81		2.2500	-.0000 +.0010		2.2813		3.3438		.8750	.005	.060	5230	13900
82	82		2.2500	+.006 +.008		2.2500		3.4375		.8750	.005	.060	6560	16000
83	83		2.2500	+.006 +.008		2.2500		3.7188		.8125	.005	.060	7000	18000
84	84		2.3125	+.006 +.008		2.3125		3.4375		.8750	.005	.060	6540	16000
85	85		2.3125	+.006 +.008		2.3125		3.7188		.8125	.005	.060	6980	18000
86	86	60	2.3622	-.0006 +.0006	60.2	2.3701	82	3.2284	18	.7087	.005	.020	5420	15300
87	87	60	2.3622	-.0006 +.0006	60.2	2.3701	90	3.5433	24.5	.9646	.005	.020	8830	23070
88	88		2.3750	+.006 +.008		2.3750		3.5625		.8750	.005	.060	9690	24500
89	89		2.3750	+.006 +.008		2.3750		3.8438		.8125	.005	.060	6920	18000
90	90		2.4375	+.006 +.008		2.4375		3.5625		.8750	.005	.060	9680	24500
91	91		2.4375	+.006 +.008		2.4375		3.8438		.8125	.005	.060	6690	18000
92	92		2.5000	-.0000 +.0012		2.5313		3.7188		1.0000	.005	.060	8740	23070
93	93		2.5000	+.006 +.008		2.5000		3.9688		.8125	.005	.060	6840	18000
94	94		2.5000	+.006 +.008		2.5000		4.0000		1.1250	.005	.060	9430	24500
95	95	65	2.5591	-.0006 +.0006	65.2	2.5670	100	3.9370	27	1.0630	.005	.040	11600	28400
96	96	65	2.5591	-.0006 +.0006	65.2	2.5670	90	3.5433	20	.7874	.005	.020	6400	18900
97	97		2.5625	+.006 +.008		2.5625		3.9688		.8125	.005	.060	6820	18000
98	98		2.5625	+.006 +.008		2.5625		4.0000		1.1250	.005	.060	9400	24500
99	99		2.6250	+.006 +.008		2.6250		4.1250		1.1250	.005	.060	10870	26620
100	100		2.6250	+.006 +.008		2.6250		4.3438		1.0000	.005	.060	9920	27200

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:10Z
Check the source to verify that this is the current version before use.

TABLE I. Preferred sizes and cross-reference of CID PIN numbers to former MS part numbers. (continued)

CID PIN: AS2491-	FORMER PART NO. MS17161-	BORE					B		C			R FILLET RADIUS MAX REF	BASIC DYNAMIC LOAD RATINGS POUNDS	BASIC STATIC LOAD RATINGS POUNDS
		A SMALL DIA.		TOLERANCE BORE DIA. (for A&D)	D (MIN) LARGE DIA.		OUTSIDE DIA. +0 -.002		HEIGHT					
		MM	INCH		MM	INCH	MM	INCH	MM	INCH	TOL ±			
101	101		2.6875	+.006 +.008		2.6875		4.1250		1.1250	.005	.060	10870	26620
102	102		2.6875	+.006 +.008		2.6875		4.3438		1.0000	.005	.060	9880	27200
103	103		2.7500	-.0000 +.0012		2.7813		4.0313		1.0000	.005	.060	8600	21700
104	104		2.7500	+.006 +.008		2.7500		4.2500		1.1250	.005	.060	11720	30180
105	105		2.7500	+.006 +.008		2.7500		4.3125		1.0000	.005	.060	11300	28400
106	106		2.7500	+.006 +.008		2.7500		4.4688		1.0000	.005	.060	11200	28400
107	107	70	2.7559	-.0006 +.0006	70.2	2.7638	103	4.0551	27	1.0630	.005	.040	9630	25800
108	108	70	2.7559	-.0006 +.0006	70.2	2.7638	95	3.7402	20	.7874	.005	.020	7390	22000
109	109		2.8125	+.006 +.008		2.8125		4.2500		1.1250	.005	.060	11720	30180
110	110		2.8125	+.006 +.008		2.8125		4.4688		1.0000	.005	.060	11200	28400
111	111		2.8750	+.006 +.008		2.8750		4.4375		1.1250	.005	.060	12470	33720
112	112		2.8750	+.006 +.008		2.8750		4.5938		1.0000	.005	.060	12400	33700
113	113		2.9375	+.006 +.008		2.9375		4.4375		1.1250	.005	.080	12470	33720
114	114		2.9375	+.006 +.008		2.9375		4.5938		1.0000	.005	.080	12400	33700
115	115	75	2.9528	-.0006 +.0006	75.2	2.9607	110	4.3307	27	1.0630	.005	.040	11410	31950
116	116	75	2.9528	-.0006 +.0006	75.2	2.9607	100	3.9370	20	.7874	.005	.020	7150	21800
117	117		3.0000	-.0000 +.0012		3.0313		4.3750		1.1250	.005	.080	11410	32000
118	118		3.0000	+.006 +.008		3.0000		4.5000		1.1250	.005	.080	9370	25800
119	119		3.0000	+.006 +.008		3.0000		4.7188		1.0000	.005	.080	12700	35500
120	120	80	3.1496	-.0006 +.0006	80.2	3.1575	110	4.3307	22	.8661	.005	.020	7370	23490

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:10Z
Check the source to verify that this is the current version before use.

TABLE I. Preferred sizes and cross-reference of CID PIN numbers to former MS part numbers. (continued)

CID PIN: A52491-	FORMER PART NO. MS17181-	BORE					B		C			R FILLET RADIUS MAX REF	BASIC DYNAMIC LOAD RATINGS POUNDS	BASIC STATIC LOAD RATINGS POUNDS
		A SMALL DIA.		TOLERANCE BORE DIA. (for A&D)	D (MIN) LARGE DIA.		OUTSIDE DIA.		HEIGHT					
		MM	INCH		MM	INCH	MM	+0 -.002 INCH	MM	INCH	TOL ±			
121	121	80	3.1469	-.0006 +.0006	80.2	3.1575	115	4.5276	29	1.1417	.005	.040	11180	38120
122	122	85	3.3465	-.0008 +.0008	85.2	3.3544	115	4.5276	22	.8661	.010	.020	7450	24300
123	123	85	3.3465	-.0008 +.0008	85.2	3.3544	125	4.9213	30.5	1.2008	.010	.040	16210	44400
124	124		3.5000	+.008 +.010		3.5000		5.0000		1.1250	.010	.080	9640	28500
125	125		3.5000	-.0000 +.0012		3.5313		5.0625		1.2500	.010	.080	14480	42680
126	126	90	3.5433	-.0008 +.0008	90.2	3.5512	120	4.7244	22	.8661	.010	.020	8840	29300
127	127	90	3.5433	-.0008 +.0008	90.2	3.5512	135	5.3150	30.5	1.2008	.010	.040	17170	49900
128	128	95	3.7402	-.0008 +.0008	95.2	3.7481	130	5.1181	25	.9843	.010	.020	11170	39000
129	129	95	3.7402	-.0008 +.0008	95.2	3.7481	140	5.5118	32.5	1.2795	.010	.040	19930	57000
130	130	100	3.9370	-.0008 +.0008	100.2	3.9449	135	5.3150	25	.9843	.010	.020	11890	40600
131	131	100	3.9370	-.0008 +.0008	100.2	3.9449	150	5.9055	32.5	1.2795	.010	.040	20300	60400
132	132		4.0000	-.0000 +.0012		4.0313		5.8125		1.3750	.010	.080	15350	49400
133	133		4.0000	+.008 +.010		4.0000		6.0000		1.3750	.010	.080	18970	55470
134	134	105	4.1339	-.0008 +.0008	105.2	4.1418	140	5.5118	25	.9843	.010	.020	11990	42100
135	135	105	4.1339	-.0008 +.0008	105.2	4.1418	155	6.1024	40	1.5748	.010	.040	23250	67900
136	136	110	4.3307	-.0008 +.0008	110.2	4.3386	145	5.7087	25	.9843	.010	.020	13290	46200
137	137		4.5000	+.008 +.010		4.5000		6.7500		1.6250	.010	.120	26450	79880
138	138	115	4.5276	-.0008 +.0008	115.2	4.5355	150	5.9055	25	.9843	.010	.020	13450	47900
139	139	115	4.5276	-.0008 +.0008	115.2	4.5355	165	6.4961	43	1.6929	.010	.040	27900	84400
140	140	120	4.7244	-.0008 +.0008	120.2	4.7323	160	6.2992	27	1.0630	.010	.020	14700	51500
141	141	125	4.9213	-.0010 +.0010	125.2	4.9292	165	6.4961	27	1.0630	.010	.020	15190	56100
142	142	125	4.9213	-.0010 +.0010	125.2	4.9292	175	6.8898	46.5	1.8307	.010	.040	26410	87900
143	143	140	5.5118	-.0010 +.0010	140.2	5.5197	200	7.8740	52	2.0472	.010	.040	40760	127800

NOTE: Tolerances are given only for inch-pound units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:10Z
Check the source to verify that this is the current version before use.