INCH-POUND

MIL-DTL-24558/14A
w/AMENDMENT 1
17 February 2006
SUPERSEDING
MIL-DTL-24558/14A
29 November 2004

DETAIL SPECIFICATION SHEET

TERMINAL BOX, CONNECTION, SUBMERSIBLE (15-FOOT), 192-TERMINAL, 576-WIRE, 600 VOLTS, SYMBOL NO. 451

This specification sheet is approved for use by all departments and agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-24558, "Terminal Boxes, Connection, for Electrical and Electronic Systems, General Specification for".

REQUIREMENTS: The terminal box shall be as specified herein and in accordance with table I and figures 1, 2, and 3.

1. Electrical rating. The terminal box shall have an electrical rating of 600 volts rms/DC. The maximum current shall be 30 amperes per stud of terminal board.

2. Dimensions and configuration. For dimensions and configuration see figures 1 through 3. All dimensions in figures 1 through 3 are expressed in inches. Overall terminal box dimensions are approximate. Exact dimensions are shown in MIL-E-24142/6, "Enclosure, Submersible (15-Foot), Sizes 8 By 10 Through 14 By 26".

3. Tolerance. All tolerances, other than specified herein, shall be in accordance with MIL-DTL-24558.

4. Standard parts. The standard parts shown in table I shall be used in the construction of the connection box specified herein. The numbers in circles shown on figures 1 through 3 are the same as those shown in the "Item" column of table I.

5. Enclosure. The enclosure shall be a 15-foot submersible type.

6. Weight. The weight of the connection box shall be 44.5 lbs. maximum.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:41Z
Check the source to verify that this is the current version before use.

7. Maximum number of wires. The maximum number of wires (including spares) shall not exceed three times the number of terminals and the maximum number of wires to be connected to a single terminal shall not exceed three.

QUALITY ASSURANCE: First article inspection and quality conformance inspection shall be as specified in MIL-DTL-24558.

GENERAL INFORMATION:

1. Drawing. The terminal box specified by MIL-DTL-24558/14A was formerly covered on NAVSHIPS Drawing No. 9000-S6202-74375.

2. Part or identification number (PIN). The PIN to be used for terminal boxes acquired to this specification is created as follows:


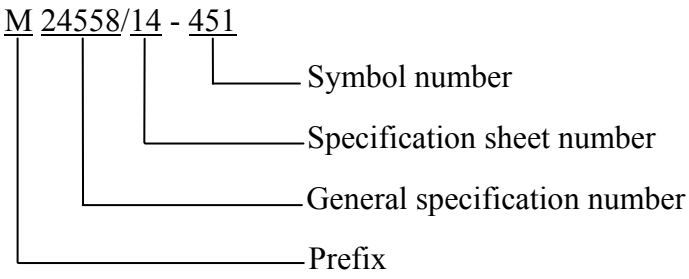


TABLE I. Parts list.


Item	Description	Qty.	Part no. or specification	Remarks
1	Enclosure assembly, brass with type A cover	1	MIL-E-24142/6	M24142/6-013
2	Identification plate	1	MIL-DTL-24558	Figure 6
3	Information plate	1	MIL-DTL-24558	Figure 6
4	Mounting bracket	8	MIL-DTL-24558	Figure 1
5	Terminal board assembly	8	A-A-59125/12	6TB24
6	RH mach screw #10-24 X 7/8" long	16	COML	Brass
7	Washer for #10 screw	16	COML	Bronze
8	RH mach screw #6-32 X 1/4" long	4	COML	Brass

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:41Z
Check the source to verify that this is the current version before use.

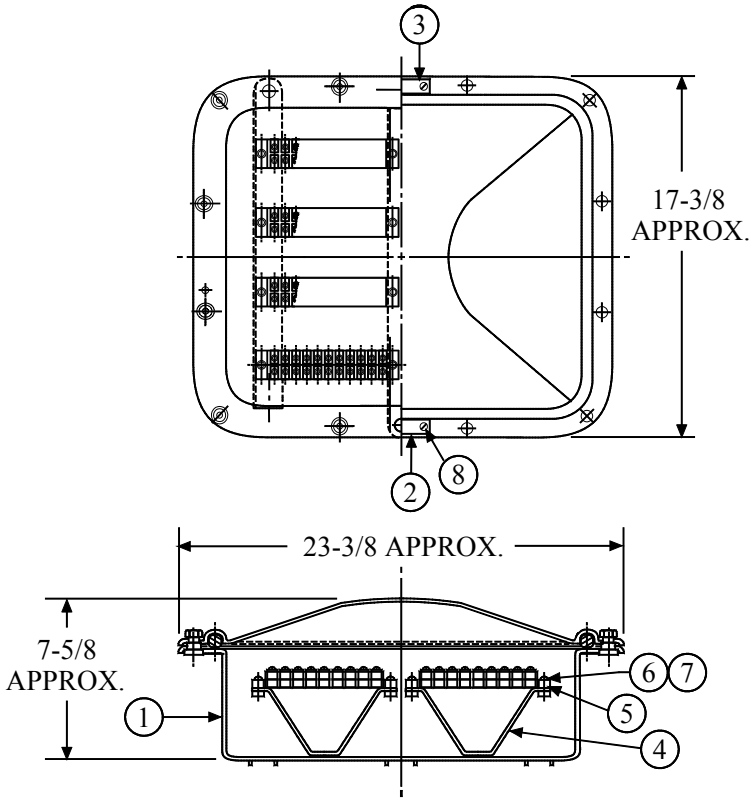

SH 11611


FIGURE 1. Connection box assembly.

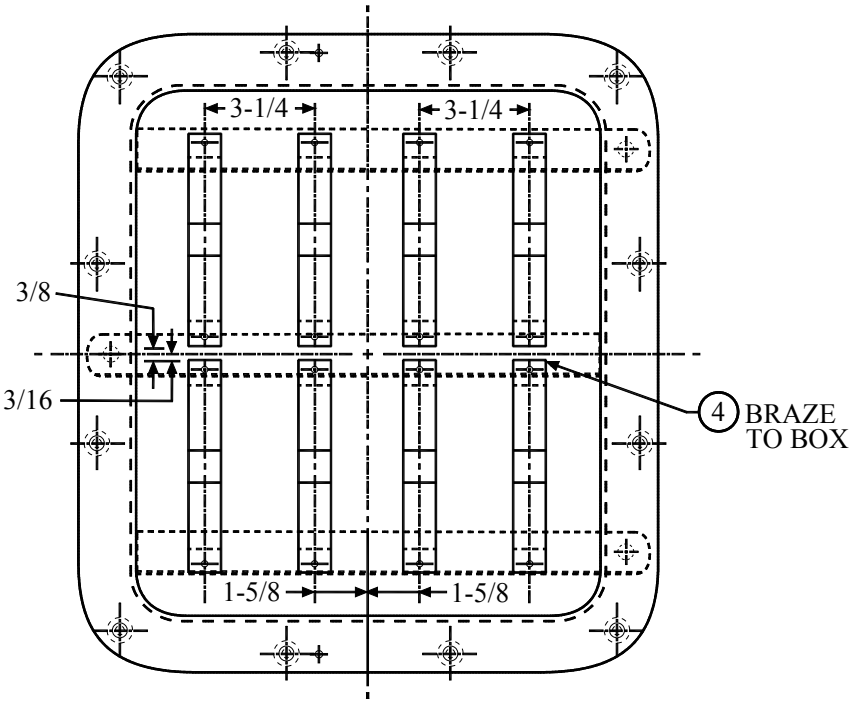

SH 11612

FIGURE 2. Location of terminal board mounting brackets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:41Z
Check the source to verify that this is the current version before use.

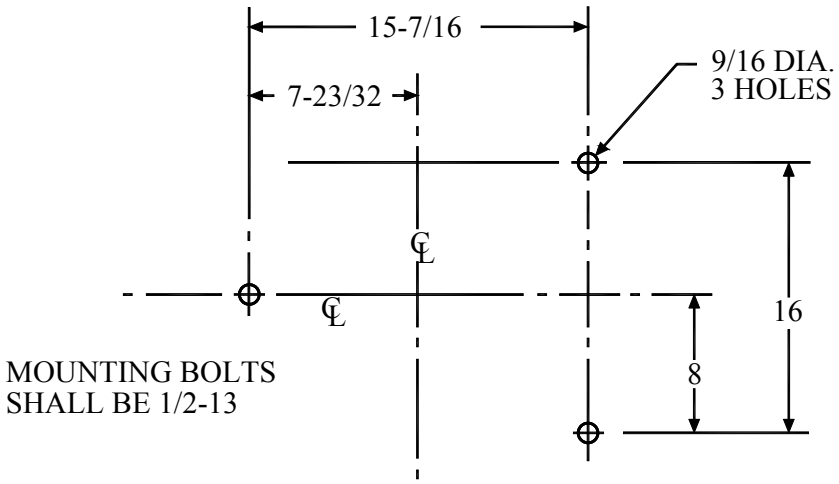

SH 11613

FIGURE 3. Mounting dimensions.

AMENDMENT NOTATIONS. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Custodian:
Navy - SH

Preparing Activity:
DLA - GS2

(Project 5940-2005-015)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:41Z
Check the source to verify that this is the current version before use.