INCH-POUND

MIL-DTL-24558/17A
29 November 2004
SUPERSEDING
MIL-T-24558/17
8 May 1981

DETAIL SPECIFICATION SHEET

# TERMINAL BOX, CONNECTION, SUBMERSIBLE (15-FOOT), 384-TERMINAL, 1152-WIRE, 600 VOLTS, SYMBOL NO. 454

This specification sheet is approved for use by all departments and agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-24558, "Terminal Boxes, Connection, for Electrical and Electronic Systems, General Specification for".

REQUIREMENTS: The terminal box shall be as specified herein and in accordance with table I and figures 1, 2, and 3.

1. Electrical rating. The terminal box shall have an electrical rating of 600 volts rms/DC. The maximum current shall be 30 amperes per stud of terminal board.

2. Dimensions and configuration. For dimensions and configuration see figures 1 through 3. All dimensions in figures 1 through 3 are expressed in inches. Overall terminal box dimensions are approximate. Exact dimensions are shown in MIL-E-24142/7, "Enclosures, Submersible (15-Foot), Size 20 By 24".

3. Tolerance. All tolerances, other than specified herein, shall be in accordance with MIL-DTL-24558.

4. Standard parts. The standard parts shown in table I shall be used in the construction of the connection box specified herein. The numbers in circles shown on figures 1 through 3 are the same as those shown in the "Item" column of table I.

5. Enclosure. The enclosure shall be a 15-foot submersible type.

6. Weight. The weight of the connection box shall be 40.0 lbs. maximum.

7. Maximum number of wires. The maximum number of wires (including spares) shall not exceed three times the number of terminals and the maximum number of wires to be connected to a single terminal shall not exceed three.



DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:42Z
Check the source to verify that this is the current version before use.

QUALITY ASSURANCE: First article inspection and quality conformance inspection shall be as specified in MIL-DTL-24558.

GENERAL INFORMATION:

1. Drawing. The terminal box specified by MIL-DTL-24558/17A was formerly covered on NAVSHIPS Drawing No. 9000-S6202-74378.

2. Part or identification number (PIN). The PIN to be used for terminal boxes acquired to this specification is created as follows:


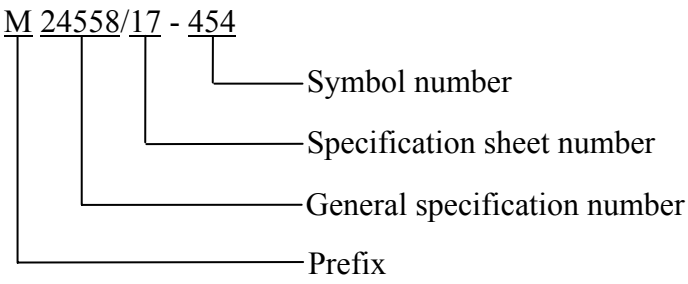



TABLE I. Parts list.

| Item | Description | Qty. | Part no. or specification | Remarks |
|---|---|---|---|---|
| 1 | Enclosure assembly, brass | 1 | MIL-E-24142/7 | M24142/7-001 |
| 2 | Identification plate | 1 | MIL-DTL-24558 | Figure 6 |
| 3 | Information plate | 1 | MIL-DTL-24558 | Figure 6 |
| 4 | Mounting bracket | 16 | MIL-DTL-24558 | Figure 1 |
| 5 | Terminal board assembly | 16 | A-A-59125/12 | 6TB24 |
| 6 | RH mach screw #10-24 X 7/8" long | 32 | COML | Brass |
| 7 | Washer for #10 screw | 32 | COML | Bronze |
| 8 | RH mach screw #6-32 X 1/4" long | 4 | COML | Brass |




Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:42Z
Check the source to verify that this is the current version before use.

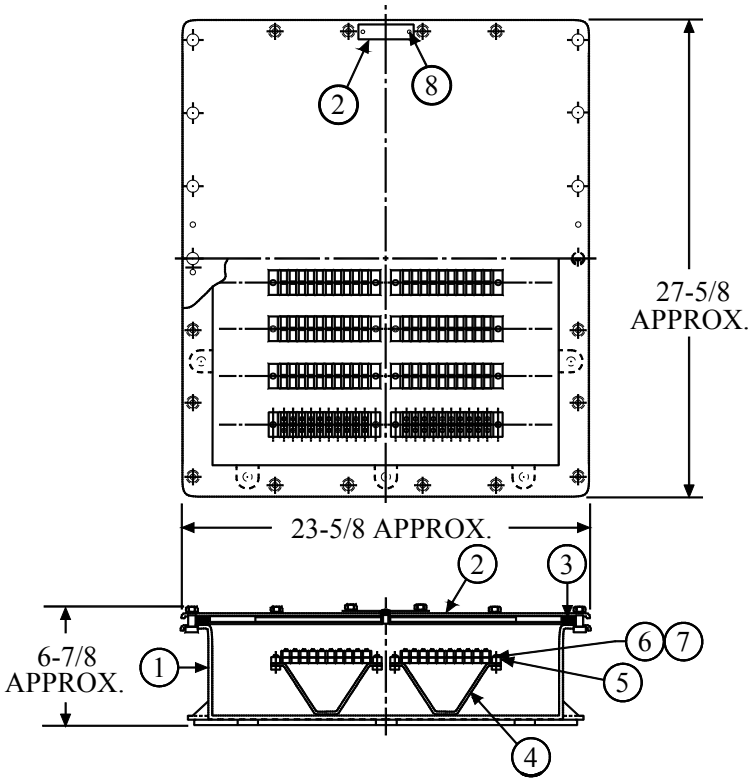


SH 11620

FIGURE 1. Connection box assembly.

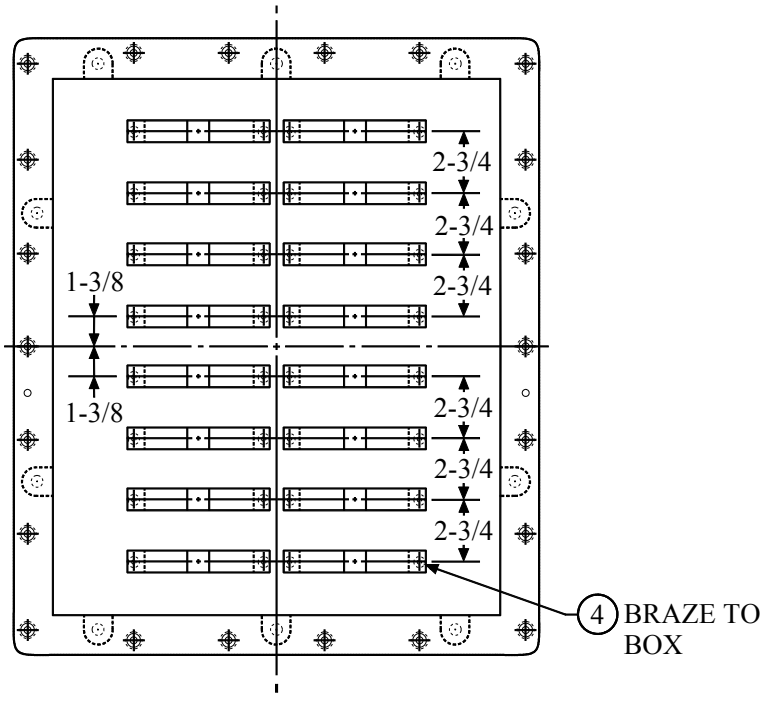



SH 11621

FIGURE 2. Location of terminal board mounting brackets.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:42Z
Check the source to verify that this is the current version before use.

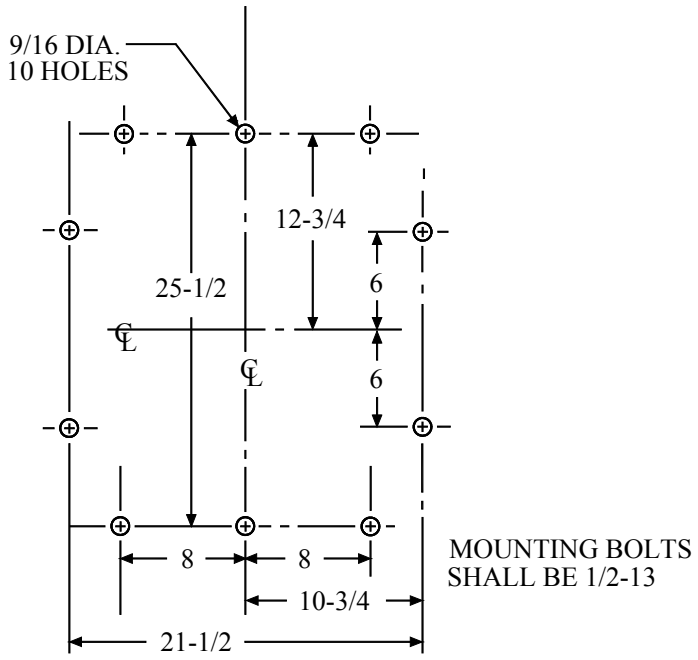


SH 11622

FIGURE 3. Mounting dimensions.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Navy - SH

Preparing Activity:
DLA - GS2

(Project 5940-1506)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:42Z
Check the source to verify that this is the current version before use.