INCH-POUND

MIL-DTL-24558/18A
w/AMENDMENT 1
17 February 2006
SUPERSEDING
MIL-DTL-24558/18A
29 November 2004

DETAIL SPECIFICATION SHEET

TERMINAL BOXES, CONNECTION, SUBMERSIBLE (15-FOOT), 600 VOLTS, 4-TERMINAL, 8-WIRE, SYMBOLS 400.1 AND 400.4, 4-TERMINAL, 12-WIRE, SYMBOLS 400.2 AND 400.3

This specification sheet is approved for use by all departments and agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-24558, "Terminal Boxes, Connection, for Electrical and Electronic Systems, General Specification for".

REQUIREMENTS: The terminal box shall be as specified herein and in accordance with table I and figures 1, 2, and 3.

1. Electrical rating. The terminal box shall have an electrical rating of 600 volts rms/DC. The maximum current shall be 15 amperes per stud of terminal board.

2. Dimensions and configuration. For dimensions and configuration see figures 1 through 3. All dimensions in figures 1 through 3 are expressed in inches. Overall terminal box dimensions are approximate. Exact dimensions are shown in MIL-E-24142/5, "Enclosure for Electrical Fittings and Fixtures, Submersible, (15-Foot), Sizes 3R, 4R and 5R".

3. Tolerance. All tolerances, other than specified herein, shall be in accordance with MIL-DTL-24558.

4. Standard parts. The standard parts shown in table I shall be used in the construction of the connection box specified herein. The numbers in circles shown on figures 1 through 3 are the same as those shown in the "Item" column of table I.

5. Enclosure. The enclosure shall be a 15-foot submersible type.

6. Finish. The interior of enclosure may be unpainted or painted at contractor's option.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:43Z
Check the source to verify that this is the current version before use.

7. Weight. The maximum weight of the connection box shall be:

Symbol number 400.1 - 2.0 lbs	Symbol number 400.3 - 3.0 lbs
Symbol number 400.2 - 3.0 lbs	Symbol number 400.4 - 2.0 lbs

QUALITY ASSURANCE: First article inspection and quality conformance inspection shall be as specified in MIL-DTL-24558.

GENERAL INFORMATION:

1. Drawing. The terminal box specified by MIL-DTL-24558/18A was formerly covered on NAVSHIPS Drawing No. 9000-S6202-74027.

2. Part or identification number (PIN). The PIN to be used for terminal boxes acquired to this specification is created as follows:

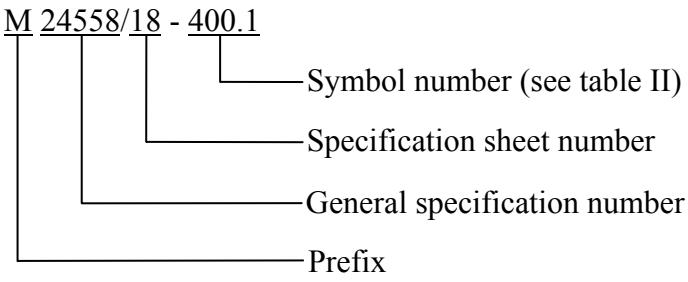


TABLE I. Parts list.

Item	Description	Qty.	Part no. or specification	Remarks
1	Enclosure assembly, 3-inch brass[1]	1	MIL-E-24142/5	M24142/5-001 for symbol 400.1
2	Enclosure assembly, 4-inch brass[1]	1	MIL-E-24142/5	M24142/5-002 for symbol 400.2
3	Enclosure assembly, 4-inch plastic	1	MIL-E-24142/11	M24142/11-002 for symbol 400.3
4	Enclosure assembly, 3-inch plastic	1	MIL-E-24142/11	M24142/11-001 for symbol 400.4
5	Terminal board assembly	1	MIL-T-55164/18	13TB4
6	Identification plate	1	MIL-DTL-24558	Figure 6
7	Information plate	1	MIL-DTL-24558	Figure 6
8	RH mach screw #6-32 X 1/2" long	2	COML	Brass
9	Washer for #6 screw	2	COML	Bronze
10	Pad	2	MIL-DTL-24558	Figure 5


[1]Box piece 23 or 44, cover piece 2 or 40, pad piece 29 and gasket ring piece 24 or 42 of NAVSHIPS Drawing No. 9000-S6501-74210 may be used as an alternate for the 3-inch and 4-inch enclosure assembly respectively, provided that the box height and mounting details are modified to comply to those specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:43Z
Check the source to verify that this is the current version before use.

TABLE II. Symbol number description.

Symbol number	National stock number	Remarks
400.1	5940-00-024-0128	[1] [3]
400.2	5940-00-231-0831	[2] [3]
400.3	5940-00-869-7082	[2] [3]
400.4	5940-00-869-7092	[1] [3]

[1]Three-inch connection boxes are to be used in installations requiring one or two cables, except that four small cables such as type DSGU-4 of MIL-DTL-24643/15 may be installed. The total number of conductors shall not exceed eight. The maximum number of wires to be connected to a single terminal shall be two.
[2]Four-inch connection boxes are to be used in installations requiring three to five cables. The total number of wires shall not exceed twelve. The maximum number of wires to be connected to a single terminal shall be three.
[3]The maximum weight shall be 1.8 lbs. for symbol numbers 400.1 and 400.4 and 2.4 lbs. for symbols 400.2 and 400.3.

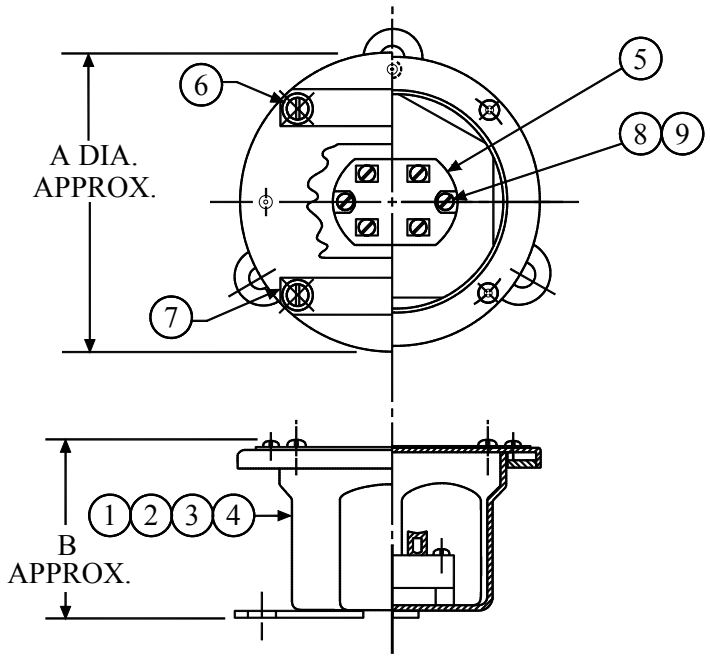


SH 11623

Symbol no.	A	B
400.1 & 400.4	4-5/8	2-3/4
400.2 & 400.3	5-3/4	3-1/2


FIGURE 1. Connection box assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:43Z
Check the source to verify that this is the current version before use.

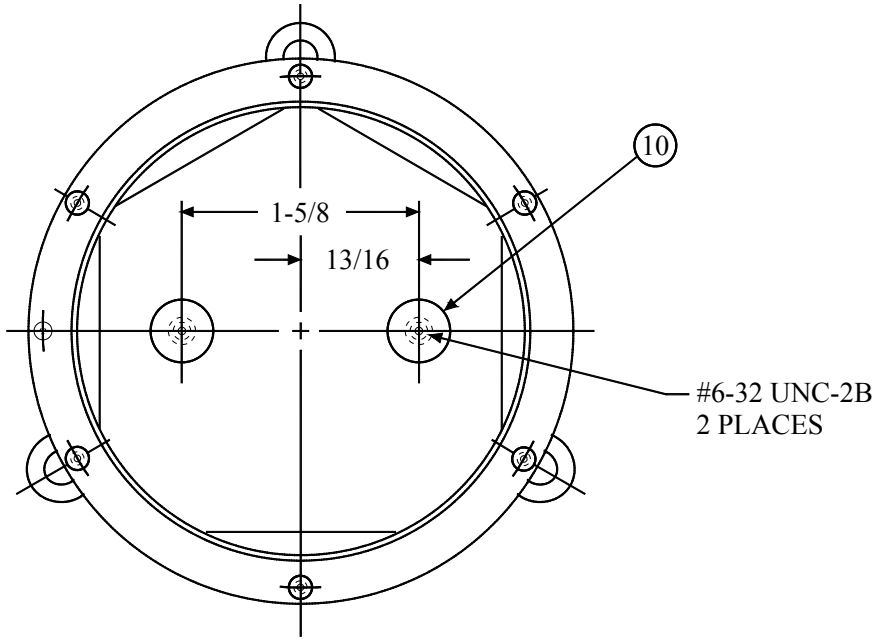

SH 11624

FIGURE 2. Location of terminal board mounting pads.

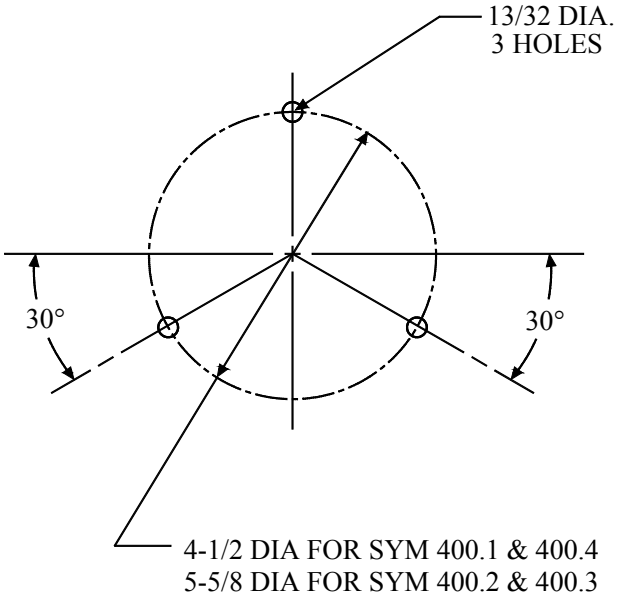

SH 11625 MOUNTING BOLTS SHALL BE 3/8-16

FIGURE 3. Mounting dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:43Z
Check the source to verify that this is the current version before use.

AMENDMENT NOTATIONS. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Custodian:
Navy - SH

Preparing Activity:
DLA - GS2

(Project 5940-2005-018)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:43Z
Check the source to verify that this is the current version before use.