
MILITARY SPECIFICATION SHEET

FLANGES, WAVEGUIDE, SINGLE RIDGE, SOCKET MOUNT (BANDWIDTH RATIO 3.6:1)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the flanges described herein shall consist of this document and the latest issue of Specification MIL-F-39000.

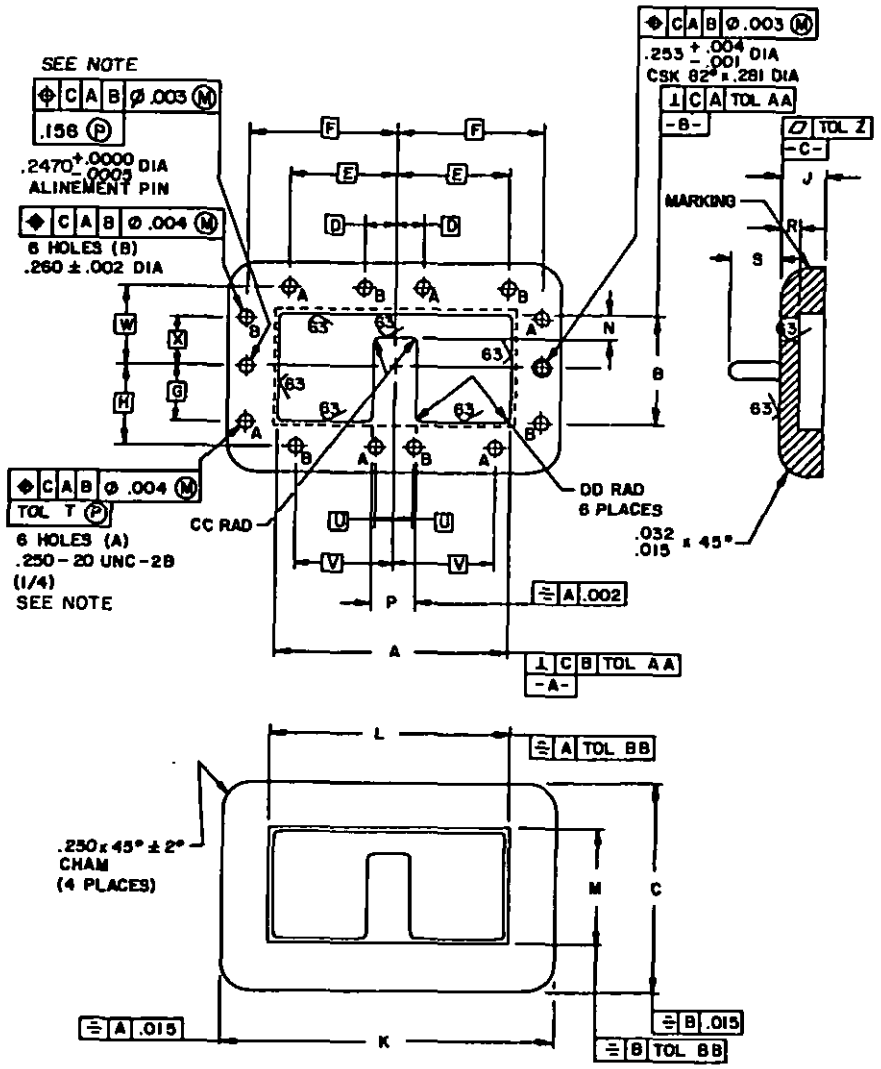


Configuration 1.

FIGURE 1. Flange.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Naval Electronic Systems Command, Department of the Navy, ATTN: ELEX 5043, Washington, D.C. 20360 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 5985


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:57Z
Check the source to verify that this is the current version before use.

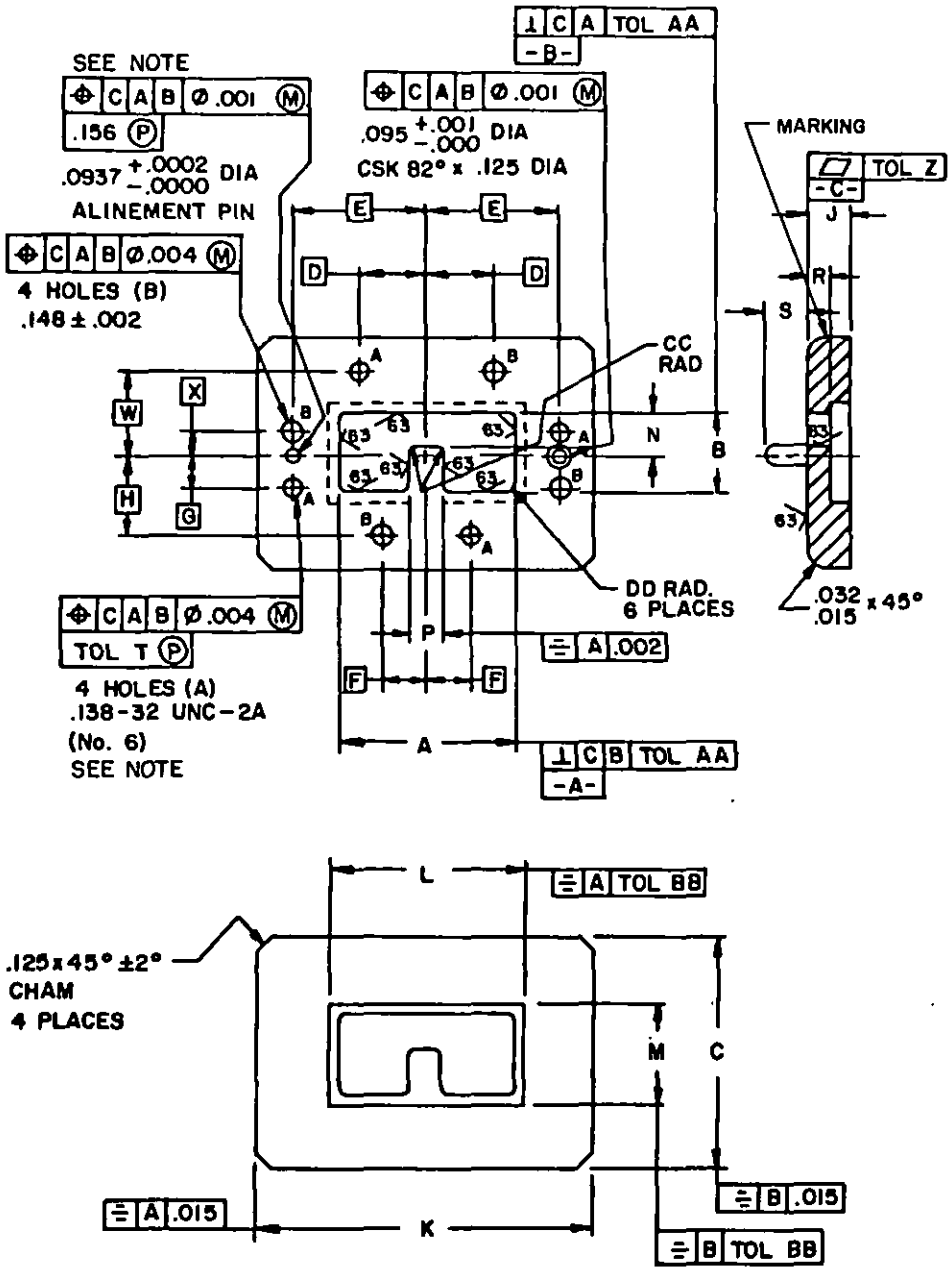

Configuration 2.

FIGURE 1. Flange - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:57Z
Check the source to verify that this is the current version before use.

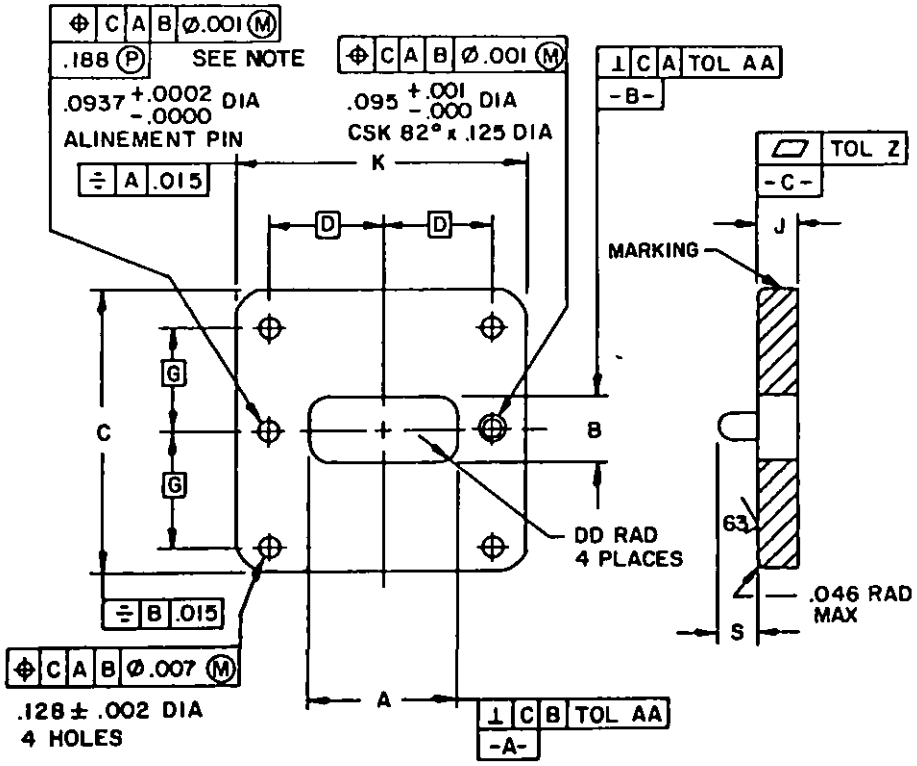

Configuration 3.

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.0002	.005	.007	.18	.125	3.18	.247	6.27
.0005	.013	.015	.38	.128	3.25	.250	6.35
.001	.02	.032	.81	.138	3.51	.253	6.43
.002	.05	.046	1.17	.148	3.76	.260	6.60
.003	.08	.0937	2.380	.156	3.96	.281	7.14
.004	.10	.095	2.41	.188	4.77		

NOTE: The projected tolerance zone surface reference is datum C.

FIGURE 1. Flange - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:57Z
Check the source to verify that this is the current version before use.

TABLE I. Part number characteristics and dimensions.

Part number M39000/2-			Part number M39000/2-			Configuration	Dimensions 1/ 2/ 3/	
	Used with			Used with				
Dash No. 4/	Waveguide M23351/1-	Mating flange M39000/2-	Dash No. 5/	Waveguide M23351/1-	Mating flange M39000/2-		A	B
001	013	001	002	014, 015, 016	002	1	3.494 ±.004 (88.75) (.10)	1.572 ±.004 (39.93) (.10)
004	017	004	005	018, 019, 020	005	2	2.422 ±.004 (61.52) (.10)	1.090 ±.004 (27.67) (.10)
007	021	007	008	022, 023, 024	008	2	.968 ±.003 (24.59) (.08)	.436 ±.003 (11.07) (.08)
010	025	010	011	026, 027, 028	011	3	.788 ±.002 (20.02) (.05)	.415 ±.002 (10.54) (.05)
013	029	013	014	030, 031, 032	014	3	.362 ±.002 (9.19) (.05)	.212 ±.002 (5.38) (.51)

Dash No. 4/	Dash No. 5/	Dimensions 1/ 2/ 3/								
		C ±.015 (.38)	D BSC.	E BSC.	F BSC.	G BSC.	H BSC.	J ±.015 (.38)	K ±.015 (.38)	L
001	002	3.125 (79.38)	.496 (12.60)	1.602 (40.69)	2.184 (55.47)	.786 (19.96)	1.098 (27.89)	.625 (15.88)	4.875 (123.82)	3.669 ±.005 (93.19) (.13)
004	005	2.062 (52.37)	.753 (19.13)	1.513 (38.43)	.635 (16.13)	.545 (13.84)	.983 (24.97)	.438 (11.13)	3.438 (87.33)	2.595 ±.003 (65.91) (.08)
007	008	1.312 (33.32)	.377 (9.58)	.752 (19.10)	.249 (6.32)	.218 (5.54)	.452 (11.48)	.250 (6.35)	1.875 (47.62)	1.079 ±.002 (27.41) (.05)
010	011	1.375 (34.92)	.312 (7.92)	---	---	.500 (12.70)	---	.188 (4.78)	1.375 (34.92)	---
013	014	.875 (22.22)	.312 (7.92)	---	---	.280 (7.11)	---	.188 (4.78)	.875 (22.22)	---

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:57Z
Check the source to verify that this is the current version before use.

TABLE I. Part number characteristics and dimensions - Continued.

Dash No. 4/	Dash No. 5/	Dimensions 1/ 2/ 3/					
		M	N	P	R ±.005 (.13)	S ±.015 (.38)	T
001	002	1.747 ±.005 (44.37) (.13)	.2690 ±.0015 (6.833) (.038)	.5940 ±.0025 (15.088) (.064)	.250 (6.35)	.156 (3.96)	.625 (15.88)
004	005	1.263 ±.003 (32.08) (.08)	.186 ±.001 (4.72) (.03)	.412 ±.002 (10.46) (.05)	.250 (6.35)	.156 (3.96)	.438 (11.13)
007	008	.547 ±.002 (13.89) (.05)	.0750 ±.0005 (1.905) (.013)	.165 ±.001 (4.19) (.03)	.125 (3.18)	.156 (3.96)	.250 (6.35)
010	011	---	---	---	---	.156 (3.96)	---
013	014	---	---	---	---	.156 (3.96)	---

Dash No. 4/	Dash No. 5/	Dimensions 1/ 2/ 3/								
		U BSC.	V BSC.	W	X	Z	AA	BB	CC ±10%	DD Max.
001	002	.283 (7.19)	1.452 (36.88)	1.214 (30.84)	.821 (20.85)	.0007 (.018)	.004 (.10)	.005 (.13)	.134 (3.40)	.047 (1.19)
004	005	---	---	.932 (23.67)	.366 (9.30)	.0007 (.018)	.004 (.10)	.003 (.08)	.037 (.94)	.047 (1.19)
007	008	---	---	.469 (11.91)	.107 (2.72)	.0004 (.010)	.003 (.08)	.002 (.05)	.015 (.38)	.031 (.79)
010	011	---	---	---	---	.0003 (.008)	.002 (.05)	---	---	.070 (1.78)
013	014	---	---	---	---	.0003 (.008)	.002 (.05)	---	---	.060 (1.52)

1/ Dimensions are in inches.
2/ Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3/ Metric equivalents are in parentheses.
4/ Material shall be aluminum alloy.
5/ Material shall be copper alloy.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:57Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and table I.

Material: See table I.
Materials supplied with flanges: See table II.

Marking:
Part number: M39000/2-(dash number from table I).
Location: See figure 1.

Cross reference and frequency range: See table III.

TABLE II. Items supplied with flanges.

Flange part No. M39000/2-	Socket head cap screw	Hex nut	Spring lockwasher
001, 002	.250-20 UNC-2A 1.50 in. long (6 ea)	—	.250 x .062 (6 ea)
004, 005	.138-32 UNC-2A 1.0 in. long (4 ea)	—	.138 x .031 (4 ea)
007, 008	.138-32 UNC-2A .625 in. long (4 ea)	—	.138 x .031 (4 ea)
010, 011, 013, 014	.112-40 UNC-2A .50 in. long (2 ea)	.112-40 UNC-2B (2 ea)	.112 x .025 (2 ea)

TABLE III. Cross reference and frequency range.

Part number 1/ M39000/2-	AN nomenclature	Frequency range (GHz)
001	UG-1604/U	.97- 3.50
002	UG-1605/U	.97- 3.50
004	UG-1607/U	1.40- 5.00
005	UG-1608/U	1.40- 5.00
007	UG-1610/U	3.50-12.40
008	UG-1611/U	3.50-12.40
010	UG-1613/U	5.00-18.00
011	UG-1614/U	5.00-18.00
013	UG-1616/U	12.40-40.00
014	UG-1617/U	12.40-40.00

1/ Dash numbers 003 (UG-1606/U), 006 (UG-1609/U), 009 (UG-1612/U), 012 (UG-1615/U), and 015 (UG-1618/U) have been deleted from specifications.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:57Z
Check the source to verify that this is the current version before use.

Custodians:
Army - EL
Navy - EC
Air Force - 85

Review activities:
Army -
Navy - SH
Air Force - 11, 99
DLA - ES

User activities:
Army - AV, AR
Navy - MC, AS, OS, SH, CG
Air Force - 14, 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5985-0854-2)

☆ U. S. GOVERNMENT PRINTING OFFICE: 1977-703-122/6872

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:57Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:57Z
Check the source to verify that this is the current version before use.