
MILITARY SPECIFICATION SHEET

FLANGES, WAVEGUIDE, DOUBLE RIDGE, SOCKET MOUNT (BANDWIDTH RATIO 2.4:1)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the flanges described herein shall consist of this document and the latest issue of Specification MIL-F-39000.

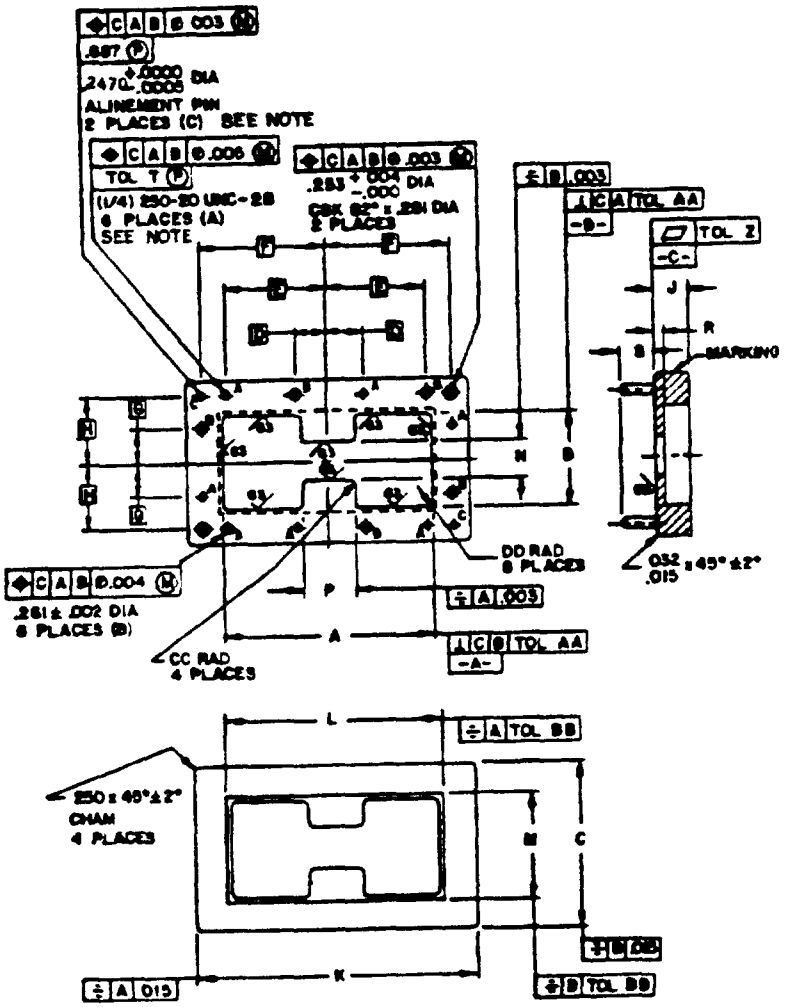


Configuration 1.

FIGURE 1. Flange

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Naval Electronic Systems Command, Department of the Navy, ATTN ELEX 5043, Washington, D.C. 20360 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter

FSC 5985


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:57Z
Check the source to verify that this is the current version before use.

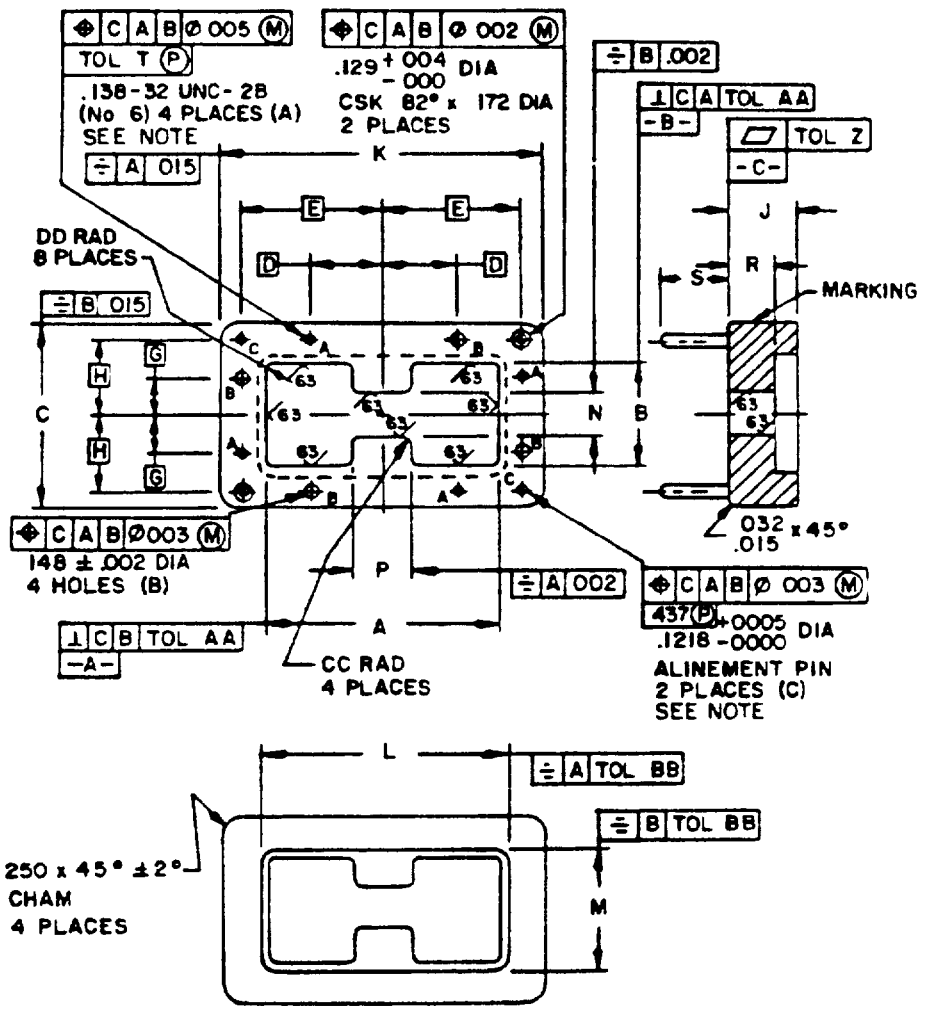

Configuration 2

FIGURE 1 Flange - Continued


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:57Z
Check the source to verify that this is the current version before use.

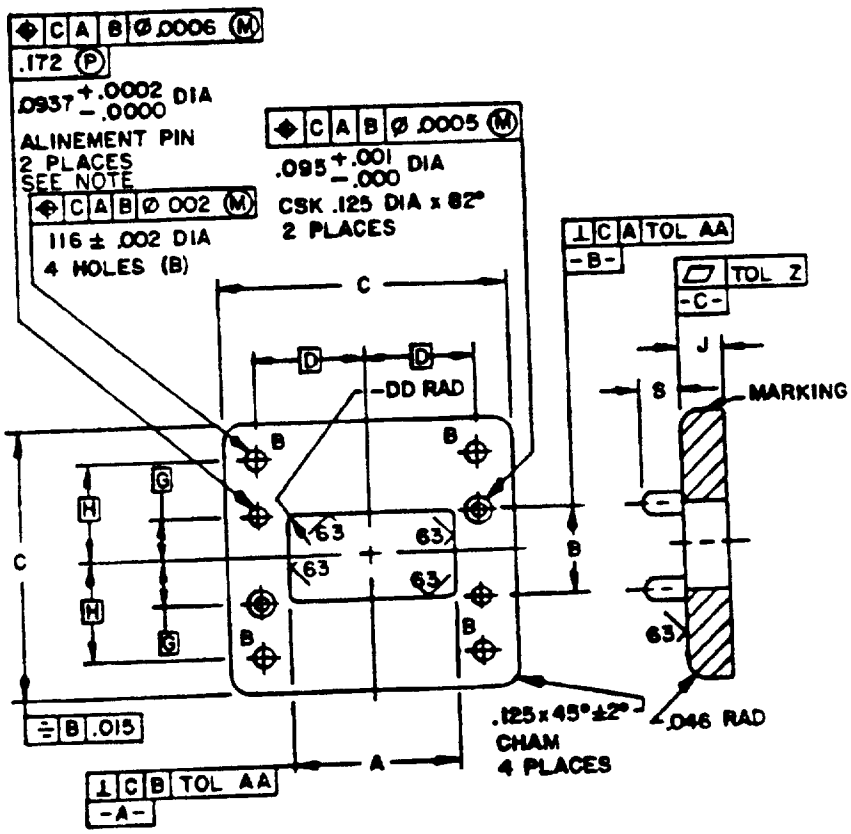

Configuration 3.

FIGURE 1 Flange - Continued


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:57Z
Check the source to verify that this is the current version before use.

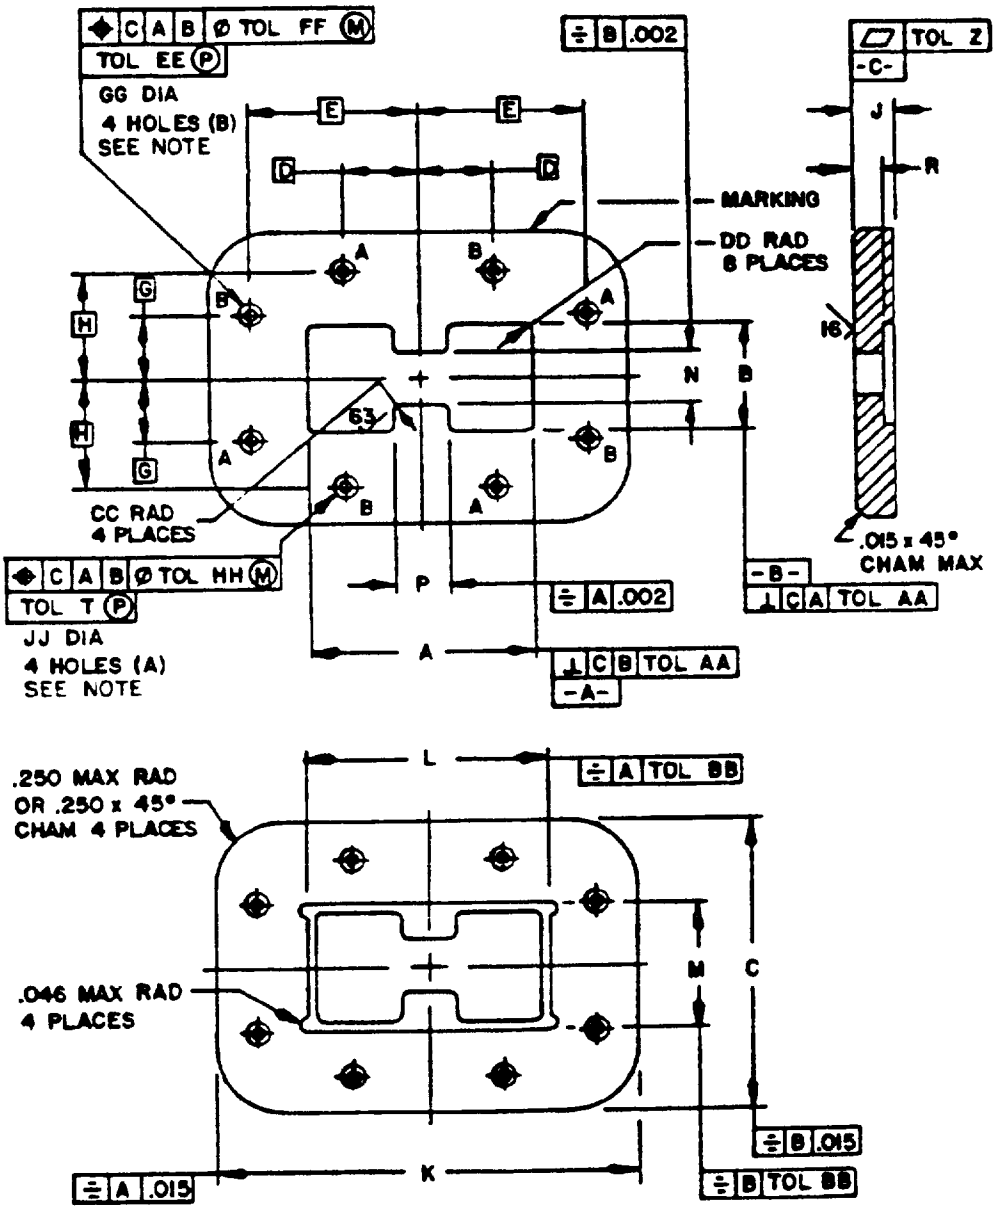

Configuration 4

FIGURE 1 Flange - Continued


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:57Z
Check the source to verify that this is the current version before use.

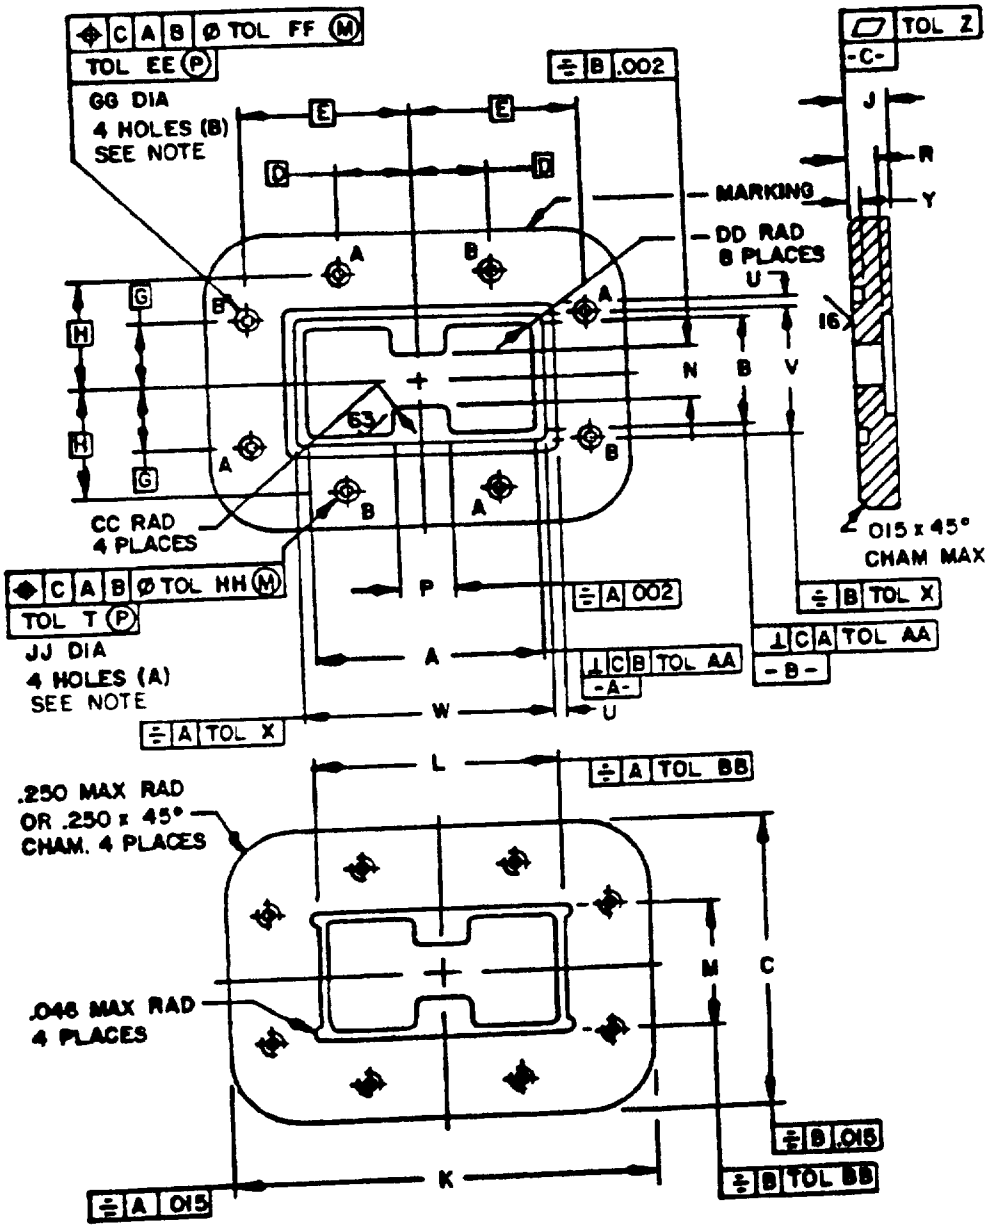

Configuration 5

FIGURE 1 Flange - Continued


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:57Z
Check the source to verify that this is the current version before use.

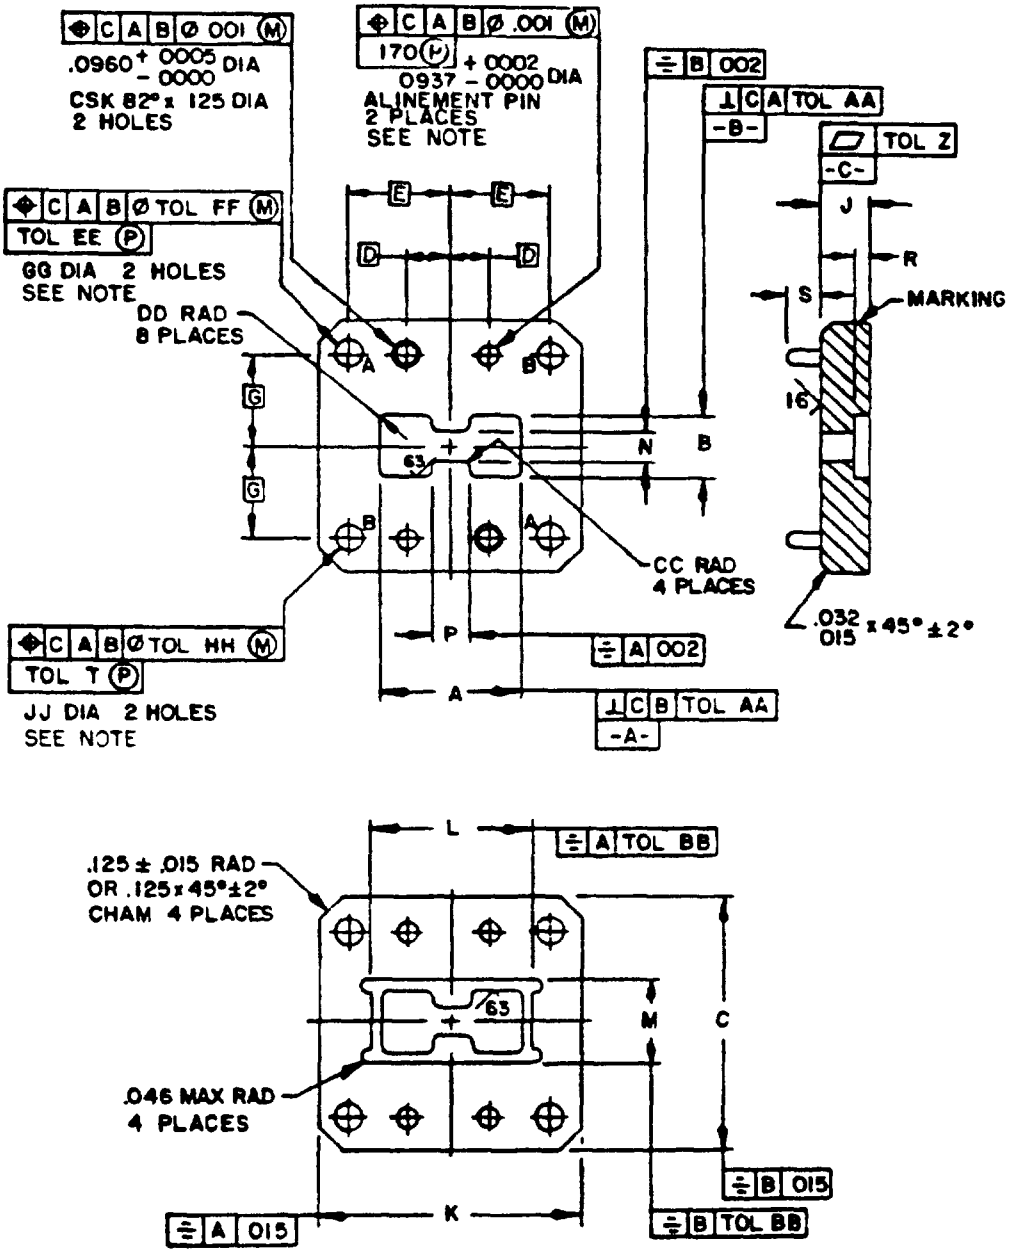

Configuration 6

FIGURE 1 Flange - Continued


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:57Z
Check the source to verify that this is the current version before use.

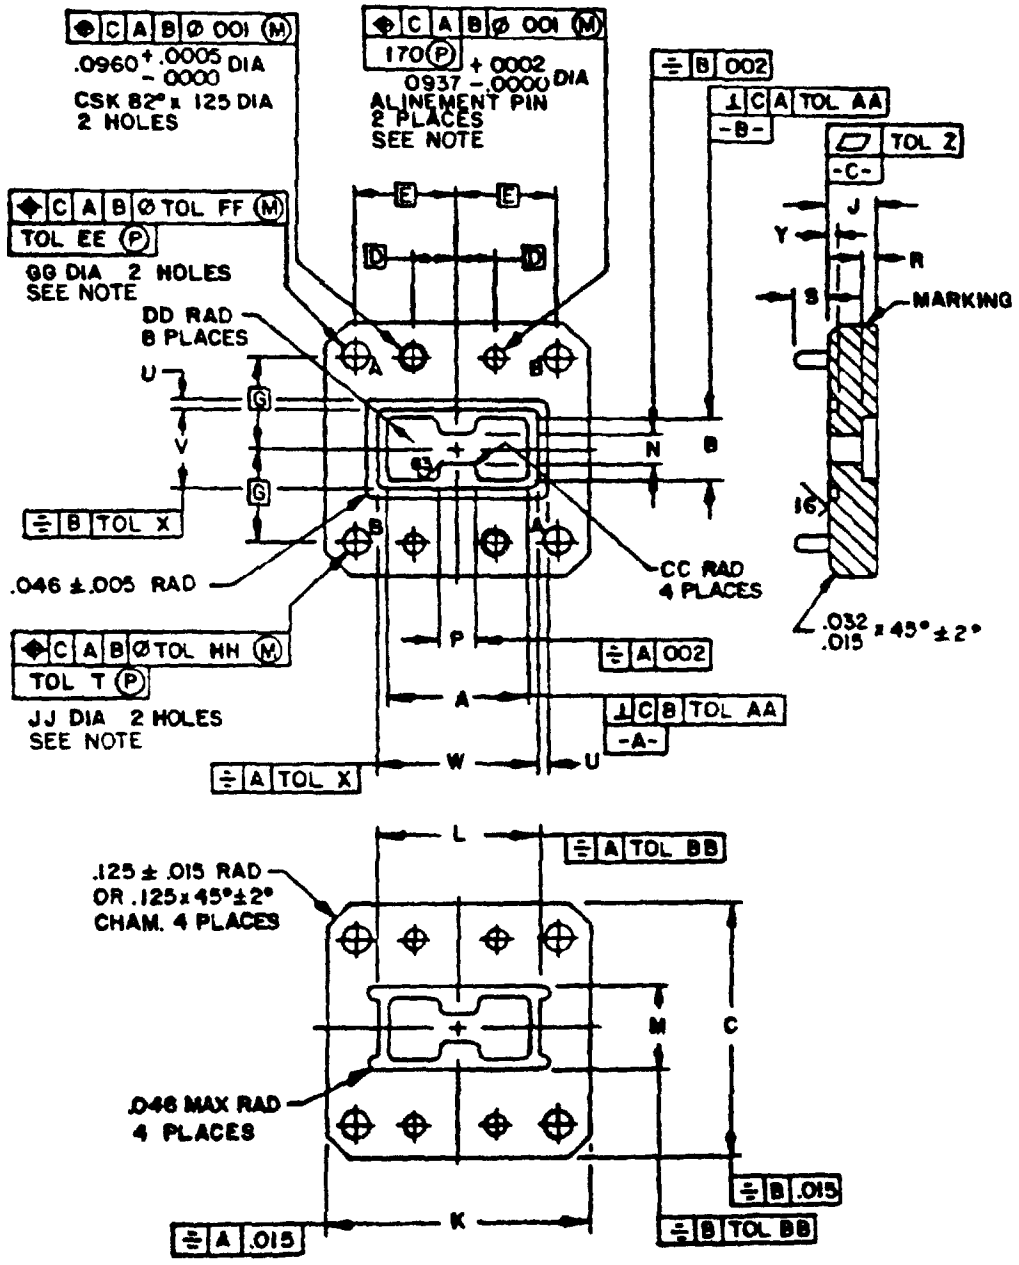

Configuration 7

FIGURE 1 Flange - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:57Z
Check the source to verify that this is the current version before use.

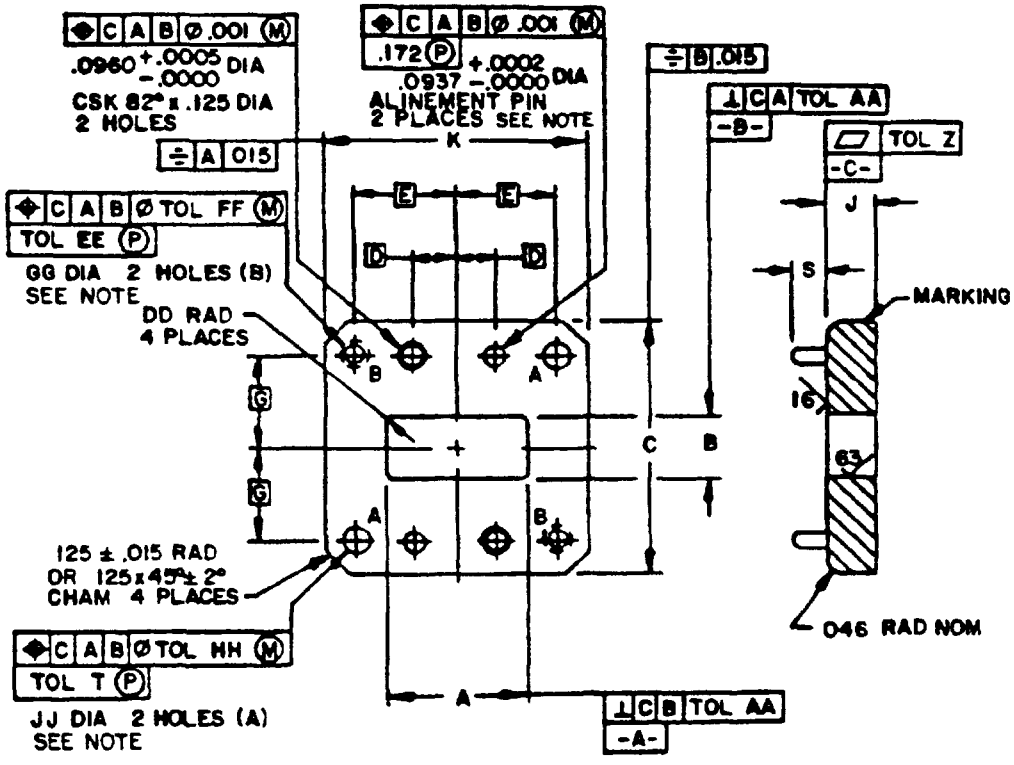

Configuration B

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.0002	.005	.005	13	116	2 95	.172	4.37
.0005	.013	.015	.38	.1218	3 094	.247	6 27
.0006	.015	.032	81	.125	3 18	.250	6 35
.001	.02	.046	1.17	129	3.28	253	6 43
.002	.05	0937	2.380	.138	3.51	.261	6.63
003	.08	095	2 41	148	3.76	.281	7 14
.004	10	0960	2 438	170	4.32	.437	11 10
						.687	17.45

NOTE The projected tolerance zone surface reference is datum C

FIGURE 1. Flange - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:57Z
Check the source to verify that this is the current version before use.

TABLE I Part number characteristics and dimensions.

Part number M39000/3-			Part number M39000/4-			Configuration	Dimensions 1/ 2/ 3/	
	Used with			Used with				
Dash No 4/	Waveguide M23351/4-	Mating flange M39000/3-	Dash No 5/	Waveguide M23351/4-	Mating flange M39000/3-		A	B
001	017	001	002	018, 019, 020	002	1	6.167 ±.005 (156 64) (.13)	2 868 ± 005 (72.85) (.13)
004	021	004	005	022, 023, 024	005	1	3 455 ±.004 (87.76) (.10)	1.607 ±.004 (40.82) (10)
007	025	007	008	026, 027, 028	008	2	2.590 ±.004 (65.79) (.10)	1.205 ±.004 (30 61) (.10)
010	029	010	011	030, 031, 032	011	2	1.480 ±.003 (37 59) (.08)	.688 ±.003 (17.48) (08)
013	033	013	014	034, 035, 036	014	2	1.090 ±.003 (27.69) (.08)	.506 ±.003 (12 85) (08)
016	037	016	017	038, 039, 040	017	3	797 ± 002 (20 24) (05)	427 ± 002 (10.85) (.05)
019	041	019	020	042, 043, 044	020	3	.557 ± 002 (14 15) (05)	305 ±.002 (7 75) (.05)
022	045	022	023	046, 047, 048	023	3	373 ± 001 (9 47) (03)	.219 ±.001 (5.56) (03)
024	025	024	025	026, 027, 028	025	4	2 590 ± 004 (65 79) (10)	1 205 ± 004 (30 61) (10)
026	025	026	027	026, 027, 028	029	4	2.590 ± 004 (65 79) (10)	1 205 ± 004 (30 61) (10)
028	025	026	029	026, 027, 028	027	4	2 590 ±.004 (65 79) (10)	1.205 ±.004 (30 61) (10)
030	029	030	031	030, 031, 032	031	4	1 480 ±.003 (37.59) (08)	.688 ± 003 (17 48) (08)
032	029	034	033	030, 031, 032	035	4	1 480 ± 003 (37 59) (08)	.688 ±.003 (17 48) (08)
034	029	032	035	030, 031, 032	033	4	1 480 ± 003 (37 59) (08)	688 ± 003 (17 48) (08)
036	033	036	037	034, 035, 036	037	4	1.090 ± 003 (27.69) (08)	.506 ± 003 (12 85) (.08)
038	033	040	039	034, 035, 036	041	4	1.090 ± 003 (27.69) (.08)	506 ± 003 (12 85) (.08)
040	033	038	041	034, 035, 036	039	4	1.090 ±.003 (27.69) (.08)	.506 ±.003 (12.85) (08)
042	049	042	043	050, 051, 052	043	4	1.025 ±.003 (26.04) (.08)	475 ±.003 (12.06) (.08)
044	049	046	045	050, 051, 052	047	4	1.025 ±.003 (26 04) (08)	475 ± 003 (12.06) (06)
046	049	044	047	050, 051, 052	045	4	1.025 ±.003 (26 04) (08)	475 ± 003 (12.06) (08)

See footnotes at end of table

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:57Z
Check the source to verify that this is the current version before use.

TABLE I Part number characteristics and dimensions - Continued

Part number M39000/3-			Part number M39000/4-			Configuration	Dimensions 1/ 2/ 3/	
	Used with			Used with				
Dash No 4/	Waveguide M23351/4-	Mating flange M39000/3-	Dash No. 5/	Waveguide M23351/4-	Mating flange M39000/3-		A	B
048	025	048	049	026, 027, 028	048	5	2.590 ±.004 (65.79) (.10)	1 205 ±.004 (30 61) (.10)
050	025	052	051	026, 027, 028	053	5	2 590 ±.004 (65.79) (10)	1 205 ±.004 (30.61) (.10)
052	025	050	053	026, 027, 028	051	5	2.590 ± 004 (65.79) (.10)	1.205 ±.004 (30.61) (.10)
054	029	054	055	030, 031, 032	055	5	1 480 ±.003 (37 59) (08)	.688 ±.003 (17.48) (.08)
056	029	058	057	030, 031, 032	059	5	1 480 ± 003 (37 59) (08)	688 ± 003 (17 48) (08)
058	029	056	059	030, 031, 032	057	5	1 480 ± 003 (37 59) (08)	688 ± 003 (17 48) (08)
060	033	060	061	034, 035, 036	061	5	1 090 ± 003 (27 69) (08)	506 ± 003 (12 85) (08)
062	033	064	063	034, 035, 036	065	5	1 090 ± 003 (27 69) (08)	506 ± 003 (12 85) (08)
064	033	062	065	034, 035, 036	063	5	1 090 ± 003 (27 69) (08)	506 ± 003 (12 85) (08)
066	049	066	067	050, 051, 052	067	5	1.025 ± 003 (26 04) (08)	475 ± 003 (12.06) (08)
068	049	070	069	050, 051, 052	071	5	1.025 ± 003 (26 04) (08)	475 ± 003 (12.06) (08)
070	049	068	071	050, 051, 052	069	5	1 025 ±.003 (26 04) (08)	.475 ±.003 (12.06) (08)
072	037	072	073	038, 039, 040	073	6	691 ± 003 (17 55) (08)	321 ± 003 (8 15) (.08)
074	037	076	075	038, 039, 040	077	6	↑	↑
076	037	074	077	038, 039, 040	075	6		
078	037	078	079	038, 039, 040	079	7		
080	037	082	081	038, 039, 040	083	7	↓	↓
082	037	080	083	038, 039, 040	081	7	.691 ± 003 (17.55) (.08)	.321 ± 003 (8 15) (.08)
084	045	084	085	046, 047, 048	085	8	.373 ±.001 (9.47) (03)	.219 ± 001 (5.56) (.03)
086	045	088	087	046, 047, 048	089	8	373 ±.001 (9 47) (03)	.219 ± 001 (5 56) (03)
088	045	086	089	046, 047, 048	087	8	373 ±.001 (9 47) (03)	219 ± 001 (5 56) (03)

See footnotes at end of table

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:57Z
Check the source to verify that this is the current version before use.

TABLE I Part number characteristics and dimensions - Continued

Dash No 4/	Dash No 5/	Dimensions 1/ 2/ 3/								
		C ±.015 (38)	D BSC	E BSC	F BSC.	G BSC.	H BSC.	J ±.015 (.38)	K ±.015 (.38)	L
001	002	5.000 (127 00)	.978 (24 84)	2.932 (74 47)	3.682 (93.52)	1.030 (26.16)	2.030 (51.56)	1.000 (25 40)	8.312 (211.12)	6.426 ± 005 (163.27) (13)
004	005	3 750 (95 25)	.546 (13 87)	1 638 (41 61)	2.263 (57.48)	.629 (15 98)	1.379 (35.03)	750 (19 05)	5 438 (138 13)	3 629 ±.004 (92 18) (10)
007	008	2 156 (54 76)	.821 (20.85)	1.571 (39.90)	---	.427 (10.85)	.877 (22.28)	.750 (19.05)	3.547 (90 09)	2 759 ±.004 (70.08) (10)
010	011	1 594 (40 49)	437 (11.10)	1.000 (25.40)	---	.353 (8.97)	.603 (15.32)	.500 (12.70)	2.391 (60.73)	1 616 ± 003 (41.05) (.08)
013	014	1 391 (35 33)	375 (9 52)	790 (20 07)	---	.263 (6 68)	.500 (12.70)	.500 (12 70)	1.969 (50 01)	1 197 ±.003 (30 40) (08)
016	017	1 375 (34 92)	530 (13 46)	---	---	.216 (5 49)	.500 (12.70)	.188 (4.78)	1 375 (34 92)	---
019	020	1 000 (25 40)	388 (9 86)	---	---	1545 (3 924)	.344 (8.74)	.188 (4 78)	1 000 (25 40)	---
022	023	875 (22 22)	3125 (7 938)	---	---	111 (2 82)	.280 (7 11)	188 (4 78)	875 (22 22)	---
024	025	2 160 (54 86)	821 (20 85)	1 571 (39.90)	---	427 (10 85)	877 (22 28)	375 (9 52)	3 550 (90 17)	2 754 ± 004 (70 08) (10)
026	027	2 160 (54 86)	821 (20 85)	1 571 (39 90)	---	427 (10 85)	877 (22 28)	375 (9 52)	3 550 (90 17)	2 754 ± 004 (70 08) (10)
028	029	2 160 (54 86)	821 (20 85)	1 571 (39 90)	---	427 (10 85)	.877 (22 28)	375 (9 52)	3 550 (90 17)	2 754 ± 004 (70 08) (10)
030	031	2 000 (50 80)	500 (12 70)	1 125 (28 58)	---	.438 (11 13)	.750 (19 05)	250 (6 35)	2 750 (69 85)	1 616 ± 003 (41 05) (08)
032	033	2 000 (50 80)	500 (12 70)	1 125 (28.58)	---	438 (11 13)	.750 (19 05)	↑	2 750 (69 85)	1 616 ± 003 (41 05) (08)
034	035	2 000 (50 80)	500 (12 70)	1 125 (28 58)	---	438 (11 13)	750 (19 05)		2 750 (69 85)	1 616 ± 003 (41 05) (08)
036	037	1 391 (35.33)	312 (7 92)	837 (21.26)	---	.263 (6 68)	545 (13 84)		1 969 (50 01)	1 197 ± 003 (30 40) (08)
038	039	1 391 (35 33)	↑	.837 (21.26)	---	.263 (6 68)	.545 (13.84)		1.969 (50 01)	1 197 ± 003 (30 40) (08)
040	041	1 391 (35.33)		.837 (21 26)	---	.263 (6 68)	.545 (13.84)		1.969 (50 01)	1 197 ±.003 (30 40) (.08)
042	043	1 500 (38 10)		.813 (20 65)	---	.312 (7 92)	.500 (12.70)		2 125 (53 98)	1 134 ± 003 (28 80) (08)
044	045	1 500 (38 10)	↓	813 (20.65)	---	.312 (7 92)	.500 (12 70)	↓	2 125 (53 98)	1 134 ±.003 (28 80) (08)
046	047	1 500 (38 10)	.312 (7 92)	.813 (20.65)	---	312 (7 92)	.500 (12.70)	.250 (6.35)	2 125 (53 98)	1 134 ± 003 (28 80) (.08)

See footnotes at end of table

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:57Z
Check the source to verify that this is the current version before use.

TABLE I Part number characteristics and dimensions - Continued

Dash No 4/	Dash No 5/	Dimensions 1/ 2/ 3/								
		C ± 015 (38)	D BSC	E BSC	F BSC.	G BSC	H BSC	J ± 015 (.38)	K ± 015 (.38)	L
048	049	2 160 (54 86)	.821 (20.85)	1 571 (39 90)	---	.427 (10.85)	.877 (22.28)	.375 (9.52)	3.550 (90.17)	2.759 ±.004 (70.08) (10)
050	051	2 160 (54.86)	.821 (20 85)	1 571 (39.90)	---	.427 (10.85)	.877 (22.28)	.375 (9 52)	3.550 (90 17)	2 759 ± 004 (70.08) (10)
052	053	2 160 (54 86)	821 (20 85)	1 571 (39.90)	---	.427 (10.85)	877 (22.28)	.375 (9.52)	3 550 (90.17)	2.759 ± 004 (70.08) (.10)
054	055	2 000 (50 80)	500 (12 70)	1 125 (28 58)	---	438 (11 13)	.750 (19.05)	.250 (6.35)	2 750 (69.85)	1 616 ± 003 (41.05) (08)
056	057	2.000 (50 80)	.500 (12 70)	1 125 (28 58)	---	438 (11 13)	750 (19 05)	↑	2 750 (69.85)	1 616 ± 003 (41.05) (08)
058	059	2 000 (50.80)	500 (12 70)	1 125 (28 58)	---	438 (11 13)	.750 (19 05)		2 750 (69 85)	1 616 ± 003 (41 05) (08)
060	061	1 391 (35 33)	.312 (7 92)	.837 (21 26)	---	263 (6.68)	545 (13 84)		1 969 (50.01)	1 197 ± 003 (30 40) (08)
062	063	1 391 (35 33)	↑	837 (21 26)	---	263 (6 68)	545 (13 84)		1 969 (50 01)	1 197 ± 00. (30 40) (08)
064	065	1 391 (35 33,		837 (21 26)	---	263 (6 68)	545 (13 84)		1 969 (50.01)	1 197 ± 00. (30 40) (08)
066	067	1 500 (38 10)		813 (20 65)	---	312 (7 92)	.500 (12 70)		2 125 (53 98)	1 134 ± 003 (28 80) (08)
068	069	1 500 (38 10)	↓	813 (20 65)	---	312 (7 92)	500 (12 70)		2 125 (53 98)	1 134 ± 00. (28 80) (08)
070	071	1 500 (38 10)	312 (7 92)	813 (20 65)	---	312 (7 92)	500 (12 70)		2 125 (53 98)	1 134 ± 00. (28 80) (08)
072	073	1 375 (34 92)	216 (5 49)	530 (13 46)	---	.500 (12 70)	---		1 375 (47 92)	798 ± 00. (20 27) (08)
074	075	↑	↑	↑	---	↑	---			↑
076	077				---		---			
078	079				---		---			
080	081	↓	↓	↓	---	↓	---	↓		↓
082	083	1 375 (34 92)	216 (5 49)	530 (13 46)	---	.500 (12 70)	---	.250 (6 35)	1 375 (47.92)	798 ± 003 (20 27) (08)
084	085	.875 (22.22)	111 (2.82)	312 (7 92)	---	.280 (7 11)	---	.188 (4.78)	.875 (22.22)	---
086	087	.875 (22 22)	111 (2 82)	312 (7.92)	---	280 (7.11)	---	.188 (4 78)	.875 (22 22)	---
088	089	875 (22 22)	111 (2 82)	312 (7 92)	---	280 (7 11)	---	188 (4 78)	875 (22 22)	---

See footnotes at end of table

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:57Z
Check the source to verify that this is the current version before use.

TABLE I Part number characteristics and dimensions - Continued

Dash No 4/	Dash No. 5/	Dimensions 1/ 2/ 3/						
		M	N	P	R ±.005 (.13)	S ±.005 (.13)	T	U ±.002 (05)
001	002	3 127 ± 005 (79 43) (13)	1 219 ±.003 (30 96) (.08)	1.542 ±.003 (39.17) (.08)	.250 (6.35)	---	1 000 (25.40)	---
004	005	1.781 ± 004 (45 24) (10)	.683 ±.003 (17 35) (.08)	.864 ±.003 (21.95) (.08)	.500 (12.70)	.687 (17.45)	.750 (19.05)	---
007	008	1.374 ± 004 (34 80) (10)	.512 ±.002 (13.00) (.05)	.648 ±.002 (16.46) (.05)	.500 (12.70)	.687 (17.45)	.750 (19.05)	---
010	011	.824 ± 003 (20 93) (.08)	.292 ±.002 (7 42) (05)	.370 ±.002 (9.40) (05)	.375 (9.52)	.437 (11.10)	.500 (12.70)	---
013	014	613 ± 003 (15 57) (08)	215 ±.002 (5 46) (.05)	.272 ±.002 (6.91) (.05)	375 (9.52)	437 (11 10)	500 (12 70)	---
016	017	---	---	---	---	.172 (4 37)	---	---
019	020	---	---	---	---	.172 (4 37)	---	---
022	023	---	---	---	---	172 (4 37)	---	---
025	026	1 374 ± 004 (34 90) (10)	512 ± 002 (13 00) (05)	.648 ± 002 (16 46) (05)	188 (4 78)	---	375 (9 52)	---
028	027	1 374 ± 004 (34 90) (10)	.512 ± 002 (13 00) (05)	648 ± 002 (16 46) (.05)	188 (4 78)	---	375 (9 52)	---
028	029	1 374 ± 004 (34 90) (10)	512 ± 002 (13 00) (05)	.648 ± 002 (16 46) (.05)	188 (4 78)	---	---	---
030	031	824 ± 003 (20 93) (08)	292 ± 002 (7 42) (.05)	.370 ± 002 (9 40) (.05)	.125 (3 18)	---	.250 (6 35)	---
032	033	824 ± 003 (20 93) (08)	.292 ± 002 (7 42) (05)	.370 ±.002 (9 40) (05)	125 (3 18)	---	.250 (6.35)	---
034	035	824 ± 003 (20 93) (08)	.292 ± 002 (7 42) (05)	370 ±.002 (9 40) (05)	125 (3 18)	---	---	---
036	037	.613 ± 003 (15 57) (08)	215 ± 002 (5 46) (05)	.272 ±.002 (6 91) (.05)	188 (4 78)	---	.250 (6 35)	---
038	039	613 ±.003 (15 57) (.08)	215 ±.002 (5 46) (.05)	.272 ±.002 (6 91) (05)	188 (4 78)	---	.250 (6.35)	---
040	041	613 ±.003 (15 57) (.08)	.215 ±.002 (5.46) (.05)	.272 ±.002 (6.91) (.05)	188 (4 78)	---	---	---
042	043	584 ±.003 (14.83) (08)	.191 ±.003 (4.85) (.08)	.256 ±.003 (6.50) (.08)	.125 (3.18)	---	250 (6 35)	---
044	045	.584 ± 003 (14 83) (08)	191 ±.003 (4 85) (.08)	.256 ±.003 (6.50) (.08)	.125 (3 18)	---	.250 (6 35)	---
046	047	584 ±.003 (14 83) (08)	191 ±.003 (4 85) (08)	256 ±.003 (6 50) (08)	.125 (3 18)	---	---	---

See footnotes at end of table

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:57Z
Check the source to verify that this is the current version before use.

TABLE I Part number characteristics and dimensions - Continued

Dash No 4/	Dash No 5/	Dimensions 1/ 2/ 3/						
		M	N	P	R ±.005 (.13)	S ± 005 (.13)	T	U ±.002 (.05)
048	049	1.374 ± 004 (34 90) (10)	.512 ±.002 (13 00) (.05)	.648 ±.002 (16.46) (.05)	.188 (4.78)	---	.375 (9.52)	.094 (2.39)
050	051	1 374 ± 004 (34 90) (.10)	.512 ±.002 (13.00) (.05)	.648 ±.002 (16 46) (.05)	.188 (4 78)	---	.375 (9.52)	.094 (2.39)
052	053	1.374 ±.004 (34 90) (.10)	.512 ±.002 (13 00) (05)	.648 ± 002 (16 46) (.05)	.188 (4.78)	---	---	.094 (2.39)
054	055	.824 ± 003 (20 93) (.08)	292 ±.002 (7.42) (.05)	.370 ± 002 (9.40) (.05)	.125 (3 18)	---	.250 (6.35)	.112 (2 84)
056	057	824 ± 003 (20 93) (08)	.292 ±.002 (7 42) (05)	.370 ±.002 (9 40) (.05)	.125 (3 18)	---	.250 (6 35)	112 (2.84)
058	059	.824 ± 003 (20 93) (08)	292 ± 002 (7 42) (05)	.370 ±.002 (9 40) (05)	.125 (3 18)	---	---	112 (2.84)
060	061	613 ± 003 (15 57) (08)	.215 ± 002 (5 46) (05)	.272 ±.002 (6 91) (05)	.188 (4 78)	---	.250 (6 35)	.094 (2 39)
062	063	613 ± 003 (15 57) (08)	215 ± 002 (5 46) (05)	.272 ±.002 (6 91) (05)	.188 (4 78)	---	.250 (6 35)	094 (2 39)
064	065	613 ± 003 (15 57) (08)	215 ± 002 (5 46) (05)	272 ± 002 (6 91) (05)	188 (4 78)	---	---	094 (2 39)
066	067	584 ± 003 (14 83) (08)	191 ± 003 (4 85) (08)	256 ± 003 (7 48) (08)	125 (3 18)	---	.250 (6 35)	112 (2 84)
068	069	584 ± 003 (14 83) (.08)	.191 ± 003 (4 85) (08)	.256 ±.003 (7 48) (.08)	.125 (3 18)	---	250 (6 35)	112 (2 84)
070	071	584 ± 003 (14 83) (08)	191 ±.003 (4 85) (08)	.256 ± 003 (7 48) (.08)	125 (3.18)	---	---	.112 (2 84)
072	073	428 ± 003 (10 87) (08)	136 ± 002 (3 45) (05)	173 ± 002 (4 39) (.05)	188 (4 78)	.170 (4 32)	---	---
074	075	↑	↑	↑	↑	↑	250 (6 35)	---
076	077	↑	↑	↑	↑	↑	---	---
078	079	↑	↑	↑	↑	↑	---	.094 (2 39)
080	081	↓	↓	↓	↓	↓	.250 (6 35)	.094 (2.39)
082	083	428 ±.003 (10 87) (08)	.136 ±.002 (3 45) (.05)	.173 ±.002 (4 39) (.05)	.188 (4.78)	170 (4 32)	---	.094 (2 39)
084	085	---	---	---	---	.172 (4.37)	---	---
086	087	---	---	---	---	.172 (4 37)	.188 (4 78)	---
088	089	---	---	---	---	172 (4 37)	---	---

See footnotes at end of table

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:57Z
Check the source to verify that this is the current version before use.

TABLE I Part number characteristics and dimensions - Continued

Dash No 4/	Dash No 5/	Dimensions 1/ 2/ 3/						
		V ±.004 (.10)	W ±.004 (.10)	X	Y	Z	AA	BB
001	002	---	---	---	---	.0007 (018)	.005 (.13)	.005 (.13)
004	005	---	---	---	---	.0007 (.018)	.004 (.10)	.004 (.10)
007	008	---	---	---	---	.0007 (.018)	.004 (.10)	.004 (.10)
010	011	---	---	---	---	.0004 (010)	.003 (08)	.003 (.08)
013	014	---	---	---	---	.0004 (010)	003 (08)	.003 (.08)
016	017	---	---	---	---	005 (13)	.002 (05)	---
019	020	---	---	---	---	005 (13)	.002 (05)	---
022	023	---	---	---	---	005 (13)	001 (03)	---
024	025	---	---	---	---	.0003 (008)	.004 (10)	.003 (08)
026	027	---	---	---	---	↑	004 (10)	↑
028	029	---	---	---	---		004 (10)	
030	031	---	---	---	---		.003 (08)	
032	033	---	---	---	---	↓	↑	
034	035	---	---	---	---	0003 (008)		
036	037	---	---	---	---	.0004 (010)		
038	039	---	---	---	---	.0004 (.010)		
040	041	---	---	---	---	.0004 (.010)		
042	043	---	---	---	---	.0003 (.008)		
044	045	---	---	---	---	.0003 (.008)	↓	↓
046	047	---	---	---	---	.0003 (.008)	003 (08)	.003 (.08)

See footnotes at end of table

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:57Z
Check the source to verify that this is the current version before use.

TABLE I Part number characteristics and dimensions - Continued

Dash No 4/	Dash No 5/	Dimensions 1/ 2/ 3/						
		V ± 004 (.10)	W ±.004 (.10)	X	Y	Z	AA	BB
048	049	1.320 (33 53)	2 710 (68 83)	.004 (10)	.056 ±.002 (1.42) (05)	.0003 (.008)	.004 (10)	.004 (.10)
050	051	1 320 (33 53)	2 710 (68.83)	↑	.056 ±.002 (1 42) (.05)	↑	.004 (10)	.004 (10)
052	053	1 320 (33 53)	2 710 (68 83)		056 ± 002 (1.42) (.05)		.004 (.10)	.004 (10)
054	055	960 (24 38)	1 750 (44 45)		.048 ±.002 (1.22) (05)		.003 (08)	.003 (.08)
056	057	960 (24 38)	1 750 (44 45)		048 ±.002 (1.22) (05)	↓	↑	↑
058	059	960 (24 38)	1 750 (44 45)		048 ± 002 (1.22) (.05)	0003 (008)		
060	061	630 (16 00)	1 214 (30 84)		.056 ± 002 (1 42) (.05)	.0004 (010)		
062	063	630 (16 00)	1 214 (30 84)		056 ± 002 (1 42) (05)	0004 (010)		
064	065	630 (16 00)	1 214 (30 84)		056 ± 002 (1 42) (05)	0004 (010)		
066	067	548 (13 92)	1 101 (27 97)		052 ± 002 (1 32) (05)	0003 (008)		
068	069	548 (13 92)	1 101 (27 97)	↓	052 ± 002 (1 32) (05)	↑		
070	071	54 (13 92)	1 101 (27 97)	004 (10)	052 ± 002 (1 32) (.05)			
072	073	---	---	---	---			
074	075	---	---	---	---			
076	077	---	---	---	---			
078	079	441 (11 20)	811 (20 60)	004 (10)	056 ± 002 (1 42) (05)			
080	081	441 (11.20)	811 (20 60)	.004 (.10)	.056 + 002 (1.42) (.05) - 000	↓	↓	↓
082	083	441 (11 20)	811 (20 60)	.004 (10)	.056 +.002 (1.42) (.05) -.000	0003 (.008)	.003 (.08)	003 (08)
084	085	---	---	---	---	.005 (.13)	.001 (.03)	---
086	087	---	---	---	---	.005 (13)	.001 (03)	---
088	089	---	---	---	---	005 (13)	.001 (03)	---

See footnotes at end of table

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:57Z
Check the source to verify that this is the current version before use.

TABLE I. Part number characteristics and dimensions - Continued

Dash No 4/	Dash No 5/	Dimensions 1/ 2/ 3/						
		CC ±10%	DD Max	EE	FF	GG	HH	JJ
001	002	.244 (6.20)	.050 (1.27)	---	---	---	---	---
004	005	.137 (3.48)	.050 (1.27)	---	---	---	---	---
007	008	.102 (2.59)	.050 (1.27)	---	---	---	---	---
010	011	.058 (1.47)	.030 (.76)	---	---	---	---	---
013	014	.043 (1.09)	.030 (.76)	---	---	---	---	---
016	017	---	.075 (1.90)	---	---	---	---	---
019	020	---	.060 (1.52)	---	---	---	---	---
022	023	---	.060 (1.52)	---	---	---	---	---
025	026	.102 (2.59)	.050 (1.27)	---	.003 (.08)	.145 +.003 (3.68) (.08) - 000	.004 (.10)	.138-32 UNC-2B (3.50)
028	027	.102 (2.59)	.050 (1.27)	.375 (9.52)	.004 (.10)	.138-32 UNC-2B (3.50)	.004 (.10)	.138-32 UNC-2B (3.50)
028	029	.102 (2.59)	.050 (1.27)	---	.003 (.08)	.145 +.003 (3.68) (.08) - 000	.003 (.08)	.145 +.003 (3.68) (.08) - 000
030	031	.058 (1.47)	.030 (.76)	---	.003 (.08)	.145 +.003 (3.68) (.08) - 000	.004 (.10)	.138-32 UNC-2B (3.50)
032	033	.058 (1.47)	↑	.250 (6.35)	.004 (.10)	.138-32 UNC-2B (3.50)	.004 (.10)	.138-32 UNC-2B (3.50)
034	035	.058 (1.47)		---	.003 (.08)	.145 +.003 (3.68) (.08) - 000	.003 (.08)	.145 +.003 (3.68) (.08) - 000
036	037	.043 (1.09)		---	.003 (.08)	.145 +.003 (3.68) (.08) - 000	.004 (.10)	.138-32 UNC-2B (3.50)
038	039	.043 (1.09)	↓	.250 (6.35)	.004 (.10)	.138-32 UNC-2B (3.50)	.004 (.10)	.138-32 UNC-2B (3.50)
040	041	.043 (1.09)	.030 (.76)	---	.003 (.08)	.145 +.003 (3.68) (.08) - 000	.003 (.08)	.145 +.003 (3.68) (.08) - 000

See footnotes at end of table

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:57Z
Check the source to verify that this is the current version before use.

TABLE I Part number characteristics and dimensions - Continued.

Dash No. 4/	Dash No. 5/	Dimensions 1/ 2/ 3/						
		CC ±10%	DD Max	EE	FF	GG	HH	JJ
042	043	.062 (1.57)	.030 (76)	---	.003 (.08)	.145 +.003 (3.68) (.08) -.000	.004 (.10)	.138-32 UNC-2B (3.50)
044	045	062 (1.57)	.030 (.76)	.250 (6 35)	.004 (.10)	.138-32 UNC-2B (3.50)	.004 (.10)	.138-32 UNC-2B (3.50)
046	047	.062 (1.57)	.030 (.76)	---	.003 (.08)	.145 +.003 (3.68) (.08) -.000	.003 (.08)	.145 +.003 (3.68) (.08) -.000
048	049	102 (2.59)	.050 (1.27)	---	.003 (.08)	.145 +.003 (3.68) (.08) -.000	.004 (.10)	.138-32 UNC-2B (3.50)
050	051	102 (2.59)	.050 (1.27)	250 (6 35)	.004 (10)	.136-32 UNC-2B (3.50)	.004 (.10)	.138-32 UNC-2B (3.50)
052	053	.102 (2 59)	.050 (1 27)	---	.003 (.08)	.145 +.003 (3.68) (.08) -.000	.003 (.08)	.145 +.003 (3.68) (.08) -.000
054	055	058 (1 47)	.030 (76)	---	.003 (.08)	.145 +.003 (3 68) (.08) -.000	.004 (.10)	138-32 UNC-2B (3.50)
056	057	058 (1 47)	↑	.250 (6.35)	.004 (10)	138-32 UNC-2B (3 50)	.004 (10)	.138-32 UNC-2B (3 50)
058	059	.058 (1 47)		---	.003 (08)	.145 +.003 (3.68) (.08) -.000	.003 (.08)	.145 +.003 (3.68) (08) -.000
060	061	.043 (1 09)		---	003 (.08)	145 + 003 (3.68) (.08) -.000	.004 (.10)	.138-32 UNC-2B (3 50)
062	063	.043 (1 09)		.250 (6 35)	.004 (.10)	.138-32 UNC-2B (3.50)	.004 (.10)	.136-32 UNC-2B (3 50)
064	065	.043 (1.09)		---	.003 (.08)	.145 +.003 (3.68) (.08) -.000	.003 (.08)	.145 +.003 (3.68) (.08) -.000
066	067	.062 (1.57)	↓	---	.003 (.08)	.145 +.003 (3.68) (.08) -.000	.004 (.10)	.138-32 UNC-2B (3.50)
068	069	.062 (1 57)	.030 (.76)	.250 (6 35)	.004 (.10)	.138-32 UNC-2B (3.50)	.004 (.10)	.138-32 UNC-2B (3 50)

See footnotes at end of table.


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:57Z
Check the source to verify that this is the current version before use.

TABLE I. Part number characteristics and dimensions - Continued

Dash No 4/	Dash No 5/	Dimensions 1/ 2/ 3/						
		CC ±10%	DD Max	EE	FF	GG	HH	JJ
070	071	062 (1 57)	.030 (76)	---	.003 (.08)	.145 +.003 (3 68) (.08) -.000	.003 (.08)	145 +.003 (3.68) (.08) -.000
072	073	027 (.69)	.020 (.51)	250 (6.35)	.004 (.10)	.138-32 UNC-2B (3 50)	.003 (.08)	.145 +.003 (3.68) (.08) - 000
074	075	↑	↑	.250 (6.35)	004 (10)	138-32 UNC-2B (3 50)	.004 (10)	.138-32 UNC-2B (3 50)
076	077			---	003 (.08)	145 + 003 (3 68) (08) - 00C	.003 (.08)	145 + 003 (3 68) (08) -.000
078	079			.250 (6 35)	.004 (10)	.138-32 UNC-2B (3 50)	.003 (.08)	145 + 00C (3.68) (.08) -.00C
080	081	↓	↓	25C (6 35)	004 (10)	138-32 UNC-2B (3 50)	004 (10)	138-32 UNC-2B (3 50)
082	083	027 (69)	020 (51)	---	.003 (08)	.145 + 003 (3 68) (08) -.000	003 (08)	145 + 003 (3 68) (.08) - 00C
084	085	---	032 (.81)	.188 (4 77)	002 (.05)	112-40 UNC-2B (2 84)	.002 (05)	116 +.002 (2 95) (05) - 00C
086	087	---	032 (81)	188 (4 77)	.002 (05)	112-40 UNC-2B (2 84)	.002 (05)	.112-40 UNC-2B (2 84)
088	089	---	032 (81)	---	002 (05)	116 +.002 (2.95) (.05) - 000	002 (.05)	.116 +.002 (2 95) (05) -.000

1/ Dimensions are in inches
2/ Metric equivalents are given for general information only and are based upon 1 00 inch = 25 4 mm
3/ Metric equivalents are in parentheses
4/ Material shall be aluminum alloy
5/ Material shall be copper alloy

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:57Z
Check the source to verify that this is the current version before use.

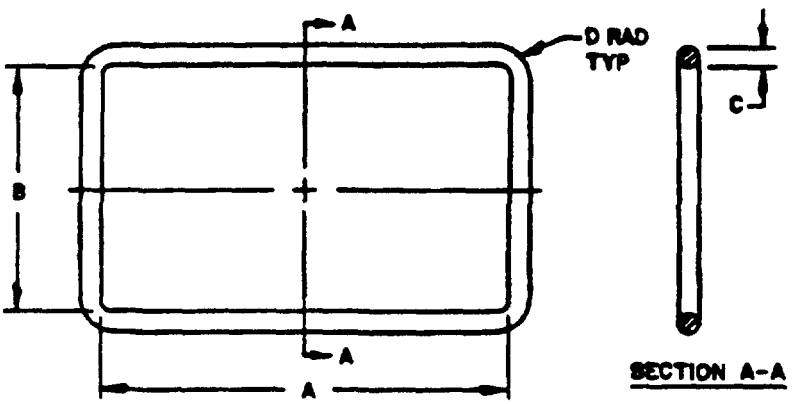

Used with part no	A	B	C Dia	D
048, 049, 050, 051, 052, 053	2 710 ± 005 (68 83) (13)	1 320 ± 005 (33.53) (13)	.080 ± 002 (2 03) (05)	078 ± 004 (1 98) (10)
054, 055, 056, 057, 058, 059	1 750 + 010 (44 45) (25) -.000	960 + 010 (24.38) (25) - 000	080 ± 002 (2 03) (05)	.078 + 004 (1 98) (10) - 000
060, 061, 062, 063, 064, 065	1 214 ± 005 (30 84) (13)	635 ± 005 (16 13) (13)	.070 ± 003 (1.78) (.08)	038 ± 004 (97) (10)
066, 067, 068, 069, 070, 071	1 106 ± 005 (28 09) (13)	553 ± 005 (14.05) (13)	080 ± 003 (2.03) (08)	.038 ± 004 (.97) (10)
078, 079, 080, 081, 082, 083	876 ± 005 (22 25) (13)	446 ± 005 (11 33) (13)	.070 ± 003 (1 78) (08)	038 ± 004 (97) (10)

NOTES
1 Dimensions are in inches
2 Metric equivalents are given for general information only and are based upon 1 00 inch = 25 4 mm
3 Metric equivalents are in parentheses

FIGURE 2 Gasket

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:57Z
Check the source to verify that this is the current version before use.

REQUIREMENTS.

Dimensions and configuration:
Flange: See figure 1 and table I.
Gasket See figure 2.

Material: Metallic alloy as specified in table I.
Materials supplied with flanges: See table II.

Marking
Part number: M39000/3-(dash number from table I).
Location: See figure 1.

Cross reference and frequency range: See table III.

TABLE II. Items supplied with flanges.

Flange part No. M39000/3-	Gasket	Socket head cap screw	Spring lockwasher
001, 002	—	.250-20 UNC-2A 2 in. long (6 ea)	.250 x .062 (6 ea)
004, 005	—	.250-20 UNC-2A 1.5 in. long (6 ea)	.250 x .062 (6 ea)
007, 008	—	.138-32 UNC-2A 1.75 in. long (4 ea)	.138 x .031 (4 ea)
010, 011, 013, 014	—	.138-32 UNC-2A 1.25 in. long (4 ea)	.138 x .031 (4 ea)
016, 017, 019, 020, 022, 023	—	.112-40 UNC-2A .50 in. long (2 ea)	.112 x .025 (2 ea)
024, 025, 026, 027, 028, 029	—	.138-32 UNC-2A .875 in. long (4 ea)	.138 x .031 (4 ea)
030, 031, 032, 033, 034, 035, 036, 037, 038, 039, 040, 041, 042, 043, 044, 045, 046, 047	—	.138-32 UNC-2A .625 in. long (4 ea)	.138 x .031 (4 ea)
048, 049, 050, 051, 052, 053	See figure 2 (1 ea)	.138-32 UNC-2A .875 in. long (4 ea)	.138 x .031 (4 ea)
054, 055, 056, 057, 058, 059, 060, 061, 062, 063, 064, 065, 066, 067, 068, 069, 070, 071	See figure 2 (1 ea)	.138-32 UNC-2A .625 in. long (4 ea)	.138 x .031 (4 ea)
072, 073, 074, 075, 076, 077	—	.138-32 UNC-2A .625 in. long (2 ea)	.138 x .031 (2 ea)
078, 079, 080, 081, 082, 083	See figure 2 (1 ea)	.138-32 UNC-2A .625 in. long (2 ea)	.138 x .031 (2 ea)
084, 085, 086, 087, 088, 089	—	.112-40 UNC-2A .50 in. long (2 ea)	.112 x .025 (2 ea)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:57Z
Check the source to verify that this is the current version before use.

TABLE III. Cross reference and frequency range.

Part number 1/ M39000/3-	AN nomenclature	Frequency range (GHz)
001	UG-1565/U	.84- 2.00
002	UG-1566/U	.84- 2.00
004	UG-1568/U	1.50- 3.60
005	UG-1569/U	1.50- 3.60
007	UG-1571/U	2.00- 4.80
008	UG-1572/U	2.00- 4.80
010	UG-1574/U	3.50- 8.20
011	UG-1575/U	3.50- 8.20
013	UG-1577/U	4.75-11.00
014	UG-1578/U	4.75-11.00
016	UG-1580/U	7.50-18.00
017	UG-1581/U	7.50-18.00
019	UG-1583/U	11.00-26.50
020	UG-1584/U	11.00-26.50
022	UG-1586/U	18.00-40.00
023	UG-1587/U	18.00-40.00
024, 025, 026, 027, 028, 029 048, 049, 050, 051, 052, 053	---	2.00- 4.80
030, 031, 032, 033, 034, 035, 054, 055, 056, 057, 058, 059	---	3.50- 8.20
036, 037, 038, 039, 040, 041, 060, 061, 062, 063, 064, 065	---	4.75-11.00
042, 043, 044, 045, 046, 047, 066, 067, 068, 069, 070, 071	---	4.75-11.00
072, 073, 074, 075, 076, 077, 078, 079, 080, 081, 082, 083	---	7.50-18.00
084, 085, 086, 087, 088, 089	---	18.00-40.00

1/ Dash numbers 003 (UG-1567/U), 006 (UG-1570/U), 009 (UG-1573/U), 012 (UG-1576/U), 015 (UG-1579/U), 018 (UG-1582/U), 021 (UG-1585/U), and 024 (UG-1588/U) have been deleted from specifications.

Custodians:
Army - EL
Navy - EC
Air Force - 85

Review activities:
Army -
Navy - SH
Air Force - 11, 99
DLA - ES

User activities:
Army - AV, AR
Navy - MC, AS, OS, SH, CG
Air Force - 14, 19

Preparing activity
Navy - EC

Agent:
DLA - ES

(Project 5985-0854-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:57Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS This form is provided to solicit beneficial comments which may improve this document and enhance its use DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed

NOTE This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements

DOCUMENT IDENTIFIER *(Number)* AND TITLE

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1 ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDED WORDING CHANGE

C REASON FOR RECOMMENDED CHANGE(S)

2 REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO

DATE

DD FORM 1 OCT 76 **1426**

EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:57Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
NAVAL ELECTRONIC SYSTEMS COMMAND
WASHINGTON, D.C. 20360

POSTAGE AND FEES PAID
NAVY DEPARTMENT
DOD 316

OFFICAL BUSINESS

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, D. C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:57Z
Check the source to verify that this is the current version before use.