INCH-POUND

MIL-PRF-39002/1F
14 May 2004
SUPERSEDING
MIL-PRF-39002/1E
1 February 1999

PERFORMANCE SPECIFICATION


RESISTOR, VARIABLE, WIRE WOUND,
SEMI-PRECISION, STYLE RK09

This specification is approved for use by all Departments
And Agencies of the Departments of Defense.

1. SCOPE

1.1 Scope. This specification covers the associated requirements for a variable, wire-wound, semi-precision resistors. These resistors are capable of full load operation at a maximum ambient temperature of 85°C, and suitable for continuous operation. These resistors have a tolerance of ±5 percent.

1.2 Part or Identifying Number (PIN). Resistors covered by this specification are identified by a PIN which consists of the basic number of this specification and a coded dash number taken from table I. The PIN is in the following form:

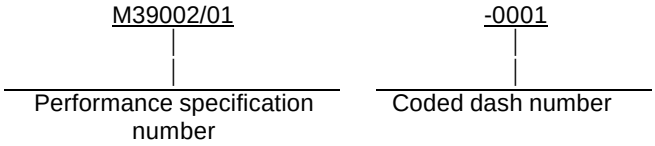

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information are as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3 and 4 of this specification, whether or not they are listed.

Comments, suggestions, or questions on this document should be addressed to: Defense Supply Center, Columbus, ATTN: DSCC-VAT, Post Office Box 3990, Columbus Ohio 43216-5000, or emailed to resistor@dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at www.dodssp.daps.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:00Z
Check the source to verify that this is the current version before use.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

DEPARTMENT OF DEFENSE SPECIFICATION

MIL-PRF-39002 - Resistor, Variable, Wire-Wound, Semi-Precision, General Specification for.

DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-202 - Test Method Standard, Electronic and Electrical Component Parts.

(Copies of these documents are available online at http://assist.daps.dla.mil/quicksearch/ or www.dodssp.daps.mil or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the reference cited herein (except for related specification sheets), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 General. The requirements for acquiring the product described herein shall consist of this document and MIL-PRF-39002.

3.2 Interface and physical dimensions. Resistors shall meet the interface and physical dimensions specified on figure 1, as applicable.

3.3 Power rating. The power rating shall be 1.5 watts based on full load operation at an ambient temperature of 85°C.

3.4 Resistance value. Resistance value shall be ion accordance with table I.

3.5 Shaft length. Shaft length shall be in accordance with table I.

3.6 Shaft style. Shaft style shall be in accordance with table I.

3.7 Bushing. The bushing shall be in accordance with table I.

3.8 Nominal resolution. Nominal resolution shall be in accordance with table I.

3.9 Rated working voltage. Rated working voltage shall be in accordance with table I.


3.10 Mechanical travel. The mechanical travel shall be 300° ±5°.

3.11 Actual effective electrical travel. The actual effective electrical travel shall be 300° ±5°.

3.12 End resistance. The end resistance shall not exceed 3 percent of the nominal total resistance value or 1 ohm, whichever is greater.

3.13 Electrical output. The electrical output (in terms of percent of applied voltage) is linear with respect to the angular position of the contact arm.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:00Z
Check the source to verify that this is the current version before use.

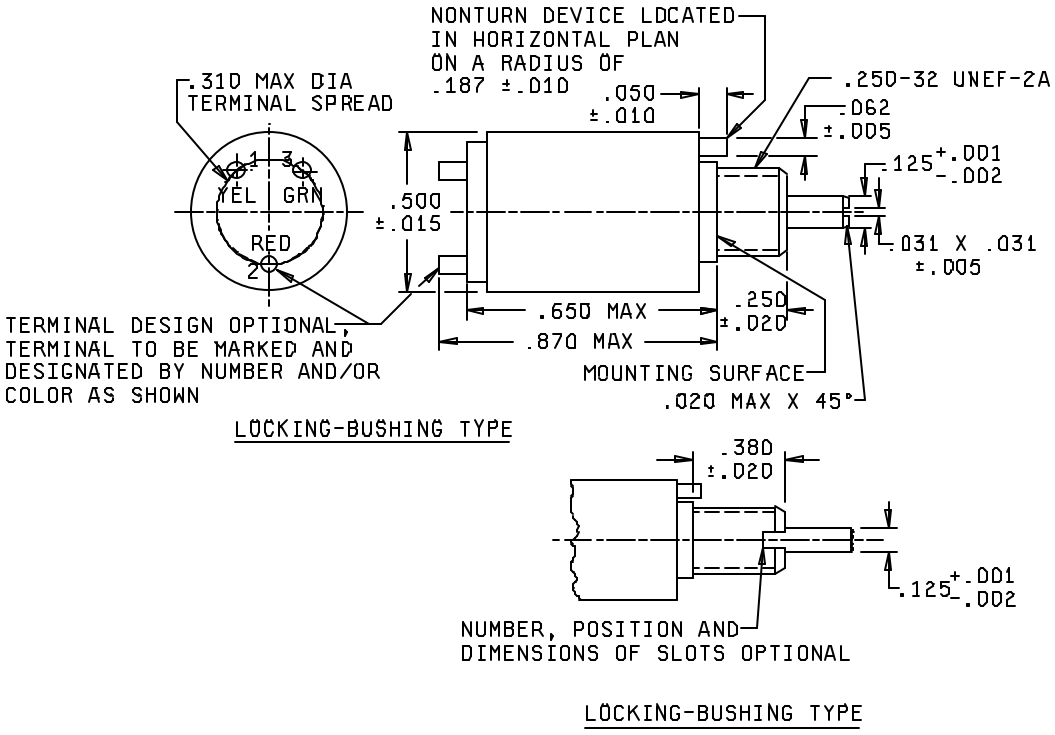

Inches	mm	Inches	mm	Inches	mm
.001	0.03	.031	0.79	.310	7.87
.002	0.05	.050	1.27	.380	9.65
.005	0.13	.062	1.57	.500	12.70
.010	0.25	.125	3.18	.650	16.51
.015	0.38	.187	4.75	.870	22.10
.020	0.51	.250	6.35		

NOTE:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 1. Style RK09 resistor.

3.14 Hardware. The mounting nut supplied shall be 0.0625 inch (1.588 mm) thick and shall measure 0.3125 inch (7.938 mm) across the hexagonal flats. For locking bushings, the locking nut shall be 0.125 inch (3.18 mm) thick and shall measure 0.3125 inch (7.938 mm) across the hexagonal flats. Thread size shall be 1/4-32NEF-2B. An internal-tooth lock washer shall be supplied and when mounted, shall have a maximum thickness of approximately 0.045 inch (1.14 mm). If retainer rings are used, they shall be not thicker than 0.032 inch (0.81 mm).

3.15 Marking. Due to size limitations, marking of the schematic diagram is optional.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:00Z
Check the source to verify that this is the current version before use.

4. VERIFICATION

4.1 Sampling and inspection. Sampling and inspection shall be in accordance with MIL-PRF-39002.

TABLE I. Style RK09 resistor.

Type designation 1/	Shaft length Inches ±.031 shaft style	Nominal total resistance value (ohms)	Nominal resolution 2/ (percent)	Rated ac and dc working voltage (volts)	Terminal	Dash number	
						Locking bushing	Standard bushing
RK09UACS100	.500 inch slotted	10	.66	3.8	S	0001	NA
RK09UACS150	.500 inch slotted	15	.88	4.9	S	0002	NA
RK09UACS200	.500 inch slotted	20	.89	5.7	S	0003	NA
RK09UACS250	.500 inch slotted	25	.80	6.2	S	0004	NA
RK09UACS350	.500 inch slotted	35	.72	7.3	S	0005	NA
RK09UACS500	.500 inch slotted	50	.65	8.6	S	0006	NA
RK09UACS750	.500 inch slotted	75	.55	10	S	0007	NA
RK09UACS101	.500 inch slotted	100	.68	12	S	0008	NA
RK09UACS151	.500 inch slotted	150	.41	14	S	0009	NA
RK09UACS201	.500 inch slotted	200	.55	17.4	S	0010	NA
RK09UACS251	.500 inch slotted	250	.39	19	S	0011	NA
RK09UACS351	.500 inch slotted	350	.36	23	S	0012	NA
RK09UACS501	.500 inch slotted	500	.42	27	S	0013	NA
RK09UACS751	.500 inch slotted	750	.35	32	S	0014	NA
RK09UACS102	.500 inch slotted	1,000	.34	39	S	0015	NA
RK09UACS152	.500 inch slotted	1,500	.31	46	S	0016	NA
RK09UACS202	.500 inch slotted	2,000	.23	55	S	0017	NA
RK09UACS252	.500 inch slotted	2,500	.21	61	S	0018	NA
RK09UACS352	.500 inch slotted	3,500	.21	73	S	0019	NA
RK09UACS502	.500 inch slotted	5,000	.17	86	S	0020	NA
RK09UACS752	.500 inch slotted	7,500	.21	104	S	0021	NA
RK09UACS103	.500 inch slotted	10,000	.15	122	S	0022	NA
RK09UACS153	.500 inch slotted	15,000	.13	150	S	0023	NA
RK09UACS203	.500 inch slotted	3/ 20,000	.12	173	S	0024	NA
RK09UACS253	.500 inch slotted	25,000	.114	194	S	0025	NA
RK09UACS353	.500 inch slotted	35,000	.102	229	S	0026	NA
RK09UACS503	.500 inch slotted	50,000	.080	272	S	0027	NA
RK09UACS753	.500 inch slotted	4/ 75,000	.060	290	S	0190	NA
RK09UACS104	.500 inch slotted	4/ 100,000	.045	300	S	0191	NA

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:00Z
Check the source to verify that this is the current version before use.

TABLE I. Style RK09 resistor – Continued.

Type designation 1/	Shaft length Inches ±.031 shaft style	Nominal total resistance value (ohms)	Nominal resolution 2/ (percent)	Rated ac and dc working voltage (volts)	Terminal	Dash number	
						Locking bushing	Standard bushing
RK09SACS100	.500 inch slotted	10	.66	3.8	S	NA	0028
RK09SACS150	.500 inch slotted	15	.88	4.9	S	NA	0029
RK09SACS200	.500 inch slotted	20	.89	5.7	S	NA	0030
RK09SACS250	.500 inch slotted	25	.80	6.2	S	NA	0031
RK09SACS350	.500 inch slotted	35	.72	7.3	S	NA	0032
RK09SACS500	.500 inch slotted	50	.65	8.6	S	NA	0033
RK09SACS750	.500 inch slotted	75	.55	10	S	NA	0034
RK09SACS101	.500 inch slotted	100	.68	12	S	NA	0035
RK09SACS151	.500 inch slotted	150	.41	14	S	NA	0036
RK09SACS201	.500 inch slotted	200	.55	17.4	S	NA	0037
RK09SACS251	.500 inch slotted	250	.39	19	S	NA	0038
RK09SACS351	.500 inch slotted	350	.36	23	S	NA	0039
RK09SACS501	.500 inch slotted	500	.42	27	S	NA	0040
RK09SACS751	.500 inch slotted	750	.35	32	S	NA	0041
RK09SACS102	.500 inch slotted	1,000	.34	39	S	NA	0042
RK09SACS152	.500 inch slotted	1,500	.31	46	S	NA	0043
RK09SACS202	.500 inch slotted	2,000	.23	55	S	NA	0044
RK09SACS252	.500 inch slotted	2,500	.21	61	S	NA	0045
RK09SACS352	.500 inch slotted	3,500	.21	73	S	NA	0046
RK09SACS502	.500 inch slotted	5,000	.17	86	S	NA	0047
RK09SACS752	.500 inch slotted	7,500	.21	104	S	NA	0048
RK09SACS103	.500 inch slotted	10,000	.15	122	S	NA	0049
RK09SACS153	.500 inch slotted	15,000	.13	150	S	NA	0050
RK09SACS203	.500 inch slotted	3/ 20,000	.12	173	S	NA	0051
RK09SACS253	.500 inch slotted	25,000	.114	194	S	NA	0052
RK09SACS353	.500 inch slotted	35,000	.102	229	S	NA	0053
RK09SACS503	.500 inch slotted	50,000	.080	272	S	NA	0054
RK09SACS753	.500 inch slotted	4/ 75,000	.060	290	S	NA	0192
RK09SACS104	.500 inch slotted	4/ 100,000	.045	300	S	NA	0193

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:00Z
Check the source to verify that this is the current version before use.

TABLE I. Style RK09 resistor - Continued.

Type designation 1/	Shaft length Inches ±.031 shaft style	Nominal total resistance value (ohms)	Nominal resolution 2/ (percent)	Rated ac and dc working voltage (volts)	Terminal	Dash number	
						Locking bushing	Standard bushing
RK09SBCS100	.625 inch slotted	10	.66	3.8	S	NA	0055
RK09SBCS150	.625 inch slotted	15	.88	4.9	S	NA	0056
RK09SBCS200	.625 inch slotted	20	.89	5.7	S	NA	0057
RK09SBCS250	.625 inch slotted	25	.80	6.2	S	NA	0058
RK09SBCS350	.625 inch slotted	35	.72	7.3	S	NA	0059
RK09SBCS500	.625 inch slotted	50	.65	8.6	S	NA	0060
RK09SBCS750	.625 inch slotted	75	.55	10	S	NA	0061
RK09SBCS101	.625 inch slotted	100	.68	12	S	NA	0062
RK09SBCS151	.625 inch slotted	150	.41	14	S	NA	0063
RK09SBCS201	.625 inch slotted	200	.55	17.4	S	NA	0064
RK09SBCS251	.625 inch slotted	250	.39	19	S	NA	0065
RK09SBCS351	.625 inch slotted	350	.36	23	S	NA	0066
RK09SBCS501	.625 inch slotted	500	.42	27	S	NA	0067
RK09SBCS751	.625 inch slotted	750	.35	32	S	NA	0068
RK09SBCS102	.625 inch slotted	1,000	.34	39	S	NA	0069
RK09SBCS152	.625 inch slotted	1,500	.31	46	S	NA	0070
RK09SBCS202	.625 inch slotted	2,000	.23	55	S	NA	0071
RK09SBCS252	.625 inch slotted	2,500	.21	61	S	NA	0072
RK09SBCS352	.625 inch slotted	3,500	.21	73	S	NA	0073
RK09SBCS502	.625 inch slotted	5,000	.17	86	S	NA	0074
RK09SBCS752	.625 inch slotted	7,500	.21	104	S	NA	0075
RK09SBCS103	.625 inch slotted	10,000	.15	122	S	NA	0076
RK09SBCS153	.625 inch slotted	15,000	.13	150	S	NA	0077
RK09SBCS203	.625 inch slotted	3/ 20,000	.12	173	S	NA	0078
RK09SBCS253	.625 inch slotted	25,000	.114	194	S	NA	0079
RK09SBCS353	.625 inch slotted	35,000	.102	229	S	NA	0080
RK09SBCS503	.625 inch slotted	50,000	.080	272	S	NA	0081
RK09SBCS753	.625 inch slotted	4/ 75,000	.060	290	S	NA	0194
RK09SBCS104	.625 inch slotted	4/ 100,000	.045	300	S	NA	0195

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:00Z
Check the source to verify that this is the current version before use.

TABLE I. Style RK09 resistor - Continued.

Type designation 1/	Shaft length Inches ±.031 shaft style	Nominal total resistance value (ohms)	Nominal resolution 2/ (percent)	Rated ac and dc working voltage (volts)	Terminal	Dash number	
						Locking bushing	Standard bushing
RK09UDCS100	.875 inch slotted	10	.66	3.8	S	0082	NA
RK09UDCS150	.875 inch slotted	15	.88	4.9	S	0083	NA
RK09UDCS200	.875 inch slotted	20	.89	5.7	S	0084	NA
RK09UDCS250	.875 inch slotted	25	.80	6.2	S	0085	NA
RK09UDCS350	.875 inch slotted	35	.72	7.3	S	0086	NA
RK09UDCS500	.875 inch slotted	50	.65	8.6	S	0087	NA
RK09UDCS750	.875 inch slotted	75	.55	10	S	0088	NA
RK09UDCS101	.875 inch slotted	100	.68	12	S	0089	NA
RK09UDCS151	.875 inch slotted	150	.41	14	S	0090	NA
RK09UDCS201	.875 inch slotted	200	.55	17.4	S	0091	NA
RK09UDCS251	.875 inch slotted	250	.39	19	S	0092	NA
RK09UDCS351	.875 inch slotted	350	.36	23	S	0093	NA
RK09UDCS501	.875 inch slotted	500	.42	27	S	0094	NA
RK09UDCS751	.875 inch slotted	750	.35	32	S	0095	NA
RK09UDCS102	.875 inch slotted	1,000	.34	39	S	0096	NA
RK09UDCS152	.875 inch slotted	1,500	.31	46	S	0097	NA
RK09UDCS202	.875 inch slotted	2,000	.23	55	S	0098	NA
RK09UDCS252	.875 inch slotted	2,500	.21	61	S	0099	NA
RK09UDCS352	.875 inch slotted	3,500	.21	73	S	0100	NA
RK09UDCS502	.875 inch slotted	5,000	.17	86	S	0101	NA
RK09UDCS752	.875 inch slotted	7,500	.21	104	S	0102	NA
RK09UDCS103	.875 inch slotted	10,000	.15	122	S	0103	NA
RK09UDCS153	.875 inch slotted	15,000	.13	150	S	0104	NA
RK09UDCS203	.875 inch slotted	3/ 20,000	.12	173	S	0105	NA
RK09UDCS253	.875 inch slotted	25,000	.114	194	S	0106	NA
RK09UDCS353	.875 inch slotted	35,000	.102	229	S	0107	NA
RK09UDCS503	.875 inch slotted	50,000	.080	272	S	0108	NA
RK09UDCS753	.875 inch slotted	4/ 75,000	.060	290	S	0196	NA
RK09UDCS104	.875 inch slotted	4/ 100,000	.045	300	S	0197	NA

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:00Z
Check the source to verify that this is the current version before use.

TABLE I. Style RK09 resistor - Continued.

Type designation 1/	Shaft length Inches ±.031 shaft style	Nominal total resistance value (ohms)	Nominal resolution 2/ (percent)	Rated ac and dc working voltage (volts)	Terminal	Dash number	
						Locking bushing	Standard bushing
RK09SDCS100	.875 inch slotted	10	.66	3.8	S	NA	0109
RK09SDCS150	.875 inch slotted	15	.88	4.9	S	NA	0110
RK09SDCS200	.875 inch slotted	20	.89	5.7	S	NA	0111
RK09SDCS250	.875 inch slotted	25	.80	6.2	S	NA	0112
RK09SDCS350	.875 inch slotted	35	.72	7.3	S	NA	0113
RK09SDCS500	.875 inch slotted	50	.65	8.6	S	NA	0114
RK09SDCS750	.875 inch slotted	75	.55	10	S	NA	0115
RK09SDCS101	.875 inch slotted	100	.68	12	S	NA	0116
RK09SDCS151	.875 inch slotted	150	.41	14	S	NA	0117
RK09SDCS201	.875 inch slotted	200	.55	17.4	S	NA	0118
RK09SDCS251	.875 inch slotted	250	.39	19	S	NA	0119
RK09SDCS351	.875 inch slotted	350	.36	23	S	NA	0120
RK09SDCS501	.875 inch slotted	500	.42	27	S	NA	0121
RK09SDCS751	.875 inch slotted	750	.35	32	S	NA	0122
RK09SDCS102	.875 inch slotted	1,000	.34	39	S	NA	0123
RK09SDCS152	.875 inch slotted	1,500	.31	46	S	NA	0124
RK09SDCS202	.875 inch slotted	2,000	.23	55	S	NA	0125
RK09SDCS252	.875 inch slotted	2,500	.21	61	S	NA	0126
RK09SDCS352	.875 inch slotted	3,500	.21	73	S	NA	0127
RK09SDCS502	.875 inch slotted	5,000	.17	86	S	NA	0128
RK09SDCS752	.875 inch slotted	7,500	.21	104	S	NA	0129
RK09SDCS103	.875 inch slotted	10,000	.15	122	S	NA	0130
RK09SDCS153	.875 inch slotted	15,000	.13	150	S	NA	0131
RK09SDCS203	.875 inch slotted	3/ 20,000	.12	173	S	NA	0132
RK09SDCS253	.875 inch slotted	25,000	.114	194	S	NA	0133
RK09SDCS353	.875 inch slotted	35,000	.102	229	S	NA	0134
RK09SDCS503	.875 inch slotted	50,000	.080	272	S	NA	0135
RK09SDCS753	.875 inch slotted	4/ 75,000	.060	290	S	NA	0198
RK09SDCS104	.875 inch slotted	4/ 100,000	.045	300	S	NA	0199

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:00Z
Check the source to verify that this is the current version before use.

TABLE I. Style RK09 resistor - Continued.

Type designation 1/	Shaft length Inches ±.031 shaft style	Nominal total resistance value (ohms)	Nominal resolution 2/ (percent)	Rated ac and dc working voltage (volts)	Terminal	Dash number	
						Locking bushing	Standard bushing
RK09SGCS100	1.250 inch slotted	10	.66	3.8	S	NA	0136
RK09SGCS150	1.250 inch slotted	15	.88	4.9	S	NA	0137
RK09SGCS200	1.250 inch slotted	20	.89	5.7	S	NA	0138
RK09SGCS250	1.250 inch slotted	25	.80	6.2	S	NA	0139
RK09SGCS350	1.250 inch slotted	35	.72	7.3	S	NA	0140
RK09SGCS500	1.250 inch slotted	50	.65	8.6	S	NA	0141
RK09SGCS750	1.250 inch slotted	75	.55	10	S	NA	0142
RK09SGCS101	1.250 inch slotted	100	.68	12	S	NA	0143
RK09SGCS151	1.250 inch slotted	150	.41	14	S	NA	0144
RK09SGCS201	1.250 inch slotted	200	.55	17.4	S	NA	0145
RK09SGCS251	1.250 inch slotted	250	.39	19	S	NA	0146
RK09SGCS351	1.250 inch slotted	350	.36	23	S	NA	0147
RK09SGCS501	1.250 inch slotted	500	.42	27	S	NA	0148
RK09SGCS751	1.250 inch slotted	750	.35	32	S	NA	0149
RK09SGCS102	1.250 inch slotted	1,000	.34	39	S	NA	0150
RK09SGCS152	1.250 inch slotted	1,500	.31	46	S	NA	0151
RK09SGCS202	1.250 inch slotted	2,000	.23	55	S	NA	0152
RK09SGCS252	1.250 inch slotted	2,500	.21	61	S	NA	0153
RK09SGCS352	1.250 inch slotted	3,500	.21	73	S	NA	0154
RK09SGCS502	1.250 inch slotted	5,000	.17	86	S	NA	0155
RK09SGCS752	1.250 inch slotted	7,500	.21	104	S	NA	0156
RK09SGCS103	1.250 inch slotted	10,000	.15	122	S	NA	0157
RK09SGCS153	1.250 inch slotted	15,000	.13	150	S	NA	0158
RK09SGCS203	1.250 inch slotted	3/ 20,000	.12	173	S	NA	0159
RK09SGCS253	1.250 inch slotted	25,000	.114	194	S	NA	0160
RK09SGCS353	1.250 inch slotted	35,000	.102	229	S	NA	0161
RK09SGCS503	1.250 inch slotted	50,000	.080	272	S	NA	0162
RK09SGCS753	1.250 inch slotted	4/ 75,000	.060	290	S	NA	0200
RK09SGCS104	1.250 inch slotted	4/ 100,000	.045	300	S	NA	0201

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:00Z
Check the source to verify that this is the current version before use.

TABLE I. Style RK09 resistor - Continued.

Type designation 1/	Shaft length Inches ±.031 shaft style	Nominal total resistance value (ohms)	Nominal resolution 2/ (percent)	Rated ac and dc working voltage (volts)	Terminal	Dash number	
						Locking bushing	Standard bushing
RK09SKCS100	2.500 inch slotted	10	.66	3.8	S	NA	0163
RK09SKCS150	2.500 inch slotted	15	.88	4.9	S	NA	0164
RK09SKCS200	2.500 inch slotted	20	.89	5.7	S	NA	0165
RK09SKCS250	2.500 inch slotted	25	.80	6.2	S	NA	0166
RK09SKCS350	2.500 inch slotted	35	.72	7.3	S	NA	0167
RK09SKCS500	2.500 inch slotted	50	.65	8.6	S	NA	0168
RK09SKCS750	2.500 inch slotted	75	.55	10	S	NA	0169
RK09SKCS101	2.500 inch slotted	100	.68	12	S	NA	0170
RK09SKCS151	2.500 inch slotted	150	.41	14	S	NA	0171
RK09SKCS201	2.500 inch slotted	200	.55	17.4	S	NA	0172
RK09SKCS251	2.500 inch slotted	250	.39	19	S	NA	0173
RK09SKCS351	2.500 inch slotted	350	.36	23	S	NA	0174
RK09SKCS501	2.500 inch slotted	500	.42	27	S	NA	0175
RK09SKCS751	2.500 inch slotted	750	.35	32	S	NA	0176
RK09SKCS102	2.500 inch slotted	1,000	.34	39	S	NA	0177
RK09SKCS152	2.500 inch slotted	1,500	.31	46	S	NA	0178
RK09SKCS202	2.500 inch slotted	2,000	.23	55	S	NA	0179
RK09SKCS252	2.500 inch slotted	2,500	.21	61	S	NA	0180
RK09SKCS352	2.500 inch slotted	3,500	.21	73	S	NA	0181
RK09SKCS502	2.500 inch slotted	5,000	.17	86	S	NA	0182
RK09SKCS752	2.500 inch slotted	7,500	.21	104	S	NA	0183
RK09SKCS103	2.500 inch slotted	10,000	.15	122	S	NA	0184
RK09SKCS153	2.500 inch slotted	15,000	.13	150	S	NA	0185
RK09SKCS203	2.500 inch slotted	3/ 20,000	.12	173	S	NA	0186
RK09SKCS253	2.500 inch slotted	25,000	.114	194	S	NA	0187
RK09SKCS353	2.500 inch slotted	35,000	.102	229	S	NA	0188
RK09SKCS503	2.500 inch slotted	50,000	.080	272	S	NA	0189
RK09SKCS753	2.500 inch slotted	4/ 75,000	.060	290	S	NA	0202
RK09SKCS104	2.500 inch slotted	4/ 100,000	.045	300	S	NA	0203

1/ For reference purposes only.
2/ Percent of resolution = 1/N x 100. N = number of turns.
3/ Maximum value based on use of wire having no less than .001 inch (0.13 mm) nominal diameter.
NOTE: For Navy use, resistance values shall be based on the use of wire having no maximum less than .001 inch (0.03 mm) wire diameter.
4/ Valued based on use of wire having no less than 0.0006 inch (0.15 mm) nominal diameter.
NOTE: For Army and Air Force use, resistance values shall be based on the of wire having no less than 0.0006 inch (0.15 mm) wire diameter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:00Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activity within the Military Department or Defense Agency, or within the military service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Notes. The notes specified in MIL-PRF-39002 are applicable to this specification.

6.2 Acquisition requirements. Acquisition documents must specify the following:


a. Title, number, date of this specification, and complete PIN (see 1.2).

b. If not otherwise specified (see 2.1), the versions of the individual documents referenced will be those in effect on the date of release of the solicitation.

C Packaging requirements.

6.3 Type designation. The type designation for identifying these parts is as follows:

NOTE: This is for information only. For the correct PIN, see 1.2.

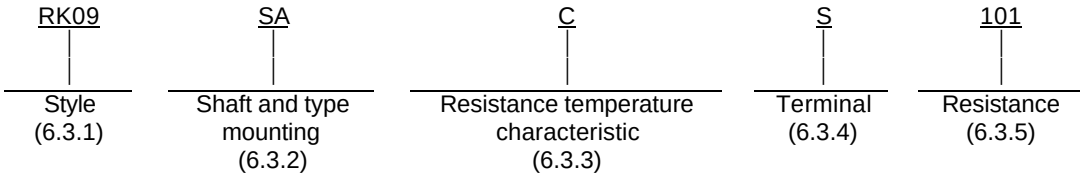

6.3.1 Style. The style is identified by the two letter symbol "RK" followed by a two digit number; the letters identify semi-precision wire-wound, variable resistors, and the number identified the physical size.

6.3.2 Shaft and type mounting. The style of shaft, type of mounting, and length of shaft is identified by a two letter symbol. The first letter indicates the style of shaft and type of mounting and the second letter indicates the length of shaft (see MIL-PRF-39002).

6.3.3 Resistance temperature characteristic. The resistance temperature characteristic of the completed resistor is identified by a single letter (see MIL-PRF-39002).

6.3.4 Terminals. The terminals are identified by a single letter (see MIL-PRF-39002).

6.3.5 Resistance. The nominal total resistance value expressed in ohms is identified by a three digit number; the first two digits represent significant figures and the last digit specified the number of zeros to follow (see MIL-PRF-39002).

6.4 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:00Z
Check the source to verify that this is the current version before use.

Custodian:
Army – CR
DLA – CC

Preparing activity:
DLA – CC

Review activity:
Army – AR

(Project 5905-2001)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at www.dodssp.daps.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:00Z
Check the source to verify that this is the current version before use.