INCH-POUND

MIL-C-39003/1G
31 January 1992.
SUPERSEDING
MIL-C-39003/1F
2 February 1984

MILITARY SPECIFICATION SHEET

CAPACITORS, FIXED, ELECTROLYTIC (SOLID ELECTROLYTE), TANTALUM,
(POLARIZED, SINTERED SLUG), ESTABLISHED RELIABILITY,
STYLE CSR13


This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-39003.

(G)


FAILURE RATE LEVELS "M", "P", AND "R" ARE INACTIVE FOR NEW DESIGN AFTER 2 FEBRUARY 1984

FAILURE RATE LEVEL "S" IS INACTIVE FOR NEW DESIGN AFTER 15 AUGUST 1984.

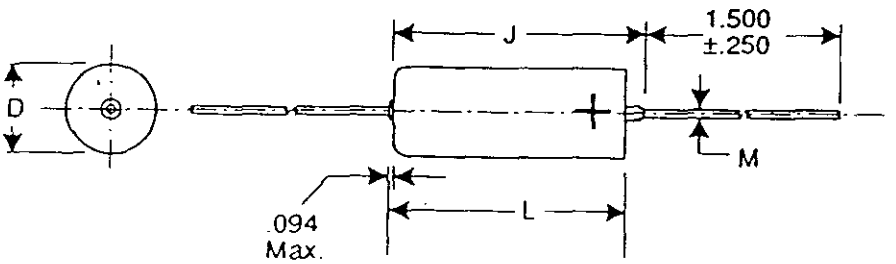

Case size	Dimensions			
	L ±.031	D +.016 -.015	M ±.002	J Max
A	.286	.135	.020	.422
B	.474	.185	.020	.610
C	.686	.289	.025	.822
D	.786	.351	.025	.922

Inches	mm	Inches	mm	Inches	mm
.002	.05	.135	3.43	.474	12.04
.015	.38	.185	4.70	.610	15.49
.016	.41	.250	6.35	.686	17.42
.020	.51	.286	7.26	.786	19.96
.025	.64	.289	7.34	.822	20.88
.031	.79	.351	8.92	.922	23.42
.094	2.39	.422	10.72	1.500	38.10



CIRCUIT DIAGRAM

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. The case insulation shall extend .015 (0.38 mm) minimum beyond each end. However, when a shrink-fitted insulation is used, it shall lap over the ends of the capacitor body.
4. Lead length may be a minimum of 1-inch long for use in tape and reel automatic insertion equipment, when specified.

FIGURE 1. Dimensions and configuration.

(G) denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:03Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figure 1.

Case type: Tubular, insulated.

Material: Metal (alloy unspecified).

Type of seal: Hermetic.

Leads: Type N-4, N-5, W-4, or W-5 of MIL-STD-1276.

DC rated voltage: See table I. Above +85°C, voltage derating is required (see MIL-C-39003).

Operating temperature: -55°C to +125°C.

Failure rate level: See table I.

DC leakage (DCL): See table I.

Capacitance (Cap.) (nom): See table I.

Cap. tolerance: ±5, ±10, or ±20 percent as shown in table I.

Dissipation factor (DF): See table I.

Stability at low and high temperatures: In accordance with MIL-C-39003.

Step 1 (+25°C):

DCL - See table I.
Cap. - Within tolerance of table I value.
DF - See table I.

Step 2 (-55°C):

ΔCap. - Not greater than ±10 percent of step 1 measured value.
DF - See table I.

Step 3 (+25°C):

DCL - See table I.
ΔCap. - Not greater than ±2 percent of step 1 measured value.
DF - See table I.

Step 4 (+85°C):

DCL - See table I.
ΔCap. - Not greater than ±8 percent of step 1 measured value.
DF - See table I.

Step 5 (+125°C):

DCL - See table I.
ΔCap. - Not greater than ±12 percent of step 1 measured value.
DF - See table I.

Step 6 (+25°C):

DCL - See table I.
ΔCap. - Not greater than ±2 percent of step 1 measured value.
DF - See table I.

Source: https://assist.dla.mil -- Downloaded: 20260-21T16:03Z
Check the source to verify that this is the current version before use.

TABLE I. Style CSR13 characteristics and dash numbers.

DC rated voltage	Cap. (nom)	Cap. tolerance	DC leakage at +25°C	DC leakage at +85°C	DC leakage at +125°C	Dissipation factor at -55°C +25°C	Dissipation factor at +85°C +125°C	Case size	Dash number M39003/01- failure rate level (%1,000 hrs.) M (1.0)	P (0.1)	R (0.01)	S (0.001)	B (0.1)	C (0.01)	D (0.001)
volts	µF	percent	µA	µA	µA	percent	percent								
6	5.6	5	.3	6.0	7.5	4	4	A	5001	5201	5401	5601	6001	7001	8001
6	5.6	10	.3	6.0	7.5	4	4	A	2241	2481	2721	2961	6002	7002	8002
6	6.8	5	.3	6.0	7.5	6	6	A	5002	5202	5402	5602	6003	7003	8003
6	6.8	10	.3	6.0	7.5	6	6	A	2242	2482	2722	2962	6004	7004	8004
6	6.8	20	.3	6.0	7.5	6	6	A	2243	2483	2723	2963	6005	7005	8005
6	47.0	5	1.5	24.0	30.0	6	6	B	5003	5203	5403	5603	6006	7006	8006
6	47.0	10	1.5	24.0	30.0	6	6	B	2244	2484	2724	2964	6007	7007	8007
6	47.0	20	1.5	24.0	30.0	6	6	B	2245	2485	2725	2965	6008	7008	8008
6	56.0	5	1.5	24.0	30.0	6	6	B	5004	5204	5404	5604	6009	7009	8009
6	56.0	10	1.5	24.0	30.0	6	6	B	2246	2486	2726	2966	6010	7010	8010
6	150.0	5	4.5	90.0	113.0	8	8	C	5005	5205	5405	5605	6011	7011	8011
6	150.0	10	4.5	90.0	113.0	8	8	C	2247	2487	2727	2967	6012	7012	8012
6	150.0	20	4.5	90.0	113.0	8	8	C	2248	2488	2728	2968	6013	7013	8013
6	180.0	5	5.5	110.0	138.0	8	8	C	5006	5206	5406	5606	6014	7014	8014
6	180.0	10	5.5	110.0	138.0	8	8	C	2249	2489	2729	2969	6015	7015	8015
6	270.0	5	6.5	130.0	163.0	8	8	D	5007	5207	5407	5607	6016	7016	8016
6	270.0	10	6.5	130.0	163.0	8	8	D	2250	2490	2730	2970	6017	7017	8017
6	330.0	5	7.5	150.0	188.0	8	8	D	5008	5208	5408	5608	6018	7018	8018
6	330.0	10	7.5	150.0	188.0	8	8	D	2251	2491	2731	2971	6019	7019	8019
6	330.0	20	7.5	150.0	188.0	8	8	D	2252	2492	2732	2972	6020	7020	8020
10	3.9	5	.3	6.0	7.5	4	4	A	5009	5209	5409	5609	6021	7021	8021
10	3.9	10	.3	6.0	7.5	4	4	A	2253	2493	2733	2973	6022	7022	8022
10	4.7	5	.4	7.0	8.8	4	4	A	5010	5210	5410	5610	6023	7023	8023
10	4.7	10	.4	7.0	8.8	4	4	A	2254	2494	2734	2974	6024	7024	8024
10	4.7	20	.4	7.0	8.8	4	4	A	2255	2495	2735	2975	6025	7025	8025
10	27.0	5	2.0	40.0	50.0	6	6	B	5011	5211	5411	5611	6026	7026	8026
10	27.0	10	2.0	40.0	50.0	6	6	B	2256	2496	2736	2976	6027	7027	8027
10	33.0	5	2.5	50.0	63.0	6	6	B	5012	5212	5412	5612	6028	7028	8028
10	33.0	10	2.5	50.0	63.0	6	6	B	2257	2497	2737	2977	6029	7029	8029
10	33.0	20	2.5	50.0	63.0	6	6	B	2258	2498	2738	2978	6030	7030	8030
10	39.0	5	2.5	50.0	63.0	6	6	B	5013	5213	5413	5613	6031	7031	8031
10	39.0	10	2.5	50.0	63.0	6	6	B	2259	2499	2739	2979	6032	7032	8032
10	82.0	5	4.0	80.0	100.0	6	6	C	5014	5214	5414	5614	6033	7033	8033
10	82.0	10	4.0	80.0	100.0	6	6	C	2260	2500	2740	2980	6034	7034	8034
10	100.0	5	5.0	100.0	125.0	8	8	C	5015	5215	5415	5615	6035	7035	8035
10	100.0	10	5.0	100.0	125.0	8	8	C	2261	2501	2741	2981	6036	7036	8036
10	100.0	20	5.0	100.0	125.0	8	8	C	2262	2502	2742	2982	6037	7037	8037

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:03Z
Check the source to verify that this is the current version before use.

Surge voltage: In accordance with MIL-C-39003.

DCL - See table I.
ΔCap. - Not greater than ±2 percent of initial measured value.
DF - See table I.

Life: Method 108 of MIL-STD-202:

240, 1,000, and 2,000 hours.

At +25°C (as applicable):

DCL - 200 percent of initial limit.
ΔCap. - Not greater than ±2 percent of initial measured value.
DF - See table I.

At +85°C:

DCL - See table I.

At +125°C:

DCL - See table I.

4,000, 6,000, 8,000, and 10,000 hours:

At +25°C (as applicable):

DCL - 400 percent of initial limit.
ΔCap. - Not greater than ±10 percent of initial measured value.
DF - See table I.

At +85°C:

DCL - 200 percent of initial limit.

At +125°C:

DCL - 200 percent of initial limit.

Marking: In accordance with MIL-C-39003.

Part or Identifying Number (PIN): M39003/01- (dash number from table I).

Substitutability data:

Substitutability for failure rate levels shall be as follows: In accordance with MIL-C-39003.

Substitutability for capacitance tolerance shall be as follows:

Cap tolerance	Will replace cap tolerance
5 percent	10 percent, 20 percent
10 percent	20 percent

For a list of superseded PIN's, see tables II and III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:03Z
Check the source to verify that this is the current version before use.

TABLE I. Style CSR13 characteristics and dash numbers.

DC rated voltage	Cap. (nom)	Cap. tolerance	DC leakage at			Dissipation factor at		Case size	Dash number M39003/01- failure rate level (%1,000 hrs.)						
			+25°C	+85°C	+125°C	-55°C +25°C	+85°C +125°C		M (1.0)	P (0.1)	R (0.01)	S (0.001)	B (0.1)	C (0.01)	D (0.001)
volts	µF	percent	µA	µA	µA	percent	percent								
10	120.0	5	6.0	120.0	150.0	8	8	C	5016	5216	5416	5616	6038	7038	8038
10	120.0	10	6.0	120.0	150.0	8	8	C	2263	2503	2743	2983	6039	7039	8039
10	180.0	5	9.0	180.0	226.0	8	8	D	5017	5217	5417	5617	6040	7040	8040
10	180.0	10	9.0	180.0	226.0	8	8	D	2264	2504	2744	2984	6041	7041	8041
10	220.0	5	10.0	200.0	250.0	8	8	D	5018	5218	5418	5618	6042	7042	8042
10	220.0	10	10.0	200.0	250.0	8	8	D	2265	2505	2745	2985	6043	7043	8043
10	220.0	20	10.0	200.0	250.0	8	8	D	2266	2506	2746	2986	6044	7044	8044
15	2.7	5	.3	6.0	7.5	4	4	A	5019	5219	5419	5619	6045	7045	8045
15	2.7	10	.3	6.0	7.5	4	4	A	2267	2507	2747	2987	6046	7046	8046
15	3.3	5	.4	8.0	10.0	4	4	A	5020	5220	5420	5620	6047	7047	8047
15	3.3	10	.4	8.0	10.0	4	4	A	2268	2508	2748	2988	6048	7048	8048
15	3.3	20	.4	8.0	10.0	4	4	A	2269	2509	2749	2989	6049	7049	8049
15	18.0	5	2.0	35.0	44.0	6	6	B	5021	5221	5421	5621	6050	7050	8050
15	18.0	10	2.0	35.0	44.0	6	6	B	2270	2510	2750	2990	6051	7051	8051
15	22.0	5	2.0	40.0	50.0	6	6	B	5022	5222	5422	5622	6052	7052	8052
15	22.0	10	2.0	40.0	50.0	6	6	B	2271	2511	2751	2991	6053	7053	8053
15	22.0	20	2.0	40.0	50.0	6	6	B	2272	2512	2752	2992	6054	7054	8054
15	56.0	5	4.0	80.0	100.0	6	6	C	5023	5223	5423	5623	6055	7055	8055
15	56.0	10	4.0	80.0	100.0	6	6	C	2273	2513	2753	2993	6056	7056	8056
15	68.0	5	5.0	100.0	125.0	6	6	C	5024	5224	5424	5624	6057	7057	8057
15	68.0	10	5.0	100.0	125.0	6	6	C	2274	2514	2754	2994	6058	7058	8058
15	68.0	20	5.0	100.0	125.0	6	6	C	2275	2515	2755	2995	6059	7059	8059
15	120.0	5	9.0	180.0	226.0	8	8	D	5025	5225	5425	5625	6060	7060	8060
15	120.0	10	9.0	180.0	226.0	8	8	D	2276	2516	2756	2996	6061	7061	8061
15	150.0	5	10.0	200.0	250.0	8	8	D	5026	5226	5426	5626	6062	7062	8062
15	150.0	10	10.0	200.0	250.0	8	8	D	2277	2517	2757	2997	6063	7063	8063
15	150.0	20	10.0	200.0	250.0	8	8	D	2278	2518	2758	2998	6064	7064	8064
20	1.2	5	.3	6.0	7.5	4	4	A	5027	5227	5427	5627	6065	7065	8065
20	1.2	10	.3	6.0	7.5	4	4	A	2279	2519	2759	2999	6066	7066	8066
20	1.5	5	.3	6.0	7.5	4	4	A	5028	5228	5428	5628	6067	7067	8067
20	1.5	10	.3	6.0	7.5	4	4	A	2280	2520	2760	3000	6068	7068	8068
20	1.5	20	.3	6.0	7.5	4	4	A	2281	2521	2761	3001	6069	7069	8069
20	1.8	5	.3	6.0	7.5	4	4	A	5029	5229	5429	5629	6070	7070	8070
20	1.8	10	.3	6.0	7.5	4	4	A	2282	2522	2762	3002	6071	7071	8071
20	2.2	5	.4	8.0	10.0	4	4	A	5030	5230	5430	5630	6072	7072	8072
20	2.2	10	.4	8.0	10.0	4	4	A	2283	2523	2763	3003	6073	7073	8073
20	2.2	20	.4	8.0	10.0	4	4	A	2284	2524	2764	3004	6074	7074	8074

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:03Z
Check the source to verify that this is the current version before use.

TABLE I. Style CSR13 characteristics and dash numbers.

DC rated voltage	Cap. (nom)	Cap. tolerance	DC leakage at			Dissipation factor at		Case size	Dash number M39003/01- failure rate level (%1,000 hrs.)						
			+25°C	+85°C	+125°C	-55°C +25°C	+85°C +125°C		M (1.0)	P (0.1)	R (0.01)	S (0.001)	B (0.1)	C (0.01)	D (0.001)
volts	µF	percent	µA	µA	µA	percent	percent								
20	8.2	5	1.0	20.0	25.0	6	6	B	5031	5231	5431	5631	6075	7075	8075
20	8.2	10	1.0	20.0	25.0	6	6	B	2285	2525	2765	3005	6076	7076	8076
20	10.0	5	1.5	30.0	38.0	6	6	B	5032	5232	5432	5632	6077	7077	8077
20	10.0	10	1.5	30.0	38.0	6	6	B	2286	2526	2766	3006	6078	7078	8078
20	10.0	20	1.5	30.0	38.0	6	6	B	2287	2527	2767	3007	6079	7079	8079
20	12.0	5	1.8	35.0	44.0	6	6	B	5033	5233	5433	5633	6080	7080	8080
20	12.0	10	1.8	35.0	44.0	6	6	B	2288	2528	2768	3008	6081	7081	8081
20	15.0	5	2.0	40.0	50.0	6	6	B	5034	5234	5434	5634	6082	7082	8082
20	15.0	10	2.0	40.0	50.0	6	6	B	2289	2529	2769	3009	6083	7083	8083
20	15.0	20	2.0	40.0	50.0	6	6	B	2290	2530	2770	3010	6084	7084	8084
20	27.0	5	2.5	50.0	63.0	6	6	C	5035	5235	5435	5635	6085	7085	8085
20	27.0	10	2.5	50.0	63.0	6	6	C	2291	2531	2771	3011	6086	7086	8086
20	33.0	5	3.5	70.0	88.0	6	6	C	5036	5236	5436	5636	6087	7087	8087
20	33.0	10	3.5	70.0	88.0	6	6	C	2292	2532	2772	3012	6088	7088	8088
20	33.0	20	3.5	70.0	88.0	6	6	C	2293	2533	2773	3013	6089	7089	8089
20	39.0	5	4.0	80.0	100.0	6	6	C	5037	5237	5437	5637	6090	7090	8090
20	39.0	10	4.0	80.0	100.0	6	6	C	2294	2534	2774	3014	6091	7091	8091
20	47.0	5	4.5	90.0	113.0	6	6	C	5038	5238	5438	5638	6092	7092	8092
20	47.0	10	4.5	90.0	113.0	6	6	C	2295	2535	2775	3015	6093	7093	8093
20	47.0	20	4.5	90.0	113.0	6	6	C	2296	2536	2776	3016	6094	7094	8094
20	56.0	5	5.5	110.0	138.0	6	6	D	5039	5239	5439	5639	6095	7095	8095
20	56.0	10	5.5	110.0	138.0	6	6	D	2297	2537	2777	3017	6096	7096	8096
20	68.0	5	7.0	140.0	175.0	6	6	D	5040	5240	5440	5640	6097	7097	8097
20	68.0	10	7.0	140.0	175.0	6	6	D	2298	2538	2778	3018	6098	7098	8098
20	68.0	20	7.0	140.0	175.0	6	6	D	2299	2539	2779	3019	6099	7099	8099
20	82.0	5	8.0	160.0	200.0	6	6	D	5041	5241	5441	5641	6100	7100	8100
20	82.0	10	8.0	160.0	200.0	6	6	D	2300	2540	2780	3020	6101	7101	8101
20	100.0	5	10.0	200.0	250.0	8	8	D	5042	5242	5442	5642	6102	7102	8102
20	100.0	10	10.0	200.0	250.0	8	8	D	2301	2541	2781	3021	6103	7103	8103
20	100.0	20	10.0	200.0	250.0	8	8	D	2302	2542	2782	3022	6104	7104	8104
35	5.6	5	1.3	25.0	32.0	4	4	B	5043	5243	5443	5643	6105	7105	8105
35	5.6	10	1.3	25.0	32.0	4	4	B	2303	2543	2783	3023	6106	7106	8106
35	6.8	5	1.5	30.0	38.0	6	6	B	5044	5244	5444	5644	6107	7107	8107
35	6.8	10	1.5	30.0	38.0	6	6	B	2304	2544	2784	3024	6108	7108	8108
35	6.8	20	1.5	30.0	38.0	6	6	B	2305	2545	2785	3025	6109	7109	8109
35	22.0	5	4.0	80.0	100.0	6	6	C	5045	5245	5445	5645	6110	7110	8110
35	22.0	10	4.0	80.0	100.0	6	6	C	2306	2546	2786	3026	6111	7111	8111
35	22.0	20	4.0	80.0	100.0	6	6	C	2307	2547	2787	3027	6112	7112	8112

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T16:03Z
Check the source to verify that this is the current version before use.

(G) TABLE I. Style CSR13 characteristics and dash numbers - Continued.

DC rated voltage	Cap. (nom)	Cap. tolerance	DC leakage at +25°C	DC leakage at +85°C	DC leakage at +125°C	Dissipation factor at -55°C +25°C	Dissipation factor at +85°C +125°C	Case size	Dash number M39003/01- failure rate level (%1,000 hrs.) M (1.0)	P (0.1)	R (0.01)	S (0.001)	B (0.1)	C (0.01)	D (0.001)
volts	µF	percent	µA	µA	µA	percent	percent								
35	27.0	5	4.5	90.0	113.0	6	6	D	5046	5246	5446	5646	6113	7113	8113
35	27.0	10	4.5	90.0	113.0	6	6	D	2308	2548	2788	3028	6114	7114	8114
35	33.0	5	5.5	110.0	138.0	6	6	D	5047	5247	5447	5647	6115	7115	8115
35	33.0	10	5.5	110.0	138.0	6	6	D	2309	2549	2789	3029	6116	7116	8116
35	33.0	20	5.5	110.0	138.0	6	6	D	2310	2550	2790	3030	6117	7117	8117
35	39.0	5	7.0	140.0	175.0	6	6	D	5048	5248	5448	5648	6118	7118	8118
35	39.0	10	7.0	140.0	175.0	6	6	D	2311	2551	2791	3031	6119	7119	8119
35	47.0	5	8.0	160.0	200.0	6	6	D	5049	5249	5449	5649	6120	7120	8120
35	47.0	10	8.0	160.0	200.0	6	6	D	2312	2552	2792	3032	6121	7121	8121
35	47.0	20	8.0	160.0	200.0	6	6	D	2313	2553	2793	3033	6122	7122	8122
50	.0047	5	.3	5.0	6.3	2	4	A	5050	5250	5450	5650	6123	7123	8123
50	.0047	10	.3	5.0	6.3	2	4	A	2314	2554	2794	3034	6124	7124	8124
50	.0047	20	.3	5.0	6.3	2	4	A	2315	2555	2795	3035	6125	7125	8125
50	.0056	5	.3	5.0	6.3	2	4	A	5051	5251	5451	5651	6126	7126	8126
50	.0056	10	.3	5.0	6.3	2	4	A	2316	2556	2796	3036	6127	7127	8127
50	.0068	5	.3	5.0	6.3	2	4	A	5052	5252	5452	5652	6128	7128	8128
50	.0068	10	.3	5.0	6.3	2	4	A	2317	2557	2797	3037	6129	7129	8129
50	.0068	20	.3	5.0	6.3	2	4	A	2318	2558	2798	3038	6130	7130	8130
50	.0082	5	.3	5.0	6.3	2	4	A	5053	5253	5453	5653	6131	7131	8131
50	.0082	10	.3	5.0	6.3	2	4	A	2319	2559	2799	3039	6132	7132	8132
50	.01	5	.3	5.0	6.3	2	4	A	5054	5254	5454	5654	6133	7133	8133
50	.01	10	.3	5.0	6.3	2	4	A	2320	2560	2800	3040	6134	7134	8134
50	.01	20	.3	5.0	6.3	2	4	A	2321	2561	2801	3041	6135	7135	8135
50	.012	5	.3	5.0	6.3	2	4	A	5055	5255	5455	5655	6136	7136	8136
50	.012	10	.3	5.0	6.3	2	4	A	2322	2562	2802	3042	6137	7137	8137
50	.015	5	.3	5.0	6.3	2	4	A	5056	5256	5456	5656	6138	7138	8138
50	.015	10	.3	5.0	6.3	2	4	A	2323	2563	2803	3043	6139	7139	8139
50	.015	20	.3	5.0	6.3	2	4	A	2324	2564	2804	3044	6140	7140	8140
50	.018	5	.3	5.0	6.3	2	4	A	5057	5257	5457	5657	6141	7141	8141
50	.018	10	.3	5.0	6.3	2	4	A	2325	2565	2805	3045	6142	7142	8142
50	.022	5	.3	5.0	6.3	2	4	A	5058	5258	5458	5658	6143	7143	8143
50	.022	10	.3	5.0	6.3	2	4	A	2326	2566	2806	3046	6144	7144	8144
50	.022	20	.3	5.0	6.3	2	4	A	2327	2567	2807	3047	6145	7145	8145
50	.027	5	.3	5.0	6.3	2	4	A	5059	5259	5459	5659	6146	7146	8146
50	.027	10	.3	5.0	6.3	2	4	A	2328	2568	2808	3048	6147	7147	8147
50	.033	5	.3	5.0	6.3	2	4	A	5060	5260	5460	5660	6148	7148	8148
50	.033	10	.3	5.0	6.3	2	4	A	2329	2569	2809	3049	6149	7149	8149
50	.033	20	.3	5.0	6.3	2	4	A	2330	2570	2810	3050	6150	7150	8150

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:03Z
Check the source to verify that this is the current version before use.

TABLE I. Style CSR13 characteristics and dash numbers - Continued.

DC rated voltage	Cap. (nom)	Cap. tolerance	DC leakage at			Dissipation factor at		Case size	Dash number M39003/01- failure rate level (%1,000 hrs.)						
			+25°C	+85°C	+125°C	-55°C +25°C	+85°C +125°C		M (1.0)	P (0.1)	R (0.01)	S (0.001)	B (0.1)	C (0.01)	D (0.001)
volts	µF	percent	µA	µA	µA	percent	percent								
50	.039	5	.3	5.0	6.3	2	4	A	5061	5261	5461	5661	6151	7151	8151
50	.039	10	.3	5.0	6.3	2	4	A	2331	2571	2811	3051	6152	7152	8152
50	.047	5	.3	5.0	6.3	2	4	A	5062	5262	5462	5662	6153	7153	8153
50	.047	10	.3	5.0	6.3	2	4	A	2332	2572	2812	3052	6154	7154	8154
50	.047	20	.3	5.0	6.3	2	4	A	2333	2573	2813	3053	6155	7155	8155
50	.056	5	.3	5.0	6.3	2	4	A	5063	5263	5463	5663	6156	7156	8156
50	.056	10	.3	5.0	6.3	2	4	A	2334	2574	2814	3054	6157	7157	8157
50	.068	5	.3	5.0	6.3	2	4	A	5064	5264	5464	5664	6158	7158	8158
50	.068	10	.3	5.0	6.3	2	4	A	2335	2575	2815	3055	6159	7159	8159
50	.068	20	.3	5.0	6.3	2	4	A	2336	2576	2816	3056	6160	7160	8160
50	.082	5	.3	5.0	6.3	2	4	A	5065	5265	5465	5665	6161	7161	8161
50	.082	10	.3	5.0	6.3	2	4	A	2337	2577	2817	3057	6162	7162	8162
50	.1	5	.3	5.0	6.3	2	4	A	5066	5266	5466	5666	6163	7163	8163
50	.1	10	.3	5.0	6.3	2	4	A	2338	2578	2818	3058	6164	7164	8164
50	.1	20	.3	5.0	6.3	2	4	A	2339	2579	2819	3059	6165	7165	8165
50	.12	5	.3	5.0	6.3	2	4	A	5067	5267	5467	5667	6166	7166	8166
50	.12	10	.3	5.0	6.3	2	4	A	2340	2580	2820	3060	6167	7167	8167
50	.15	5	.3	5.0	6.3	2	4	A	5068	5268	5468	5668	6168	7168	8168
50	.15	10	.3	5.0	6.3	2	4	A	2341	2581	2821	3061	6169	7169	8169
50	.15	20	.3	5.0	6.3	2	4	A	2342	2582	2822	3062	6170	7170	8170
50	.18	5	.3	5.0	6.3	2	4	A	5069	5269	5469	5669	6171	7171	8171
50	.18	10	.3	5.0	6.3	2	4	A	2343	2583	2823	3063	6172	7172	8172
50	.22	5	.3	5.0	6.3	2	4	A	5070	5270	5470	5670	6173	7173	8173
50	.22	10	.3	5.0	6.3	2	4	A	2344	2584	2824	3064	6174	7174	8174
50	.22	20	.3	5.0	6.3	2	4	A	2345	2585	2825	3065	6175	7175	8175
50	.27	5	.3	5.0	6.3	2	4	A	5071	5271	5471	5671	6176	7176	8176
50	.27	10	.3	5.0	6.3	2	4	A	2346	2586	2826	3066	6177	7177	8177
50	.33	5	.3	5.0	6.3	2	4	A	5072	5272	5472	5672	6178	7178	8178
50	.33	10	.3	5.0	6.3	2	4	A	2347	2587	2827	3067	6179	7179	8179
50	.33	20	.3	5.0	6.3	2	4	A	2348	2588	2828	3068	6180	7180	8180
50	.39	5	.3	5.0	6.3	2	4	A	5073	5273	5473	5673	6181	7181	8181
50	.39	10	.3	5.0	6.3	2	4	A	2349	2589	2829	3069	6182	7182	8182
50	.47	5	.3	5.0	6.3	2	4	A	5074	5274	5474	5674	6183	7183	8183
50	.47	10	.3	5.0	6.3	2	4	A	2350	2590	2830	3070	6184	7184	8184
50	.47	20	.3	5.0	6.3	2	4	A	2351	2591	2831	3071	6185	7185	8185
50	.56	5	.3	5.0	6.3	2	4	A	5075	5275	5475	5675	6186	7186	8186
50	.56	10	.3	5.0	6.3	2	4	A	2352	2592	2832	3072	6187	7187	8187
50	.68	5	.3	5.0	6.3	2	4	A	5076	5276	5476	5676	6188	7188	8188
50	.68	10	.3	5.0	6.3	2	4	A	2353	2593	2833	3073	6189	7189	8189

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T16:03Z
Check the source to verify that this is the current version before use.

(G) TABLE I. Style CSR13 characteristics and dash numbers - Continued.

DC rated voltage	Cap. (nom)	Cap. tolerance	DC leakage at			Dissipation factor at		Case size	Dash number M39003/01- failure rate level (%1,000 hrs.)						
			+25°C	+85°C	+125°C	-55°C +25°C	+85°C +125°C		M (1.0)	P (0.1)	R (0.01)	S (0.001)	B (0.1)	C (0.01)	D (0.001)
volts	µF	percent	µA	µA	µA	percent	percent								
50	.68	20	.3	5.0	6.3	2	4	A	2354	2594	2834	3074	6190	7190	8190
50	.82	5	.3	5.0	6.3	2	4	A	5077	5277	5477	5677	6191	7191	8191
50	.82	10	.3	5.0	6.3	2	4	A	2355	2595	2835	3075	6192	7192	8192
50	1.0	5	.4	8.0	10.0	2	4	A	5078	5278	5478	5678	6193	7193	8193
50	1.0	10	.4	8.0	10.0	2	4	A	2356	2596	2836	3076	6194	7194	8194
50	1.0	20	.4	8.0	10.0	2	4	A	2357	2597	2837	3077	6195	7195	8195
50	1.2	5	.4	9.0	11.0	4	4	B	5079	5279	5479	5679	6196	7196	8196
50	1.2	10	.4	9.0	11.0	4	4	B	2358	2598	2838	3078	6197	7197	8197
50	1.5	5	.6	12.0	15.0	4	4	B	5080	5280	5480	5680	6198	7198	8198
50	1.5	10	.6	12.0	15.0	4	4	B	2359	2599	2839	3079	6199	7199	8199
50	1.5	20	.6	12.0	15.0	4	4	B	2360	2600	2840	3080	6200	7200	8200
50	1.8	5	.7	14.0	18.0	4	4	B	5081	5281	5481	5681	6201	7201	8201
50	1.8	10	.7	14.0	18.0	4	4	B	2361	2601	2841	3081	6202	7202	8202
50	2.2	5	.8	17.0	22.0	4	4	B	5082	5282	5482	5682	6203	7203	8203
50	2.2	10	.8	17.0	22.0	4	4	B	2362	2602	2842	3082	6204	7204	8204
50	2.2	20	.8	17.0	22.0	4	4	B	2363	2603	2843	3083	6205	7205	8205
50	2.7	5	1.0	20.0	25.0	4	4	B	5083	5283	5483	5683	6206	7206	8206
50	2.7	10	1.0	20.0	25.0	4	4	B	2364	2604	2844	3084	6207	7207	8207
50	3.3	5	1.2	25.0	32.0	4	4	B	5084	5284	5484	5684	6208	7208	8208
50	3.3	10	1.2	25.0	32.0	4	4	B	2365	2605	2845	3085	6209	7209	8209
50	3.3	20	1.2	25.0	32.0	4	4	B	2366	2606	2846	3086	6210	7210	8210
50	3.9	5	1.5	30.0	38.0	4	4	B	5085	5285	5485	5685	6211	7211	8211
50	3.9	10	1.5	30.0	38.0	4	4	B	2367	2607	2847	3087	6212	7212	8212
50	4.7	5	1.7	35.0	44.0	4	4	B	5086	5286	5486	5686	6213	7213	8213
50	4.7	10	1.7	35.0	44.0	4	4	B	2368	2608	2848	3088	6214	7214	8214
50	4.7	20	1.7	35.0	44.0	4	4	B	2369	2609	2849	3089	6215	7215	8215
50	5.6	5	2.2	45.0	56.0	4	4	C	5087	5287	5487	5687	6216	7216	8216
50	5.6	10	2.2	45.0	56.0	4	4	C	2370	2610	2850	3090	6217	7217	8217
50	6.8	5	2.2	45.0	56.0	6	6	C	5088	5288	5488	5688	6218	7218	8218
50	6.8	10	2.2	45.0	56.0	6	6	C	2371	2611	2851	3091	6219	7219	8219
50	6.8	20	2.2	45.0	56.0	6	6	C	2372	2612	2852	3092	6220	7220	8220
50	8.2	5	2.5	50.0	63.0	6	6	C	5089	5289	5489	5689	6221	7221	8221
50	8.2	10	2.5	50.0	63.0	6	6	C	2373	2613	2853	3093	6222	7222	8222
50	10.0	5	2.5	50.0	63.0	6	6	C	5090	5290	5490	5690	6223	7223	8223
50	10.0	10	2.5	50.0	63.0	6	6	C	2374	2614	2854	3094	6224	7224	8224
50	10.0	20	2.5	50.0	63.0	6	6	C	2375	2615	2855	3095	6225	7225	8225
50	12.0	5	3.0	60.0	75.0	6	6	C	5091	5291	5491	5691	6226	7226	8226
50	12.0	10	3.0	60.0	75.0	6	6	C	2376	2616	2856	3096	6227	7227	8227
50	15.0	5	4.0	80.0	100.0	6	6	C	5092	5292	5492	5692	6228	7228	8228

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:03Z
Check the source to verify that this is the current version before use.

Ⓖ TABLE I. Style CSR13 characteristics and dash numbers - Continued.

DC rated voltage	Cap. (nom)	Cap. tolerance	DC leakage at +25°C	DC leakage at +85°C	DC leakage at +125°C	Dissipation factor at -55°C +25°C	Dissipation factor at +85°C +125°C	Case size	Dash number M39003/01- failure rate level (%1,000 hrs.) M (1.0)	P (0.1)	R (0.01)	S (0.001)	B (0.1)	C (0.01)	D (0.001)
volts	µF	percent	µA	µA	µA	percent	percent								
50	15.0	10	4.0	80.0	100.0	6	6	C	2377	2617	2857	3097	6229	7229	8229
50	15.0	20	4.0	80.0	100.0	6	6	C	2378	2618	2858	3098	6230	7230	8230
50	18.0	5	4.5	90.0	113.0	6	6	C	5093	5293	5493	5693	6231	7231	8231
50	18.0	10	4.5	90.0	113.0	6	6	C	2379	2619	2859	3099	6232	7232	8232
50	22.0	5	5.5	110.0	138.0	6	6	D	5094	5294	5494	5694	6233	7233	8233
50	22.0	10	5.5	110.0	138.0	6	6	D	2380	2620	2860	3100	6234	7234	8234
50	22.0	20	5.5	110.0	138.0	6	6	D	2381	2621	2861	3101	6235	7235	8235
75	.1	5	.3	5.0	6.3	2	4	A	5095	5295	5495	5695	6236	7236	8236
75	.1	10	.3	5.0	6.3	2	4	A	2382	2622	2862	3102	6237	7237	8237
75	.1	20	.3	5.0	6.3	2	4	A	2383	2623	2863	3103	6238	7238	8238
75	.12	5	.3	5.0	6.3	2	4	A	5096	5296	5496	5696	6239	7239	8239
75	.12	10	.3	5.0	6.3	2	4	A	2384	2624	2864	3104	6240	7240	8240
75	.15	5	.3	5.0	6.3	2	4	A	5097	5297	5497	5697	6241	7241	8241
75	.15	10	.3	5.0	6.3	2	4	A	2385	2625	2865	3105	6242	7242	8242
75	.15	20	.3	5.0	6.3	2	4	A	2386	2626	2866	3106	6243	7243	8243
75	.18	5	.3	5.0	6.3	2	4	A	5098	5298	5498	5698	6244	7244	8244
75	.18	10	.3	5.0	6.3	2	4	A	2387	2627	2867	3107	6245	7245	8245
75	.22	5	.3	5.0	6.3	2	4	A	5099	5299	5499	5699	6246	7246	8246
75	.22	10	.3	5.0	6.3	2	4	A	2388	2628	2868	3108	6247	7247	8247
75	.22	20	.3	5.0	6.3	2	4	A	2389	2629	2869	3109	6248	7248	8248
75	.27	5	.3	5.0	6.3	2	4	A	5100	5300	5500	5700	6249	7249	8249
75	.27	10	.3	5.0	6.3	2	4	A	2390	2630	2870	3110	6250	7250	8250
75	.33	5	.3	5.0	6.3	2	4	A	5101	5301	5501	5701	6251	7251	8251
75	.33	10	.3	5.0	6.3	2	4	A	2391	2631	2871	3111	6252	7252	8252
75	.33	20	.3	5.0	6.3	2	4	A	2392	2632	2872	3112	6253	7253	8253
75	.39	5	.3	5.0	6.3	2	4	A	5102	5302	5502	5702	6254	7254	8254
75	.39	10	.3	5.0	6.3	2	4	A	2393	2633	2873	3113	6255	7255	8255
75	.47	5	.3	5.0	6.3	2	4	A	5103	5303	5503	5703	6256	7256	8256
75	.47	10	.3	5.0	6.3	2	4	A	2394	2634	2874	3114	6257	7257	8257
75	.47	20	.3	5.0	6.3	2	4	A	2395	2635	2875	3115	6258	7258	8258
75	.56	5	.3	5.0	6.3	2	4	A	5104	5304	5504	5704	6259	7259	8259
75	.56	10	.3	5.0	6.3	2	4	A	2396	2636	2876	3116	6260	7260	8260
75	.68	5	.3	5.0	6.3	2	4	A	5105	5305	5505	5705	6261	7261	8261
75	.68	10	.3	5.0	6.3	2	4	A	2397	2637	2877	3117	6262	7262	8262
75	.68	20	.3	5.0	6.3	2	4	A	2398	2638	2878	3118	6263	7263	8263
75	.82	5	.3	5.0	6.3	2	4	B	5106	5306	5506	5706	6264	7264	8264
75	.82	10	.3	5.0	6.3	2	4	B	2399	2639	2879	3119	6265	7265	8265
75	1.0	5	.3	5.0	6.3	2	4	B	5107	5307	5507	5707	6266	7266	8266

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T16:03Z
Check the source to verify that this is the current version before use.

(G) TABLE I. Style CSR13 characteristics and dash numbers - Continued.

DC rated voltage	Cap. (nom)	Cap. tolerance	DC leakage at +25°C	DC leakage at +85°C	DC leakage at +125°C	Dissipation factor at -55°C +25°C	Dissipation factor at +85°C +125°C	Case size	Dash number M39003/01- failure rate level (%1,000 hrs.) M (1.0)	P (0.1)	R (0.01)	S (0.001)	B (0.1)	C (0.01)	D (0.001)
volts	µF	percent	µA	µA	µA	percent	percent								
75	1.0	10	.3	5.0	6.3	2	4	B	2400	2640	2880	3120	6267	7267	8267
75	1.0	20	.3	5.0	6.3	2	4	B	2401	2641	2881	3121	6268	7268	8268
75	1.2	5	.3	5.0	6.3	4	4	B	5108	5308	5508	5708	6269	7269	8269
75	1.2	10	.3	5.0	6.3	4	4	B	2402	2642	2882	3122	6270	7270	8270
75	1.5	5	.6	10.0	13.0	4	4	B	5109	5309	5509	5709	6271	7271	8271
75	1.5	10	.6	10.0	13.0	4	4	B	2403	2643	2883	3123	6272	7272	8272
75	1.5	20	.6	10.0	13.0	4	4	B	2404	2644	2884	3124	6273	7273	8273
75	1.8	5	.7	10.0	13.0	4	4	B	5110	5310	5510	5710	6274	7274	8274
75	1.8	10	.7	10.0	13.0	4	4	B	2405	2645	2885	3125	6275	7275	8275
75	2.2	5	.8	15.0	19.0	4	4	B	5111	5311	5511	5711	6276	7276	8276
75	2.2	10	.8	15.0	19.0	4	4	B	2406	2646	2886	3126	6277	7277	8277
75	2.2	20	.8	15.0	19.0	4	4	B	2407	2647	2887	3127	6278	7278	8278
75	2.7	5	1.0	15.0	19.0	4	4	B	5112	5312	5512	5712	6279	7279	8279
75	2.7	10	1.0	15.0	19.0	4	4	B	2408	2648	2888	3128	6280	7280	8280
75	3.3	5	1.2	20.0	25.0	4	4	B	5113	5313	5513	5713	6281	7281	8281
75	3.3	10	1.2	20.0	25.0	4	4	B	2409	2649	2889	3129	6282	7282	8282
75	3.3	20	1.2	20.0	25.0	4	4	B	2410	2650	2890	3130	6283	7283	8283
75	3.9	5	1.5	20.0	25.0	4	4	B	5114	5314	5514	5714	6284	7284	8284
75	3.9	10	1.5	20.0	25.0	4	4	B	2411	2651	2891	3131	6285	7285	8285
75	4.7	5	3.0	60.0	75.0	4	4	C	5115	5315	5515	5715	6286	7286	8286
75	4.7	10	3.0	60.0	75.0	4	4	C	2412	2652	2892	3132	6287	7287	8287
75	4.7	20	3.0	60.0	75.0	4	4	C	2413	2653	2893	3133	6288	7288	8288
75	5.6	5	3.0	60.0	75.0	4	4	C	5116	5316	5516	5716	6289	7289	8289
75	5.6	10	3.0	60.0	75.0	4	4	C	2414	2654	2894	3134	6290	7290	8290
75	6.8	5	5.0	100.0	125.0	6	6	C	5117	5317	5517	5717	6291	7291	8291
75	6.8	10	5.0	100.0	125.0	6	6	C	2415	2655	2895	3135	6292	7292	8292
75	6.8	20	5.0	100.0	125.0	6	6	C	2416	2656	2896	3136	6293	7293	8293
75	8.2	5	5.0	100.0	125.0	6	6	C	5118	5318	5518	5718	6294	7294	8294
75	8.2	10	5.0	100.0	125.0	6	6	C	2417	2657	2897	3137	6295	7295	8295
75	10.0	5	5.0	100.0	125.0	6	6	C	5119	5319	5519	5719	6296	7296	8296
75	10.0	10	5.0	100.0	125.0	6	6	C	2418	2658	2898	3138	6297	7297	8297
75	10.0	20	5.0	100.0	125.0	6	6	C	2419	2659	2899	3139	6298	7298	8298
75	12.0	5	5.0	100.0	125.0	6	6	D	5120	5320	5520	5720	6299	7299	8299
75	12.0	10	5.0	100.0	125.0	6	6	D	2420	2660	2900	3140	6300	7300	8300
75	15.0	5	7.0	140.0	175.0	6	6	D	5121	5321	5521	5721	6301	7301	8301
75	15.0	10	7.0	140.0	175.0	6	6	D	2421	2661	2901	3141	6302	7302	8302
75	15.0	20	7.0	140.0	175.0	6	6	D	2422	2662	2902	3142	6303	7303	8303

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:03Z
Check the source to verify that this is the current version before use.

TABLE I. Style CSR13 characteristics and dash numbers - Continued.

DC rated voltage	Cap. (nom)	Cap. tolerance	DC leakage at			Dissipation factor at		Case size	Dash number M39003/01- failure rate level (%1,000 hrs.)						
			+25°C	+85°C	+125°C	-55°C +25°C	+85°C +125°C		M (1.0)	P (0.1)	R (0.01)	S (0.001)	B (0.1)	C (0.01)	D (0.001)
volts	µF	percent	µA	µA	µA	percent	percent								
100	.0047	5	.3	5.0	6.3	2	4	A	5122	5322	5522	5722	6304	7304	8304
100	.0047	10	.3	5.0	6.3	2	4	A	2423	2663	2903	3143	6305	7305	8305
100	.0047	20	.3	5.0	6.3	2	4	A	2424	2664	2904	3144	6306	7306	8306
100	.0056	5	.3	5.0	6.3	2	4	A	5123	5323	5523	5723	6307	7307	8307
100	.0056	10	.3	5.0	6.3	2	4	A	2425	2665	2905	3145	6308	7308	8308
100	.0068	5	.3	5.0	6.3	2	4	A	5124	5324	5524	5724	6309	7309	8309
100	.0068	10	.3	5.0	6.3	2	4	A	2426	2666	2906	3146	6310	7310	8310
100	.0068	20	.3	5.0	6.3	2	4	A	2427	2667	2907	3147	6311	7311	8311
100	.0082	5	.3	5.0	6.3	2	4	A	5125	5325	5525	5725	6312	7312	8312
100	.0082	10	.3	5.0	6.3	2	4	A	2428	2668	2908	3148	6313	7313	8313
100	.01	5	.3	5.0	6.3	2	4	A	5126	5326	5526	5726	6314	7314	8314
100	.01	10	.3	5.0	6.3	2	4	A	2429	2669	2909	3149	6315	7315	8315
100	.01	20	.3	5.0	6.3	2	4	A	2430	2670	2910	3150	6316	7316	8316
100	.012	5	.3	5.0	6.3	2	4	A	5127	5327	5527	5727	6317	7317	8317
100	.012	10	.3	5.0	6.3	2	4	A	2431	2671	2911	3151	6318	7318	8318
100	.015	5	.3	5.0	6.3	2	4	A	5128	5328	5528	5728	6319	7319	8319
100	.015	10	.3	5.0	6.3	2	4	A	2432	2672	2912	3152	6320	7320	8320
100	.015	20	.3	5.0	6.3	2	4	A	2433	2673	2913	3153	6321	7321	8321
100	.018	5	.3	5.0	6.3	2	4	A	5129	5329	5529	5729	6322	7322	8322
100	.018	10	.3	5.0	6.3	2	4	A	2434	2674	2914	3154	6323	7323	8323
100	.022	5	.3	5.0	6.3	2	4	A	5130	5330	5530	5730	6324	7324	8324
100	.022	10	.3	5.0	6.3	2	4	A	2435	2675	2915	3155	6325	7325	8325
100	.022	20	.3	5.0	6.3	2	4	A	2436	2676	2916	3156	6326	7326	8326
100	.027	5	.3	5.0	6.3	2	4	A	5131	5331	5531	5731	6327	7327	8327
100	.027	10	.3	5.0	6.3	2	4	A	2437	2677	2917	3157	6328	7328	8328
100	.033	5	.3	5.0	6.3	2	4	A	5132	5332	5532	5732	6329	7329	8329
100	.033	10	.3	5.0	6.3	2	4	A	2438	2678	2918	3158	6330	7330	8330
100	.033	20	.3	5.0	6.3	2	4	A	2439	2679	2919	3159	6331	7331	8331
100	.039	5	.3	5.0	6.3	2	4	A	5133	5333	5533	5733	6332	7332	8332
100	.039	10	.3	5.0	6.3	2	4	A	2440	2680	2920	3160	6333	7333	8333
100	.047	5	.3	5.0	6.3	2	4	A	5134	5334	5534	5734	6334	7334	8334
100	.047	10	.3	5.0	6.3	2	4	A	2441	2681	2921	3161	6335	7335	8335
100	.047	20	.3	5.0	6.3	2	4	A	2442	2682	2922	3162	6336	7336	8336
100	.056	5	.3	5.0	6.3	2	4	A	5135	5335	5535	5735	6337	7337	8337
100	.056	10	.3	5.0	6.3	2	4	A	2443	2683	2923	3163	6338	7338	8338
100	.068	5	.3	5.0	6.3	2	4	A	5136	5336	5536	5736	6339	7339	8339
100	.068	10	.3	5.0	6.3	2	4	A	2444	2684	2924	3164	6340	7340	8340
100	.068	20	.3	5.0	6.3	2	4	A	2445	2685	2925	3165	6341	7341	8341
100	.082	5	.3	5.0	6.3	2	4	A	5137	5337	5537	5737	6342	7342	8342

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:03Z
Check the source to verify that this is the current version before use.

(G) TABLE I. Style CSR13 characteristics and dash numbers - Continued.

DC rated voltage	Cap. (nom)	Cap. tolerance	DC leakage at +25°C	DC leakage at +85°C	DC leakage at +125°C	Dissipation factor at -55°C +25°C	Dissipation factor at +85°C +125°C	Case size	Dash number M39003/01- failure rate level (%1,000 hrs.) M (1.0)	P (0.1)	R (0.01)	S (0.001)	B (0.1)	C (0.01)	D (0.001)
volts	µF	percent	µA	µA	µA	percent	percent								
100	.082	10	.3	5.0	6.3	2	4	A	2446	2686	2926	3166	6343	7343	8343
100	.1	5	.3	5.0	6.3	2	4	A	5138	5338	5538	5738	6344	7344	8344
100	.1	10	.3	5.0	6.3	2	4	A	2447	2687	2927	3167	6345	7345	8345
100	.1	20	.3	5.0	6.3	2	4	A	2448	2688	2928	3168	6346	7346	8346
100	.12	5	.3	5.0	6.3	2	4	A	5139	5339	5539	5739	6347	7347	8347
100	.12	10	.3	5.0	6.3	2	4	A	2449	2689	2929	3169	6348	7348	8348
100	.15	5	.3	5.0	6.3	2	4	A	5140	5340	5540	5740	6349	7349	8349
100	.15	10	.3	5.0	6.3	2	4	A	2450	2690	2930	3170	6350	7350	8350
100	.15	20	.3	5.0	6.3	2	4	A	2451	2691	2931	3171	6351	7351	8351
100	.18	5	.3	5.0	6.3	2	4	A	5141	5341	5541	5741	6352	7352	8352
100	.18	10	.3	5.0	6.3	2	4	A	2452	2692	2932	3172	6353	7353	8353
100	.22	5	.3	5.0	6.3	2	4	A	5142	5342	5542	5742	6354	7354	8354
100	.22	10	.3	5.0	6.3	2	4	A	2453	2693	2933	3173	6355	7355	8355
100	.22	20	.3	5.0	6.3	2	4	A	2454	2694	2934	3174	6356	7356	8356
100	.27	5	.3	5.0	6.3	2	4	A	5143	5343	5543	5743	6357	7357	8357
100	.27	10	.3	5.0	6.3	2	4	A	2455	2695	2935	3175	6358	7358	8358
100	.33	5	.3	5.0	6.3	2	4	A	5144	5344	5544	5744	6359	7359	8359
100	.33	10	.3	5.0	6.3	2	4	A	2456	2696	2936	3176	6360	7360	8360
100	.33	20	.3	5.0	6.3	2	4	A	2457	2697	2937	3177	6361	7361	8361
100	.39	5	.3	5.0	6.3	2	4	A	5145	5345	5545	5745	6362	7362	8362
100	.39	10	.3	5.0	6.3	2	4	A	2458	2698	2938	3178	6363	7363	8363
100	.47	5	.3	5.0	6.3	2	4	A	5146	5346	5546	5746	6364	7364	8364
100	.47	10	.3	5.0	6.3	2	4	A	2459	2699	2939	3179	6365	7365	8365
100	.47	20	.3	5.0	6.3	2	4	A	2460	2700	2940	3180	6366	7366	8366
100	.56	5	.3	5.0	6.3	2	4	A	5147	5347	5547	5747	6367	7367	8367
100	.56	10	.3	5.0	6.3	2	4	A	2461	2701	2941	3181	6368	7368	8368
100	.68	5	.3	5.0	6.3	2	4	B	5148	5348	5548	5748	6369	7369	8369
100	.68	10	.3	5.0	6.3	2	4	B	2462	2702	2942	3182	6370	7370	8370
100	.68	20	.3	5.0	6.3	2	4	B	2463	2703	2943	3183	6371	7371	8371
100	.82	5	.4	5.0	6.3	2	4	B	5149	5349	5549	5749	6372	7372	8372
100	.82	10	.4	5.0	6.3	2	4	B	2464	2704	2944	3184	6373	7373	8373
100	1.0	5	.5	5.0	6.3	2	4	B	5150	5350	5550	5750	6374	7374	8374
100	1.0	10	.5	5.0	6.3	2	4	B	2465	2705	2945	3185	6375	7375	8375
100	1.0	20	.5	5.0	6.3	2	4	B	2466	2706	2946	3186	6376	7376	8376
100	1.2	5	.5	5.0	6.3	4	4	B	5151	5351	5551	5751	6377	7377	8377
100	1.2	10	.5	5.0	6.3	4	4	B	2467	2707	2947	3187	6378	7378	8378
100	1.5	5	.7	10.0	13.0	4	4	B	5152	5352	5552	5752	6379	7379	8379
100	1.5	10	.7	10.0	13.0	4	4	B	2468	2708	2948	3188	6380	7380	8380
100	1.5	20	.7	10.0	13.0	4	4	B	2469	2709	2949	3189	6381	7381	8381

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:03Z
Check the source to verify that this is the current version before use.

TABLE I. Style CSR13 characteristics and dash numbers - Continued.

DC rated voltage	Cap. (nom)	Cap. tolerance	DC leakage at			Dissipation factor at		Case size	Dash number M39003/01- failure rate level (%1,000 hrs.)						
			+25°C	+85°C	+125°C	-55°C +25°C	+85°C +125°C		M (1.0)	P (0.1)	R (0.01)	S (0.001)	B (0.1)	C (0.01)	D (0.001)
volts	µF	percent	µA	µA	µA	percent	percent								
100	1.8	5	.7	10.0	13.0	4	4	B	5153	5353	5553	5753	6382	7382	8382
100	1.8	10	.7	10.0	13.0	4	4	B	2470	2710	2950	3190	6383	7383	8383
100	2.2	5	.9	15.0	19.0	4	4	B	5154	5354	5554	5754	6384	7384	8384
100	2.2	10	.9	15.0	19.0	4	4	B	2471	2711	2951	3191	6385	7385	8385
100	2.2	20	.9	15.0	19.0	4	4	B	2472	2712	2952	3192	6386	7386	8386
100	2.7	5	1.1	15.0	19.0	4	4	B	5155	5355	5555	5755	6387	7387	8387
100	2.7	10	1.1	15.0	19.0	4	4	B	2473	2713	2953	3193	6388	7388	8388
100	3.3	5	1.5	30.0	38.0	6	6	C	5156	5356	5556	5756	6389	7389	8389
100	3.3	10	1.5	30.0	38.0	6	6	C	5157	5357	5557	5757	6390	7390	8390
100	3.3	20	1.5	30.0	38.0	6	6	C	5158	5358	5558	5758	6391	7391	8391
100	3.9	5	1.5	30.0	38.0	6	6	C	5159	5359	5559	5759	6392	7392	8392
100	3.9	10	1.5	30.0	38.0	6	6	C	5160	5360	5560	5760	6393	7393	8393
100	4.7	5	2.5	50.0	63.0	6	6	C	5161	5361	5561	5761	6394	7394	8394
100	4.7	10	2.5	50.0	63.0	6	6	C	5162	5362	5562	5762	6395	7395	8395
100	4.7	20	2.5	50.0	63.0	6	6	C	5163	5363	5563	5763	6396	7396	8396
100	5.6	5	2.5	50.0	63.0	6	6	C	5164	5364	5564	5764	6397	7397	8397
100	5.6	10	2.5	50.0	63.0	6	6	C	5165	5365	5565	5765	6398	7398	8398
100	6.8	5	2.5	50.0	63.0	6	6	C	5166	5366	5566	5766	6399	7399	8399
100	6.8	10	2.5	50.0	63.0	6	6	C	5167	5367	5567	5767	6400	7400	8400
100	6.8	20	2.5	50.0	63.0	6	6	C	5168	5368	5568	5768	6401	7401	8401

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T16:03Z
Check the source to verify that this is the current version before use.

Ⓖ TABLE II. Substitutability data. 1/

Substitute item MIL-C-39003/1F and /1G (B level)	Substitutable for: MIL-C-39003/1A, /1C, /1D, and /1E	MIL-C-39003/1B	MIL-C-39003/1	MIL-C-26655/2D CS12	MIL-C-26655/2D CS13	MIL-C-38102/4B(USAF)
6002	2001	CSR13B565KL	0001	0001	0002	4ECAA565KP
	2241	" M	0002			
	2481	" P	0003			
	2721	" R	0004			
	2961	" S	0005			
6004	2002	CSR13B685KL	0006	0003	0004	4ECAA685KP
	2242	" M	0007			
	2482	" P	0008			
	2722	" R	0009			
	2962	" S	0010			
6005	2003	CSR13B685ML	0011	0005	0006	
	2243	" M	0012			
	2483	" P	0013			
	2723	" R	0014			
	2963	" S	0015			
6007	2004	CSR13B476KL	0016	0007	0008	4ECAB476KP
	2244	" M	0017			
	2484	" P	0018			
	2724	" R	0019			
	2964	" S	0020			
6008	2005	CSR13B476ML	0021	0009	0010	
	2245	" M	0022			
	2485	" P	0023			
	2725	" R	0024			
	2965	" S	0025			
6010	2006	CSR13B566KL	0026	0011	0012	4ECAB566KP
	2246	" M	0027			
	2486	" P	0028			
	2726	" R	0029			
	2966	" S	0030			
6012	2007	CSR13B157KL	0031	0013	0014	4ECAC157KP
	2247	" M	0032			
	2487	" P	0033			
	2727	" R	0034			
	2967	" S	0035			
6013	2008	CSR13B157ML	0036	0015	0016	4ECAC157LP
	2248	" M	0037			
	2488	" P	0038			
	2728	" R	0039			
	2968	" S	0040			
6015	2009	CSR13B187KL	0041	0017	0018	4ECAC187KP
	2249	" M	0042			
	2489	" P	0043			
	2729	" R	0044			
	2969	" S	0045			

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:03Z
Check the source to verify that this is the current version before use.

(G) TABLE II. Substitutability data - Continued. 1/

Substitute item MIL-C-39003/1F and /1G (B level)	Substitutable for: MIL-C-39003/1A, /1C, /1D, and /1E	MIL-C-39003/1B	MIL-C-39003/1	MIL-C-26655/2D CS12	MIL-C-26655/2D CS13	MIL-C-38102/4B(USAF)
6017	2010	CSR13B277KL	0046	0019	0020	4ECAD337KP
	2250	" M	0047			
	2490	" P	0048			
	2730	" R	0049			
	2970	" S	0050			
6019	2011	CSR13B337KL	0051	0021	0022	4ECAD337KP
	2251	" M	0052			
	2491	" P	0053			
	2731	" R	0054			
	2971	" S	0055			
6020	2012	CSR13B337ML	0056	0023	0024	4ECAD337LP
	2252	" M	0057			
	2492	" P	0058			
	2732	" R	0059			
	2972	" S	0060			
6022	2013	CSR13C395KL	0061	0025	0026	4ECBA395KP
	2253	" M	0062			
	2493	" P	0063			
	2733	" R	0064			
	2973	" S	0065			
6024	2014	CSR13C475KL	0066	0027	0028	4ECBA475KP
	2254	" M	0067			
	2494	" P	0068			
	2734	" R	0069			
	2974	" S	0070			
6025	2015	CSR13C475ML	0071	0029	0030	
	2255	" M	0072			
	2495	" P	0073			
	2735	" R	0074			
	2975	" S	0075			
6027	2016	CSR13C276KL	0076	0031	0032	4ECBB276KP
	2256	" M	0077			
	2496	" P	0078			
	2736	" R	0079			
	2976	" S	0080			
6029	2017	CSR13C336KL	0081	0033	0034	
	2257	" M	0082			
	2497	" P	0083			
	2737	" R	0084			
	2977	" S	0085			
6030	2018	CSR13C336ML	0086	0035	0036	
	2258	" M	0087			
	2498	" P	0088			
	2738	" R	0089			
	2978	" S	0090			

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026l0-21T16:03Z
Check the source to verify that this is the currentversion before use.

Ⓖ TABLE II. Substitutability data - Continued. 1/

Substitute item MIL-C-39003/1F and /1G (B level)	Substitutable for: MIL-C-39003/1A, /1C, /1D, and /1E	MIL-C-39003/1B	MIL-C-39003/1	MIL-C-26655/2D CS12	MIL-C-26655/2D CS13	MIL-C-38102/4B(USAF)
6032	2019 2259 2499 2739 2979	CSR13C396KL " M " P " R " S	0091 0092 0093 0094 0095	0037	0038	4ECBB396KP
6034	2020 2260 2500 2740 2980	CSR13C326KL " M " P " R " S	0096 0097 0098 0099 0100	0039	0040	4ECBC826KP
6036	2021 2261 2501 2741 2981	CSR13C107KL " M " P " R " S	0101 0102 0103 0104 0105	0041	0042	4ECBC107KP
6037	2022 2262 2502 2742 2982	CSR13C107ML " M " P " R " S	0106 0107 0108 0109 0110	0043	0044	4ECBC107LP
6039	2023 2263 2503 2743 2983	CSR13C127KL " M " P " R " S	0111 0112 0113 0114 0115	0045	0046	4ECBC127KP
6041	2024 2264 2504 2744 2984	CSR13C187KL " M " P " R " S	0116 0117 0118 0119 0120	0047	0048	4ECBD187KP
6043	2025 2265 2505 2745 2985	CSR13C227KL " M " P " R " S	0121 0122 0123 0124 0125	0049	0050	4ECBD227KP
6044	2026 2266 2506 2746 2986	CSR13C227ML " M " P " R " S	0126 0127 0128 0129 0130	0051	0052	4ECBD227LP
6046	2027 2267 2507 2747 2987	CSR13D275KL " M " P " R " S	0131 0132 0133 0134 0135	0053	0054	4ECCA275KP

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 202610-21T16:03Z
Check the source to verify that this is the current version before use.

(G) TABLE II. Substitutability data - Continued. 1/

Substitute item MIL-C-39003/1F and /1G (B level)	Substitutable for: MIL-C-39003/1A, /1C, /1D, and /1E	MIL-C-39003/1B	MIL-C-39003/1	MIL-C-26655/2D CS12	MIL-C-26655/2D CS13	MIL-C-38102/4B(USAF)
6048	2028 2268 2508 2748 2988	CSR13D335KL " M " P " R " S	0136 0137 0138 0139 0140	0055	0056	4ECCA335KP
6049	2029 2269 2509 2749 2989	CSR13D335ML " M " P " R " S	0141 0142 0143 0144 0145	0057	0058	
6051	2030 2270 2510 2750 2990	CSR13D186KL " M " P " R " S	0146 0147 0148 0149 0150	0059	0060	4ECCB186KP
6053	2031 2271 2511 2751 2991	CSR13D226KL " M " P " R " S	0151 0152 0153 0154 0155	0061	0062	4ECCB226KP
6054	2032 2272 2512 2752 2992	CSR13D226ML " M " P " R " S	0156 0157 0158 0159 0160	0063	0064	
6056	2033 2273 2513 2753 2993	CSR13D566KL " M " P " R " S	0161 0162 0163 0164 0165	0065	0066	4ECCC566KP
6058	2034 2274 2514 2754 2994	CSR13D686KL " M " P " R " S	0166 0167 0168 0169 0170	0067	0068	4ECCC686KP
6059	2035 2275 2515 2755 2995	CSR13D686ML " M " P " R " S	0171 0172 0173 0174 0175	0069	0070	4ECCC686LP
6061	2036 2276 2516 2756 2996	CSR13D127KL " M " P " R " S	0176 0177 0178 0179 0180	0071	0072	4ECCD127KP

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026l0-21T16:03Z
Check the source to verify that this is the current version before use.

(G) TABLE II. Substitutability data - Continued. 1/

Substitute item MIL-C-39003/1F and /1G (B level)	Substitutable for: MIL-C-39003/1A, /1C, /1D, and /1E	MIL-C-39003/1B	MIL-C-39003/1	MIL-C-26655/2D CS12	MIL-C-26655/2D CS13	MIL-C-38102/4B(USAF)
6063	2037 2277 2517 2757 2997	CSR13D157KL " M " P " R " S	0181 0182 0183 0184 0185	0073	0074	4ECCD157KP
6064	2038 2278 2518 2758 2998	CSR13D157ML " M " P " R " S	0186 0187 0188 0189 0190	0075	0076	4ECCD157LP
6066	2039 2279 2519 2759 2999	CSR13E125KL " M " P " R " S	0191 0192 0193 0194 0195	0077	0078	4ECDA125KP
6068	2040 2280 2520 2760 3000	CSR13E155KL " M " P " R " S	0196 0197 0198 0199 0200	0079	0080	4ECDA155KP
6069	2041 2281 2521 2761 3001	CSR13E155ML " M " P " R " S	0201 0202 0203 0204 0205	0081	0082	
6071	2042 2282 2522 2762 3002	CSR13E185KL " M " P " R " S	0206 0207 0208 0209 0210	0083	0084	4ECDA185KP
6073	2043 2283 2523 2763 3003	CSR13E225KL " M " P " R " S	0211 0212 0213 0214 0215	0085	0086	4ECDA225KP
6074	2044 2284 2524 2764 3004	CSR13E225ML " M " P " R " S	0216 0217 0218 0219 0220	0087	0088	
6076	2045 2285 2525 2765 3005	CSR13E825KL " M " P " R " S	0221 0222 0223 0224 0225	0089	0090	4ECDB825KP

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 202610-21T16:03Z
Check the source to verify that this is the current version before use.

Ⓖ TABLE II. Substitutability data - Continued. 1/

Substitute item MIL-C-39003/1F and /1G (B level)	Substitutable for: MIL-C-39003/1A, /1C, /1D, and /1E	MIL-C-39003/1B	MIL-C-39003/1	MIL-C-26655/2D CS12	MIL-C-26655/2D CS13	MIL-C-38102/4B(USAF)
6078	2046	CSR13E106KL	0226	0091	0092	4ECDB106KP
	2286	" M	0227			
	2526	" P	0228			
	2766	" R	0229			
	3006	" S	0230			
6079	2047	CSR13E106ML	0231	0093	0094	
	2287	" M	0232			
	2527	" P	0233			
	2767	" R	0234			
	3007	" S	0235			
6081	2048	CSR13E126KL	0236	0095	0096	4ECDB126KP
	2288	" M	0237			
	2528	" P	0238			
	2768	" R	0239			
	3008	" S	0240			
6083	2049	CSR13E156KL	0241	0097	0098	4ECDB156KP
	2289	" M	0242			
	2529	" P	0243			
	2769	" R	0244			
	3009	" S	0245			
6084	2050	CSR13E156ML	0246	0099	0100	
	2290	" M	0247			
	2530	" P	0248			
	2770	" R	0249			
	3010	" S	0250			
6086	2051	CSR13E276KL	0251	0101	0102	4ECDC276KP
	2291	" M	0252			
	2531	" P	0253			
	2771	" R	0254			
	3011	" S	0255			
6088	2052	CSR13E336KL	0256	0103	0104	4ECDC336KP
	2292	" M	0257			
	2532	" P	0258			
	2772	" R	0259			
	3012	" S	0260			
6089	2053	CSR13E336ML	0261	0105	0106	4ECDC336LP
	2293	" M	0262			
	2533	" P	0263			
	2773	" R	0264			
	3013	" S	0265			
6091	2054	CSR13E396KL	0266	0107	0108	4ECDC396KP
	2294	" M	0267			
	2534	" P	0268			
	2774	" R	0269			
	3014	" S	0270			

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 202610-21T16:03Z
Check the source to verify that this is the current version before use.

(G) TABLE II. Substitutability data - Continued. 1/

Substitute item MIL-C-39003/1F and /1G (B level)	Substitutable for: MIL-C-39003/1A, /1C, /1D, and /1E	MIL-C-39003/1B	MIL-C-39003/1	MIL-C-26655/2D CS12	MIL-C-26655/2D CS13	MIL-C-38102/4B(USAF)
6093	2055 2295 2535 2775 3015	CSR13E476KL " M " P " R " S	0271 0272 0273 0274 0275	0109	0110	4ECDC476KP
6094	2056 2296 2536 2776 3016	CSR13E476ML " M " P " R " S	0276 0277 0278 0279 0280	0111	0112	4ECDC476LP
6096	2057 2297 2537 2777 3017	CSR13E566KL " M " P " R " S	0281 0282 0283 0284 0285	0113	0114	4ECDD566KP
6098	2058 2298 2538 2778 3018	CSR13E686KL " M " P " R " S	0286 0287 0288 0289 0290	0115	0116	4ECDD686KP
6099	2059 2299 2539 2779 3019	CSR13E686ML " M " P " R " S	0291 0292 0293 0294 0295	0117	0118	4ECDD686LP
6101	2060 2300 2540 2780 3020	CSR13E826KL " M " P " R " S	0296 0297 0298 0299 0300	0119	0120	4ECDD826KP
6103	2061 2301 2541 2781 3021	CSR13E107KL " M " P " R " S	0301 0302 0303 0304 0305	0121	0122	4ECDD107KP
6104	2062 2302 2542 2782 3022	CSR13E107ML " M " P " R " S	0306 0307 0308 0309 0310	0123	0124	4ECDD107LP
6106	2063 2303 2543 2783 3023	CSR13F565KL " M " P " R " S	0311 0312 0313 0314 0315	0171	0172	4ECEB566KP

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:03Z
Check the source to verify that this is the current version before use.

(G) TABLE II. Substitutability data - Continued. 1/

Substitute item MIL-C-39003/1F and /1G (B level)	Substitutable for: MIL-C-39003/1A, /1C, /1D, and /1E	MIL-C-39003/1B	MIL-C-39003/1	MIL-C-26655/2D CS12	MIL-C-26655/2D CS13	MIL-C-38102/48(USAF)
6108	2064	CSR13F685KL	0316	0173	0174	4ECEB685KP
	2304	" M	0317			
	2544	" P	0318			
	2784	" R	0319			
	3024	" S	0320			
6109	2065	CSR13F685ML	0321	0175	0176	
	2305	" M	0322			
	2545	" P	0323			
	2785	" R	0324			
	3025	" S	0325			
6111	2066	CSR13F226KL	0326	0191	0192	4ECEC226KP
	2306	" M	0327			
	2546	" P	0328			
	2786	" R	0329			
	3026	" S	0330			
6112	2067	CSR13F226ML	0331	0193	0194	4ECEC226LP
	2307	" M	0332			
	2547	" P	0333			
	2787	" R	0334			
	3027	" S	0335			
6114	2068	CSR13F276KL	0336	0195	0196	4ECED276KP
	2308	" M	0337			
	2548	" P	0338			
	2788	" R	0339			
	3028	" S	0340			
6116	2069	CSR13F336KL	0341	0197	0198	4ECED336KP
	2309	" M	0342			
	2549	" P	0343			
	2789	" R	0344			
	3029	" S	0345			
6117	2070	CSR13F336ML	0346	0199	0200	4ECED336LP
	2310	" M	0347			
	2550	" P	0348			
	2790	" R	0349			
	3030	" S	0350			
6119	2071	CSR13F396KL	0351	0201	0202	4ECED396KP
	2311	" M	0352			
	2551	" P	0353			
	2791	" R	0354			
	3031	" S	0355			
6121	2072	CSR13F476KL	0356	0203	0204	4ECED476KP
	2312	" M	0357			
	2552	" P	0358			
	2792	" R	0359			
	3032	" S	0360			

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 20260-21T16:03Z
Check the source to verify that this is the current version before use.

Ⓖ TABLE II. Substitutability data - Continued. 1/

Substitute item MIL-C-39003/1F and /1G (B level)	Substitutable for: MIL-C-39003/1A, /1C, /1D, and /1E	MIL-C-39003/1B	MIL-C-39003/1	MIL-C-26655/2D CS12	MIL-C-26655/2D CS13	MIL-C-38102/4B(USAF)
6122	2073	CSR13F476ML	0361	0205	0206	4ECED476LP
	2313	" M	0362			
	2553	" P	0363			
	2793	" R	0364			
	3033	" S	0365			
6124	2074	CSR13G472KL	0366			4ECEA472KP
	2314	" M	0367			
	2554	" P	0368			
	2794	" R	0369			
	3034	" S	0370			
6125	2075	CSR13G472ML	0371			
	2315	" M	0372			
	2555	" P	0373			
	2795	" R	0374			
	3035	" S	0375			
6127	2076	CSR13G562KL	0376			4ECEA562KP
	2316	" M	0377			
	2556	" P	0378			
	2796	" R	0379			
	3036	" S	0380			
6129	2077	CSR13G682KL	0381			4ECEA682KP
	2317	" M	0382			
	2557	" P	0383			
	2797	" R	0384			
	3037	" S	0385			
6130	2078	CSR13G682ML	0386			
	2318	" M	0387			
	2558	" P	0388			
	2798	" R	0389			
	3038	" S	0390			
6132	2079	CSR13G822KL	0391			4ECEA822KP
	2319	" M	0392			
	2559	" P	0393			
	2799	" R	0394			
	3039	" S	0395			
6134	2080	CSR13G103KL	0396			4ECEA103KP
	2320	" M	0397			
	2560	" P	0398			
	2800	" R	0399			
	3040	" S	0400			
6135	2081	CSR13G103ML	0401			
	2321	" M	0402			
	2561	" P	0403			
	2801	" R	0404			
	3041	" S	0405			

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:03Z
Check the source to verify that this is the current version before use.

(G) TABLE II. Substitutability data - Continued. 1/

Substitute item MIL-C-39003/1F and /1G (B level)	Substitutable for: MIL-C-39003/1A, /1C, /1D, and /1E	MIL-C-39003/1B	MIL-C-39003/1	MIL-C-26655/2D CS12	MIL-C-26655/2D CS13	MIL-C-38102/4B(USAF)
6137	2082	CSR13G123KL	0406			4ECEA123KP
	2322	" M	0407			
	2562	" P	0408			
	2802	" R	0409			
	3042	" S	0410			
6139	2083	CSR13G153KL	0411			4ECEA153KP
	2323	" M	0412			
	2563	" P	0413			
	2803	" R	0414			
	3043	" S	0415			
6140	2084	CSR13G153ML	0416			
	2324	" M	0417			
	2564	" P	0418			
	2804	" R	0419			
	3044	" S	0420			
6142	2085	CSR13G183KL	0421			4ECEA183KP
	2325	" M	0422			
	2565	" P	0423			
	2805	" R	0424			
	3045	" S	0425			
6144	2086	CSR13G223KL	0426			4ECEA223KP
	2326	" M	0427			
	2566	" P	0428			
	2806	" R	0429			
	3046	" S	0430			
6145	2087	CSR13G223ML	0431			
	2327	" M	0432			
	2567	" P	0433			
	2807	" R	0434			
	3047	" S	0435			
6147	2088	CSR13G273KL	0436			4ECEA273KP
	2328	" M	0437			
	2568	" P	0438			
	2808	" R	0439			
	3048	" S	0440			
6149	2089	CSR13G333KL	0441			4ECEA333KP
	2329	" M	0442			
	2569	" P	0443			
	2809	" R	0444			
	3049	" S	0445			
6150	2090	CSR13G333ML	0446			
	2330	" M	0447			
	2570	" P	0448			
	2810	" R	0449			
	3050	" S	0450			

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:03Z
Check the source to verify that this is the current version before use.

Ⓖ TABLE II. Substitutability data - Continued. 1/

Substitute item MIL-C-39003/1F and /1G (B level)	Substitutable for: MIL-C-39003/1A, /1C, /1D, and /1E	MIL-C-39003/1B	MIL-C-39003/1	MIL-C-26655/2D CS12	MIL-C-26655/2D CS13	MIL-C-38102/4B(USAF)
6152	2091	CSR13G393KL	0451			4ECEA393KP
	2331	" M	0452			
	2571	" P	0453			
	2811	" R	0454			
	3051	" S	0455			
6154	2092	CSR13G473KL	0456			4ECEA473KP
	2332	" M	0457			
	2572	" P	0458			
	2812	" R	0459			
	3052	" S	0460			
6155	2093	CSR13G473ML	0461			
	2333	" M	0462			
	2573	" P	0463			
	2813	" R	0464			
	3053	" S	0465			
6157	2094	CSR13G563KL	0466			4ECEA563KP
	2334	" M	0467			
	2574	" P	0468			
	2814	" R	0469			
	3054	" S	0470			
6159	2095	CSR13G683KL	0471			4ECEA683KP
	2335	" M	0472			
	2575	" P	0473			
	2815	" R	0474			
	3055	" S	0475			
6160	2096	CSR13G683ML	0476			
	2336	" M	0477			
	2576	" P	0478			
	2816	" R	0479			
	3056	" S	0480			
6162	2097	CSR13G823KL	0481			4ECEA823KP
	2337	" M	0482			
	2577	" P	0483			
	2817	" R	0484			
	3057	" S	0485			
6164	2098	CSR13G104KL	0486			4ECEA104KP
	2338	" M	0487			
	2578	" P	0488			
	2818	" R	0489			
	3058	" S	0490			
6165	2099	CSR13G104ML	0491			
	2339	" M	0492			
	2579	" P	0493			
	2819	" R	0494			
	3059	" S	0495			

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 202610-21T16:03Z
Check the source to verify that this is the current version before use.

(G) TABLE II. Substitutability data - Continued. 1/

Substitute item MIL-C-39003/1F and /1G (B level)	Substitutable for: MIL-C-39003/1A, /1C, /1D, and /1E	MIL-C-39003/1B	MIL-C-39003/1	MIL-C-26655/2D CS12	MIL-C-26655/2D CS13	MIL-C-38102/4B(USAF)
6167	2100	CSR13G124KL	0496			4ECEA124KP
	2340	" M	0497			
	2580	" P	0498			
	2820	" R	0499			
	3060	" S	0500			
6169	2101	CSR13G154KL	0501			4ECEA154KP
	2341	" M	0502			
	2581	" P	0503			
	2821	" R	0504			
	3061	" S	0505			
6170	2102	CSR13G154ML	0506			
	2342	" M	0507			
	2582	" P	0508			
	2822	" R	0509			
	3062	" S	0510			
6172	2103	CSR13G184KL	0511			4ECEA184KP
	2343	" M	0512			
	2583	" P	0513			
	2823	" R	0514			
	3063	" S	0515			
6174	2104	CSR13G224KL	0516			4ECEA224KP
	2344	" M	0517			
	2584	" P	0518			
	2824	" R	0519			
	3064	" S	0520			
6175	2105	CSR13G224ML	0521			
	2345	" M	0522			
	2585	" P	0523			
	2825	" R	0524			
	3065	" S	0525			
6177	2106	CSR13G274KL	0526			4ECEA274KP
	2346	" M	0527			
	2586	" P	0528			
	2826	" R	0529			
	3066	" S	0530			
6179	2107	CSR13G334KL	0531			4ECEA334KP
	2347	" M	0532			
	2587	" P	0533			
	2827	" R	0534			
	3067	" S	0535			
6180	2108	CSR13G334ML	0536			
	2348	" M	0537			
	2588	" P	0538			
	2828	" R	0539			
	3068	" S	0540			

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026l0-21T16:03Z
Check the source to verify that this is the current version before use.

Ⓖ TABLE II. Substitutability data - Continued. 1/

Substitute item MIL-C-39003/1F and /1G (B level)	Substitutable for: MIL-C-39003/1A, /1C, /1D, and /1E	MIL-C-39003/1B	MIL-C-39003/1	MIL-C-26655/2D CS12	MIL-C-26655/2D CS13	MIL-C-38102/4B(USAF)
6182	2109	CSR13G394KL	0541			4ECEA394KP
	2349	" M	0542			
	2589	" P	0543			
	2829	" R	0544			
	3069	" S	0545			
6184	2110	CSR13G474KL	0546			4ECEA474KP
	2350	" M	0547			
	2590	" P	0548			
	2830	" R	0549			
	3070	" S	0550			
6185	2111	CSR13G474ML	0551			
	2351	" M	0552			
	2591	" P	0553			
	2831	" R	0554			
	3071	" S	0555			
6187	2112	CSR13G564KL	0556			4ECEA564KP
	2352	" M	0557			
	2592	" P	0558			
	2832	" R	0559			
	3072	" S	0560			
6189	2113	CSR13G684KL	0561			4ECEA684KP
	2353	" M	0562			
	2593	" P	0563			
	2833	" R	0564			
	3073	" S	0565			
6190	2114	CSR13G684ML	0566			
	2354	" M	0567			
	2594	" P	0568			
	2834	" R	0569			
	3074	" S	0570			
6192	2115	CSR13G824KL	0571			4ECEA824KP
	2355	" M	0572			
	2595	" P	0573			
	2835	" R	0574			
	3075	" S	0575			
6194	2116	CSR13G105KL	0576	0207	0208	4ECEA105KP
	2356	" M	0577			
	2596	" P	0578			
	2836	" R	0579			
	3076	" S	0580			
6195	2117	CSR13G105ML	0581	0209	0210	
	2357	" M	0582			
	2597	" P	0583			
	2837	" R	0584			
	3077	" S	0585			

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:03Z
Check the source to verify that this is the current version before use.

(G) TABLE II. Substitutability data - Continued. 1/

Substitute item MIL-C-39003/1F and /1G (B level)	Substitutable for: MIL-C-39003/1A, /1C, /1D, and /1E	MIL-C-39003/1B	MIL-C-39003/1	MIL-C-26655/2D CS12	MIL-C-26655/2D CS13	MIL-C-38102/4B(USAF)
6197	2118	CSR13G125KL	0586	0211	0212	4ECEB125KP
	2358	" M	0587			
	2598	" P	0588			
	2838	" R	0589			
	3078	" S	0590			
6199	2119	CSR13G155KL	0591	0213	0214	4ECEB155KP
	2359	" M	0592			
	2599	" P	0593			
	2839	" R	0594			
	3079	" S	0595			
6200	2120	CSR13G155ML	0596	0215	0216	
	2360	" M	0597			
	2600	" P	0598			
	2840	" R	0599			
	3080	" S	0600			
6202	2121	CSR13G185ML	0601	0217	0218	4ECEB185KP
	2361	" M	0602			
	2601	" P	0603			
	2841	" R	0604			
	3081	" S	0605			
6204	2122	CSR13G225KL	0606	0219	0220	4ECEB225KP
	2362	" M	0607			
	2602	" P	0608			
	2842	" R	0609			
	3082	" S	0610			
6205	2123	CSR13G225ML	0611	0221	0222	
	2363	" M	0612			
	2603	" P	0613			
	2843	" R	0614			
	3083	" S	0615			
6207	2124	CSR13G275KL	0616	0223	0224	4ECEB275KP
	2364	" M	0617			
	2604	" P	0618			
	2844	" R	0619			
	3084	" S	0620			
6209	2125	CSR13G335KL	0621	0225	0226	4ECEB335KP
	2365	" M	0622			
	2605	" P	0623			
	2845	" R	0624			
	3085	" S	0625			
6210	2126	CSR13G335ML	0626	0227	0228	
	2366	" M	0627			
	2606	" P	0628			
	2846	" R	0629			
	3086	" S	0630			

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:03Z
Check the source to verify that this is the current version before use.

Ⓖ TABLE II. Substitutability data - Continued. 1/

Substitute item MIL-C-39003/1F and /1G (B level)	Substitutable for: MIL-C-39003/1A, /1C, /1D, and /1E	MIL-C-39003/1B	MIL-C-39003/1	MIL-C-26655/2D CS12	MIL-C-26655/2D CS13	MIL-C-38102/4B(USAF)
6212	2127	CSR13G395KL	0631	0229	0230	4ECEB395KP
	2367	" M	0632			
	2607	" P	0633			
	2847	" R	0634			
	3087	" S	0635			
6214	2128	CSR13G475KL	0636	0231	0232	4ECEB475KP
	2368	" M	0637			
	2608	" P	0638			
	2848	" R	0639			
	3088	" S	0640			
6215	2129	CSR13G475ML	0641	0233	0234	
	2369	" M	0642			
	2609	" P	0643			
	2849	" R	0644			
	3089	" S	0645			
6217	2130	CSR13G565KL	0646	0235	0236	
	2370	" M	0647			
	2610	" P	0648			
	2850	" R	0649			
	3090	" S	0650			
6219	2131	CSR13G685KL	0651	0237	0238	
	2371	" M	0652			
	2611	" P	0653			
	2851	" R	0654			
	3091	" S	0655			
6220	2132	CSR13G685ML	0656	0239	0240	
	2372	" M	0657			
	2612	" P	0658			
	2852	" R	0659			
	3092	" S	0660			
6222	2133	CSR13G825KL	0661	0241	0242	4ECEC825KP
	2373	" M	0662			
	2613	" P	0663			
	2853	" R	0664			
	3093	" S	0665			
6224	2134	CSR13G106KL	0666	0243	0244	4ECEC106KP
	2374	" M	0667			
	2614	" P	0668			
	2854	" R	0669			
	3094	" S	0670			
6225	2135	CSR13G106ML	0671	0245	0246	4ECEC106LP
	2375	" M	0672			
	2615	" P	0673			
	2855	" R	0674			
	3095	" S	0675			

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 202610-21T16:03Z
Check the source to verify that this is the current version before use.

Ⓖ TABLE II. Substitutability data - Continued. 1/

Substitute item MIL-C-39003/1F and /1G (B level)	Substitutable for: MIL-C-39003/1A, /1C, /1D, and /1E	MIL-C-39003/1B	MIL-C-39003/1	MIL-C-26655/2D CS12	MIL-C-26655/2D CS13	MIL-C-38102/4B(USAF)
6227	2136	CSR13G126KL	0676	0247	0248	4ECEC126KP
	2376	" M	0677			
	2616	" P	0678			
	2856	" R	0679			
	3096	" S	0680			
6229	2137	CSR13G156KL	0681	0249	0250	4ECEC156KP
	2377	" M	0682			
	2617	" P	0683			
	2857	" R	0684			
	3097	" S	0685			
6230	2138	CSR13G156ML	0686	0251	0252	4ECEC156LP
	2378	" M	0687			
	2618	" P	0688			
	2858	" R	0689			
	3098	" S	0690			
6232	2139	CSR13G186KL	0691	0253	0254	4ECEC186KP
	2379	" M	0692			
	2619	" P	0693			
	2859	" R	0694			
	3099	" S	0695			
6234	2140	CSR13G226KL	0696	0255	0256	
	2380	" M	0697			
	2620	" P	0698			
	2860	" R	0699			
	3100	" S	0700			
6235	2141	CSR13G226ML	0701	0257	0258	
	2381	" M	0702			
	2621	" P	0703			
	2861	" R	0704			
	3101	" S	0705			
6237	2142	CSR13H104KL	0706	0259	0260	
	2382	" M	0707			
	2622	" P	0708			
	2862	" R	0709			
	3102	" S	0710			
6238	2143	CSR13H104ML	0711	0261	0262	
	2383	" M	0712			
	2623	" P	0713			
	2863	" R	0714			
	3103	" S	0715			
6240	2144	CSR13H124KL	0716	0263	0264	
	2384	" M	0717			
	2624	" P	0718			
	2864	" R	0719			
	3104		0720			

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026l0-21T16:03Z
Check the source to verify that this is the current version before use.

(G) TABLE II. Substitutability data - Continued. 1/

Substitute item MIL-C-39003/1F and /1G (B level)	Substitutable for: MIL-C-39003/1A, /1C, /1D, and /1E	MIL-C-39003/1B	MIL-C-39003/1	MIL-C-26655/2D CS12	MIL-C-26655/2D CS13	MIL-C-38102/4B(USAF)
6242	2145	CSR13H154KL	0721	0265	0266	
	2385	" M	0722			
	2625	" P	0723			
	2865	" R	0724			
	3105	" S	0725			
6243	2146	CSR13H154ML	0726	0267	0268	
	2386	" M	0727			
	2626	" P	0728			
	2866	" R	0729			
	3106	" S	0730			
6245	2147	CSR13H184KL	0731	0269	0270	
	2387	" M	0732			
	2627	" P	0733			
	2867	" R	0734			
	3107	" S	0735			
6247	2148	CSR13H224KL	0736	0271	0272	
	2388	" M	0737			
	2628	" P	0738			
	2868	" R	0739			
	3108	" S	0740			
6248	2149	CSR13H224ML	0741	0273	0274	
	2389	" M	0742			
	2629	" P	0743			
	2869	" R	0744			
	3109	" S	0745			
6250	2150	CSR13H274KL	0746	0275	0276	
	2390	" M	0747			
	2630	" P	0748			
	2870	" R	0749			
	3110	" S	0750			
6252	2151	CSR13H334KL	0751	0277	0278	
	2391	" M	0752			
	2631	" P	0753			
	2871	" R	0754			
	3111	" S	0755			
6253	2152	CSR13H334ML	0756	0279	0280	
	2392	" M	0757			
	2632	" P	0758			
	2872	" R	0759			
	3112	" S	0760			
6255	2153	CSR13H394KL	0761	0281	0282	
	2393	" M	0762			
	2633	" P	0763			
	2873	" R	0764			
	3113	" S	0765			

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 202610-21T16:03Z
Check the source to verify that this is the current version before use.

(G) TABLE II. Substitutability data - Continued. 1/

Substitute item MIL-C-39003/1F and /1G (B level)	Substitutable for: MIL-C-39003/1A, /1C, /1D, and /1E	MIL-C-39003/1B	MIL-C-39003/1	MIL-C-26655/2D CS12	MIL-C-26655/2D CS13	MIL-C-38102/4B(USAF)
6257	2154	CSR13H474KL	0766	0283	0284	
	2394	" M	0767			
	2634	" P	0768			
	2874	" R	0769			
	3114	" S	0770			
6258	2155	CSR13H474KL	0771	0285	0286	
	2395	" M	0772			
	2635	" P	0773			
	2875	" R	0774			
	3115	" S	0775			
6260	2156	CSR13H564KL	0776	0287	0288	
	2396	" M	0777			
	2636	" P	0778			
	2876	" R	0779			
	3116	" S	0780			
6262	2157	CSR13H684KL	0781	0289	0290	
	2397	" M	0782			
	2637	" P	0783			
	2877	" R	0784			
	3117	" S	0785			
6263	2158	CSR13H684ML	0786	0291	0292	
	2398	" M	0787			
	2638	" P	0788			
	2878	" R	0789			
	3118	" S	0790			
6265	2159	CSR13H824KL	0791	0293	0294	
	2399	" M	0792			
	2639	" P	0793			
	2879	" R	0794			
	3119	" S	0795			
6267	2160	CSR13H105KL	0796	0295	0296	
	2400	" M	0797			
	2640	" P	0798			
	2880	" R	0799			
	3120	" S	0800			
6268	2161	CSR13H105ML	0801	0297	0298	
	2401	" M	0802			
	2641	" P	0803			
	2881	" R	0804			
	3121	" S	0805			
6270	2162	CSR13H125KL	0806	0299	0300	
	2402	" M	0807			
	2642	" P	0808			
	2882	" R	0809			
	3122	" S	0810			

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:03Z
Check the source to verify that this is the current version before use.

(G) TABLE II. Substitutability data - Continued. 1/

Substitute item MIL-C-39003/1F and /1G (B level)	Substitutable for: MIL-C-39003/1A, /1C, /1D, and /1E	MIL-C-39003/1B	MIL-C-39003/1	MIL-C-26655/2D CS12	MIL-C-26655/2D CS13	MIL-C-38102/4B(USAF)
6272	2163	CSR13H155KL	0811	0301	0302	
	2403	" M	0812			
	2643	" P	0813			
	2883	" R	0814			
	3123	" S	0815			
6273	2164	CSR13H155ML	0816	0303	0304	
	2404	" M	0817			
	2644	" P	0818			
	2884	" R	0819			
	3124	" S	0820			
6275	2165	CSR13H185KL	0821	0305	0306	
	2405	" M	0822			
	2645	" P	0823			
	2885	" R	0824			
	3125	" S	0825			
6277	2166	CSR13H225KL	0826	0307	0308	
	2406	" M	0827			
	2646	" P	0828			
	2886	" R	0829			
	3126	" S	0830			
6278	2167	CSR13H225ML	0831	0309	0310	
	2407	" M	0832			
	2647	" P	0833			
	2887	" R	0834			
	3127	" S	0835			
6280	2168	CSR13H275KL	0836	0311	0312	
	2408	" M	0837			
	2648	" P	0838			
	2888	" R	0839			
	3128	" S	0840			
6282	2169	CSR13H335KL	0841	0313	0314	
	2409	" M	0842			
	2649	" P	0843			
	2889	" R	0844			
	3129	" S	0845			
6283	2170	CSR13H335ML	0846	0315	0316	
	2410	" M	0847			
	2650	" P	0848			
	2890	" R	0849			
	3130	" S	0850			
6285	2171	CSR13H395KL	0851	0317	0318	
	2411	" M	0852			
	2651	" P	0853			
	2891	" R	0854			
	3131	" S	0855			

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:03Z
Check the source to verify that this is the current version before use.

(G) TABLE II. Substitutability data - Continued. 1/

Substitute item MIL-C-39003/1F and /1G (B level)	Substitutable for: MIL-C-39003/1A, /1C, /1D, and /1E	MIL-C-39003/1B	MIL-C-39003/1	MIL-C-26655/2D CS12	MIL-C-26655/2D CS13	MIL-C-38102/4B(USAF)
6287	2172	CSR13H475KL	0856	0319	0320	
	2412	" M	0857			
	2652	" P	0858			
	2892	" R	0859			
	3132	" S	0860			
6288	2173	CSR13H475ML	0861	0321	0322	
	2413	" M	0862			
	2653	" P	0863			
	2893	" R	0864			
	3133	" S	0865			
6290	2174	CSR13H565KL	0866	0323	0324	
	2414	" M	0867			
	2654	" P	0868			
	2894	" R	0869			
	3134	" S	0870			
6292	2175	CSR13H685KL	0871	0325	0326	
	2415	" M	0872			
	2655	" P	0873			
	2895	" R	0874			
	3135	" S	0875			
6293	2176	CSR13H685ML	0876	0327	0328	
	2416	" M	0877			
	2656	" P	0878			
	2896	" R	0879			
	3136	" S	0880			
6295	2177	CSR13H825KL	0881	0329	0330	
	2417	" M	0882			
	2657	" P	0883			
	2897	" R	0884			
	3137	" S	0885			
6297	2178	CSR13H106KL	0886	0331	0332	
	2418	" M	0887			
	2658	" P	0888			
	2898	" R	0889			
	3138	" S	0890			
6298	2179	CSR13H106ML	0891	0333	0334	
	2419	" M	0892			
	2659	" P	0893			
	2899	" R	0894			
	3139	" S	0895			
6300	2180	CSR13H126KL	0896	0335	0336	
	2420	" M	0897			
	2660	" P	0898			
	2900	" R	0899			
	3140	" S	0900			

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:03Z
Check the source to verify that this is the current version before use.

Ⓖ TABLE II. Substitutability data - Continued. 1/

Substitute item MIL-C-39003/1F and /1G (B level)	Substitutable for: MIL-C-39003/1A, /1C, /1D, and /1E	MIL-C-39003/1B	MIL-C-39003/1	MIL-C-26655/2D CS12	MIL-C-26655/2D CS13	MIL-C-38102/4B(USAF)
6302	2181	CSR13H156KL	0901	0337	0338	
	2421	" M	0902			
	2661	" P	0903			
	2901	" R	0904			
	3141	" S	0905			
6303	2182	CSR13H156ML	0906	0339	0340	
	2422	" M	0907			
	2662	" P	0908			
	2902	" R	0909			
	3142	" S	0910			
6305	2183	CSR13J472KL		0341	0342	
	2423	" M				
	2663	" P				
	2903	" R				
	3143	" S				
6306	2184	CSR13J472ML		0343	0344	
	2424	" M				
	2664	" P				
	2904	" R				
	3144	" S				
6308	2185	CSR13J562KL		0345	0346	
	2425	" M				
	2665	" P				
	2905	" R				
	3145	" S				
6310	2186	CSR13J682KL		0347	0348	
	2426	" M				
	2666	" P				
	2906	" R				
	3146	" S				
6311	2187	CSR13J682ML		0349	0350	
	2427	" M				
	2667	" P				
	2907	" R				
	3147	" S				
6313	2188	CSR13J822KL		0351	0352	
	2428	" M				
	2668	" P				
	2908	" R				
	3148	" S				
6315	2189	CSR13J103KL		0353	0354	
	2429	" M				
	2669	" P				
	2909	" R				
	3149	" S				

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 202610-21T16:03Z
Check the source to verify that this is the current version before use.

(G) TABLE II. Substitutability data - Continued. 1/

Substitute item MIL-C-39003/1F and /1G (B level)	Substitutable for: MIL-C-39003/1A, /1C, /1D, and /1E	MIL-C-39003/1B	MIL-C-39003/1	MIL-C-26655/20 CS12	MIL-C-26655/20 CS13	MIL-C-38102/48(USAF)
6316	2190 2430 2670 2910 3150	CSR13J103ML " M " P " R " S		0355	0356	
6318	2191 2431 2671 2911 3151	CSR13J123KL " M " P " R " S		0357	0358	
6320	2192 2432 2672 2912 3152	CSR13J153KL " M " P " R " S		0359	0360	
6321	2193 2433 2673 2913 3153	CSR13J153ML " M " P " R " S		0361	0362	
6323	2194 2434 2674 2914 3154	CSR13J183KL " M " P " R " S		0363	0364	
6325	2195 2435 2675 2915 3155	CSR13J223KL " M " P " R " S		0365	0366	
6326	2196 2436 2676 2916 3156	CSR13J223ML " M " P " R " S		0367	0368	
6328	2197 2437 2677 2917 3157	CSR13J273KL " M " P " R " S		0369	0370	
6330	2198 2438 2678 2918 3158	CSR13J333KL " M " P " R " S		0371	0372	

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:03Z
Check the source to verify that this is the current version before use.

(G) TABLE II. Substitutability data - Continued. 1/

Substitute item MIL-C-39003/1F and /1G (B level)	Substitutable for: MIL-C-39003/1A, /1C, /1D, and /1E	MIL-C-39003/1B	MIL-C-39003/1	MIL-C-26655/20 CS12	MIL-C-26655/20 CS13	MIL-C-38102/4B(USAF)
6331	2199	CSR13J333ML		0373	0374	
	2439	" M				
	2679	" P				
	2919	" R				
	3159	" S				
6333	2200	CSR13J393KL		0375	0376	
	2440	" M				
	2680	" P				
	2920	" R				
	3160	" S				
6335	2201	CSR13J473KL		0377	0378	
	2441	" M				
	2681	" P				
	2921	" R				
	3161	" S				
6336	2202	CSR13J473ML		0379	0380	
	2442	" M				
	2682	" P				
	2922	" R				
	3162	" S				
6338	2203	CSR13J563KL		0381	0382	
	2443	" M				
	2683	" P				
	2923	" R				
	3163	" S				
6340	2204	CSR13J683KL		0383	0384	
	2444	" M				
	2684	" P				
	2924	" R				
	3164	" S				
6341	2205	CSR13J683ML		0385	0386	
	2445	" M				
	2685	" P				
	2925	" R				
	3165	" S				
6343	2206	CSR13J823KL		0387	0388	
	2446	" M				
	2686	" P				
	2926	" R				
	3166	" S				
6345	2207	CSR13J104KL	0911	0389	0390	
	2447	" M	0912			
	2687	" P	0913			
	2927	" R	0914			
	3167	" S	0915			

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:03Z
Check the source to verify that this is the current version before use.

(G) TABLE II. Substitutability data - Continued. 1/

Substitute item MIL-C-39003/1F and /1G (B level)	Substitutable for: MIL-C-39003/1A, /1C, /1D, and /1E	MIL-C-39003/1B	MIL-C-39003/1	MIL-C-26655/2D CS12	MIL-C-26655/2D CS13	MIL-C-38102/4B(USAF)
6346	2208	CSR13J104ML	0916	0391	0392	
	2448	" M	0917			
	2688	" P	0918			
	2928	" R	0919			
	3168	" S	0920			
6348	2209	CSR13J124KL	0921	0393	0394	
	2449	" M	0922			
	2689	" P	0923			
	2929	" R	0924			
	3169	" S	0925			
6350	2210	CSR13J154KL	0926	0395	0396	
	2450	" M	0927			
	2690	" P	0928			
	2930	" R	0929			
	3170	" S	0930			
6351	2211	CSR13J154ML	0931	0397	0398	
	2451	" M	0932			
	2691	" P	0933			
	2931	" R	0934			
	3171	" S	0935			
6353	2212	CSR13J184KL	0936	0399	0400	
	2452	" M	0937			
	2692	" P	0938			
	2932	" R	0939			
	3172	" S	0940			
6355	2213	CSR13J224KL	0941	0401	0402	
	2453	" M	0942			
	2693	" P	0943			
	2933	" R	0944			
	3173	" S	0945			
6356	2214	CSR13J224ML	0946	0403	0404	
	2454	" M	0947			
	2694	" P	0948			
	2934	" R	0949			
	3174	" S	0950			
6358	2215	CSR13J274KL	0951	0405	0406	
	2455	" M	0952			
	2695	" P	0953			
	2935	" R	0954			
	3175	" S	0955			
6360	2216	CSR13J334KL	0956	0407	0408	
	2456	" M	0957			
	2696	" P	0958			
	2936	" R	0959			
	3176	" S	0960			

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:03Z
Check the source to verify that this is the current version before use.

(G) TABLE II. Substitutability data - Continued. 1/

Substitute item MIL-C-39003/1F and /1G (B level)	Substitutable for: MIL-C-39003/1A, /1C, /1D, and /1E	MIL-C-39003/1B	MIL-C-39003/1	MIL-C-26655/2D CS12	MIL-C-26655/2D CS13	MIL-C-38102/4B(USAF)
6361	2217	CSR13J334ML	0961	0409	0410	
	2457	" M	0962			
	2697	" P	0963			
	2937	" R	0964			
	3177	" S	0965			
6363	2218	CSR13J394KL	0966	0411	0412	
	2458	" M	0967			
	2698	" P	0968			
	2938	" R	0968			
	3178	" S	0970			
6365	2219	CSR13J474KL	0971	0413	0414	
	2459	" M	0972			
	2699	" P	0973			
	2939	" R	0974			
	3179	" S	0975			
6366	2220	CSR13J474ML	0976	0415	0416	
	2460	" M	0977			
	2700	" P	0978			
	2940	" R	0979			
	3180	" S	0980			
6368	2221	CSR13J564KL	0981	0417	0418	
	2461	" M	0982			
	2701	" P	0983			
	2941	" R	0984			
	3181	" S	0985			
6370	2222	CSR13J684KL	0986	0419	0420	
	2462	" M	0987			
	2702	" P	0988			
	2942	" R	0989			
	3182	" S	0990			
6371	2223	CSR13J684ML	0991	0421	0422	
	2463	" M	0992			
	2703	" P	0993			
	2943	" R	0994			
	3183	" S	0995			
6373	2224	CSR13J824KL	0996	0423	0424	
	2464	" M	0997			
	2704	" P	0998			
	2944	" R	0999			
	3184	" S	1000			
6375	2225	CSR13J105KL	1001	0425	0426	
	2465	" M	1002			
	2705	" P	1003			
	2945	" R	1004			
	3185	" S	1005			

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:03Z
Check the source to verify that this is the current version before use.

(G) TABLE II. Substitutability data - Continued. 1/

Substitute item MIL-C-39003/1F and /1G (B level)	Substitutable for: MIL-C-39003/1A, /1C, /1D, and /1E	MIL-C-39003/1B	MIL-C-39003/1	MIL-C-26655/2D CS12	MIL-C-26655/2D CS13	MIL-C-38102/4B(USAF)
6376	2226	CSR13J105ML	1006	0427	0428	
	2466	" M	1007			
	2706	" P	1008			
	2946	" R	1009			
	3186	" S	1010			
6378	2227	CSR13J125KL	1011	0429	0430	
	2467	" M	1012			
	2707	" P	1013			
	2947	" R	1014			
	3187	" S	1015			
6380	2228	CSR13J155KL	1016	0431	0432	
	2468	" M	1017			
	2708	" P	1018			
	2948	" R	1019			
	3188	" S	1020			
6381	2229	CSR13J155ML	1021	0433	0434	
	2469	" M	1022			
	2709	" P	1023			
	2949	" R	1024			
	3189	" S	1025			
6383	2230	CSR13J185KL	1026	0435	0436	
	2470	" M	1027			
	2710	" P	1028			
	2950	" R	1029			
	3190	" S	1030			
6385	2231	CSR13J225KL	1031	0437	0438	
	2471	" M	1032			
	2711	" P	1033			
	2951	" R	1034			
	3191	" S	1035			
6386	2232	CSR13J225ML	1036	0439	0440	
	2472	" M	1037			
	2712	" P	1038			
	2952	" R	1039			
	3192	" S	1040			
6388	2233	CSR13J275KL	1041	0441	0442	
	2473	" M	1042			
	2713	" P	1043			
	2953	" R	1044			
	3193	" S	1045			

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026l0-21T16:03Z
Check the source to verify that this is the current version before use.

Ⓖ TABLE II. Substitutability data - Continued. 1/

1/ Items having a better failure rate (FRL) may be substituted for items of a lesser FRL, as shown in table II.

Example: -2961(S) may replace -2001(L), -2241(M), -2481(P) and -2721(R)
-2721(R) may replace -2001(L), -2241(M), and -2481(P)
-2481(P) may replace -2001(L),and -2241(M)
-2241(M) may replace -2001(L).

Also shown in table II are units covered by past issues of this specification sheet (which are identified by either dash number or type designation) and units formerly covered by MIL-C-26655/2D and MIL-C-38102/4B(USAF). Table II is arranged in a manner that the first line of a group is FRL "L" and progresses downward to FRL "S". In this manner of grouping, the FRL of a specific dash number may be identified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:03Z
Check the source to verify that this is the current version before use.

(G) TABLE III. Substitutability for number of MIL-C-39003/5(USAF).

Dash no. MIL-C-39003/1F	Substitutable for no. MIL-C-39003/5(USAF)		Dash no. MIL-C-39003/1F	Substitutable for no. MIL-C-39003/5(USAF)		Dash no. MIL-C-39003/1F	Substitutable for no. MIL-C-39003/5(USAF)		Dash no. MIL-C-39003/1F	Substitutable for no. MIL-C-39003/5(USAF)		Dash no. MIL-C-39003/1F	Substitutable for no. MIL-C-39003/5(USAF)	
M(1.0)	L(2.0)	M(1.0)	M(1.0)	L(2.0)	M(1.0)	M(1.0)	L(2.0)	M(1.0)	M(1.0)	L(2.0)	M(1.0)	M(1.0)	L(2.0)	M(1.0)
5001	0001	0161	5037	0037	0197	5073	0073	0233	5109	0109	0269	5145	0145	0305
5002	0002	0162	5038	0038	0198	5074	0074	0234	5110	0110	0270	5146	0146	0306
5003	0003	0163	5039	0039	0199	5075	0075	0235	5111	0111	0271	5147	0147	0307
5004	0004	0164	5040	0040	0200	5076	0076	0236	5112	0112	0272	5148	0148	0308
5005	0005	0165	5041	0041	0201	5077	0077	0237	5113	0113	0273	5149	0149	0309
5006	0006	0166	5042	0042	0202	5078	0078	0238	5114	0114	0274	5150	0150	0310
5007	0007	0167	5043	0043	0203	5079	0079	0239	5115	0115	0275	5151	0151	0311
5008	0008	0168	5044	0044	0204	5080	0080	0240	5116	0116	0276	5152	0152	0312
5009	0009	0169	5045	0045	0205	5081	0081	0241	5117	0117	0277	5153	0153	0313
5010	0010	0170	5046	0046	0206	5082	0082	0242	5118	0118	0278	5154	0154	0314
5011	0011	0171	5047	0047	0207	5083	0083	0243	5119	0119	0279	5155	0155	0315
5012	0012	0172	5048	0048	0208	5084	0084	0244	5120	0120	0280			
5013	0013	0173	5049	0049	0209	5085	0085	0245	5121	0121	0281			
5014	0014	0174	5050	0050	0210	5086	0086	0246	5122	0122	0282			
5015	0015	0175	5051	0051	0211	5087	0087	0247	5123	0123	0283			
5016	0016	0176	5052	0052	0212	5088	0088	0248	5124	0124	0284			
5017	0017	0177	5053	0053	0213	5089	0089	0249	5125	0125	0285			
5018	0018	0178	5054	0054	0214	5090	0090	0250	5126	0126	0286			
5019	0019	0179	5055	0055	0215	5091	0091	0251	5127	0127	0287			
5020	0020	0180	5056	0056	0216	5092	0092	0252	5128	0128	0288			
5021	0021	0181	5057	0057	0217	5093	0093	0253	5129	0129	0289			
5022	0022	0182	5058	0058	0218	5094	0094	0254	5130	0130	0290			
5023	0023	0183	5059	0059	0219	5095	0095	0255	5131	0131	0291			
5024	0024	0184	5060	0060	0220	5096	0096	0256	5132	0132	0292			
5025	0025	0185	5061	0061	0221	5097	0097	0257	5133	0133	0293			
5026	0026	0186	5062	0062	0222	5098	0098	0258	5134	0134	0294			
5027	0027	0187	5063	0063	0223	5099	0099	0259	5135	0135	0295			
5028	0028	0188	5064	0064	0224	5100	0100	0260	5136	0136	0296			
5029	0029	0189	5065	0065	0225	5101	0101	0261	5137	0137	0297			
5030	0030	0190	5066	0066	0226	5102	0102	0262	5138	0138	0298			
5031	0031	0191	5067	0067	0227	5103	0103	0263	5139	0139	0299			
5032	0032	0192	5068	0068	0228	5104	0104	0264	5140	0140	0300			
5033	0033	0193	5069	0069	0229	5105	0105	0265	5141	0141	0301			
5034	0034	0194	5070	0070	0230	5106	0106	0266	5142	0142	0302			
5035	0035	0195	5071	0071	0231	5107	0107	0267	5143	0143	0303			
5036	0036	0196	5072	0072	0232	5108	0108	0268	5114	0144	0304			

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T16:03Z
Check the source to verify that this is the current version before use.

(G) TABLE III. Substitutability for number of MIL-C-39003/5(USAF) - Continued.

Dash no. in MIL-C-39003/1F	Substitutable for no. of MIL-C-39003/5(USAF)				
	L(2.0)	M(1.0)	P(0.1)	R(0.01)	S(0.001)
5201 P(0.1)	0001	0161	0321		
5355 P(0.1)	0155	0315	0475		
5401 R(0.01)	0001	0161	0321	0481	
5555 R(0.01)	0155	0315	0475	0635	
5601 S(0.001)	0001	0161	0321	0481	0641
5755 S(0.001)	0155	0315	0475	0635	0795

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Navy - SH
Air Force - 17, 85, 99
DLA - ES

User activities:
Navy - AS, MC, OS
Air Force - 19

Preparing activity:
Navy - EC

(Project 5910-1754)

Source: https://assist.dla.mil -- Downloaded: 202610-21T16:03Z
Check the source to verify that this is the current version before use.