MIL-C-45009(Ord)
21 November 1957
SUPERSEDING
FCP 3417A
12 September 1956

MILITARY SPECIFICATION

CIRCLE, AIMING, M2; PACKAGING OF

1. SCOPE

1.1 This specification covers the packaging and packing of Aiming Circle, M2, with equipment, for each level of protection.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids, form a part of this specification.

SPECIFICATIONS

Federal

O-E760	Ethyl Alcohol (Ethanol)
UU-P-268	Paper, Kraft, Wrapping
UU-P-313	Paper, Lens Tissue
UU-T-106	Tape, Masking; Paper (Pressure-Sensitive)
UU-T-111	Tape; Paper, Gummed (Sealing and Securing)
CCC-C-271	Cheesecloth, Bleached and Unbleached
JJJ-C-561	Cotton; Sterile and Nonsterile
LLL-F-291	Fiberboard; Corrugated, Single Face, (Flexible)

FSC 1290

Source: https://assist.dla.mil -- Downloaded: 20260-22T02:12Z
Check the source to verify that this is the current version before use.

PPP-B-585	Boxes; Wood, Wirebound
PPP-B-601	Boxes, Wood, Cleated-Plywood
PPP-B-621	Boxes, Wood, Nailed and Lock-Corner
PPP-B-636	Boxes, Fiber
PPP-T-60	Tape; Pressure Sensitive Adhesive, Waterproof - for Packaging and Sealing
PPP-T-76	Tape, Pressure-Sensitive Adhesive, Paper, Water-Resistant

Military

JAN-P-100	Packaging and Packing for Overseas Shipment - General Specification
MIL-P-116	Preservation, Methods of
MIL-B-117	Bags, Interior Packaging
MIL-B-121	Barrier Material, Greaseproofed, Flexible (Waterproofed)
MIL-B-130	Barrier-Material, Paper, Noncorrosive
MIL-B-131	Barrier Material; Water Vaporproof, Flexible
MIL-L-3150	Lubricating-Oil, Preservative, Medium
MIL-C-7769	Cushioning Material, Bound Fiber
MIL-P-13988	Paper, Lens, Tissue, Antitarnish, Wrapping

STANDARDS

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	Marking for Shipment and Storage

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:12Z
Check the source to verify that this is the current version before use.

(Copies of specifications, standards and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer).

3. REQUIREMENTS

3.1 Materials and Methods.- The materials, methods and procedures used in the packaging of items shall be in accordance with this specification. Materials and methods not covered by a specification shall be suited to the intended use and subject to the approval of the contracting officer. Unless otherwise specified, the contractor shall provide the Government inspector certification of adherence to the required material specifications.

3.1.1 Materials.- The following shall apply wherever packaging materials are referred to in this specification by name only:

REFERENCE	FULL IDENTIFICATION
Barrier material	Type II of Specification MIL-B-130
Flexible single face corrugated fiberboard	Type I of Specification LLL-F-291
Gummed tape	Class 1 or 2 of Specification UU-T-111
Pressure sensitive tape	Type I of Specification UU-T-106.

3.2 Size of containers.- Bags, interior containers and exterior containers shall be of a minimum size to adequately contain the items.

3.3 Preservation and packaging

3.3.1 Level A.

3.3.1.1 Cleaning.

3.3.1.1.1 Optics.

3.3.1.1.1.1 The following materials and equipment shall be used in the cleaning of optics:

Materials and equipment	Specification
Alcohol, ethyl	Grade II of Specification O-E-760
Bottle, glass, 4 ounce	----------
Brush, camel's hair	----------
Cheesecloth	Specification CCC-C-271
Cloth, batiste	----------

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:12Z
Check the source to verify that this is the current version before use.

Cotton, absorbent	Grade A, class 1 of Specification JJJ-C-561
Paper, lens tissue	Specification UU-P-313
Sticks, orange or equal	----------
Syringe, rubber	----------

3.3.1.1.1.2 Cleaning exposed glass surfaces of the optics shall be accomplished in the following manner:

a. Loose particles of dust shall be removed from the surfaces of the optics with a camel's hair brush.

b. The surface to be cleaned shall be wiped with a circular motion, using a cloth which is saturated with alcohol. The surfaces shall be dried with a clean wiping cloth.

c. A swab shall be made by wrapping one piece of lens tissue paper around the end of an orange stick or equal. One or two drops of alcohol shall be added on the tip of the swab. The swabbing operation shall begin at the center of the polished surface. A light, downward pressure shall be exerted on the swab and with a circular motion gradually increase the radius of area being cleaned until the entire surface has been swabbed. This operation shall be repeated until no trace of dirt, lint or smears are perceptible.

d. A rubber syringe shall be used as a bellows to remove any residual dust or lint that may remain on the cleaned surface.

e. Immediately after cleaning, the optics and other glass surfaces shall be covered or wrapped with lens tissue paper conforming to Specification MIL-P-13988.

3.3.1.1.2 Other surfaces.- Cleaning Process C-1 of Specification MIL-P-116 shall be used to clean other surfaces of the aiming circle and the equipment.

3.3.1.2 Drying.- Immediately after cleaning, the item shall be dried thoroughly in accordance with any applicable procedure specified in Specification MIL-P-116 that will not damage the items.

3.3.1.3 Preservative application.- Preservative conforming to Specification MIL-L-3150 (P-7 Specification MIL-P-116) shall be applied on the threads of the screw that secures the aiming circle to the tripod. Remove excess preservative.

3.3.1.4 Unit packaging.- The aiming circle and equipment shall be packaged in accordance with the following packaging methods and as specified herein:

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:12Z
Check the source to verify that this is the current version before use.

ITEM	PACKAGING METHOD (specified in Specification MIL-P-116)
Aiming circle	IA-8
Instrument light, back plate, plumb bob, lamp holders and cover (Canvas)	IA-8
Tripod	IC-5
Metal cover	IC-5
ORD-7 SNL F-379 and TM 9-6166 (placed together)	IC-1

3.3.1.4.1 Aiming circle

3.3.1.4.1.1 Securing lens tissue paper.- The lens tissue paper covering the optics and glass surfaces shall be secured to the aiming circle with pressure sensitive tape.

3.3.1.4.1.2 Instrument settings.- The 3 leveling knobs shall be turned counter clock-wise until finger tight, then backed off a half turn. The azimuth knob shall be set at zero and the locking lever for the compass needle shall be set at the vertical position, which locks the compass needle. The elevation knob shall be set at zero. Figure 1 shows the aiming circle set at the aforementioned setting.

3.3.1.4.1.3 Wrapping.- The aiming circle shall be wrapped in such a manner that it is covered with two thicknesses of barrier material. The wrap shall be secured in place with gummed tape.

3.3.1.4.1.4 Water-vaporproof bag.- The wrapped aiming circle shall be placed in a bag fabricated from water-vaporproof barrier material conforming to class 1 of Specification MIL-B-131. The bag shall be heat sealed in such a manner that it will pass the heat seal test of Specification MIL-P-116. Entrapped air shall be exhausted prior to final closure.

3.3.1.4.1.5 Cushioning and immobilizing in a fiberboard box

3.3.1.4.1.5.1 Each bagged aiming circle shall be cushioned and immobilized in a fiberboard box conforming to class 2 or 3, any compliance symbol and any style, except FTC, TS, OPF and FPF, of Specification PPP-B-636. The size of the box shall be 8 inches by 8 inches by 12 inches.

3.3.1.4.1.5.2 Bound cushioning material at least two inches thick, conforming to type III or IV of Specification MIL-C-7769, shall be used to cushion and immobilize the bagged aiming circle in the fiberboard box in the following manner and as shown in Figure 2:

a. Four strips of bound cushioning material, at least three inches wide, shall be positioned on the bottom of the box with the width of the material against the sides of the box. The length of two strips shall be equal to the width of the box. The length of the other two strips shall be such that they fit snugly between the other two strips.

Source: https://assist.dla.mil -- Downloaded: 20260-22T02:12Z
Check the source to verify that this is the current version before use.

b. A piece of bound cushioning material shall be placed on the bottom of the box between the previously placed strips of bound cushioning material. The length and width of the piece shall be such that the piece fits snugly between the four strips of bound cushioning material.

c. The bagged aiming circle shall then be placed in the box with the base of the aiming circle resting on the piece of bound cushioning material that was placed on the bottom of the box.

d. Pieces of bound cushioning material shall be placed around the bagged aiming circle in such a manner that the pieces are packed tightly between the sides of the box and the bagged item as shown in Figure 2. Pieces of the bound cushioning material shall be stuffed in the box until the cushioning material is even with the top of the bagged item or slightly above the bag.

e. A piece of bound cushioning material 8 inches long by 8 inches wide shall be placed on top of the pieces of bound cushioning material and the bagged item.

f. The fiberboard box shall be closed with pressure sensitive tape conforming to Specification PPP-T-76 in accordance with the Appendix to the box specification.

3.3.1.4.2 Back plate, instrument light, plumb bob, lamp holders and canvas cover.- The back plate shall be positioned in the cover. The instrument light shall then be secured to the back plate. The plumb bob and the lamp holders shall be placed in their respective positions in the cover. The cover shall then be closed and secured. The cover containing the aforementioned items shall be wrapped with flexible single face corrugated fiberboard. The wrap shall be secured with gummed tape. The wrapped items shall then be placed in a water-vaporproof bag conforming to class 2 of Specification MIL-B-131. The bag shall be heat sealed in such a manner that it will pass the heat seal and quick leak tests of Specification MIL-P-116. Entrapped air shall be exhausted prior to final closure. The bagged items shall then be immobilized in a fiberboard box as shown in Figure 3. The characteristics of the fiberboard box and the manner in which it is closed shall be as specified in 3.3.1.4.1.5.1 and 3.3.1.4.1.5.2f.

3.3.1.4.3 Tripod.- Greaseproofed barrier material, conforming to type I, grade C, class 1 of Specification MIL-B-121, shall be applied over the capped end of the tripod. The tripod legs shall be pushed back to their retracted position and clamped. The tripod legs shall then be strapped together with the straps provided on the tripod. The carrying strap shall be neatly folded and secured to the tripod leg with pressure sensitive tape conforming to type III, any class of Specification PPP-T-60. Flexible single face corrugated fiberboard shall be wrapped around the projections near the base of the tripod. The flexible single face corrugated wrap shall be secured in place with gummed tape. A block of wood shall be positioned at each end of a fiberboard box as shown in Figure 4. The tripod shall either fit snugly in the fiberboard box or be immobilized in the box with flexible single face corrugated fiberboard. The characteristics of the fiberboard box and the manner in which it is closed shall be as specified in 3.3.1.4.1.5.1 and 3.3.1.4.1.5.2f.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:12Z
Check the source to verify that this is the current version before use.

3.3.1.4.4 Metal Cover.- The metal cover, shown in Figure 5, shall be wrapped with barrier material. The wrap shall be secured with gummed tape. The wrapped cover shall be immobilized in a fiberboard box. The characteristics of the fiberboard box and the manner in which it is closed shall be as specified in 3.3.1.4.1.5.1 and 3.3.1.4.1.5.2f.

3.3.1.4.5 Publications.- Publications ORD-7 SNL F379 and TM 9-6166 shall be inserted in a bag conforming to type II, class b of Specification MIL-B-117. The bag shall be heat sealed. See 6.4.

3.3.2 Level B

3.3.2.1 Cleaning, drying and preservative application.- Cleaning, drying and preservative application shall be as specified in 3.3.1.1, 3.3.1.2 and 3.3.1.3.

3.3.2.2 Unit packaging.- Unit packaging the aiming circle and equipment shall be as specified in 3.3.1.4, except that fiberboard boxes conforming to class 1, any style, except FTC, TS, OPF and FPF, of Specification PPP-B-636 shall be used in lieu of the boxes specified in 3.3.1.4.1.5.1, 3.3.1.4.2, 3.3.1.4.3 and 3.3.1.4.4, which changes Method IC-5 to Method I of Specification MIL-P-116 for the tripod and Method IC-5 to Method III of Specification MIL-P-116 for the metal cover. The boxes shall be closed as specified in the Appendix to the box specification.

3.3.3 Level C

3.3.3.1 Cleaning and drying.- Cleaning and drying shall be as specified in 3.3.1.1 and 3.3.1.2.

3.3.3.2 Unit packaging.- The aiming circle and equipment shall be packaged Method III of Specification MIL-P-116 and as described in 3.3.2.2, except as follows:

a. The water-vaporproof bags, specified in 3.3.1.4.1.4 and 3.3.1.4.2, shall be omitted.

b. Publications ORD-7 SNL F379 and TM 9-6166 (see 6.4) shall be wrapped with 50 pound kraft paper conforming to grade B of Specification UU-P-268. The wrap shall be secured with gummed tape. The bag, specified in 3.3.1.4.5, shall be omitted.

3.4 Packing

3.4.1 Level A.- One unit packaged aiming circle with equipment shall be immobilized in a shipping container as shown in Figure 6. The shipping container shall conform to one of the following specifications:

PPP-B-601 Style A or B (overseas type) - type II or III, class 2 plywood
PPP-B-621 Class 2 (overseas), Style 2 or 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:12Z
Check the source to verify that this is the current version before use.

3.4.2 Level B.- One unit packaged aiming circle with equipment shall be immobilized in a shipping container as shown in Figure 6. The shipping container shall conform to one of the following containers:

PPP-B-601	Any style under domestic type
PPP-B-621	Class 1 (Domestic), style 2 or 4

3.4.3 Level C.- One unit packaged aiming circle with equipment shall be immobilized in a shipping container as shown in Figure 6. The shipping container shall conform to one of the following containers:

PPP-B-585	Any style, class 1
PPP-B-601	Any style under domestic type
PPP-B-621	Class 1 (Domestic), any style

3.4.4 Strapping.- Metal strapping shall be applied on nailed wood and plywood boxes. The type of strapping and the method of applying it shall be as specified in the applicable container specification, except that the straps on a Level B or C container shall not be stapled.

3.5 Marking

3.5.1 Interior packages.- Marking of interior packages shall be in accordance with Standard MIL-STD-129. The serial number shall be added in the identification data on each unit package for Levels A and B and omitted on the Level C unit package.

3.5.2 Shipping container.- The shipping container shall be marked in accordance with Standard MIL-STD-129. The serial number of the aiming circle shall be added in the identification data on each shipping container for Levels A and B and omitted on the Level C shipping container.

3.5.3 Stock number.- The stock number to be added in the identification data shall be obtained from the contracting officer.

3.5.4 Protective coatings on markings.- Exterior markings on Level A shipping containers shall be protected with waterproofing material in accordance with Standard MIL-STD-129.

3.6 Pilot pack.- Prior to quantity production, a pilot pack, consisting of a complete and packed shipping container, shall be submitted to the Government inspector to determine conformance with the applicable requirements of this specification for Levels A and B.

3.7 Workmanship.- Adequate controls shall be utilized to check for contamination of the preservative and cleaning solvents. Wraps shall be neat, conforming, and firmly secured. Tapes shall be uniformly applied. Shipping containers shall be free of protruding staples, nails, etc. Strapping shall be applied perpendicular to

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:12Z
Check the source to verify that this is the current version before use.

the sides of the container just prior to shipment and shall not cover any container marking. Irrelevant marking shall be neatly obliterated. Visual observation shall indicate that the application of specified materials and methods are practical and will not result in packaging or packing deficiencies.

4. QUALITY ASSURANCE PROVISIONS

4.1 Procedures.- The inspection and test procedures specified in this section are the minimum that shall be conducted to determine acceptability of packaging and packing of Circle, Aiming,M2. Inspection and tests shall be accomplished by the contractor under surveillance of the Government Inspector. Prior to production, the pilot pack shall have passed all the inspections and tests specified in 4.4 and 4.5.

4.2 Lot sizes.- The lot size submitted for acceptance purposes shall be determined by the procuring activity and shall be consistent with available facilities and be compatible with production and delivery schedules.

4.3 Sampling.- Sampling for inspection including destructive testing of unit packages shall be in accordance with MIL-STD-105 .

4.4 Inspection - Classification of defects.- Visual inspection for defects established in table I shall apply to each item of the applicable sample of interior packages and exterior containers. The acceptable quality levels specified in table I are expressed in percent defective.

TABLE I - CLASSIFICATION OF DEFECTS

MAJOR DEFECTS

AQL - 1.5		Reqts.	Method of Inspection
1.	Improper instrument settings (Levels A, B, C)	3.3.1.4.1.2	Visual
2.	Improper cushioning (Level A)	3.3.1.4.1.5	Visual
3.	Improper unit packing (Level A)	3.4.1	Visual
	Improper unit packing (Level B)	3.4.2	Visual
	Improper unit packing (Level C)	3.4.3	Visual
4.	Completeness of unit package (Level A)	3.3.1.4	Visual
	Completeness of unit package (Level B)	3.3.2.2	Visual
	Completeness of unit package (Level C)	3.3.3.2	Visual
5.	Improper marking, interior package	3.5.1	Visual
	Improper marking, shipping container	3.5.2	Visual
	Improper marking, stock number	3.5.3	Visual
6.	Improper protective coating on markings	3.5.4	Visual

Source: https://assist.dla.mil -- Downloaded: 20260-22T02:12Z
Check the source to verify that this is the current version before use.

MINOR DEFECTS

AQL - 2.5		Reqts.	Method of Inspection
41.	Improper cleaning, optics (Level A)	3.3.1.1.1	Visual
	Improper cleaning, other surfaces (Level A)	3.3.1.1.2	Visual
	Improper cleaning (Level B)	3.3.2.1	Visual
	Improper cleaning (Level C)	3.3.3.1	Visual
42.	Improper drying (Level A)	3.3.1.2	Visual
	Improper drying (Level B)	3.3.2.1	Visual
	Improper drying (Level C)	3.3.3.1	Visual
43.	Improper preservative (Level A)	3.3.1.3	Visual
	Improper preservative (Level B)	3.3.2.1	Visual
44.	Improper tissue covering (Levels A, B, C)	3.3.1.4.1.1	Visual
45.	Improper wrapping aiming circle (Levels A, B, C)	3.3.1.4.1.3	Visual
46.	Improper waterproof bagging (Levels A & B)	3.3.1.4.1.4	Visual
47.	Excess air (Levels A & B)	3.3.1.4.1.4	Visual
48.	Improper positioning items (Level A)	3.3.1.4.2	Visual
49.	Tripod packaging (Level A)	3.3.1.4.3	Visual
	Tripod packaging (Level B)	3.3.2.2	Visual
	Tripod packaging (Level C)	3.5.1	Visual
50.	Tripod cover	3.3.1.4.4 3.3.2.2	Visual
51.	Publications	3.3.1.4.5	Visual
52.	Strapping	3.4.4	Visual
53.	Workmanship	3.7	Visual

4.5 Tests

4.5.1 Rough handling tests.- The pilot pack specified in 3.6 shall be subjected to the rough handling tests in accordance with specification MIL-P-116, applicable only to Level A.

4.5.2 Sampling for destructive testing shall be in accordance with table IV of MIL-STD-105 , L-4. Samples shall be subject to the following packaging tests in accordance with the procedures outlined in JAN-P-100 specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:12Z
Check the source to verify that this is the current version before use.

Test	AQL - I-4	Paragraph
Heat Seal Test	A & B	3.3.1.4.1.4
Freedom from dirt and smut	A & B	3.3.1.1
Immobilized packaging	A & B	3.3.1.4.1.5 3.3.2.2

4.6 Acceptance and rejection

4.6.1 Final Acceptance.- Inspection lots shall be accepted when the samples have been inspected for the characteristics given in table I of this specification provided the number of rejects are within the limits established in table IV of MIL-STD-105 . All rejected lots shall be returned to contractor for screening of defective characteristics. After corrections have been made, the lots shall be resubmitted for acceptance inspection on the next tighter AQL level.

4.7 Destructive testing

4.7.1 Lots shall be accepted when the number of defective units are found within the limits established in table IV-A of MIL-STD-105 for their respective lot sizes. Should the number of rejects exceed the limit, then the lot is rejected and must be repacked.

4.7.2 Rough handling tests.- The pilot pack shall have passed the rough handling test when it meets the "Acceptance Requirements"of MIL-P-116 specification.

5. PREPARATION FOR DELIVERY

(There are no applicable requirements.)

6. NOTES

6.1 Order data.- Procurement documents should specify the following:

(a) Title, number and date of this specification.

(b) Selection of applicable levels of packaging and packing.

(1) Level B packaging is intended to provide economical but limited protection and should be specified only when it is determined to be appropriate. Effective period of protection is twelve (12) months from date of initial packaging.

6.2 Storage surveillance.- Each tripod and metal cover packaged in accordance with Level B requirements must be inspected to determine condition when not used within the time period indicated. Aiming circle tripods and metal covers not used within the time period specified must either be repackaged in accordance with Level B requirements in this specification or with Level A requirements if storage beyond an additional year is anticipated.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:12Z
Check the source to verify that this is the current version before use.

6.3 Dimensions, cubage and weight of shipping container.- The following inside dimensions, cubage and gross weight are approximate for one unit packaged aiming circle and equipment packed in a nailed wood box:

Inside dimensions	- 37-1/2 inches long by 16 inches wide by 8-1/2 inches deep
Cubage	- 4.2 cubic feet
Gross weight	- 75. pounds


6.4 Publications.- The publications specified in 3.3.1.4.5 and 3.3.3.2.b will be furnished by the contracting officer.

Notice: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Custodian:
Army - Ordnance Corps

Preparing Activity:
Army - Ordnance Corps

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:12Z
Check the source to verify that this is the current version before use.

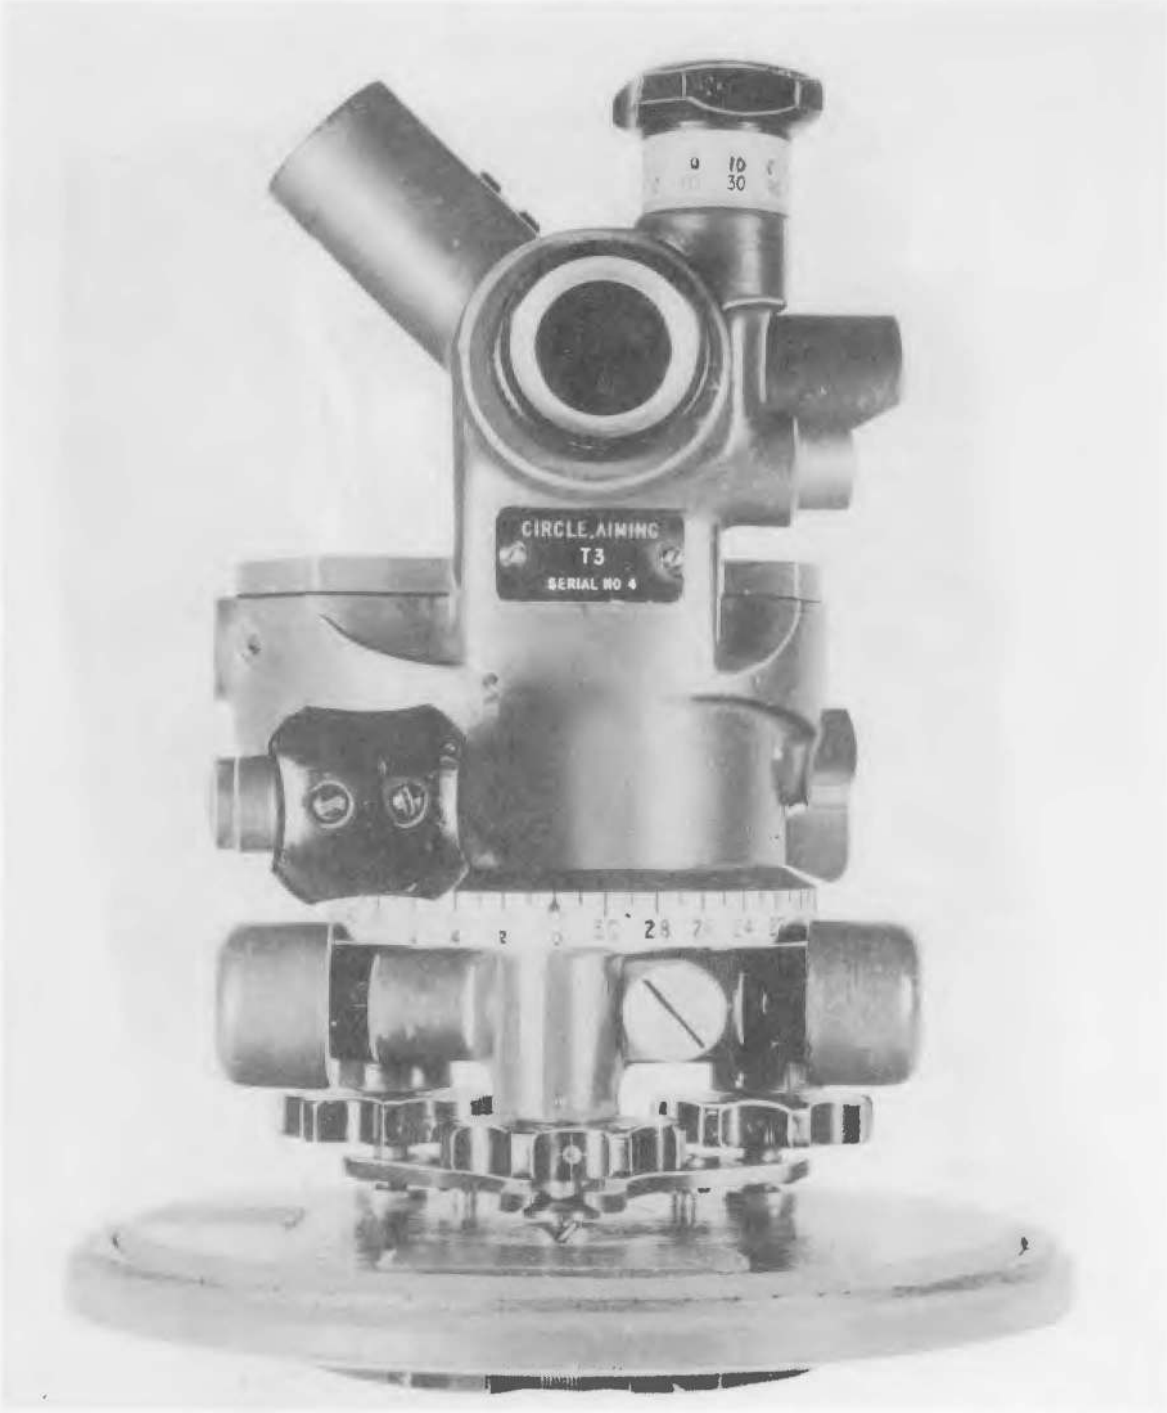


NEG. #25399-1 9-29-54 FRANKFORD ARSENAL ORD. CORPS

CIRCLE, AIMING, M2 - Showing the correct setting of the Aiming Circle prior to positioning the cover on the Aiming Circle.

FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:12Z
Check the source to verify that this is the current version before use.

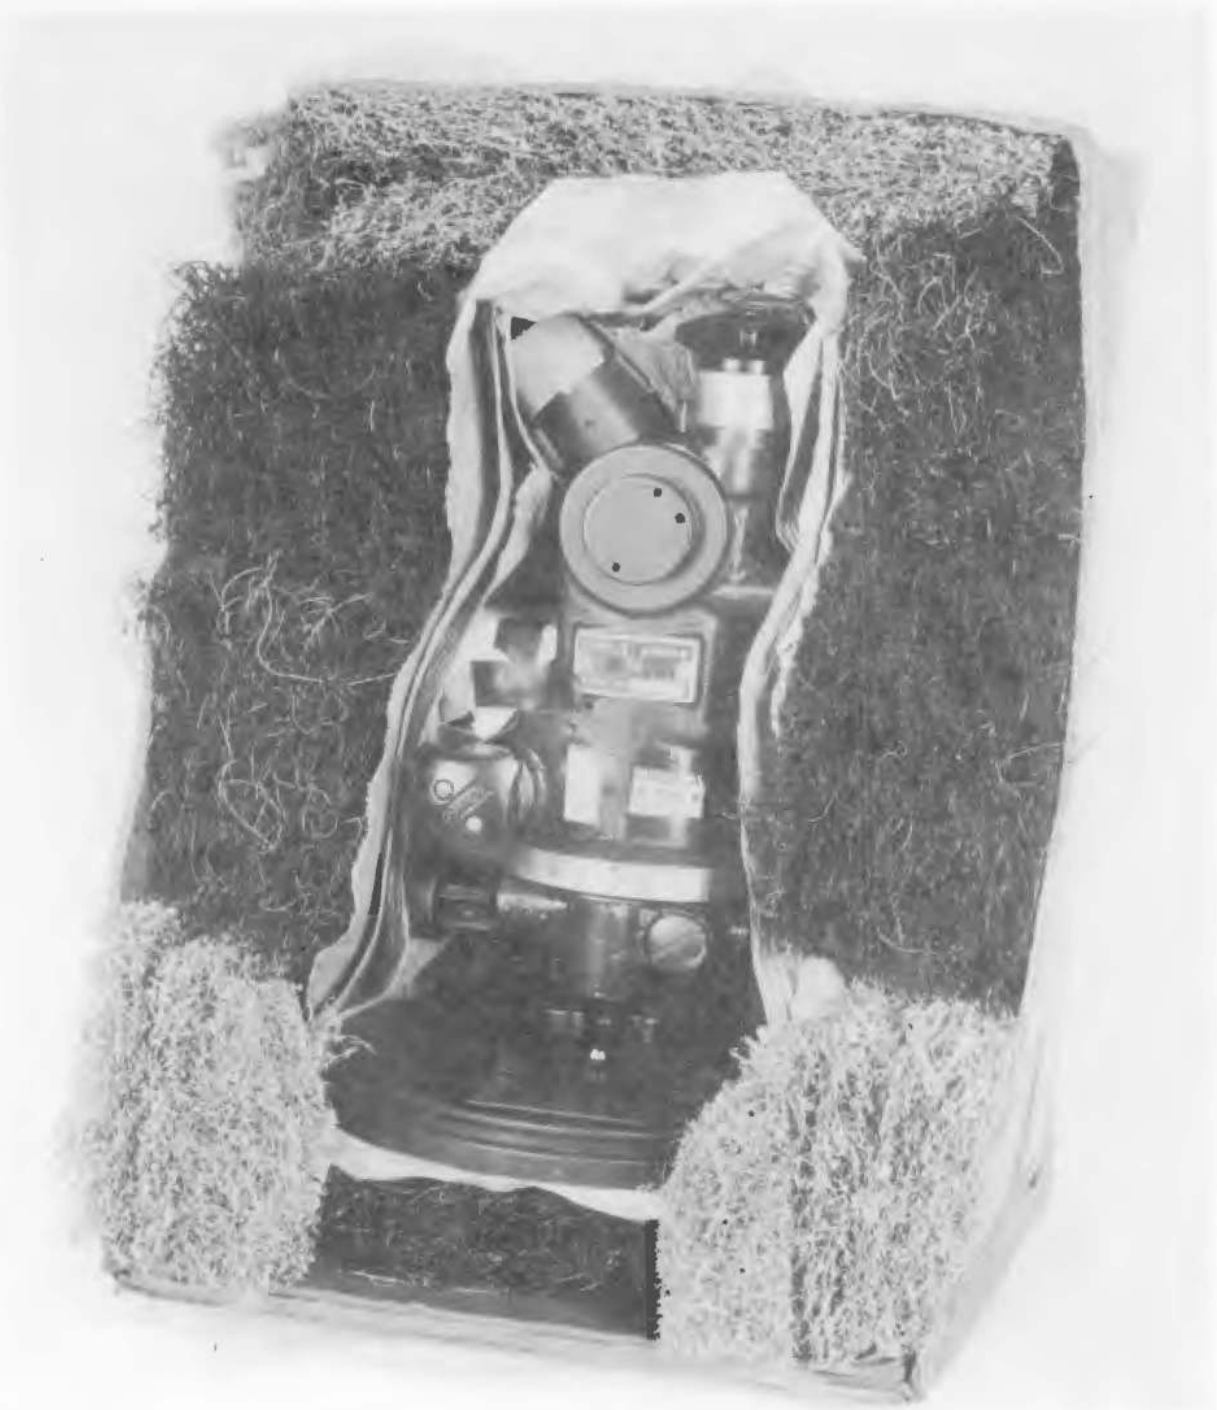


NEG. #31787 2/28/57 FRANKFORD ARSENAL ORD CORPS

CIRCLE, AIMING, M2, W/E - Packaging the aiming circle.

FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:12Z
Check the source to verify that this is the current version before use.

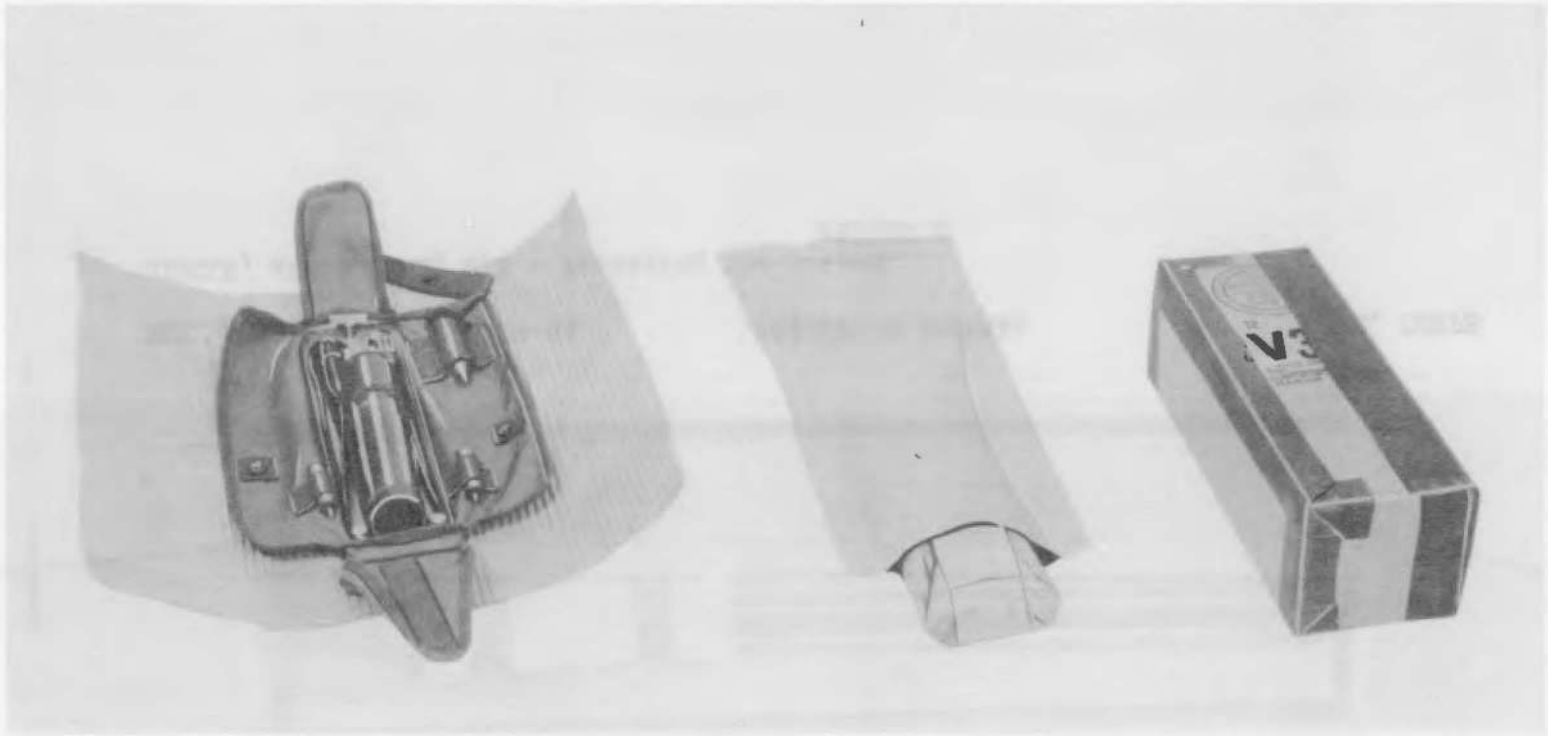


NEG. #25399-3 9-29-54 FRANKFORD ARSENAL ORD. CORPS

CIRCLE, AIMING, M2, W/E - Positioning the instrument light, plumb bob and lamp holders in the cover and on the back plate; also, packaging the aforementioned items.

FIGURE 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:12Z
Check the source to verify that this is the current version before use.

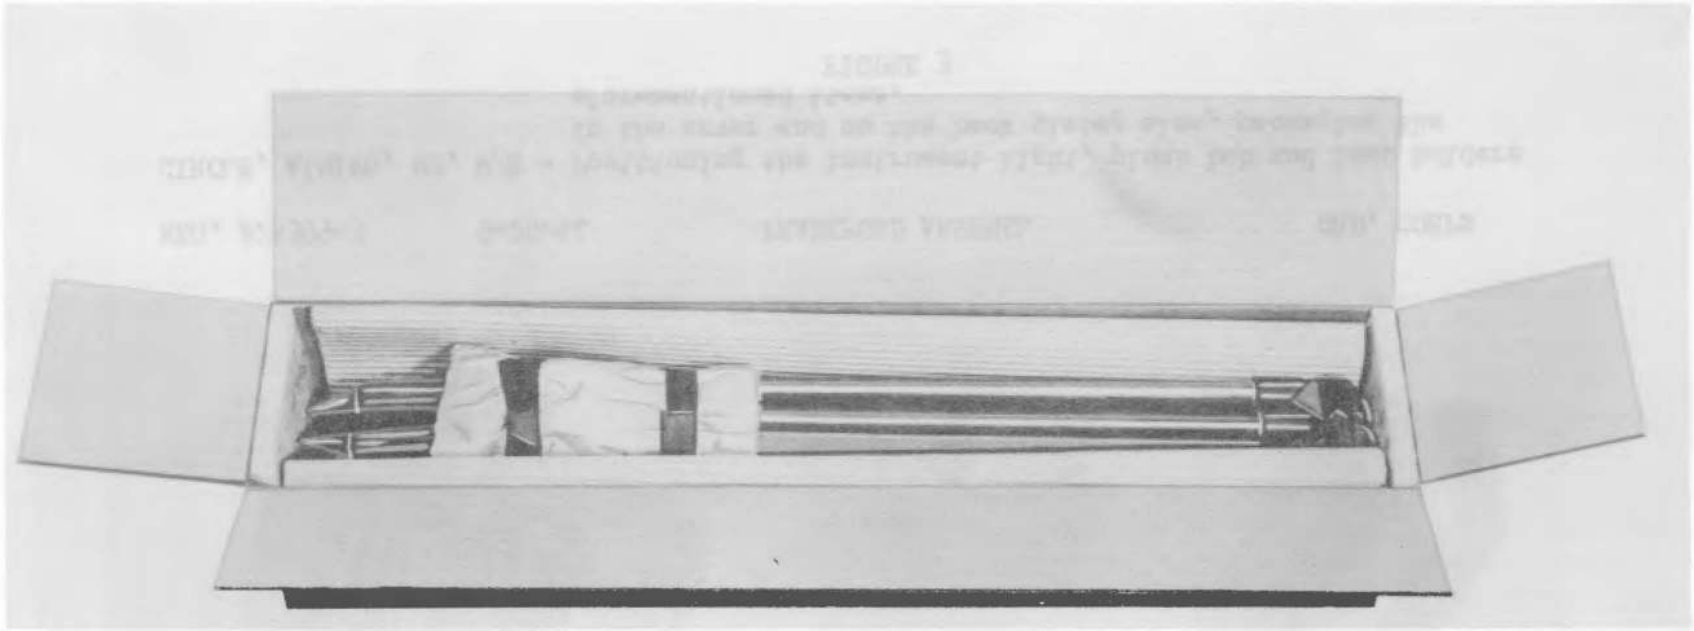


NEG. #25399-4 9-29-54 FRANKFORD ARSENAL ORD. CORPS

CIRCLE, AIMING, M2, W/E - Packaging the tripod.

FIGURE 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:12Z
Check the source to verify that this is the current version before use.

MIL-P-45009(Ord)

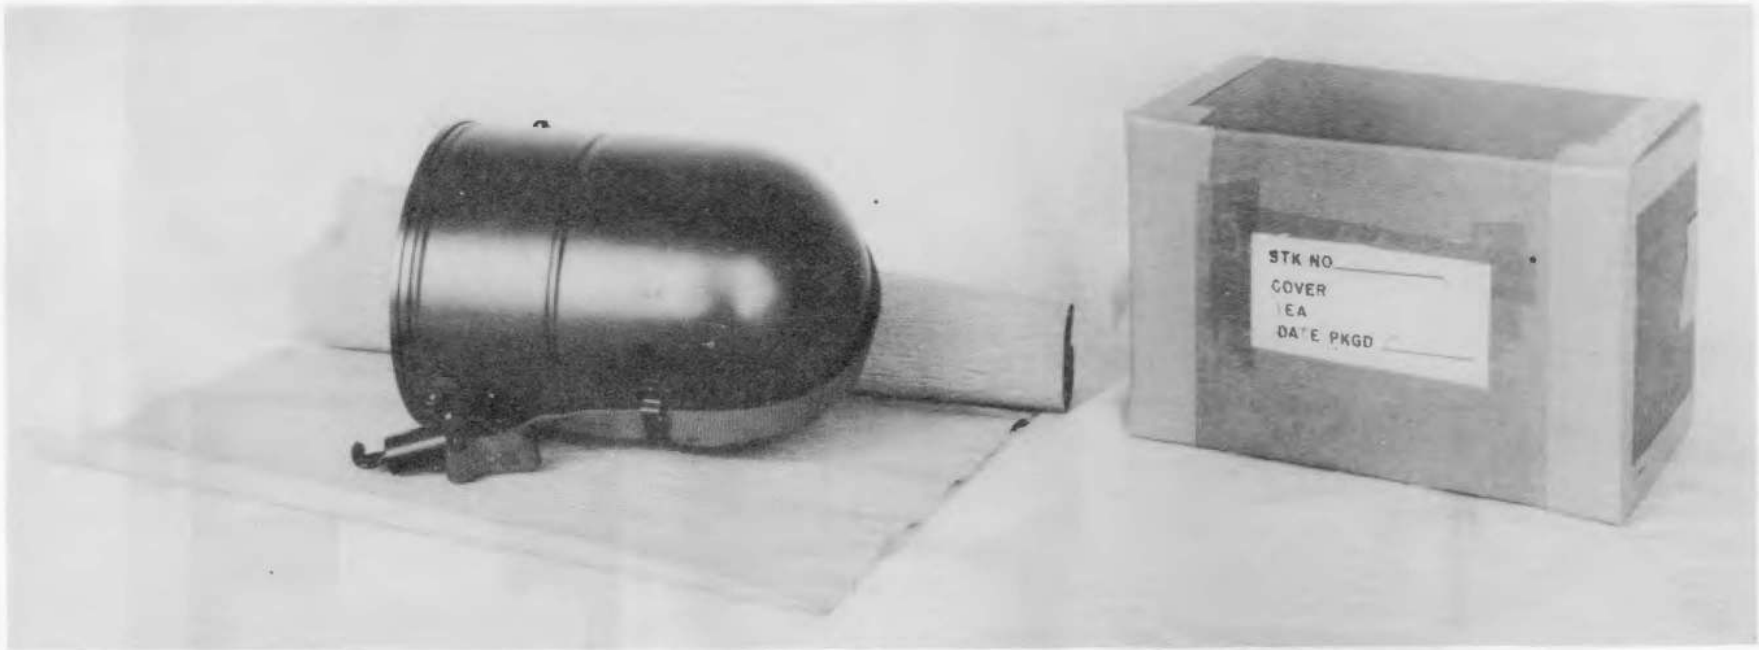


NEG. #31788 2/28/57 FRANKFORD ARSENAL ORD CORPS

CIRCLE, AIMING, M2, W/E - Packaging the aiming circle cover.

FIGURE 5

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:12Z
Check the source to verify that this is the current version before use.

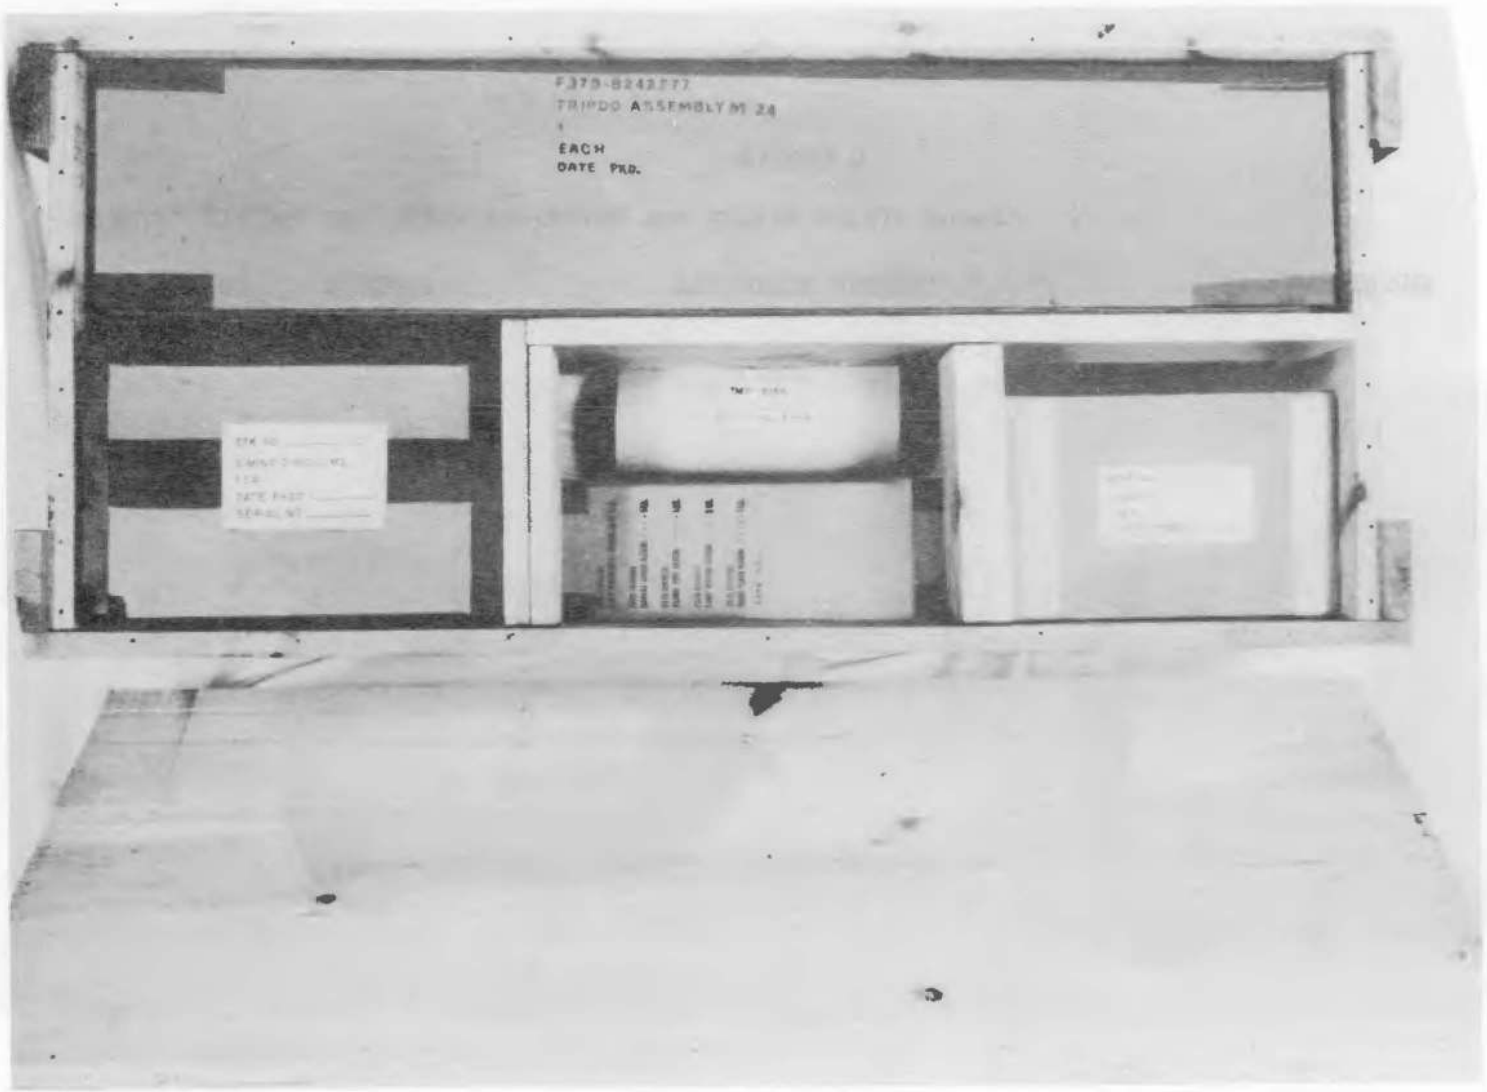

NEG. #31789 2/28/57 FRANKFORD ARSENAL ORD CORPS

CIRCLE, AIMING, M2, W/E - Showing the packaged aiming circle and packaged equipment immobilized in the shipping container.

FIGURE 6

MIL-P-6006(ORD)

Source: https://assist.dla.mil -- Downloaded: 202640-22T02:12Z
Check the source to verify that this is the current version before use.