29 December 1968
SUPERSEDING
PA-PD-1901 Rev 1
1 August 1963

MILITARY SPECIFICATION

CODE CARD, WAR RESERVE

1. SCOPE

1.1 This specification covers special requirements not included on the drawings, and provides the quality assurance provisions for the fabrication of parts, assembling, and the preparation for delivery for one type of code card used with the Atomic Demolition charge and designated as Code Card, War Reserve.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposals, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

L-T-90-Tape, Pressure-Sensitive, Adhesive, (Cellophane and Cellulose Acetate).

MILITARY

MIL-B-22205 - Bags, Transparent, Flexible, Heat Sealable for Packing Applications
MIL-P-116 - Preservation, Methods of
MIL-P-117 - Bag and Sleeve, Interior Packaging
MIL-P-13949 - Plastic Sheet, Laminated, Copper Clad for Printed Wiring

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:17Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL

Federal Method Standard No. 151 - Metals: Test Method

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-1168 - Lot Numbering of Ammunition

DRAWINGS

ORDNANCE CORPS

8808362 - Packing and Marking for Storage and Shipments
8824956 - Box, Set-up, Paperboard, for Code Cards
8839551 - Box, Set-up, Paperboard, for Code Cards
8854416 - Electrical Test Panel
8854423 - Operating Instructions for 8854416
8858579 - Code Card, Radio
8858580 - Code Card, Wire
8858581 - Radio Test "A" Assembly
8858582 - Wire Test "A" Assembly
8858583 - Radio Test "B" Assembly
8858584 - Wire Test "B" Assembly
8860585 - Code Card Set, Radio
8860586 - Code Card Set, Wire
EL-8858579 - Equipment List
EL-8858580 - Equipment List
EL-8858581 - Equipment List
EL-8858582 - Equipment List
EL-8858583 - Equipment List
EL-8860584 - Equipment List

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Materials. The contractor shall furnish objective evidence (see 6.2) that the material used to fabricate any part complies with the specifications listed on the applicable drawing.

3.2 First article testing. Requirements for the submission of first article samples by the contractor shall be as specified in the contract (see 4.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:17Z
Check the source to verify that this is the current version before use.

3.3 Coding. The war reserve code cards shall be coded as specified on the applicable drawing and herein. Codes shall be assigned by the procuring activity. Coding shall be limited to a maximum surface area surface penetration without any adverse effect to the reliability or functioning of the code card.

3.4 Continuity.

3.4.1 Test code cards. The test code card shall have continuity in accordance with the applicable drawing when tested as specified in 4.4.1.

3.4.2 War Reserve Code Cards. The code card shall have continuity in accordance with the assigned code and corresponding serial number (see 6.4) when tested as specified in 4.4.1.

3.5 Insulation resistance. The card assembly shall have an insulation resistance of not less than 30 megohms at a potential of 500 ± 50 Volts direct current (Vdc) with current limited to 5 milliamperes (ma) when tested as specified in 4.4.2.

3.6 Paint and plating adhesion. The painted and plated surfaces of the card assembly shall show no evidence of peeling, chipping or flaking when tested as specified in 4.4.3.

3.7 Plating thickness. The thickness of the gold plating shall be a minimum of 0.000080 (80 millionths) inches and the thickness of the silver plating shall be in accordance with the requirement specified on the drawing when tested as specified in 4.4.4.

3.8 Plating hardness. The plating on the card assembly shall have a hardness of at least 110 diamond pyramid hardness as determined by testing in accordance with 4.4.5.

3.9 Peel strength. The card assembly shall have a minimum peel strength of 9 pounds per inch width as determined by testing in accordance with 4.4.6.

3.10 Temperature cycling. The card assembly shall withstand temperature cycling from -85 ± 5°F. to +255 ± 5°F. without evidence of peeling, blistering, bubbling, cracking or other deterioration (see 6.4) and after test shall comply with the requirement of 3.4, 3.5, 3.6 and 3.9 as determined by testing as specified in 4.4.7.

3.11 Humidity. The card assembly shall withstand exposure to a relative humidity of 90 percent minimum with the temperature cycling between +90 ± 5 degrees Fahrenheit (°F.) and +160 ± 5°F. for a period of 72 hours without evidence of swelling, blistering, peeling, bubbling, cracking or other deterioration (see 6.4) and after test shall comply with the requirements of 3.4, 3.5, 3.6 and 3.9 as determined by testing as specified in 4.4.8.

3.12 Serialization. The contractor shall assign serial numbers as required by drawing.

3.12.1 Unclassified items. The contractor may select any number which complies with the drawing requirement. These numbers shall not be duplicated.

3.12.2 Classified items. Production quantities shall not be revealed. Random serial numbers shall be selected by the contractor in a manner which has been approved by the procuring agency. These numbers shall not be duplicated.

3.12.3 Suffix numbers (applicable to war reserve only). In addition to the serial numbers, each of the 12 card assemblies of each type that comprise six sets (see 6.5) shall be distinguished by bearing a suffix after the serial number. The suffix shall be a number from 1 through 12, inclusive. EXAMPLE: Assume the serial number to be 1234, the 12 card assemblies with suffix added shall be serialized as 1234-1, 1234-2.....1234-12.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:17Z
Check the source to verify that this is the current version before use.

3.13 Workmanship.

3.13.1 Plastic and metal characteristics. All components shall be free from cracks, splits, cold flow, shrinkage, cold shuts, inclusions, porosity, or other similar characteristic.

3.13.2 Burrs. Parts shall be free from burrs.

3.13.3 Foreign matter. Parts shall be free from chips, dirt, grease, rust, corrosion, or any embedded foreign material.

3.13.4 Cleaning. The cleaning method shall not be injurious to any of the parts, nor shall the parts be contaminated by the cleaning agents.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 First article inspection.

4.2.1 Quantity to be submitted. When the contract requires first article inspection, the contractor shall submit 3 of each code card to be produced and 9 test specimens (see figure I) for first article testing to the testing facility designated in the invitation for bids or request for proposal.

4.2.2 Inspection and testing to be performed. The first article inspection sample shall be subjected to the inspections and tests specified in table I. Tests need not be conducted in order specified in table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:17Z
Check the source to verify that this is the current version before use.

Table I

First article inspections and tests

Examination or test	Contractor's inspection permissable before submission	Destructive	Non-Destructive
1. Classification of characteristics (see 4.3.2.1)	X		X
2. Continuity (see 3.4)	X		X
3. Insulation resistance (see 3.5)	X		X
4. Paint and plating adhesion (see 3.6)	X		X
5. Plating thickness	X		X
6. Peel strength (see 3.9)	X		X
7. Temperature cycling (see 3.10)	X		X
8. Humidity (see 3.11)		X	

4.2.3 Inspection equipment. The inspection and testing specified in 4.2.2 shall be accomplished by using the gages and test equipment specified in 4.3.4.1.

4.2.4 Rejection. If any item fails to comply with any of the applicable requirements, the first article sample shall be rejected.

4.3 Product acceptance inspection.

4.3.1 Lot formation. A lot shall consist of parts and assemblies produced by one manufacturer in one unchanged process, in accordance with the same drawing, same drawing revision, same specification and same specification revision. Drawing, specification and process changes not affecting safety, performance, storage, or interchangeability, as determined by the Government, shall not necessitate changing the lot interfix number. The criteria and procedures for the assignment of lot numbers shall be in accordance with MIL-STD-1168.

4.3.1.1 Inspection lot. An inspection lot shall be the quantity of parts, subassemblies, or assemblies from the same lot, which are submitted to inspection for Government acceptance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:17Z
Check the source to verify that this is the current version before use.

4.3.2 Product inspection examination. Critical characteristics shall require 100 percent inspection of all items in the inspection lot. A sample shall be selected at random from each inspection lot in accordance with the applicable major or minor characteristic table and inspected for all characteristics in the applicable classification. Any characteristic in the sample found to be defective shall reject the inspection lot. Sequence for as long as all characteristic inspections are performed.

Major characteristic table II		Minor characteristic table III	
Lot size	Sample size	Lot size	Sample size
1- 155	100% inspection	1- 25	100% inspection
156- 200	155	26- 30	25
201- 250	175	31- 35	26
251- 300	190	36- 40	27
301- 350	200	41- 45	28
351- 400	210	46- 50	29
401- 450	220	51- 55	30
451- 500	225	56- 60	31
501- 550	230	61- 65	32
551- 600	235	66- 70	33
601- 650	240	71- 75	34
651- 700	243	76- 85	35
701- 750	247	86- 95	36
751- 800	250	96- 110	37
801- 900	254	111- 130	38
901-1000	258	131- 156	39
1001-1100	261	157- 190	40
1101-1200	264	191- 240	41
1201-1300	266	241- 340	42
1301-1400	268	341- 520	43
1401-1500	270	521-1120	44
1501-1600	272	1121 and over	45

4.3.2.1 Classification of characteristics. Critical, major, and minor characteristics are defined in MIL-STD-105. Inspection shall be conducted as follows:

4.3.2.1.1 Code card, radio (see dwg. 8858579), code card, wire (see dwg. 8858580), radio test "A" assembly (see dwg. 8858581), wire test "A" assembly (see dwg. 8858582), radio test "B" assembly (see dwg. 8858583), radio test "B" assembly (see dwg. 8858584), before coding.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:17Z
Check the source to verify that this is the current version before use.

Categories	Characteristics	Method of inspection
Critical:		
*1.	Location of registry both sides	gage
*2.	Outline of registry (both sides)	gage
3.	Peeling or separation of conductor from board	Visual
4.	No looseness of bond including bubbles or blisters	Visual-Manual
Major:		
101.	Bottom length to end notches	gage
102.	Perpendicularity of bottom end slots	gage
103.	Length from left bottom end slots left side of slot right of center slot	gage
104.	Width of left bottom notch	gage
105.	Length from left bottom notch to left side of slot left of center slot	gage
106.	Width of 2 large bottom slots	gage
107.	Location of right registry hole if present	gage
108.	Diameter of right registry hole if present	gage
109.	Depth of 2 end notches	gage
110.	Total width	
111.	Location of left registry hole if present	gage
112.	Diameter of left registry hole if present	gage
113.	Length from bottom end notches to sides of center slot	gage
114.	Total length	gage
115.	Thickness	gage
116.	Depth of slots	gage
117.	Circuitry clearly defined	Visual
118.	No warpage	Visual
119.	Smooth edges	Manual
120.	No copper flashing in slots and on edges	Visual
121.	Board not chipped or cracked	Visual
122.	Etched marking proper and identifiable	Visual
123.	No cuts, tears or cracks in conductor portion	Visual
124.	Painting	Visual
125.	Paint proper color	Visual
126.	No paint on undesignated area	Visual
127.	Serialization (see 3.12)	Visual
128.	Materials (see 3.1)	Visual
129.	Workmanship (see 3.13)	Visual-Manual

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:17Z
Check the source to verify that this is the current version before use.

*Each 35 or less card assemblies produced shall be inspected as follows: one card shall be inspected completely and the remaining 34 or less card assemblies shall be inspected for the location and width of one contact on each portion of both sides (a total of 4 contacts) of the card assemblies.

4.3.2.1.2 Code ard radio (see dwg. 8858579), code card wire (see dwg. 8858580), radio test "A" assembly (see dwg. 8858581), wire test "A" assembly (see dwg. 8868682), radio test "B" assembly (see dwg. 8858583), wire test "B" assembly (see dwg. 8858584).

Categories	Characteristics	Method of inspection
Critical:		
1.	No ragged edges of conductor pattern in coding area	Visual
2.	No peeling of conductor in coding area	Visual
3.	Coding(see 3.3)	Visual
Major:		
101.	No excessive surface penetration	Visual
102.	No copper flashing loose or embedded in coding area	Visual
103.	Plating hardness (see 3.8)	gage
104.	Workmanship (see 3.13)	Visual-Manual

4.3.2.1.3 Code card set, radio (see dwg. 8860585) and code card set, wire (see dwg. 8860586).

Categories	Characteristics	Method of inspection
Critical: None defined.		
Major:		
101.	Number of code cards	Visual-Manual
Minor: None defined.		

4.3.2.1.4 Box, set-up, paperboard, for code cards (see dwg. 8824956 and 8839551) and section 5).

Categories	Characteristics	Method of inspection
Critical: None defined.		

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:17Z
Check the source to verify that this is the current version before use.

Major:
101. Suffix number present and proper (when applicable).....Visual
102. Serial numbers of same type of card in agreement.....Visual
103. Correct number of cards of each type.....Visual
104. Packaging materials (see 3.1).....Visual
105. Proper packing of 2 cards in inner bag.....Visual-Manual
106. Inner bag sealed in accordance with 3.2 MIL-B-2205.....Visual-Manual
107. Contents tight in box.....Manual
108. Box sealed with sealing strip.....Visual
109. Label on box.....Visual
110. Marking on box label.....Visual
111. Corners blunted on box.....Visual
112. Air exhausted from bag.....Manual
113. Objective evidence (see 6.2) available for heat seal test of bag in accordance with MIL-P-116.....Visual
114. No hole, crack or split in bag.....Visual

Minor:
201. Marking of bag.....Visual
202. Workmanship (see 3.13).....Visual-Manual

4.3.2.1.5 Packing and Marking for Storage and Shipments (see dwg. 8808362 and section 5).

Categories	Characteristics	Method of inspection

Critical: None defined.

Major:
101. Gross load weight, max.....*Measure
102. Contents tight in package.....Manual
103. Correctly packed.....Visual-Manual
104. Package material (see 3.1 SQAP-Appendix I).....Visual

*Determine weight with a suitable scale.

Minor:
201. Marking.....Visual
202. Workmanship (see SQAP-Appendix I).....Visual-Manual

4.3.3 Testing. The contractor shall perform all the tests specified in this paragraph. Tests do not have to be performed in the order specified.

Test	Test classification
a. Continuity	Critical
b. Insulation resistance	Critical
c. Paint and plating adhesion	Minor
d. Plating thickness	Minor
e. Plating Hardness	Major
f. Peel strength	Major

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:17Z
Check the source to verify that this is the current version before use.

Of these tests d, e and f are considered destructive and samples so tested shall not be returned to the lot. Destructive samples are over and above the deliverable quantity of items required by the contract.

4.3.3.1 Continuity (see 3.4) and insulation resistance (see 3.5). Each card assembly in the lot shall be subjected to these tests in the order specified, (see applicable paragraph in 4.4). If any card assembly fails to comply with the applicable requirement, it shall be classified defective and removed from the lot.

4.3.3.2 Paint and plating adhesion (see 3.6) and Peel strength (see 3.9). One card assembly from each 35 assemblies or portion thereof produced shall be subjected to this test (see applicable paragraph in 4.4). If any card assembly fails to comply with the applicable requirement, the lot shall be rejected.

4.3.3.3 Plating thickness (see 3.7) and plating hardness (see 3.8). One test specimen (see figure 1) shall be processed for each batch of cards plated and this specimen shall be subjected to these tests in the order specified (see applicable paragraph in 4.4). If any specimen fails to comply with the applicable requirement, the batch is represented by the sample in which failure occurred, shall be rejected.

4.3.4 Acceptance inspection equipment.

4.3.4.1 Critical and major characteristics and tests. Inspection and testing shall be performed with the acceptance inspection equipment, operating instructions, and calibration instructions specified on the Equipment Lists (EL - 8858579, 8858580, 8858581, 8858582, 8858583, and 8858584). When either of the conditions listed below exist, the contractor shall design required equipment or specify suitable commercial equipment. The contractor shall obtain approval of such designs, operating instructions, and special calibration instructions as specified in 6.3 prior to use on the contract.

a. Any deviation from equipment or procedures specified on the EL is desired.
b. The code "CD" is listed in the "Part or Identifying Number" column on the EL.

4.4 Test methods. The tolerances specified herein are absolute with no allowance for test equipment inaccuracy. The tolerances used by the manufacturer shall be equal to the absolute tolerances less the accuracy tolerances of the test equipment used.

4.4.1 Continuity (see 3.4). Continuity shall be determined in accordance with Continuity Test Fixture dwg 8854416, applicable operating instructions dwg 8854423, and the coding instructions furnished for each particular serialized set of card assemblies.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:17Z
Check the source to verify that this is the current version before use.

4.4.2 Insulation resistance (see 3.5). Insulation resistance shall be determined in accordance with Table IV Insulation Resistance Test Fixture dwg. 8854416 applicable operating instructions dwg. 8854423, and the coding instructions furnished for each particular serialized set of card assemblies.

Table IV

Insulation resistance

Safe buss on forward side	Negative potential to all other points listed in "From" column
Safe buss on rear side	"
Fire buss on forward side	"
Fire buss on rear side	"
Each missing or broken bit	"

4.4.3 Paint and plating adhesion (see 3.6). The adhesion shall be determined by utilizing a strip of pressure-sensitive cellophane tape conforming to type I, Class A, of Specification L-T-90, ½ inch and 5 inches long (effective length). The tape shall be pressed firmly across the surface of the conductor pattern or the painted surface and then be removed rapidly by manual force applied approximately perpendicular to the pattern. Each side of the board shall be tested, one side shall be utilized for paint adhesion and the other side for plating adhesion. Fresh tape shall be used for each test.

4.4.4 Plating thickness (see 3.7). The thickness of the plating shall be obtained in accordance with method 521 or 522 of Federal Test Method Standard No. 151. This test shall be performed on a portion of the test specimen (see figure 1).

4.4.5 Plating hardness (see 3.8). The applicable portion of the specimen (see figure 1) shall be plated with a minimum thickness of 0,001 inches of gold. The specimen shall be sectioned and the hardness shall be obtained in accordance with method 244 of Federal Test Method Standard No. 151 on the sectioned end of the specimen, which shall be adequately supported on each side when impression is made.

4.4.6 Peel strength (see 3.9). The peel strength of the conductor shall be obtained in accordance with the test specified in Specification MIL-P-13949. This test shall be performed on the 4 applicable portions of the test specimen.

4.4.7 Temperature cycling. The card and the test specimens shall be cycled as follows, 30 + 5 minutes at -85°F; 10 + 5 minutes at room ambient temperature; 30 + 5 minutes at +225°F. and 10 + 5 minutes at room ambient temperature. The items shall be subjected to a total of 5 such cycles performed continuously. Two separate chambers shall be utilized for this test and the thermal capacity of the chamber shall be sufficient so that the specified temperatures can be reached within 2 minutes after transfer. Upon completion of the fifth cycle, the card shall comply with 3.4, 3.5, 3.6 and 3.9.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:17Z
Check the source to verify that this is the current version before use.

4.4.8 Humidity. The card and the test specimens shall be placed in a test chamber. The temperature shall be raised to +160°F. for the first 2 hours and maintained at +160°F. for a period of 6 hours. The temperature shall then be gradually reduced during a 16 hour period to +90°F. This completes one 24 hour cycle and the items shall be subjected to three such cycles continuously performed for a total of 72 hours. The relative humidity throughout the test shall be 90 percent minimum. Upon completion of test, the items shall be wiped dry and the cards shall comply with 3.4, 3.5, 3.6 and 3.9.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. Preservation and packaging shall be level A or C as specified (see 6.1).

5.1.1 Level A. The code cards shall be packaged in accordance with dwgs. 8824956, 8839551 and 8808362 as applicable using the specified moisture barrier.

5.1.2 Level C. The code cards shall be packaged in accordance with dwgs. 8824956, 8839551 and 8808362 as applicable except that the moisture barrier may be omitted.

5.2 Packing.

5.2.1 Level A and C. The code cards shall be packed in accordance with dwgs. 8824956, 8839551 and 8808362 as applicable.

5.3 Marking. Marking shall be in accordance with dwgs. 8824956, 8839551.

6. NOTES

6.1 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification.
b. Type required (see 1.2).
c. Selection of applicable level of packaging and packing required (see 5.1 and 5.2).

6.2 Objective evidence. Records of contractor quality control and inspections which can be verified.

6.3 Acceptance inspection equipment. The contractor shall obtain approval of equipment designs, operating instructions, and calibration instructions from the Commanding Officer, Picatinny Arsenal, Dover, New Jersey 07801, ATTN: SMUPA-NR4.


6.4 Conflicts regarding "or other deterioration". Conflicts resulting from the term "or other deterioration" shall be submitted to the technical agency for review and clarification. However, the government reserves the right of making the final decision.

Custodian:
Army - MU

Preparing activity:
Army - MU

Project No. 1195-A048

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:17Z
Check the source to verify that this is the current version before use.

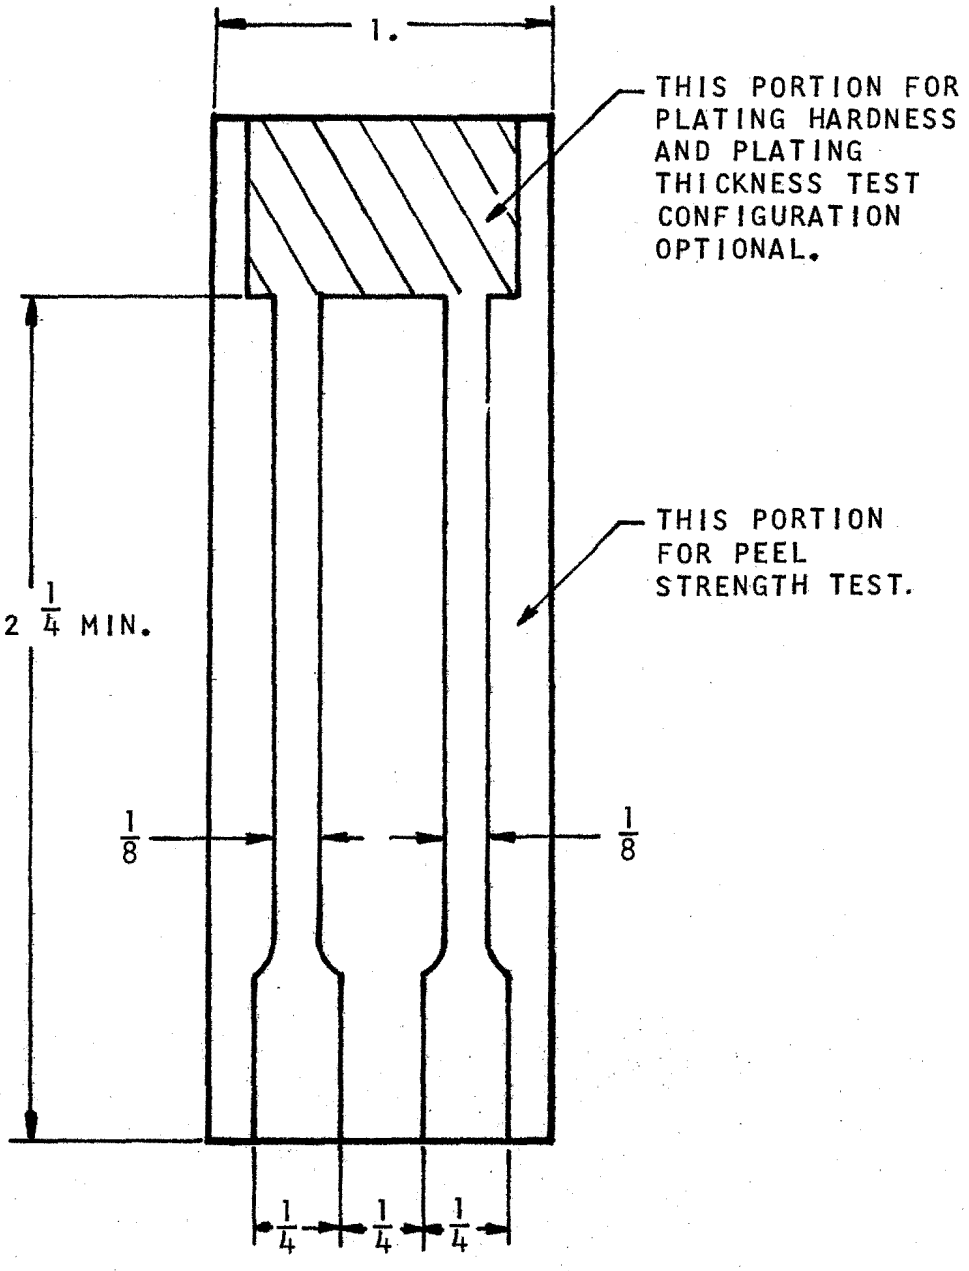

MATERIAL:

PLASTIC SHEET, LAMINATED, COPPER-CLAD, TYPE FL-G-C-2/2, SPEC MIL-P-13949.

NOTE: DUPLICATE PATTERN ON OPPOSITE SIDE OF BOARD.

FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:17Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

MIL-C-50224(MU) Code Card, War Reserve

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426 REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:17Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

Commanding Officer
Picatinny Arsenal
ATTN: SMUPA-NR
Dover, New Jersey 07801

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:17Z
Check the source to verify that this is the current version before use.