MIL-I-60508 (MU)
26 May 1966
SUPERSEDING
FA-PD-MI-2487, Rev 0
17 February 1961
FA-PD-MI-2274, Rev 0
23 September 1958
FA-PD-MI-2451, Rev 1
11 January 1961
FA-PD-MI-2309, Rev 0
6 November 1958

MILITARY SPECIFICATION
INITIATOR, CARTRIDGE ACTUATED, DELAY, M6A1, M26, M33, M44, METAL PARTS ASSEMBLY

1. SCOPE

1.1 This specification covers Initiator, Cartridge Actuated, Delay, M6A1, M26, M33, M44, Metal Parts Assembly. The assembly will ultimately be loaded and used in conjunction with other propellant actuated devices in aircrew emergency escape systems.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein:

SPECIFICATION
Military
MIL-A-2550 - Ammunition and Special Weapons, General Specification For

STANDARDS
Federal
FED-STD-151 - Metals; Test Methods

Military
MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-109 - Quality Assurance Terms and Definitions
MIL-STD-413 - Visual Inspection Guide for Rubber O-rings
MIL-STD-639 - Surface Roughness Values Preferred for Army Ordnance Materiel
MIL-STD-1167 - Ammunition Data Card

FSC 1377

Source: https://assist.dla.mil -- Downloaded: 202640-23T00:40Z
Check the source to verify that this is the currentversion before use.

2.1 (cont)

DRAWINGS

Munitions Command

D8593315	- Initiator, Cartridge Actuated, Delay, Metal Parts Assembly
C8796826	- Container, Ammunition, Fiber, M375 for Initiator, Delay, M4, M6A1, M12, M26, M33, M44, M45 or M49.
C8796827	- Box, Packing, Ammunition, for Initiator, Delay, M4, M6A1, M12, M26, M33, M44, M45 or M49, in Fiber Container, M375
IEL-8593315	- Index of Inspection Equipment List for Initiator, Cartridge Actuated, Delay, M6A1, M26, M33, M44, Metal Parts Assembly

(Copies of specifications, standards and drawings required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 General.- Materials, parts and assemblies shall comply with the requirements specified on the applicable drawings, referenced specifications and the following:

3.2 Initial production sample.- Unless otherwise directed by the contracting officer, an initial production sample shall be required.

3.3 Material.- The contractor shall be responsible for selecting from the classification list contained in the raw material specification, the surface and physical condition of the raw material intended for use in manufacture.

3.4 Physical properties.- Physical properties required by the drawing shall be uniform throughout the part within specified tolerances. Requirements for all alloy steel parts shall be achieved by quenching and tempering.

3.5 Hydrostatic pressure.- The initiator chamber and cap shall withstand a hydrostatic pressure of 5500 to 6500 pounds per square inch (psi) for 15 seconds, minimum, without deformation or mechanical failure (see 6.1).

3.6 Shear pin strength.- The shear pin, after application of protective finish, shall shear when a load of 41 pounds plus or minus five pounds is applied at the steady rate of 0.125 inch per minute.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:40Z
Check the source to verify that this is the current version before use.

3.7 Metal parts assembly.- Parts shall be combined to produce an assembly which conforms to the requirements of the metal parts assembly drawing. All threaded joints shall be assembled handtight.

3.8 Protective finish.- Protective finish shall be in accordance with the applicable specifications and shall apply to all surfaces of the component regardless of contour configuration.

3.9 Residual magnetism.- The metal parts assembly shall not deflect the indicator of the compass more than three degrees in either direction when passed in front of the compass at a distance of six inches.

3.10 Workmanship.- The requirements for workmanship are as specified on the applicable drawings, referenced specifications and the following:

3.10.1 Metal defects.- All components shall be free from cracks, splits, cold shuts, inclusions, porosity or any similar defect.

3.10.2 Burr.- No part shall have a burr which might interfere with the assembly or function of the item or which might be injurious to personnel handling the item.

3.10.3 Foreign matter.- No part or assembly shall contain chips, dirt, grease, rust, corrosion or other foreign matter.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Quality assurance terms and definitions.- Reference shall be made to MIL-STD-109 to define the quality assurance terms used.

4.1.2 Inspection.- Inspection shall be in accordance with MIL-A-2550.

4.2 Initial production sample.- At the beginning of regular production, the supplier shall submit an initial production sample to a Government approved facility for evaluation. The sample shall consist of five metal parts assemblies, 10 sets of unassembled parts and 50 shear pins from the same lot of shear pins tested by the supplier. The sample shall be manufactured

Source: https://assist.dla.mil -- Downloaded: 202610-23T00:40Z
Check the source to verify that this is the current version before use.

4.2 (cont)

in the same manner, using the same materials, equipment, processes and procedures as used in regular production. All parts and materials, including packaging and packing, must be the same as will be used for regular production and shall be obtained from the same source of supply. After inspection and provisional acceptance at source, the initial production sample shall be inspected for all requirements of the drawings and specifications. The Government reserves the right to require new initial production samples until such time as an acceptable sample is submitted.

4.3 Inspection provisions.

4.3.1 Lot.

4.3.1.1 Submission of product.- The product shall be submitted in accordance with MIL-STD-105.

4.3.1.2 Size of lot.- For the purpose of identification and shipment, the shipping lots of metal parts assemblies shall consist of 623 assemblies, maximum, provided the homogeneity requirements of inspection lots have been retained. A smaller lot may be shipped upon approval of the contracting officer.

4.3.2 Examination.- One-hundred percent examination shall be performed for all critical defects. Examination for major and minor defects shall be performed on a defect basis in accordance with the classification of defects contained herein, using the sampling plan and associated criteria in tables I and II. For an individual defect (single characteristic) the criteria in table I shall be used. For total defects within a major or minor group the criteria in table II shall be used. All nonconforming material shall be rejected. The Ordnance Standard Finish Blocks prescribed in MIL-STD-639 shall be used as a basis of comparison for surface roughness determination. Four power (4X) magnification may be used in performing visual examination for such defects as burr and foreign matter. Inspection for rubber O-rings shall be in accordance with MIL-STD-413.

Table I

Lot Size	Sample Size	Major		Minor	
		Accept	Reject	Accept	Reject
1 - 300	100% examination	-	-	-	-
301 - 1,300	110	1	2	2	3
1,301 - 3,200	150	2	3	3	4
3,201 - 8,000	225	3	4	4	5
8,001 - 22,000	300	4	5	5	6

Source: https://assist.dla.mil -- Downloaded: 202610-23T00:40Z
Check the source to verify that this is the current version before use.

4.3.2 (cont)

Table II

Total Allowable Defects per Sample Size

	Major		Minor	
	Accept	Reject	Accept	Reject
Sample Sizes for Major Defects	110	150	225	300
Number of Defects in Class				
2 - 3	1	2	3	4
4 - 7	2	3	4	5
8 - 19	3	4	5	7
20 - 43	4	5	8	10
over 43	6	8	11	14
Sample Sizes for Minor Defects	110	150	225	300
Number of Defects in Class				
2 - 3	2	3	4	5
4 - 7	3	4	5	7
8 - 16	4	5	8	10
17 - 48	6	8	11	14
over 48	8	11	17	20

4.3.2.1 Retainer, Cartridge, Dwg D8593313, covering a detail of Dwg D8593315.

Defect	Method of Inspection
CRITICAL	
1. Metering slots in base missing	Visual
MAJOR	
101. Pitch diameter of thread, max	Gage
102. Minor diameter of thread, max	Gage
103. Concentricity of cavity with pitch diameter of thread	Gage
104. Concentricity of counterbore with cavity	Gage
105. Perpendicularity of pitch diameter of thread with base	Gage
106. Symmetry of metering slots in base with body	Gage
107. Diameter of cavity, max	Gage
108. Depth of cavity	Gage
109. Depth to bottom of counterbore	Gage
110. Depth of metering slots in base	Gage
111. Length of effective thread, min	Gage
112. Length of thread, max	Gage

Source: https://assist.dla.mil -- Downloaded: 202610-23T00:40Z
Check the source to verify that this is the current version before use.

4.3.2.1 (cont)

	Defect	Method of Inspection
113.	Internal radius at mouth of cavity	Gage
114.	Total length	Measure
115.	Width of metering slots in base	Measure
116.	Drill point in base, max	Measure
117.	Number of elongated slots incorrect	Visual
118.	Thread damaged or not full	Visual
119.	Metal defective	Visual
120.	Protective finish inadequate or defective	Visual
121.	Surface finish on internal radius and base improper	Visual
122.	Burr	Visual
123.	Foreign matter	Visual
MINOR		
201.	Pitch diameter of thread, min	Gage
202.	Diameter of cavity, min	Gage
203.	Diameter of counterbore	Gage
204.	Diameter of head	Gage
205.	Depth of counterbore	Gage
206.	Diameter of body	Measure
207.	Length of elongated slots	Measure
208.	Length of head	Measure
209.	Width of elongated slots	Measure
210.	Location of elongated slots	Measure
211.	Angle between head and body	Measure
212.	Angular location of metering slots	Visual
213.	Marking missing, incorrect or illegible	Visual
214.	Profile of elongated slots	Visual
215.	Radius missing or incorrect	Visual
216.	Surface finish improper, except as otherwise classified	Visual

4.3.2.2 Chamber, Initiator, Dwg D8593314, covering a detail of Dwg D8593315.

CRITICAL		
	None defined.	
MAJOR		
101.	Pitch diameter of large thread, min	Gage
102.	Major diameter of large thread, min	Gage
103.	Pitch diameter of small thread, min	Gage
104.	Major diameter of small thread, min	Gage
105.	Concentricity of counterbore with pitch diameter of large thread	Gage
106.	Concentricity of datum diameter with small thread	Gage

Source: https://assist.dla.mil -- Downloaded: 202610-23T00:40Z
Check the source to verify that this is the current version before use.

4.3.2.2 (cont)

	Defect	Method of Inspection
107.	Diameter of counterbore	Gage
108.	Depth of cavity	Gage
109.	Thickness of wall, min	Gage
110.	Location of datum diameter	Gage
111.	Profile of gas port	Gage
112.	Thread damaged or not full	Visual
113.	Chamfer at base of cavity missing or incorrect	Visual
114.	Metal defective	Visual
115.	Protective finish inadequate or defective	Visual
116.	Surface finish at end of gas port improper	Visual
117.	Burr	Visual
118.	Foreign matter	Visual
MINOR		
201.	Pitch diameter of large thread, max	Gage
202.	Pitch diameter of small thread, max	Gage
203.	Diameter of cavity	Gage
204.	Diameter of hole	Gage
205.	Diameter of small thread pilot	Gage
206.	Diameter of large thread pilot	Gage
207.	Length of large thread pilot	Gage
208.	Length of gas port	Gage
209.	Thickness of wall, max	Gage
210.	Location of small thread	Gage
211.	Depth of counterbore	Measure
212.	Total length	Measure
213.	Length to end of large thread	Measure
214.	Marking missing, incorrect or illegible	Visual
215.	Radius or chamfer missing or incorrect, except as otherwise classified	Visual
216.	Surface finish improper, except as otherwise classified	Visual

4.3.2.3 Pin, Shear, Dwg B8594745, covering a detail of Dwg D8593315.

	Defect	Method of Inspection
CRITICAL		
	None defined.	
MAJOR		
101.	Diameter, max	Gage
102.	Total length, min	Measure
103.	Metal defective	Visual
104.	Protective finish inadequate or defective	Visual
105.	Surface finish improper	Visual
106.	Burr	Visual
107.	Foreign matter	Visual

Source: https://assist.dla.mil -- Downloaded: 202640-23T00:40Z
Check the source to verify that this is the current version before use.

4.3.2.3 (cont)

	Defect	Method of Inspection
MINOR		
201.	Total length, max	Measure
202.	Profile of end	Measure

4.3.2.4 Cap, Dwg D8594856, covering a detail of Dwg D8593315.

CRITICAL		
	None defined.	
MAJOR		
101.	Pitch diameter of thread, max	Gage
102.	Minor diameter of thread, max	Gage
103.	Concentricity of pitch diameter of thread with center hole, including perpendicularity with base of cavity	Gage
104.	Symmetry of flats with pitch diameter of thread	Gage
105.	Diameter of hole	Gage
106.	Depth of cavity	Gage
107.	Length of effective thread, min	Gage
108.	Length to thread centerline	Gage
109.	Thickness of base	Gage
110.	Height, max	Gage
111.	Profile of body	Measure
112.	Internal radius at base of large thread cavity missing or incorrect	Visual
113.	Thread damaged or not full	Visual
114.	Metal defective	Visual
115.	Protective finish inadequate or defective	Visual
116.	Burr	Visual
117.	Foreign matter	Visual
MINOR		
201.	Pitch diameter of thread, min	Gage
202.	Pitch diameter of set screw thread	Gage
203.	Minor diameter of set screw thread, max	Gage
204.	Diameter of flange holes	Gage
205.	Length between flange holes	Gage
206.	Width across body flats	Gage
207.	Location of flange holes	Measure
208.	Length of flange	Measure
209.	Width of flange	Measure
210.	Thickness of flange	Measure
211.	Location of set screw holes	Measure
212.	Marking missing, incorrect or illegible	Visual
213.	Radius or chamfer, missing or incorrect, except as otherwise classified	Visual
214.	Surface finish improper	Visual

Source: https://assist.dla.mil -- Downloaded: 202640-23T00:40Z
Check the source to verify that this is the currentversion before use.

4.3.2.5 Housing, Firing Pin, Dwg D8594858, covering a detail of Dwg D8593315.

	Defect	Method of Inspection
CRITICAL		
	None defined.	
MAJOR		
101.	Pitch diameter of internal thread, max	Gage
102.	Minor diameter of internal thread, max	Gage
103.	Pitch diameter of external thread, min	Gage
104.	Major diameter of external thread, min	Gage
105.	Concentricity of pitch diameter of internal thread with cavity	Gage
106.	Concentricity of groove with flange	Gage
107.	Concentricity of boss cavity with cavity	Gage
108.	Concentricity of pitch diameter of external thread with cavity	Gage
109.	Concentricity of cavity with flange	Gage
110.	Concentricity of striker hole with cavity	Gage
111.	Concentricity of body, flange end, with flange	Gage
112.	Perpendicularity of flange face with cavity	Gage
113.	Perpendicularity of face of boss with pitch diameter of external thread	Gage
114.	Symmetry of pin hole with cavity	Gage
115.	Symmetry of width across flat with body, flange end	Gage
116.	Diameter of cavity, max	Gage
117.	Diameter at datum location	Gage
118.	Diameter of pin hole, max	Gage
119.	Diameter of groove	Gage
120.	Diameter of flange, min	Gage
121.	Depth of counterbore, internal thread	Gage
122.	Depth of thread cavity	Gage
123.	Length of effective internal thread, min	Gage
124.	Angle at datum diameter	Gage
125.	Height of boss	Gage
126.	Diameter of chamfer at internal thread cavity	Measure
127.	Length of internal thread, max	Measure
128.	Angle at bottom of thread cavity, min	Measure
129.	Angles at mouth of internal thread cavity	Measure
130.	Radius at root of boss	Measure
131.	Profile of groove	Measure
132.	Thread damaged or not full	Visual
133.	Metal defective	Visual
134.	Protective finish inadequate or defective	Visual
135.	Surface finish of cavity and chamfer, thread cavity improper	Visual
136.	Burr or sharp corner	Visual
137.	Foreign matter	Visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:40Z
Check the source to verify that this is the current version before use.

4.3.2.5 (cont)

	Defect	Method of Inspection
MINOR		
201.	Pitch diameter of internal thread, min	Gage
202.	Pitch diameter of external thread, max	Gage
203.	Pitch diameter of pin hole thread	Gage
204.	Minor diameter of pin hole thread, max	Gage
205.	Diameter of cavity, min	Gage
206.	Diameter of boss cavity	Gage
207.	Diameter of body, flange end	Gage
208.	Diameter of pin hole, min	Gage
209.	Diameter of counterbore, internal thread	Gage
210.	Diameter of undercut in cavity, if applicable	Gage
211.	Diameter of flange, max	Gage
212.	Diameter of striker hole	Gage
213.	Depth of striker hole	Gage
214.	Depth of drill hole, pin thread, max	Gage
215.	Total length	Gage
216.	Length of effective thread, pin hole	Gage
217.	Length from rear flange to boss face	Gage
218.	Length from bottom of cavity to boss face	Gage
219.	Width across flats	Gage
220.	Location of pin hole	Gage
221.	Diameter of body, midsection	Measure
222.	Length of body, midsection	Measure
223.	Length across flanges	Measure
224.	Length of flat, flange end	Measure
225.	Width of rear flange	Measure
226.	Width of groove	Measure
227.	Width of undercut in cavity, if applicable	Measure
228.	Marking missing, incorrect or illegible	Visual
229.	Radius and/or chamfer, missing or incorrect, except as otherwise classified	Visual
230.	Surface finish improper, except as otherwise classified	Visual

4.3.2.6 Pin, Firing, Dwg C8594859, covering a detail of Dwg D8593315.

CRITICAL		
	None defined.	
MAJOR		
101.	Concentricity of groove with body	Gage
102.	Concentricity of striker with body	Gage
103.	Concentricity of striker shoulder with body	Gage
104.	Symmetry of pin hole with body	Gage
105.	Diameter of body, min	Gage
106.	Diameter of groove	Gage
107.	Diameter of striker, max	Gage
108.	Diameter of pin hole, max	Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:40Z
Check the source to verify that this is the current version before use.

4.3.2.6 (cont)

	Defect	Method of Inspection
	109. Depth of pin hole, max	Measure
	110. Profile of striker	Measure
	111. Profile of groove	Measure
	112. Metal defective	Visual
	113. Protective finish inadequate or defective	Visual
	114. Surface finish of body and striker tip improper	Visual
	115. Burr or sharp corner	Visual
	116. Foreign matter	Visual
MINOR		
	201. Diameter of body, max	Gage
	202. Diameter of striker shoulder	Gage
	203. Diameter of pin hole, min	Gage
	204. Depth of pin hole, min	Gage
	205. Length from body to tip of striker	Gage
	206. Length of striker	Gage
	207. Location of pin hole	Gage
	208. Location of groove	Gage
	209. Depth of slot in base	Measure
	210. Total length	Measure
	211. Width of groove	Measure
	212. Width of slot in base	Measure
	213. Location of slot in base	Visual
	214. Marking missing, incorrect or illegible	Visual
	215. Radius missing or incorrect	Visual
	216. Surface finish improper, except as otherwise classified	Visual

4.3.2.7 Assembly, less Shear Pin, Cap, Cartridge Retainer and Chamber, Dwg D8593315, less Dwgs B8594745, D8594856, D8593313 and D8593314.

CRITICAL		
	1. Protrusion of firing pin	Gage
	2. O-ring missing	Visual
MAJOR		
	None defined.	
MINOR		
	201. O-ring not lubricated	Visual

4.3.2.8 Assembly, less Cap, Chamber, Cartridge Retainer, Shipping Plug and Shipping Cap, Dwg D8593315, less Dwgs D8594856, D8593314, D8593313, B8593298 and A8359536.

CRITICAL		
	1. Shear pin not engaged in firing pin	Visual/Manual

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:40Z
Check the source to verify that this is the current version before use.

4.3.2.8 (cont)

Defect	Method of Inspection
2. Shear pin set screw missing	Visual
MAJOR	
101. O-ring missing or not lubricated	Visual
102. Thread damaged	Visual
103. Foreign matter	Visual
MINOR	
None defined.	

4.3.2.9 Assembly, Dwg D8593315.

CRITICAL	
1. Any part missing, except as otherwise classified	Visual
2. Marking missing, incorrect or illegible	Visual
MAJOR	
None defined.	
MINOR	
201. Shipping cap or plug missing	Visual
202. Protective finish inadequate or defective	Visual

4.3.2.10 Container, Fiber, Dwg C8796826.

CRITICAL	
None defined.	
MAJOR	
None defined.	
MINOR	
201. Contents loose	Manual
202. Metal ends loose or distorted	Manual
203. Gap between body and cover, max	Visual
204. Cut or damaged through all impregnated layers	Visual

4.3.2.11 Box, Packing, Dwg C8796827.

CRITICAL	
None defined.	
MAJOR	
None defined.	

Source: https://assist.dla.mil -- Downloaded: 202640-23T00:40Z
Check the source to verify that this is the currenversion before use.

4.3.2.11 (cont)

Defect	Method of Inspection
MINOR	
201. Contents loose	Visual/Manual
202. Hardware missing, loose, broken or improperly engaged	Visual/Manual
203. Strapping missing, loose, broken or improperly assembled	Visual/Manual
204. Contents of box exposed	Visual
205. Box damaged	Visual
206. Marking missing, incorrect or illegible	Visual
207. Number of units incorrect	Visual

4.3.3 Inspection testing.- The following tests shall be performed in accordance with the provisions of 4.4:

4.3.3.1 Hardness.- Fifty units from each heat treated lot of components shall be tested for compliance with the requirements on the applicable drawing. Failure of any unit to comply with the drawing requirements shall be cause for rejection of the lot of components.

4.3.3.2 Hydrostatic pressure.- Each chamber and cap shall be subjected to the hydrostatic pressure. Failure of any cap or chamber subassembly to comply with the requirement of 3.5 shall be cause for rejection of the subassembly.

4.3.3.3 Shear pin strength.- Fifty pins from each lot shall be tested for shear strength. Failure of any shear pin to comply with the requirement of 3.6 shall be cause for rejection of the lot.

4.3.3.4 Protective finish.- The number of units for protective finish tests shall be in accordance with the applicable specification. Failure of any sample to comply with the requirements of the applicable specification shall be cause for rejection of the lot.

4.3.3.5 Residual magnetism.- Each assembly shall be subjected to the test for excessive residual magnetism. Failure of any sample to comply with the requirement of 3.9 shall be cause for rejection of the assembly.

4.3.4 Inspection equipment.- The examination and tests shall be made using equipment listed on IEL-8593315.

4.4 Test methods and procedures.

4.4.1 Hardness.- Prior to the application of protective finish, a hardness tester shall be used to determine compliance with the requirements of the applicable drawing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:40Z
Check the source to verify that this is the current version before use.

4.4.2 Hydrostatic pressure.- Prior to the application of protective finish, the cap and chamber shall be mounted in the device, using the fixture for properly sealing all openings and subjected to the internal hydrostatic pressure to determine compliance with the requirement of 3.5.

4.4.3 Shear pin strength.- After application of protective finish, the pin shall be subjected to the shear pin strength test to determine compliance with 3.6. The test shall be performed in the fixture in conjunction with a tensile testing machine.

4.4.4 Protective finish.- Test procedures for protective finish shall be in accordance with the applicable specification referenced on the applicable drawing.

4.4.5 Residual magnetism.- The assembly shall be tested for excessive residual magnetism in an area free of local magnetic effects by placing the assembly six inches from and at the same height as the compass in a north-south horizontal position (cap end at south) with the compass set in an east-west heading as shown in figure 1. The assembly shall be moved slowly past the compass in a longitudinal direction for its entire length, rotated 90 degrees in the horizontal position about its longitudinal axis and moved slowly back past the compass. This procedure shall be repeated for each 90-degree rotation of the assembly.

5. PREPARATION FOR DELIVERY

5.1 Packing and marking - Level A.- Packing and marking shall be in accordance with dwgs C8796826 and C8796827.

5.2 Data cards.- Data card information shall be as specified in MIL-STD-1167.

6. NOTES

6.1 A mechanical failure is defined as any deformation or breakage of a part, the occurrence of which is other than a design function.

Custodian:

Army - MU


Preparing activity:

Army - MU

Project No. 1377-A036

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:40Z
Check the source to verify that this is the current version before use.

PILOT'S STANDBY COMPASS, TYPE AN-5766

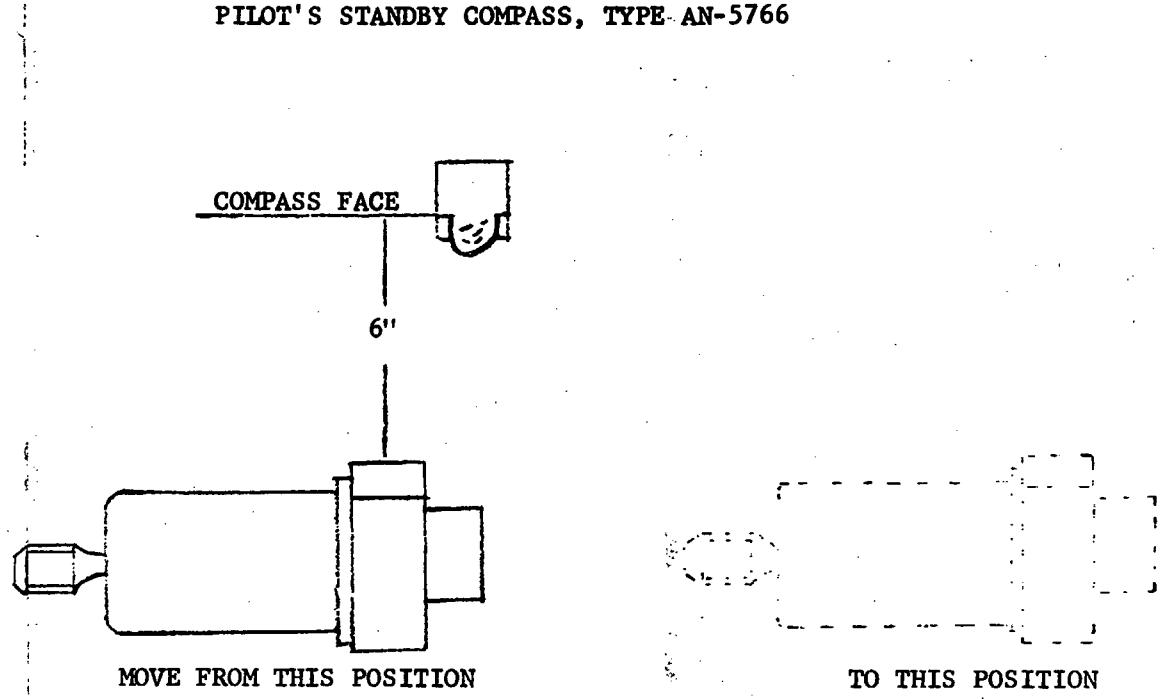

PLAN VIEW

NOTE:

INITIATOR AND COMPASS SHALL LIE IN A HORIZONTAL PLANE

LAYOUT FOR DETERMINATION OF RESIDUAL MAGNETISM IN INITIATOR, CARTRIDGE ACTUATED, DELAY, M6A1, M26, M33 and M44.

FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:40Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity.

SPECIFICATION

ORGANIZATION | CITY AND STATE

CONTRACT NO. | QUANTITY OF ITEMS PROCURED | DOLLAR AMOUNT $

MATERIAL PROCURED UNDER A

[ ] DIRECT GOVERNMENT CONTRACT [ ] SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)* | DATE

DD FORM 1 OCT 64 1426

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:40Z
Check the source to verify that this is the current version before use.