MIL-F-48293A (PA)
1 MARCH 1976
SUPERSEDING
MIL-F-48293 (PA)
20 FEBRUARY 1974

MILITARY SPECIFICATION

FUZE ASSEMBLY FOR M56 ANTI-TANK MINE

This specification is approved for use by Picatinny Arsenal, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

*1.1 Scope. - This specification covers the inspection, tests and loading of the fuze assembly used in the M56 Anti-tank Mine.

2. APPLICABLE DOCUMENTS

*2.1 Issues of Documents. - The following documents of the issue in effect on date of invitation for bid or requests for proposals, form a part of this specification to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-A-48078 - Ammunition, Standard Quality Assurance Provisions, General Specification for
MIL-D-46253 - Detonator, Electric, T20E1
MIL-L-48286 - Lead Assembly (For M56 Mine Sub-System).

STANDARDS

FEDERAL

FED-STD-151 - Metals; Test Methods

MILITARY

FSC: 1345

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, Picatinny Arsenal, Dover, New Jersey 07801 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:21Z
Check the source to verify that this is the current version before use.

MIL- STD-105 - Sampling Procedures and Tables for Inspection by Attributes (ABC- STD-105)
MIL- STD- 331 - Fuze and Fuze Components, Environmental and Performance For

DRAWINGS

PICATINNY ARSENAL

PRODUCT AND PACKAGE DRAWINGS

9281588 - Fuze Assembly
9288631 - Packing and Marking for M56 Fuze Assembly.

[Copies of specifications; standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the Contracting Officer).

2.2 Other publications. - The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on the date of invitation for bids shall apply.

"AMERICAN SOCIETY FOR TESTING AND MATERIALS - ASTM Standards, 1974 Edition, Part 44.

(Copies may be obtained from the Americal Society for Testing Materials, 1916 Race Street, Philadelphia, Pennsylvania 19103)".

CODE OF FEDERAL REGULATIONS, TITLE 49 - TRANSPORTATION, PARTS 0-190

(The Code of Federal Regulations is avialable from the Superintendent of Documents, U.S. Government Printing Office, Washington D.C. 20402. Orders shall specify CFT 0-190 (latest revision],
*(For meaning of asterisk see paragraph 6.6)

3. REQUIREMENTS

.3.1 Material. - Materials shall be in accordance with the applicable drawings and specifications,

3.2 Assembly. - The assembly shall comply with all requirements specified on drawing (dwg.) 9281588 as applicable, all associated drawings and with all requirements specified in applicable specifications.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:21Z
Check the source to verify that this is the current version before use.

3.3 Fuze assembly

*3 .3.1 Jolt and Jumble. - The fuze shall not arm when the safety slip is properly installed and the assembly is tested as specified in Paragraph 4.5.8.10.

*3.3.2 Mechanical Arming. - The safety and Arming Mechanism shall function (explosive train full in-line) when shocked to the force-time requirements specified by curve No. 1.

3.3.3 Fuze resistance. - The resistance between the curved spring and the non-insulated terminal shall not exceed two (2) ohms when tested as specified in 4.5.8.4.

3.4 Mechanical properties. - Cold-working or heat-treating (including quenching-and-tempering, normalizing, normalizing-and-tempering, annealing, and stress-relieving) operations, shall be performed in such a manner as to produce the specified properties uniformly throughout the entire lot.

3.5 Workmanship. - All parts and assemblies shall be fabricated and finished in a thorough, workmanlike manner. They shall be free of burrs, chips, sharp edges, cracks, unblended radii, surface defects, dirt, grease, rust, corrosion products, and other foreign matter. The cleaning method used shall not be injurious to any parts, nor shall the parts be contaminated by the cleaning agents . All marking and stamping shall be neat and sharply defined.

3.6 Submission of results of contractor-conducted examinations and tests. - The contractor shall forward copies of the results of any of his examinations or tests to the designated address as specified in paragraph 6.4.

3.7 First Article Inspection. - This specification makes provisions for first article inspection. Requirements for the submission of first article samples by the contractor shall be as specified in the contract.

4. QUALITY ASSURANCE PROVISIONS

*4.1 Responsibility for Inspection and Standard Quality Assurance Provisions. - Unless otherwise specified herein or in the contract, the provisions of MIL-A-48078 shall apply and are hereby made a part of this specification.

*4.2 Classification of Inspections. - The following types of inspection shall conducted on this item:

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:21Z
Check the source to verify that this is the current version before use.

a. First Article Inspection

b. Quality Conformance Inspection

*4.3 First Article Inspection

4.3.1 Submission. - The contractor shall submit a first article sample (See 6.2b) as designated by the Contracting Officer. The first article sample shall consist of:

a. Ten (10) sets of all components

b. Ten (10) sets of all subassemblies ‘

c. Twenty-five (25) fuze assemblies

Included in the first article shall be five (5) items from each , cavity used to produce tasted or molded parts and five (5) items from each die set used to extrude parts. The parts shall be so identified as to permit the tracing of the item to the cavity or die set from which it was produced. The first article sample shall be evaluated in accordance with the provisions of 4.3.2 and 4.3.3.

*4.3.2 Inspections to be Performed. - Assemblies and components will be subjected by the Government to the examinations and tests as follows:

a) All components, sub-assemblies and assemblies shall be inspected in accordance with 4.4.2.1 through 4.4.2.16.

b) Ten (10) curved springs shall be tested for the hardness requirements in accordance with 4.4.3.1.

c) Ten (10) spring clips shall be tested for the hardness requirements in accordance with 4.4.3.2.

d) Ten (10) C-weight springs shall be tested for the spring rate requirements in accordance with 4.5.1.

e) Ten (10) G-weight lock springs shall be tested for the spring rate requirements in accordance with 4.5.2.

f) Ten (10) slider release lock springs shall be tested for the spring rate requirements in accordance with 4.5.3.

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:21Z
Check the source to verify that this is the current version before use.

g) Ten (10) shorting leafs shall be tested for the hardness requirements in accordance with 4.4.3.6.

h) Ten (10) slider springs shall be tested for the spring rate requirements in accordance with 4.5.4.

i) Ten (10) slider assemblies shall be tested for the push test requirements in accordance with 4.5.5.

j) Ten (10) fuze flex cable assemblies shall be tested first for the continuity resistance requirements in accordance with 4.5.6.1. The cable assemblies shall then be tested for the insulation resistance requirements in accordance with 4.5.6.2.

k) Ten (10) battery springs shall be tested for the spring rate requirements in accordance with 4.5.7.

1) Twenty-five (25) fuze assemblies shall be tested in the following sequence for the following tests:

(1) Mechanical arming in accordance with 4.5.8.1.
(2) Static arming in accordance with 4.5.8.2.
(3) Arming switch functioning in accordance with 4.5.8.3.
(4) Fuze resistance in accordance with 4.5.8.4.
(5) Curved spring compression in accordance with 4.5.8,5.
(6) G-weight retainer staking in accordance with 4.5.8.6.
(7) Slider safety in accordance with 4.5.8.7.
(8) Screw torquing in accordance with 4.5.8.8.
(9) Detonator short test in accordance with 4.5.8.9.

m) Ten (10) of the fuze assemblies from 4.3.2.1 shall be tested for the jolt and jumble requirements in accordance with 4.5.8.10.

n) The lead assemblies shall be certified by a Government Agency that they performed to the requirements of MIL-L-48288.

o) The detonators shall be certified by a Government Agency that they performed to the requirements of MIL-D-46253.

*4.3.3 Rejection. - If any component, subassembly or assembly fails to comply with any or all of the applicable requirements, the first article sample shall be rejected. The Government reserves the right to terminate its inspection upon any failure of an inert component, subassembly or assembly to comply with any of the stated requirements.

Source: https://assist.dla.mil -- Downloaded: 2026l0-22T19:21Z
Check the source to verify that this is the current version before use.

4.4 QUALITY CONFORMANCE INSPECTION

*4.4.1 Inspection Lot Formation. - Inspection lots shall comply with the lot formation provisions of MIL-A-48078, In addition inspection lots of fuze assemblies shall contain:

a) Lead assemblies from one (1) interfix lot from one (1) manufacturer.

b) Detonators from one (1) interfix lot from one (1) manufacturer.

*4.4.2 Examination. - (See MIL-A-48078). - Unless otherwise specified in the Classification of Defects and test tables, sampling plans for major and minor defects shall be in accordante with MIL-STD-105, Inspection Level 11. Equipment necessary for the performance of the inspections listed shall be in accordante with 4.4.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:21Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-48293A(PA)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.1	Fuze Assembly				9281588
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major:					
101	Component missing, damaged, distorted or loose		0.40%	3.2	Visual
102	Assembly not in full un-armed condition		0.40%	3.2	Visual
103	Safety clip in place		0.40%	3.2	Visual
104	Maximum length		0.40%	3.2	Gage
Minor:					
201	Maximum height		0.65%	3.2	Gage
202	Maximum depth		0.65%	3.2	Gage
203	Evidence of poor workmanship		1.0%	3.5	Visual

NOTES:

SARPA-QA FORM 2567 FEB 74 4810

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:21Z
Check the source to verify that this is the current version before use.

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
*4.4.2.2	Housing, Fuze		9281589
			NEXT HIGHER ASSEMBLY 9281588

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major:					
101	Maximum material - Fuze well profile interface dimensions		0.40%	3.2	Gage
102	Maximum material - Fuze well depth interface dimensions		0.40%	3.2	Gage
103	Maximum material - Electronic module profile interface dimensions		0.40%	3.2	Gage
104	Boss cover interface dimensions		0.40%	3.2	Gage
105	Location & G-weight hole		0.40%	3.2	Gage
106	Location of slider lock pin hole		0.40%	3.2	Gage
107	Finish on G-weight hole	10	0/1	3.2	Gage
108	Finish on slider lock pin hole	10	0/1	3.2	Gage
Minor:					
201	Depth of Battery hole		0.65%	3.2	Gage
202	Minimum diameter of battery hole		0.65%	3.2	Gage
203	Evidence of poor workmanship		1.0%	3.5	Visual

NOTES

Source: https://assist.dla.mil -- Downloaded: 2026-02-22T19:21Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-48293A(PA)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.3	Lock, Slider		9281590
			NEXT HIGHER ASSEMBLY 9281588

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major:					
101	Spherical radius		0.40%	3.2	Gage
102	Ball radius		0.40%	3.2	Gage
103	Finish on body diameter	10	0/1	3.2	Gage
Minor:					
201	Location of body diameter to slider diameter		0.65%	3.2	Gage
202	Evidence of poor workmanship		1.0%	3.5	Gage

NOTES:

SARPA-QA FORM 2567 FEB 74 4810

Source: https://assist.dla.mil -- Downloaded: 2026-02-22T19:21Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-48293A(PA)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9281591
‡4.4.2.4	Lock, G-Weight				NEXT HIGHER ASSEMBLY 9281588
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major:					
101	Length of tab		0.40%	3.2	Gage
102	Angle of tab		0.40%	3.2	Gage
Minor:					
201	Evidence of poor workmanship		1.0	3.5	Visual

NOTES:

SARPA-QA FORM 2567 FEB 74 4810

01

Source: https://assist.dla.mil -- Downloaded: 2026-02-22T19:21Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-48293A(PA)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9281592
*4.4.2.5	Retainer, G-Weight				NEXT HIGHER ASSEMBLY 9281588
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major: 101	Minimum length of tab		0.40%	3.2	Gage
Minor: 201	Evidence of poor workmanship		1.0	3.5	Visual

NOTES

SARPA-QA FORM 2567 FEB 74 4810

Source: https://assist.dla.mil -- Downloaded: 2026-02-22T19:21Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-48293A(PA)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9281601
4.4.2.6	Slider Housing Assembly				NEXT HIGHER ASSEMBLY 9281588
CATEGORY	EXAMINATION OR TEST	NO OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major:					
101	Improper Assembly		0.40%	3.2	Visual
102	Component parts missing		0.40%	3.2	Visual
103	Staking operation missing or incomplete		0.40%	3.2	Visual
Minor:					
201	Evidence of poor workmanship		1.0%	3.5	Visual

NOTES

SARPA-QA FORM 2567 FEB 74 4810

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:21Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-48293A(PA)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
*4.4.2.7	Housing Slider	1 OF 1	9281602
			NEXT HIGHER ASSEMBLY 9281601

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major:					
101	Slider hole diameter		0.40%	3.2	Gage
102	Depth of slider hole		0.40%	3.2	Gage
103	Location of lock pin hole		0.40%	3.2	Gage
104	Location of slider hole		0.40%	3.2	Gage
105	Location of detonator hole		0.40%	3.2	Gage
106	Finish on slider hole	10	0/1	3.2	Gage
Minor:					
201	Minimum width of guide pin slot		0.65%	3.2	Gage
202	Evidence of poor workmanship		1.0%	3.5	Visual

NOTES

SARPA-QA FORM 2567 FEB 74 4810

13

Source: https://assist.dla.mil -- Downloaded: 2026-02-22T19:21Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-48293A(PA)

PARAGRAPH	TITLE		SHEET	OF	DRAWING NUMBER
*4.4.2.8	Sleeve		1	1	9281605
					NEXT HIGHER ASSEMBLY 9281601
CATEGORY	EXAMINATION OR TEST	NO OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major: 101	Inside diameter		0.40%	3.2	Gage
Minor: 201	Evidence of poor workmanship		1.0%	3.5	Visual

NOTES

SARPA-QA FORM 2567 FEB 74 4810

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:21Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-48293A(PA)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.9	Leaf, Shorting		9281606
			NEXT HIGHER ASSEMBLY
			9281601

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major:	None defined				
Minor:					
201	Distance from bend to centerline of hole		0.65%	3.2	Gage
202	Evidence of poor workmanship		1.0%	3.5	Visual

NOTES

SARPA-QA FORM 2567 FEB 74 4810

15

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:21Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-48293A(PA)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9281608
4.4.2.10	Pin				NEXT HIGHER ASSEMBLY 9281601
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major: 101	Un-knurled diameter		0.40%	3.2	Gage
Minor: 201	Evidence of poor workmanship		1.0%	3.2	Visual

1/

NOTES

SARPA-QA FORM 2567 FEB 74 4810

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:21Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-48293A(PA)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9281609
*4.4.2.11	Slider Assembly				NEXT HIGHER ASSEMBLY 9281601
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical:	None defined				
Major:					
101	Lead assembly improperly assembled		0.40%	3.2	Visual
102	Presence of staking		0.40%	3.2	Visual
103	Lead assembly and staking flush or below flush		0.40%	3.2	Gage
Minor:					
201	Evidence of poor workmanship		1.0%	3.5	Visual

NOTES

SARPA-QA FORM 2567 FEB 74 4810

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:21Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-48293A(PA)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.12	Slider		9281610
			NEXT HIGHER ASSEMBLY
			9281609

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major:					
101	Large outer diameter		0.40%	3.2	Gage
102	Location of lock pin hole		0.40%	3.2	Gage
103	Guide pin hole diameter		0.40%	3.2	Gage
104	Location of lead assembly hole		0.40%	3.2	Gage
105	Finish on lockpin angle groove		0.40%	3.2	Gage
106	Finish	10	0/1	3.2	Gage
Minor					
201	Evidence of poor workmanship		1/0%	3.5	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:21Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-48293A(PA)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
*4.4.2.13	Switch and Flex Cable Assembly				9281611
					NEXT HIGHER ASSEMBLY
					9281601
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major:					
101	Missing, damaged or distorted components, improper alignment		0.40%	3.2	Visual
102	Improper solder joints		0.40%	3.2	Visual
Minor:					
201	Evidence of poor workmanship		1.0%	3.5	Visual

NOTES

SARPA-QA FORM 2567 FEB 74 4910

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:21Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-48293A(PA)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9282573
*4.4.2.14	Flex Cable Assembly				NEXT HIGHER ASSEMBLY 9281611
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major:					
101	Location of eyelet holes to connector pins		0.40%	3.2	Gage
102	Improper solder connections		0.40%	3.2	Gage
Minor:					
201	Evidence of poor workmanship		1.0%	3.5	Visual

NOTES

SARPA-QA FORM 2567 FEB 74 4810

20

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:21Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-48293A(PA)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9287587
*4.4.2.15	G-Weight				NEXT HIGHER ASSEMBLY 9281588
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major:					
101	Large diameter		0.40%	3.2	Gage
Minor:					
201	Overall length		0.65%	3.2	Gage
202	Evidence of poor workmanship		1.0%	3.5	Visual

NOTES

SARPA-QA FORM 2567 FEB 74 4810

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:21Z
Check the source to verify that this is the current version before use.

4.4.3 Testing

*4.4.3.1 Spring, Curved Hardness (see dwg. 9281595). - Major Defect - Thirty-two (32) springs shall be randomly selected from each lot and tested in accordance with Test Method 243.1 of FED-STD 151 or ASTM 384. Any spring failing to comply with all of the specified requirements shall be classed defective. The lot shall be rejected if one (1) or more springs are classed defective (Destructive test) .

*4.4.3.2 Clip, Spring Hardness (see dwg. 9281596). - Major Defect. - Ten (10) springs shall be randomly selected from each lot and tested for the hardness requirement in accordance with Test Method 243.1 of FED-STD-151. Any clip failing to comply with all of the specified requirements shall be classed defective. The lot shall classed defective if one (1) or more clips are classed defective (Destructive Test).

*4.4.3.3 Spring, G-Weight Spring Rate (see dwg. 9281597). - Major Defect. - Thirty-two (32) springs shall be randomly selected from each lot and tested for the specified requirements in accordance with 4.5.1 The lot shall be rejected if one (1) or more springs are classed defective (Non-destructive test).

*4.4.3.4 Spring, lock,1 G-Weight Spring Rate (see dwg. 9281598). Major Defect - Thirty-two (32) springs shall be randomly selected from each lot and tested for the specified requirements in accordance with 4.5.2. The lot shall be rejected if one (1) or more springs are classed defective (Non-destructive test).

*4.4.3.5 Spring, Slider Release Lock, Spring Rate (see dwg. 9281600). - Major defect. - Thirty two (32) springs shall be randomly selected from each lot and tested for the specified requirements in accordance with 4.5.3. The lot shall be rejected if one (1) or more springs are classed defective (Non-destructive test).

*4.4.3.6 Leaf, Shorting Hardness (see dwg. 9281606). - Major defect. - Thirty -two (32) samples shall be randomly selected from each lot and tested in accordance with Test Method 242.1 of FED-STD-151 or ASTM 384. The sample shall be classed defective if it fails to comply with all of the specified requirement. The lot shall be rejected if one (1) or more samples are classed defective (Destructive test-.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:21Z
Check the source to verify that this is the current version before use.

*4.4.3.7 Spring, Slider Spring Rate (see dwg. 9281607). - Major defect. - Thirty-two (32) springs shall be randomly selected from each lot and tested in accordance with 4.5.4. The lot shall be rejected if one (1) or more springs are classed defective (Non-destructive test).

*4.4.3.8 Slider Assembly Push Test (see dwg. 9281609) , Major Defect. - Thirty-two (32) slider assemblies shall be randomly selected from each lot and tested in accordance with 4.5.5. The lot shall be rejected if one (1) or more assemblies are classed defective (Non-destructive test).

*4*4*3*9 Flex Cable Assembly, Fuze (see dwg. 9282573).

*4.4.3.9.1 Continuity Resistance, Major Defect. - Thirty-two (32) assemblies shall be randomly selected from each lot and tested in accordance with 4.5.6.1. The lot shall be rejected if one (1) or more assemblies are classed defective (Non-destructive test).

*4.4.3.9.2 Insulation Resistance. - Major Defect. - The lot shall be screened 100 percent in accordance with 4.5.6.2. Any cable assembly classed defective shall be removed from the lot (Non-destructive test).

*4.4.3.10 Spring, Battery Spring Rate (see dwg. 9287586). - Major defect. - Thirty-two (32) springs shall be randomly selected from each lot and tested in accordance with 4.5.7. The lot shall be classed defective if one (1) or more springs are classed defective (Non-destructive test).

*4.4.3.11 Fuze Assembly

*4.4.3.11.1 Mechanical Arming (see 3.3.2) Major Defect. - Two hundred (200) fuze assembles shall be randomly selected from each lot and tested in accordance with 4.5.8.1. The lot shall be rejected if four (4) or more samples are classed defective (Non-destructive test).

*4.4.3.11.2 Static Arming (see dwg. 9281588) , Major Defect. - Two hundred (200) samples shall be randomly selected from each lot and tested in accordance with 4.5.8.2. The lot shall be rejected if three (3) or more samples are classed defective (Non-destructive test). Testing shall not be performed until a minimum of four (4) days is attained after the assembly operation has been completed.

*4.4.3.11.3 Arming Switch Functioning (see dwg. 9231588). - The lot shall be screened 100 percent for the specified requirement and

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:21Z
Check the source to verify that this is the current version before use.

tested in accordance with 4.5.8.3. Any assembly classed defective shall be removed from the lot (Non-destructive test) .

*4.4.3.11.4 Fuze Resistance (see 3.3.3), Major Defect - Two hundred(200) fuze assemblied shall be randomly selected from each lot and tested in accordance with 4.5.8.4. The lot shall be rejected if three (3) or more fuze assemblies are classed defective (Non-destructive test).

*4.4.3.11.5 Curved Spring Compression Test (see dwg. 9281588) , Major defect - Two hundred (200) assemblies shall be randomly selected from each lot and. tested in accordance with 4.5.8.5. The lot shall be classed defective if three (3) or more assemblies are classed defective (Non-destructive test).

*4.4.3.11.6 G-Weight Retainer Staking Strength (see dwg. 9281588), Major Defect - Thirty-two (32) assemblies shall be randomly selected from each lot and tested in accordance with 4.5.8.6. The lot shall be rejected if one (1) or more assemblies are classed defective. (Non-destructive} .

*4.4.3.11.7 Slider Safety Test (see dwg. 9281588) , Major Defect. - The lot shall be screened 100 percent for the specified requirement and tested in accordance with 4.5.8.7. Any assembly classed defective shall be removed from the lot (Non-destructive test) .

*4.4.3.11.8 Screw Torque (see dwg. 9281588), Major Defect. - Thirty-two (32) assemblies shall be randomly selected from each lot and tested in accordance with 4.5.8.8. The lot shall be rejected if one (1) or more assemblies are classed defective (Non-destructive test).

*4.4.3.11.9 Detonator Short (see dwg. 9281589), Major Defect. - The lot shall be screened 100 percent after all of the other tests are completed for the specified requirement in accordance with 4.5.8.9. Any assembly classed defective shall be removed from the lot (Non-destructive test).

*4.4.3.12 Slider Hardness (see dwg. 9281610), Major Defect. - Ten (10) samples shall be randomly selected from each lot and tested in accordance with Test Method 243.1 of FED-STD-151. The lot shall be rejected if one (1) or more samples are classed defective. (Non-destructive test).

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:21Z
Check the source to verify that this is the current version before use.

*4.4.3.13 Slider Lock Hardness (see dwg. 9281588), Major Defect. - Ten (10) samples shall be randomly selected from each lot and tested in accordance with Test Method 243.1 of FED-STD-151. The lot shall be classed defective if one (1) or more samples are classed defective (Non-destructive test)".

*4.4.3.14 Lead Assembly Acceptance. - Major Defect - Each lot of leads shall be accepted by a Government Agency in accordance with MIL-L-48286 prior to use in a fuze lot.

*4.4.3.15 Detonator Acceptance. - Major Defect - Each lot of detonators shall be accepted by a Government Agency in accordance with MIL-D-46253 prior to use in a fuze lot.

*4. 4.3.16 Dimensional Control of Cast Parts. - In place of the normal sampling associated with the Classification of Defects, and with the approval of the Contracting Officer, a sample of at least three (3) parts (as cast) from each cavity shall be dimensionally inspected to qualify a new or reworked cavity for use in production or as a control o-f the cavity during production. Inspectionn for control of each cavity during production shall be performed on the above quantities from each cavity after production of 5000 parts. Individual cavity identification must be provided. If any defective parts are found during qualification of the cavity. the cavity producing the defective part shall not be used in production. If any defective parts are found when inspection is performed for control of the cavity, the cavity producing the defective part shall be removed from production. Further, that portion of-production since the last control check shall be returned to the contractor for corrective action. All cavities formerly removed from production because of some fault, may, after reworking, be returned to production providing they pass the qualification test specified above. The contractor may request a change of inspection frequency providing he presents objective evidence to substantiate the request to the Contracting Officer.

*4.4.3.17 Dimensional Control of Stamped Parts. - In place of the normal sampling associated with the Classification of Defects, and with the approval of the Contracting Officer, a sample of at least ten (10) parts shall be dimensionally inspected to qualify the tool used in the stamping process for use in production. In addition, a random sample of five (5) parts shall be selected from the last portion of each hour's production for dimensional inspection as a control of the tool during production. If any defective

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:21Z
Check the source to verify that this is the current version before use.

parts are found during qualification of the tool, the tool producing the defective part shall not be used in production. If any defective parts are found when inspection is performed for control of the tool, the tool producing the defective part shall be removed from production. Further, that portion of production since the last tool control check shall be returned to the contractor for corrective action. All tools removed from production because of some fault, may, after reworking, be returned to production providing they pass the qualification test above. The contractor may request a change of inspection frequency providing he presents objective evidence to the Contracting Officer to substantiate the request.

*4.4.4 Inspection Equipment. - The inspection equipment required to perform the inspection and tests prescribed in this specification is identified in the "Paragraph Reference/Inspection Method" column in the tables starting with paragraph 4.4.2.1 and the test methods (See 4.5), The contractor shall submit for approval, inspection equipment designs in accordance with the terms of the contract. See Section 6 of MIL-A-48078 and 6.3 herein.

*4.5 Test Methods and Procedures

*4.5.1 Spring, G-Weight, Spring Rate. - The spring free length shall be measured prior to applying a compressive force. The spring height shall then be measured after it is compressed by applying the specified force. Any spring failing to comply with all of the specified requirements shall be classed defective.

*4.5.2 Spring, Lock, G-Weight Spring Rate. - The spring shall be mounted in an approved fixture to prevent if from rotating. The loads shall then be applied and the displacement measured against the specified angles per specified applied torque. The spring shall not break or crack during the application of the forces and the spring shall return to within ten (10) percent of the original position. Any spring failing to comply with all of the specified requirements shall be classed defective."

*4.5.3 Spring, Slider Release Lock Spring Rate. - The spring free length shall be measured prior to applying a compressive force. The spring height shall then be measured after it is compressed by applying the specified force. Any spring failing to comply with all of the specified requirements shall be classed defective.

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:21Z
Check the source to verify that this is the current version before use.

*4.5.4 Spring, Slider, Spring Rate. - The spring free length shall be measured prior to applying a compressive force. The spring height shall then be measured after it is compressed by applying the specified force. Any spring failing to comply with all of the specified requirements shall be classed defective.

*4.5.5 Slider Assembly Push Test. - The slider assembly shall be positioned in a fixture and a rod shall appy the specified load to the lead assembly. The slider assembly shall be classed defective if the lead assembly moves out of the staked area when the force is applied.

*4.5.6 Flex Cable Assembly Fuze. -

*4. 5.6.1 Continuity Resistance. - The cable assembly shall be measured for the specified resistance using a digital readout milliohmmeter. Any cable assembly that has resistance in excess of the specified maximum value shall be classed defective.

*4. 5.6.2 Insulation Resistance. - The cable assembly shall be measured for the specified insulation resistance by applying five hundred plus fifty volts direct current (500 + 50 v.d.c.) between one cable trace and all the other traces tied together (that are not part of the single trace under test). A microammeter shall measure any leakage current resulting from the 500 v.d.c. potential. The cable shall be classed defective if the leakage current exceeds two (2) microampere. After the one trace is tested for insulation resistance, with respect to the rest of the cable, The remaining points (traces) shall be tested in a similar manner to measure their insulation with respect to the other traces. If any measurement exceeds the 2 microampere at 500 v.d.c. requirement, it too, shall be classed defective.

*4.5.7 Spring, Battery Spring Rate. - The spring wire diameter and the free length shall be measured prior to applying a compressive force . The spring height shall then be measured after if is compressed by applying the specified force. Any spring failing to comply with all of the specified requirements shall be classed defective.

*4.5.8 Fuze Assembly

*4. 5.8.1 Mechanical Arming. - The fuze assembly shall be subjected to the load within the profile described by curve no. 1 by shocking. The assembly shall be classed defective if it fails

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:21Z
Check the source to verify that this is the current version before use.

to arm after shocking. The assembly shall be reset after the test and returned to the lot. If the assembly can not be reset, it shall be classed defective.

*4. 5.8.2 Static Arming. - The G-weight shall be gradually depressed in an approved fixture until the slider bar arms. If the slider fails to arm when the maximum load is applied, the assembly shall be classed defective. After testing, the S and A shall be reset and the safety slip replaced before the unit is returned to the lot.

*4.5.8.3 Arming Switch Functioning. - The required resistance shall be measured on an ohmmeter at the specified flex cable pin and the battery spring when the switch is in the open position. The slider shall be released and the ohmmeter shall measure the closed circuit resistance at the specified flex cable pin and the battery spring, Current during test shall be limited to a maximum of one (1) milliampere. After testing, the fuze shall be reset and the switch shall return to the open circuit condition. Any assembly failing to comply with all of the specified requirements shall be classed defective.

*4.5 .8.4 Fuze Resistance. - The resistance shall be measured between the curved spring and the non-insulted terminal with ab ohmmeter with a limited current of one (1) milliampere. The assembly shall be classed defective if it fails to comply with the resistance requirements.

*4.5. 8.5 Curved Spring Compression Test. - The spring shall be compressed and returned to the specified dimension when the load is released. Springs failing to comply to the specified requirements shall be classed defective.

*4.5.8.6 G-Weight Retainer Staking Strength. - The specified load shall be applied to the slider lock in the specified direction without causing the G-weight retainer to move out of place, Any retainer that moves out of place shall cause the assembly to be classed defective.

4.5.8.7 Slider Safety Test. - The assembly shall be secured and the specified force applied to the G-weight when the safety clip is in position. The assembly shall be classed defective if the slider moves into the armed position.

*4. 5.8.8 Screw Torque Test. - The screw shall not turn when the specified torque is applied The assembly shall be classed

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:21Z
Check the source to verify that this is the current version before use.

defective if it fails to comply with all of the specified requirements.

*4.5.8.9 Detonator Short Test. - The assembly shall be tested for the specified resistance using a digital readout ohmmeter that is current limited to one (1) milliampere. Any assembly failing to comply with all of the specified requirements shall be classed defective.

*4.5. 8.10 Jolt and Jumble. - The fuze assembly with safety clip installed shall be installed in a suitable holding fixture and tested in accordance with the test methods of test 101.1 and MIL-STD-331. The fuze less holding fixture shall then be tested in accordance with the test methods of test 102.1 of MIL-STD-331. Testing is destructive and the sample shall not be returned to the lot.

5. PREPARATION FOR DELIVERY

5.1 Preservation and Packaging. -

5.1.1 Level A. - The fuze assembly shall be preserved and packaged in accordance with dwg. 9288631.

5.1.2 Packaging. - The fuze assembly shall be packaged in accordance with the Code of Federal Regulations, CFR 49 parts 0-190.

5.2 Packing. -

5.2.1 Level A. - The fuze assemblies shall be packed in accordante with dwgs. 9288631 and CFT 49 parts 0-190.

5.3 Marking. - Marking of the carton shall comply with Level A, dwg. 9288631. Markings shall also specify the part nomenclature and Class of Explosive as well as a note, HANDLE CAREFULLY.

5.4 Shipping. - When components of more than one lot are shipped as a carload, each lot shall be kept separate, and the division between lots clearly indicated to prevent mixing of the lots in transit.

6. NOTES

*6.1 Intended Use. - The fuze assembly shall be used as the safing and arming mechanism in the M56 Anti-tank mine.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:21Z
Check the source to verify that this is the current version before use.

*6.2 Ordering Data. Procurement documents shall specify the following:

a. Title, number and date of this specification.

b. Provisions for outmission of first article samples.

c. Provisions of MIL-A-48078.

*6.3 Submission of Inspection Equipment Designs For Approval. (see MIL-A-48078) - Submit equipment designs as required to:

Commander
Picatinny Arsenal
ATTN : SARPA-QA-T-T
Dover, New Jersey 07801

*6.4 Submission of Results of Contractor Conducted Examine tions and Tests (see 3.6). - The contractor shall send his remarks to:

Commander
Picatinny Arsenal
ATTN: SARPA-QA-A-M
Dover, New Jersey 07801

*6.5 Distribution of Ammunition Data Cards. Distribution of data cards shall include the following:

Commander
Picatinny Arsenal
ATTN: SARPA-QA-A-M
Dover, New Jersey 07801


6.6 The margins of this specification are marked with an asterisk to indicate where changes (additions, modification.s , corrections, deletions) from the Previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the require-ments of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Army-PA

Preparing Activity:
Army-PA

Project Number: 1345-A-167

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:21Z
Check the source to verify that this is the current version before use.

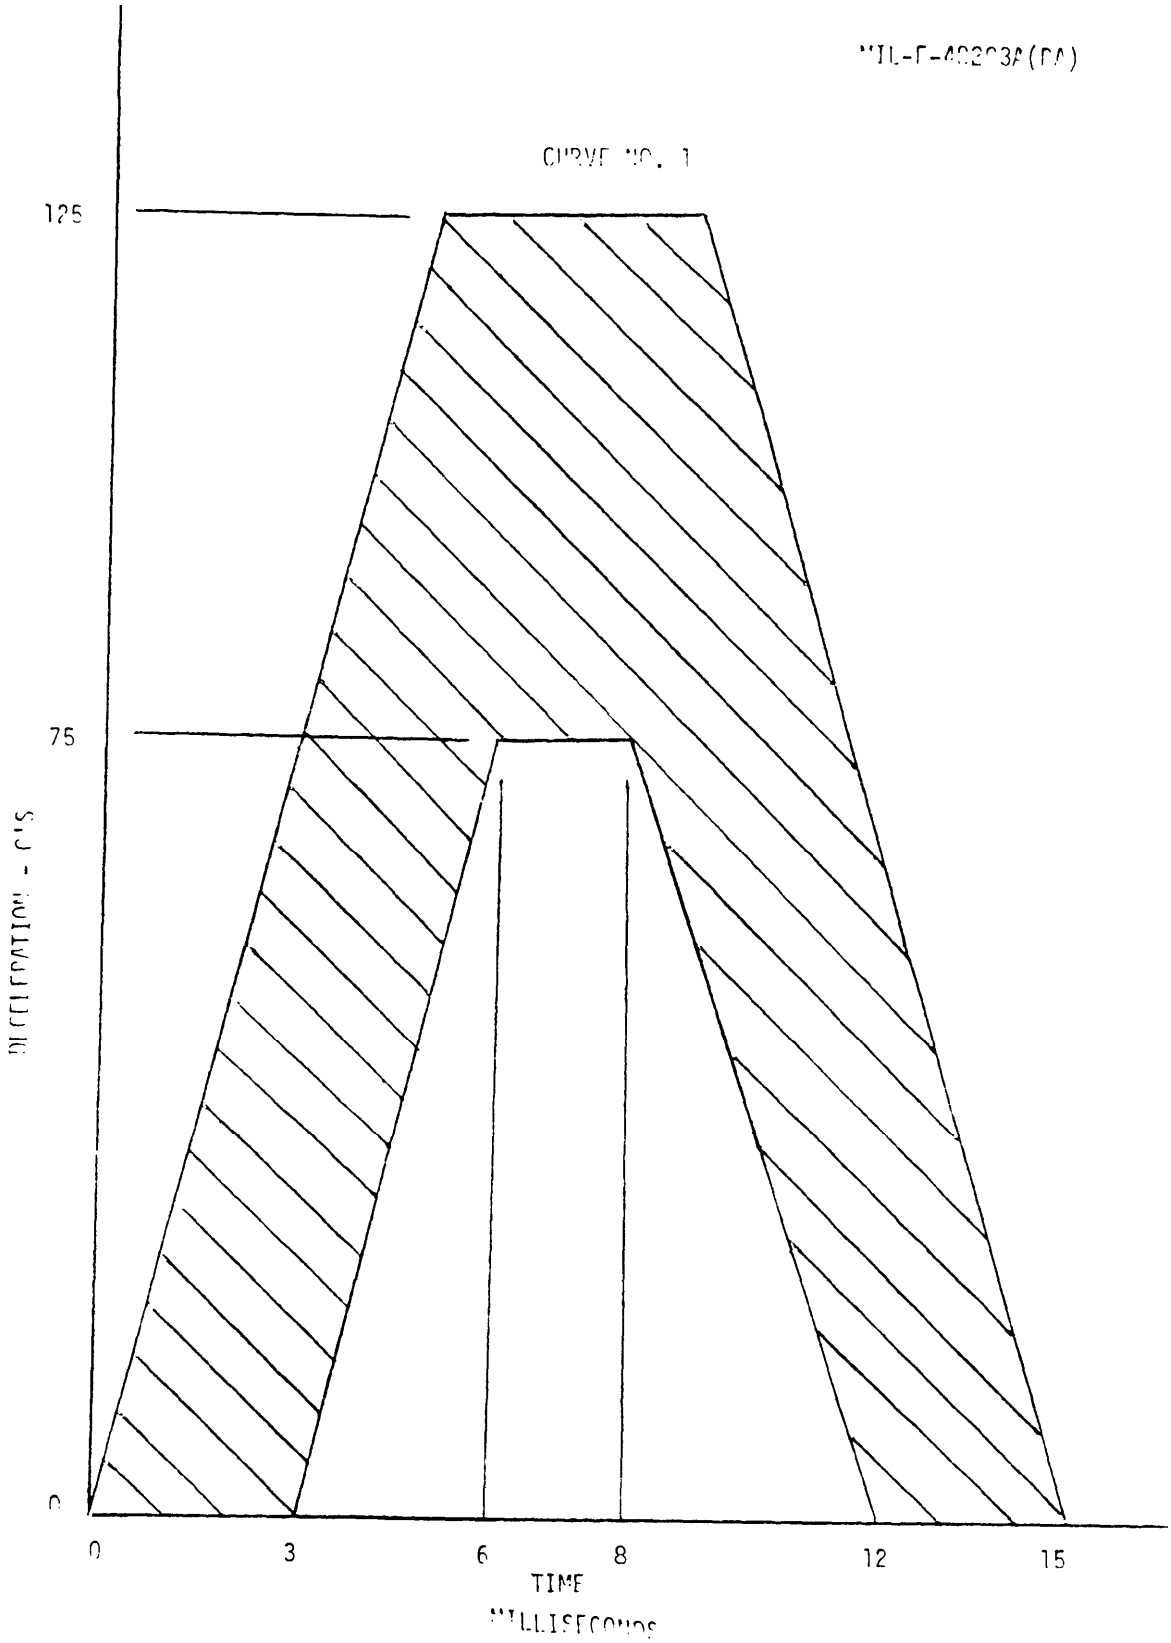

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:21Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:21Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING.

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOC RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:21Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314



OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

COMMANDER
Picatinny Arsenal
ATTN: SARPA-QA-A
Dover, New Jersey 07801

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:21Z
Check the source to verify that this is the current version before use.