MILITARY SPECIFICATION

THERMOCOUPLE : ENGINE CYLINDER, BAYONET TYPE, MS 90324

This specification has been approved by the Bureau of Naval Weapons, Department of the Navy.

1. SCOPE

1.1 Scope - This specification covers design and all performance requirements for the procurement of Thermocouples; Engine Cylinder Bayonet Type.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on the date of the invitation for bids, form a part of this specification to the extent specified herein.

SPECIFICATIONS

Federal

QQ-C-320	Chromium Plating (Electrodeposited)
QQ-N-290	Nickel Plating (Electrodeposited)
QQ-Z-325	Zinc Plating, Electrodeposited Requirements for

Military

MIL-E-5272	Enviromental Testing, Aeronautical and Associated Equipment, General Specification for.
MIL-W-5845	Wire, Electrical, Iron and Constantan Thermocouple

FSC 6620

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:08Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

Military (Continued)

MIL-E-17555	Electronic and Electrical Equipment and Associated Repair Parts, Preparation for Delivery of
MIL-P-23408	Plating. Tin-Cadmium (Electrodeposited)
MIL-D-1000	Drawings, Engineering and Associated Lists

STANDARDS

Military

MIL-STD-129	Marking for Shipment and Storage
MIL-STD-143	Specifications and Standards, Order of Precedence for the Selection of
MIL-STD-794	Parts and Equipment, Procedure for, Packaging and Packing of
MS33586	Metals, Definition of Dissimilar
MS90324	Thermocouples - Engine Cylinder Bayonet Type

2.2 Availability of documents - When requesting any of the applicable documents, refer to both title and number. Copies of this specification, and applicable documents may be obtained upon application to the Commanding Officer, Naval Supply Depot, Code 1051, 5801 Tabor Avenue, Philadelphia, Pennsylvania, 19120.

3. REQUIREMENTS

3.1 Preproduction - The thermocouples furnished under this specification shall be a product, samples of which have been tested and have passed the preproduction tests specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:08Z
Check the source to verify that this is the current version before use.

3.2 Selection of Government Documents - Except as provided in 3.2.1 and 3.2.2, specifications and standards for necessary commodities and services not specified herein shall be selected in accordance with MIL-STD-143.

3.2.1 Standard parts - With the exception of 3.2.2 MS and AN standard parts shall be used where they suit the purpose. They shall be identified on the drawings by their part numbers.

3.2.2 Commercial parts - Commercial parts having suitable properties shall be used, when on the date of invitations for bids, there are no suitable standard parts. In any case, commercial parts, such as screws, bolts, nuts, cotter pins, having suitable properties, may be used provided:

(a) They can be replaced by the standard parts (MS or AN) without alteration.

(b) The corresponding standard part numbers are referenced in the parts list and if practicable on the contractor's drawings.

3.3 Materials - Materials shall conform to applicable specifications and shall be as specified herein. Materials for which there are no applicable specifications, or which are not specifically described herein, shall be of the best quality, of the lightest practical weight, and suitable for the purpose intended.

3.3.1 Critical materials - Noncritical materials shall be used where practicable. Where the use of a critical material is essential to meet specifications requirements, the material used shall be the least critical of those which are adequate for the purpose.

3.3.2 Non-magnetic materials - Non-magnetic materials shall be used for all parts of the thermocouple except where magnetic materials are essential.

3.3.3 Metals - Metals shall be of the corrosion resistant type, or shall be suitably protected as specified herein to resist corrosion due to fuels, salt spray or atmospheric conditions to which the thermocouple may be subjected when in storage or during normal service life.

3.3.3.1 Dissimilar metals - Except for the sensing junction, dissimilar metals as defined in MS33586 shall not be used in intimate contact with each other unless they are suitable protected against electrolytic corrosion by means of protective coatings.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:08Z
Check the source to verify that this is the current version before use.

3.3.3.2 Iron and steel parts - Where practicable, iron and steel parts shall be chromium, nickel, or zinc plated in accordance with QQ-C-320, QQ-N-290, or QQ-Z-325 respectively. Parts in a confined space in the presence of organic material shall be tin-cadmium plated in accordance with MIL-P-23408. The class and type of plating shall meet the requirements of 3.3.4.

3.3.4 Protective treatment - When materials are used in the construction of the thermocouple that are subject to atmospheric or environmental conditions likely to cause corrosion in normal service life, they shall be protected against corrosion in a manner that will in no way prevent compliance with the performance requirements of this specification. Finishes and protective coatings which will crack, chip, or scale during normal service life or are affected by extremes of atmospheric or environmental conditions, shall not be used.

3.3.5 Fungus-proof materials - Materials which are nutrients for fungi shall not be used where it is practicable to avoid them. Where used, they shall be treated with a fungicidal agent acceptable to the procuring activity. If the materials are used in a hermetically sealed enclosure, fungicidal treatment will not be necessary.

3.3.6 Fumes and vapors - Materials used in the construction of the thermocouple shall not produce corrosive, deleterious, or toxic fumes or vapors under the conditions specified herein.

3.4 Design and construction - The design of the thermocouple shall conform to MS90324 and include the following features: produce an EMF equal to the EMF produced by the master thermocouple test rig Figure 1, (thermocouple nearest the tip as shown) within the tolerance specified herein. The thermocouple shall be so constructed that no parts will work loose in service, and will withstand the normal shocks, vibrations and such other conditions as are incident to service without failure during shipping, storage and installation.


3.4.1 Weight - The thermocouple shall be so designed that when completely assembled, the weight shall not exceed 0.15 pound.

3.5 Electrical requirements -

3.5.1 Wiring -

3.5.1.1 Stranding - Each iron wire and each constantan wire shall consist of at least five strands. The wire size of all strands shall be the same, but the exact gage shall depend upon that required to bring the resistance to the value

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:08Z
Check the source to verify that this is the current version before use.

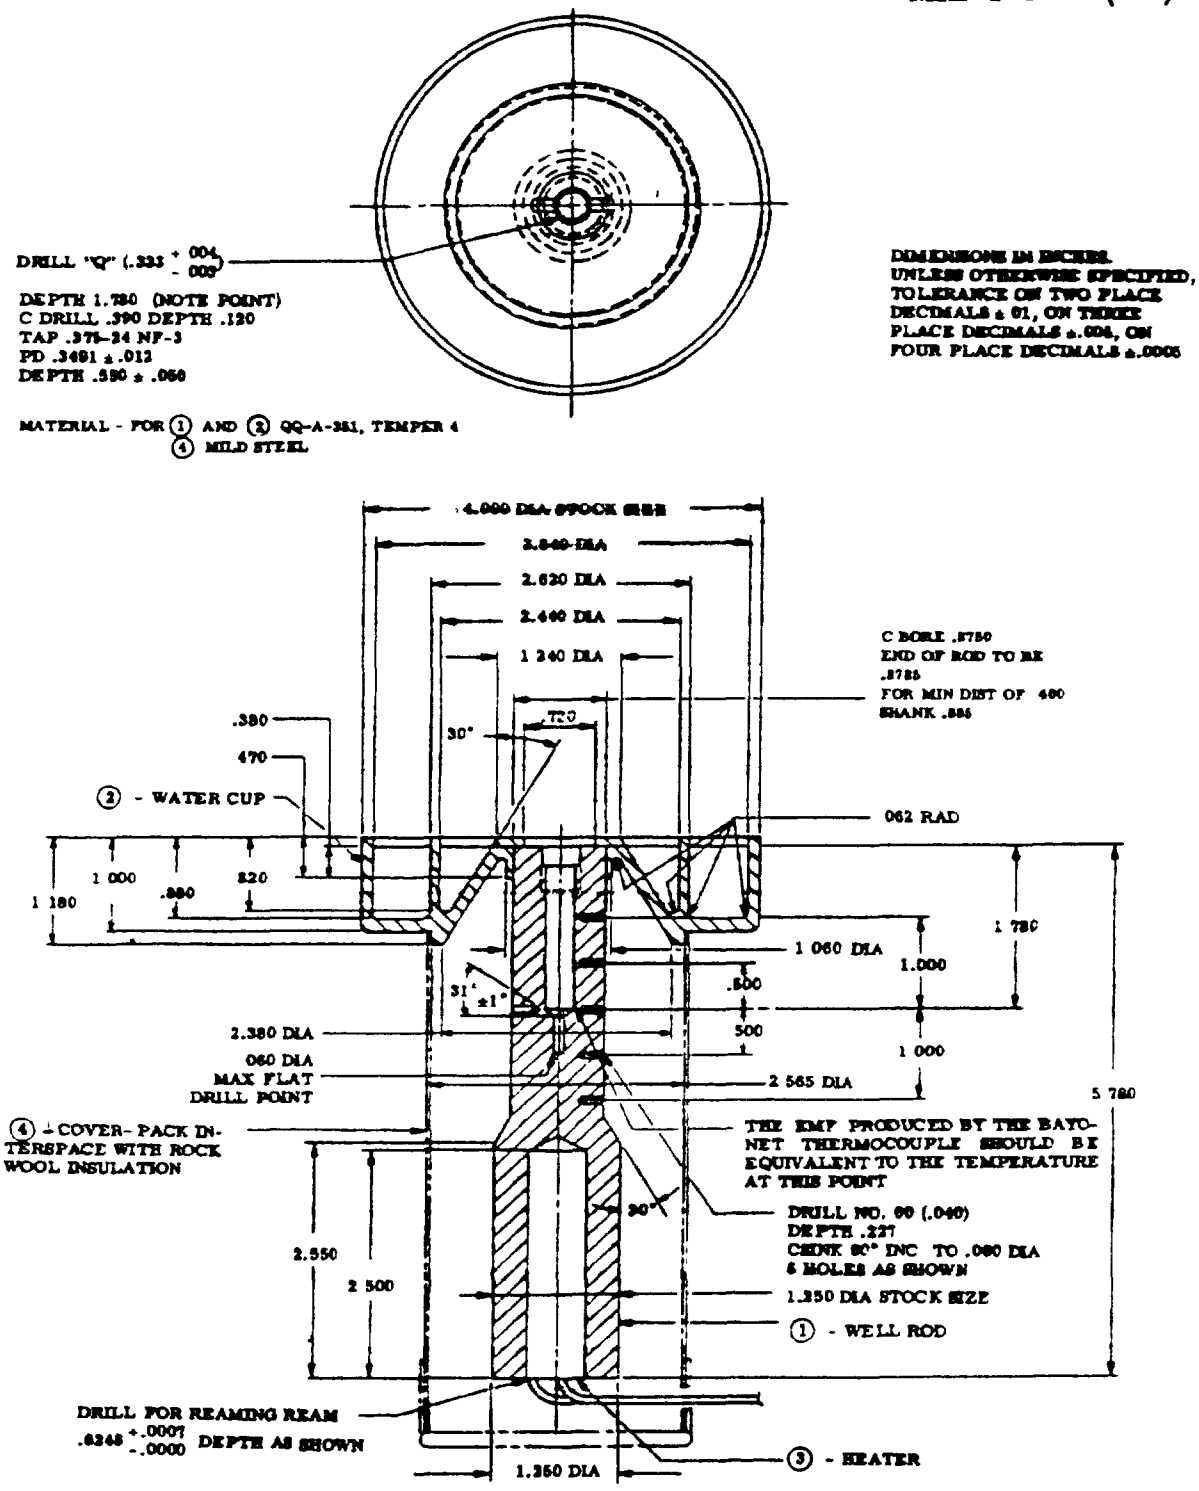

BEFORE ASSEMBLY OF (1) - WELL ROD, AND (2) - WATER CUP, INSTALL SIX FE-CONST THERMOCOUPLES WITH 2 FT LEADS AS FOLLOWS ARC WELD A SMALL BEAD TO FORM JUNCTION ON SPECIALLY SELECTED NO. 30 B & S GAGE, GLASS COVERED, IRON-CONSTANTAN, DUPLEX THERMOCOUPLE WIRE BY ELECTRICAL CONTACT OF TWISTED JUNCTION ON SURFACE OF MERCURY POOL. (USE 12-24V-DC). REMOVE OUTER GLASS BRAID FOR DISTANCE OF 500 FROM TIP, LEAVING INSULATION TO JUNCTION ON INDIVID-UAL WIRES. INSTALL TO FULL DEPTH OF HOLE BY CEMENTING WITH TECHNICAL - B COPPER DENTAL CEMENT. WRAP WIRES 1/2 TURN AROUND ROD, CEMENT TO ROD SURFACE WITH GLYPTAL, AND LASH TOGETHER, TAG WIRES TO SHOW LOCATION IN ROD. ASSEMBLE (1) - WELL ROD, AND (2) - WATER CUP, BY PRESSING TOGETHER INSTALL (3) - HEATER IN BORE, PEEN LIGHTLY TO HOLD IN PLACE BRINGING INTEGRAL LEADS THRU (4), NEAR BOTTOM SPLICE ON 3 FT OF LAMP CORD AND ATTACH STD 3 PRONG RECEPTICAL PLUG PACK ROCK WOOL AROUND (1) AND TIE IN PLACE WITH STRING BEFORE PRESSING ASSEMBLY INTO (4) - COVER.

Figure 1. Thermocouple Test Rig

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:08Z
Check the source to verify that this is the current version before use.

specified herein. The exposed thermocouple wire shall be suitably protected to resist deterioration from oil, cooling liquids, or heat, by a suitably protective outer covering as shown on MS90324.

3.5.1.2 Temperature range - The thermocouple assembly shall be constructed to function satisfactorily in the temperature range -50° to +325° C (-58° to +617° F).

3.5.1.3 Insulation - The color of the outer insulation shall be black. The thermocouple wires and insulation outside of the thermocouple stem shall be suitably protected to resist deterioration from oil, cooling liquid, engine cleaning fluid, or heat, by a protective sheath of a construction and design as shown on MS90324 or as otherwise specified.

3.6 Performance - The thermocouple shall perform satisfactorily when subjected to tests specified in section 4 of this specification.

3.7 Identification of product -

3.7.1 Marking - The manufacturer's part number, manufacturer's name or trade mark and MS part No. shall be permanently marked on the thermocouple. Marking may be accomplished by stamping or molding on the cap, by use of a sleeve over the lead wires, or by marking directly on the outer protective covering.

3.8 Installation -

3.8.1 Installation instructions - The contractor shall furnish with each thermocouple one copy of installation instructions with illustrations and diagrams if necessary. Prior to printing, two copies shall be furnished to the procuring activity for approval. Whenever possible, the instructions shall be arranged to require only one sheet of paper either 8-1/2 by 11, or 11 by 17 inches.

3.8.2 Envelope - An envelope furnished by the contractor shall be packaged with each thermocouple and shall be marked as follows:

IMPORTANT

THIS ENVELOPE CONTAINS

INSTALLATION INSTRUCTIONS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:08Z
Check the source to verify that this is the current version before use.

3.9 Workmanship - The thermocouple including all parts and accessories shall be constructed and finished in a thoroughly workmanlike manner. Particular attention shall be paid to neatness and thoroughness of soldering, wiring, marking of parts and assemblies, plating, painting, riveting, machine-screw assemblage, welding and brazing, and freedom of parts from burrs and sharp edges.

3.10 Soldering - Soldering shall be performed as indicated in MS90324.

3.11 No data is required by this specification (other than reports accompanying samples submitted for testing), or by applicable documents referenced in Section 2, unless specified in the contract or order. (See para 6.2)

3.12 Interchangeability - All parts having the same manufacturer's part number shall be directly and completely interchangeable with each other with respect to installation and performance. Changes in manufacturer's part numbers shall be governed by the drawing number requirements of MIL-D-1000.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection - Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Classification of inspection - Inspection of the thermocouples shall be classified as follows:

(a) Preproduction inspection: Preproduction inspection consists of examination and tests performed after award of contract on sample thermocouple to determine that the thermocouples meets the requirements of this specification. The sample shall be representative in design, performance, and configuration of the thermocouple which will be produced on the manufacturer's production line.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:08Z
Check the source to verify that this is the current version before use.

(b) Quality conformance inspection: Quality conformance inspection consists of examination and tests performed on thermocouples manufactured and submitted for acceptance under contract.

4.3 Preproduction inspection - The preproduction inspection of the thermocouples shall consist of all of the examinations and tests of this specification performed in the order specified under the paragraph headed Inspection methods.

4.3.1 Preproduction inspection sample - Preproduction inspection samples shall consist of three thermocouples manufactured in accordance with this specification. The samples shall be forwarded, at the manufacturer's expense, for preproduction inspection and shall have been previously subjected only to the Individual inspection. The samples shall be forwarded to the laboratory designated by the procuring activity.

4.3.1.1 Preproduction inspection sample identification - The preproduction inspection samples shall be plainly identified by durable tags, securely attached, and marked with the following information:

Sample for Preproduction Inspection
Thermocouples; Engine Cylinder Bayonet Type
Submitted by (Manufacturer's name, date) for
Preproduction Inspection in accordance with
Specification MIL-T-81272 (WP) under contract
or order number.
MS90327 (WP)
Manufacturer's Part Number

4.4 Quality conformance inspection - The Quality conformance inspection shall consist of the Individual inspection, and the Sampling plans, of this specification. The contractor shall furnish all samples and shall be responsible for accomplishing all the inspections Sampling plan B inspections shall be conducted at a Government laboratory designated by the procuring activity. Quality conformance inspection, except for Sampling plan B, shall be under the supervision of the Government quality control representative. The contractor shall furnish test reports showing quantitative results for all tests required by this specification, signed by an authorized representative of the contractor or laboratory as applicable. Acceptance or approval of material during the course of manufacture shall in no case be construed as a guarantee of the acceptance of the finished product.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:08Z
Check the source to verify that this is the current version before use.

4.4.1 Individual inspection - Each thermocouple submitted for acceptance shall be subjected to the Individual inspection. This inspection shall determine compliance with the requirements of material, workmanship, operational adequacy, and reliability. As a minimum, each thermocouple accepted shall have passed the following inspections

Examination of Product
E. M. F. Output (Single point check)
Spring Tension
Resistance

4.4.2 Sampling plans - The Sampling plans shall consist of Sampling plan A and Sampling plan B inspections. The inspection samples selected for sampling tests shall first have passed the Individual inspections. The inspection samples which have been subjected to Sampling plan A inspection shall not be delivered on contract until they have been refurbished and resubmitted and passed all the Individual inspections. Inspection samples which have been subjected to the Sampling plan B inspection shall not be delivered on contract..

4.4.2.1 Sampling plan A sample selection - Sampling plan A samples shall be selected at random in accordance with the following schedule:

Quantity Offered for Acceptance	Quantity to be Selected for Inspection
First 15	(See Note)
Next 50	1
Next 75	1
Next 100	1
Each additional 200 or fraction thereof	1

NOTE: When Sampling plan B is invoked, the quantity shall be zero.
When Sampling plan B is to be omitted, the quantity shall be one.

When a defective thermocouple occurs, no items from those still on hand or later produced shall be accepted until the extent and cause of failure have been determined and appropriately corrected. In addition, shift to one sample out of fifteen and proceed as indicated.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:08Z
Check the source to verify that this is the current version before use.

4.4.2.1.1 Sampling plan A inspection - Each sample selected for Sampling plan A inspection shall be subjected to the following tests in the order listed.

EMF Output (complete check)
Response Time
Spring Life

4.4.2.2 Sampling plan B instructions - Two thermocouples shall be selected at random from the first 15 produced on contract and submitted within 10 days after manufacture. These samples shall be forwarded, at the contractor s expense, to a Government laboratory designated by the procuring activity. Each sample shall be plainly identified by a durable tag, securely attached and marked with the following information

Thermocouples Engine Cylinder Bayonet Type
Submitted by (manufacturer's name, date)
for production acceptance Sampling plan B inspection, in accordance with Contract/order No.
Manufacturer's part number _____

4.4.2.2.1 Sampling plan B inspection - Each sample selected for Sampling plan B inspection shall be subjected to the following tests in the order listed.

Sampling plan A
Cold resistance
Vibration
High temperature
Humidity

4.5 Inspection conditions -

4.5.1 Standard conditions - Unless otherwise specified, all tests required by this specification shall be made under the following conditions:

Temperature	Room Ambient 25° ±5° C
Pressure	Normal Atmospheric (approximately 29.92 inches H_g.)
Humidity	Room Ambient up to 90% Relative humidity

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:08Z
Check the source to verify that this is the current version before use.

4.5.2 Test rig - The thermocouple test rig shall conform to Figure 1. When the master thermocouple is at a temperature of 275° C (527° F.), there shall be a thermal gradient of approximately 56° C (133° F.) per inch from the master thermocouple to the top of the fixture.

4.5.3 Temperature tolerances - Unless otherwise specified, temperature tolerances shall be ° C ± 5°, ° F ± 9°.

4.6 Inspection methods -

4.6.1 Examination of product - Each thermocouple shall be examined externally to determine conformance with the applicable drawings and with all the requirements of this specification not covered by tests.

4.6.2 EMF output (single point check) - The test rig shall conform to Figure 1. The EMF produced by the thermocouple at a temperature of 200° C (392° F.) shall be in accordance with Table I, within a tolerance of ± 0.16 mv.

TABLE I

EMF Output for Iron-Constantan Thermocouples

Temperature ° C.	Electromotive Force (mv)
50	2.66
100	5.40
150	8.19
200	10.99
250	13.79
300	16.56

Values are for reference junction temperature 0° C. Temperature values shall be held within 2° C. EMF values produced by the thermocouple at any temperature shall correspond to Table II of MIL-W-5845 within a tolerance of ±0.16 mv.

4.6.3 Spring Tension - The tip of the thermocouple shall be fixed and the collar depressed until the distance from the top of the collar to the tip is 2.50 inches. The spring tension shall be a minimum of 2.50 pounds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:08Z
Check the source to verify that this is the current version before use.

4.6.4 Resistance - The resistance of the complete thermocouple shall be checked by any method satisfactory to the Inspector, and shall be 0.250 ohm (+0.000 -0.025).

4.6.5 EMF output (complete check) - The test rig shall conform to Figure 1. The EMF produced by the thermocouple at all temperatures shall be in accordance with Table I, within a tolerance of ±0.16 mv.


4.6.6 Response time - The thermocouple shall be placed in a fixture such as shown in Figure 1. The tip temperature of the thermocouple shall be +200° ± 2° C (392° ± 3.6° F). The thermocouple shall be quickly transferred to another fixture which has a temperature of +260° ± 2° C (500° ± 3.6° F) provided at the bottom of the well. The time required, inserting the thermocouple into the second fixture, for the thermocouple to produce EMF equivalent to 250° C ± 0° (13.79 mv), shall be noted. The response time of the thermocouple shall be considered the average of several tests. The time required shall not exceed 20 seconds.

4.6.7 Spring life - The thermocouple shall be tested in a rig which will approximately duplicate the conditions of temperature gradient of the rig shown in Figure 1. The tip of the thermocouple shall be subjected to a temperature of 275° C (527° F) for a period of 50 hours. The hole into which the thermocouple is inserted shall conform to Figure 2, and shall have the minimum depth specified thereon. At the end of 50 hours the thermocouple shall be cooled to room temperature and the test described herein under Spring tension shall be repeated. The Spring tension shall be a minimum of 2.00 pounds.

4.6.8 Cold resistance - The thermocouple shall be placed in an ambient temperature of -65° C (-85° F) for 48 hours. With the temperature at -65° C a continuity check shall be made across the two terminals. There shall be no open or short circuit. Then at room temperature the Resistance test shall be conducted and the results shall be within the tolerances specified for this test.

4.6.9 Vibration - The thermocouple shall be mounted in an aluminum block which shall be designed to approximate the temperature gradient of the calibration fixture, Figure 1. The temperature at the bottom of the hole shall be approximately 275° C (527° F). The aluminum test block shall be mounted on a vibration stand. For one half the test the thermocouple shall be mounted in a horizontal position with respect to the vibration stand, and for the remainder of the test shall be mounted in a vertical position. The holes in the aluminum block into which the thermocouple is inserted shall be the minimum specified, as shown in Figure 2. The thermocouple shall be so mounted in the aluminum

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:08Z
Check the source to verify that this is the current version before use.

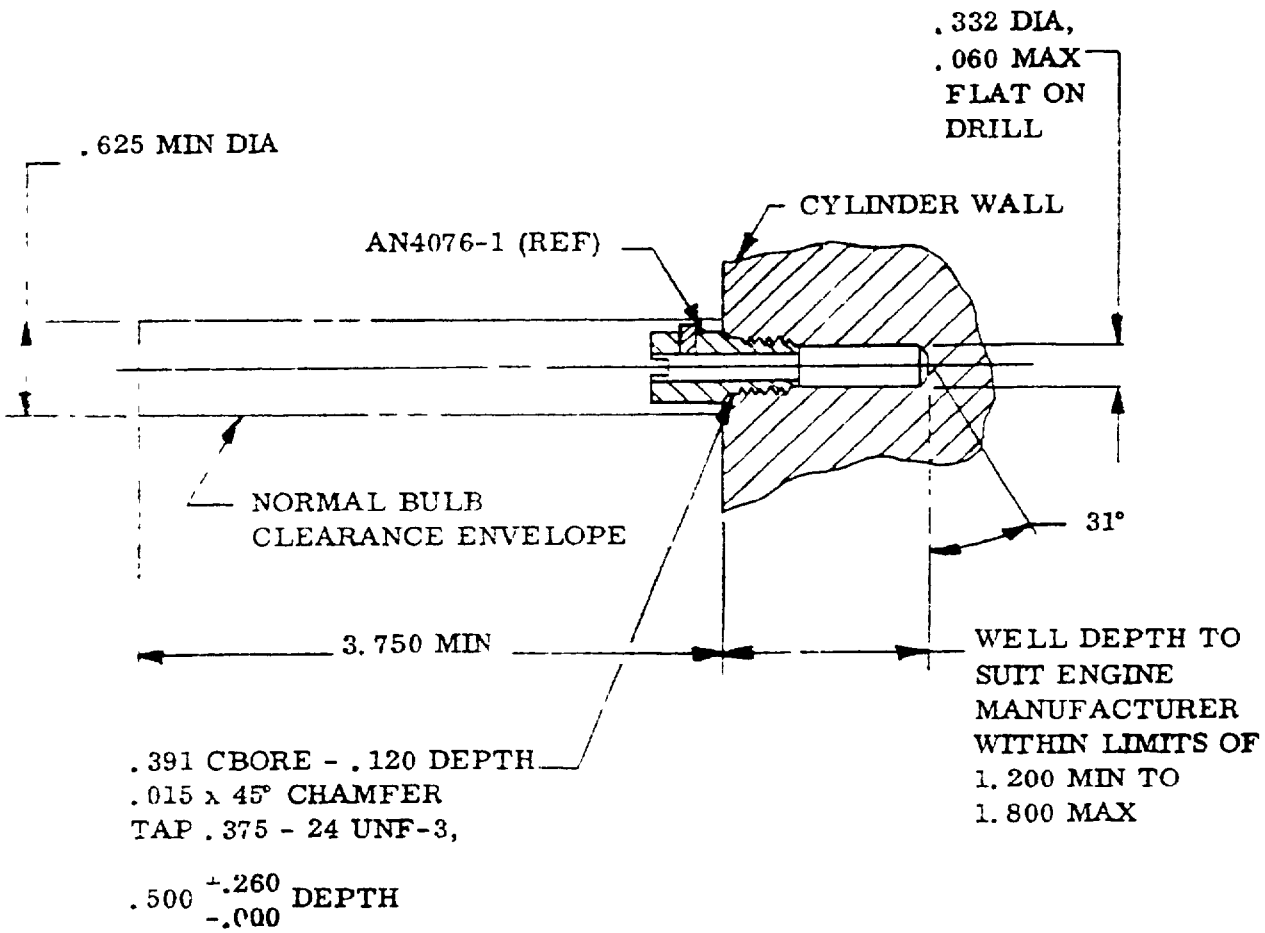

DIMENSIONS IN INCHES, UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.010, ANGLES ±1°.

Figure 2. Element Installation Clearance - Engine Cylinder Head Temperature Measuring

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:08Z
Check the source to verify that this is the current version before use.

test block that the angle between the thermocouple and thermocouple leads shall be a minimum of 100°. The leads shall be held by a stationary bracket in such manner that there shall be no pull on the leads. The vibration test shall be conducted for a period of 100 hours at a total amplitude of 0.008 inch and a frequency of 10,000 cycles per minute. The motion of the aluminum block shall be vertical simple harmonic motion. There shall be no failure of the thermocouple during this test.

Following the vibration test, the following tests, as specified herein, shall be conducted, and the results shall be within the tolerances specified for the particular test:

(a) Spring tension - The spring tension shall be a minimum of 2.0 pounds.

(b) Resistance

(c) EMF Output (Complete Check)

4.6.10 High temperature - The thermocouple shall be placed in an ambient temperature of +176° C. (+350° F.) for a period of eight hours. There shall be no failure of insulation or melting of solder as a result of this test.

4.6.11 Humidity - The thermocouple shall be placed in a suitable enclosure maintained at a temperature of 60° C. (140° F) and relative humidity of 90% ± 5%. After a period of six hours the heat shall be shut off and the enclosure allowed to cool for 18 hours. The humidity shall reach 100 percent as the temperature is reduced. (Precaution should be taken to prevent water dripping on the thermocouple). The entire procedure shall be conducted 6 times. The thermocouple shall then be subjected to the resistance test specified herein, and shall satisfy the requirements of that test. At the end of this test the EMF output test complete check shall be repeated and the thermocouple shall meet the requirements of that test. The Spring Tension test shall be repeated. The Spring Tension shall be a minimum of 2.00 pounds.

4.6.12 Fungus Resistance - The thermocouple shall be tested in accordance with Procedure I of Specification MIL-E-5272 except that the test period shall be 14 days. After the testing procedure has been completed, any evidence of the growth of fungi found upon inspection shall be cause for rejection of the thermocouple or of any lot represented by the tested thermocouple.

4.6.13 Salt Spray - The thermocouple shall be tested in accordance with Procedure I of Specification MIL-E-5272. After completion of the test

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:08Z
Check the source to verify that this is the current version before use.

procedure, the thermocouple shall be subjected to and meet the requirements of the Individual Tests.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging - Preservation and packaging shall be Level A or C as specified in contract or order (see 6.2).

5.1.1 Level A - The thermocouple shall be preserved and packaged in accordance with the requirements and procedures for Level A as specified in MIL-E-17555. The method of preservation shall be IC-1.

5.1.2 Level C - The thermocouple shall be packaged to afford the minimum degree of protection necessary to prevent deterioration or damage during shipment under normal environmental conditions and commercial modes of transportation.

5.2 Packing - Packing shall be Level A, B or C, as specified in contract or order (see 6.2).

5.2.1 Level A - The thermocouple preserved and packaged as described in 5.1 shall be packed in overseas type containers as listed in MIL-STD-794 and in accordance with the requirements and procedures as defined by MIL-E-17555.

5.2.2 Level B - The thermocouple preserved and packaged as described in 5.1 shall be packed as in Level B. The exterior container shall be of the domestic exterior type as listed in MIL-STD-794.

5.2.3 Level C - The thermocouple that requires overpacking by the carrier shall be packed in exterior type shipping containers in a manner that will insure safe transportation at the lowest rate to the point of delivery, and shall meet as a minimum, the requirements of the rules and regulations applicable to the mode of transportation selected.

5.3 Marking - In addition to any special marking required by the contract or order, unit packages, intermediate packages, and shipping containers shall be marked in accordance with the requirements of MIL-STD-129.

6. NOTES

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:08Z
Check the source to verify that this is the current version before use.

6.1 Intended use - The bayonet type thermocouple covered by this specification is intended for use on aircraft to operate a thermocouple type of indicator for indicating the cylinder head temperature of air cooled engine cylinders.

6.2 Ordering data - Procurement documents shall specify the following:

(a) Title, Number and Date of this Specification.

(b) The quantity, MS part number including dash number and type number, if any, of the thermocouple desired.

(c) Levels of packaging (see 5.1) and packing (see 5.2) desired.

(d) Items of data required

6.3 Precedence of documents - When the requirements of the contract, this specification, or applicable subsidiary specifications are in conflict, the following precedence shall apply: .

(1) Contract - The contract shall have precedence over any specification.

(2) This specification - This specification shall have precedence over all applicable subsidiary specifications. Any deviations from this specification, or from subsidiary specifications where applicable shall be specifically approved in writing by the procuring acitvity.

(3) Referenced specifications - Any referenced specifications shall have precedence over all applicable subsidiary specifications referenced therein. All referenced specifications shall apply to the extent specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:08Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
Bureau of Naval Weapons
Washington, D. C. 20360

POSTAGE AND FEES PAID
NAVY DEPARTMENT

OFFICIAL BUSINESS

BUREAU OF NAVAL WEAPONS (RREN-5)
DEPARTMENT OF THE NAVY
WASHINGTON, D. C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:08Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity *(as indicated on reverse hereof)*.

SPECIFICATION

MIL-T-81272(WP) THERMOCOUPLE: ENGINE CYLINDER, BAYONET TYPE MS90324

ORGANIZATION *(Of submitter)*	CITY AND STATE

CONTRACT NO	QUANTITY OF ITEMS PROCURED	DOLLAR AMOUNT
		$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3 IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4 REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)*	DATE

DD FORM 1 APR 63 1426

C-8279

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:08Z
Check the source to verify that this is the current version before use.