
MILITARY SPECIFICATION SHEET

TOOL KITS, ELECTRICAL CONNECTORS, CONTACTS, AND CONNECTOR AND CABLE ACCESSORIES: TOOL KIT FOR MIL-C-22520/7 CRIMPING TOOL AND POSITIONERS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the tool kit described herein shall consist of this document and the latest issue of Specification MIL-T-83507.

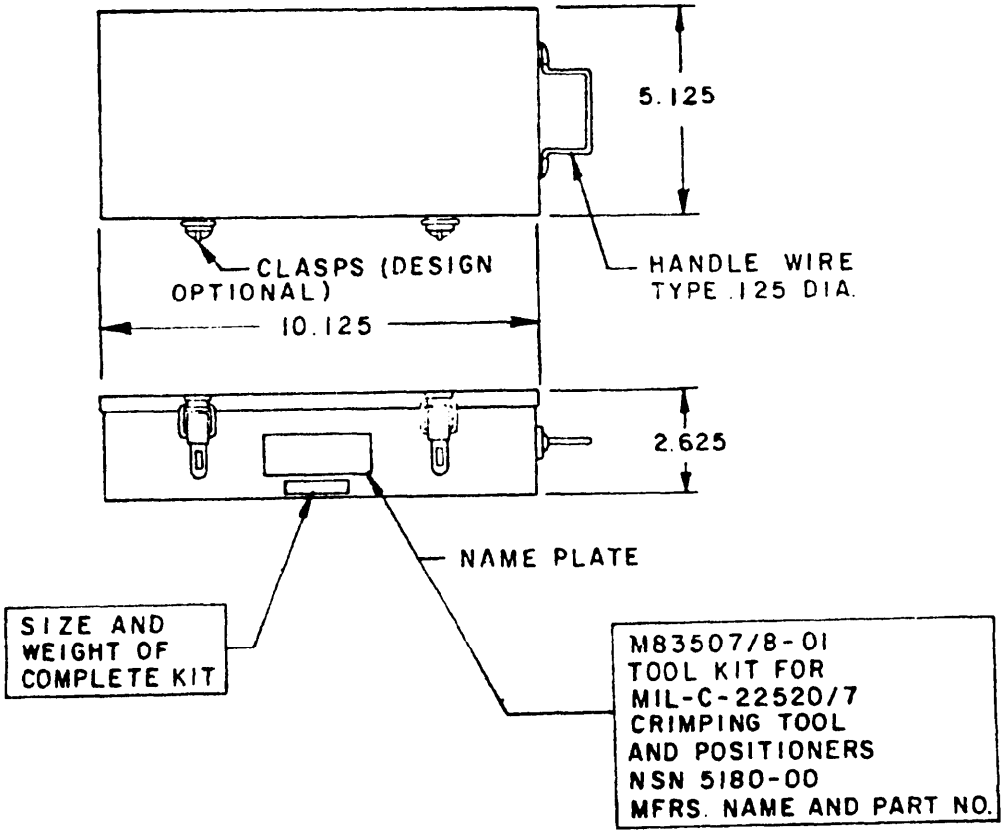

NOTES:
1. For drawing notes and metric equivalents, see figure 5.
2. Part number M83507/8-01 includes case and tools.

FIGURE 1. Tool kit for MIL-C-22520/7 crimping tool and positioners.

FSC 5180


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:22Z
Check the source to verify that this is the current version before use.

PARTS LIST:

(1)	M83507/8-02	- Tool case assembly.
(1)	M22520/7-01	- Crimp tool frame.
(1)	M22520/7-02	- Positioner.
(1)	M22520/7-03	- Positioner.
(1)	M22520/7-04	- Positioner.
(1)	M22520/7-05	- Positioner.
(1)	M22520/7-06	- Positioner.
(1)	M22520/7-07	- Positioner.
(1)	M22520/7-08	- Positioner.
(1)	M22520/7-09	- Positioner.
(1)	M22520/7-10	- Positioner.
(1)	M22520/7-11	- Positioner.
(1)	M22520/7-12	- Positioner.
(1)	M22520/7-13	- Positioner.
(1)	M22520/3-3	- In-service inspection gage.
(1 set)	Contents charts, instruction sheets, and tool selection chart.	

FIGURE 1. Tool kit for MIL-C-22520/7 crimping tool and positioners - Continued.


Source: https://assist.dla.mil -- Downloaded: 202610-23T08:22Z
Check the source to verify that this is the current version before use.

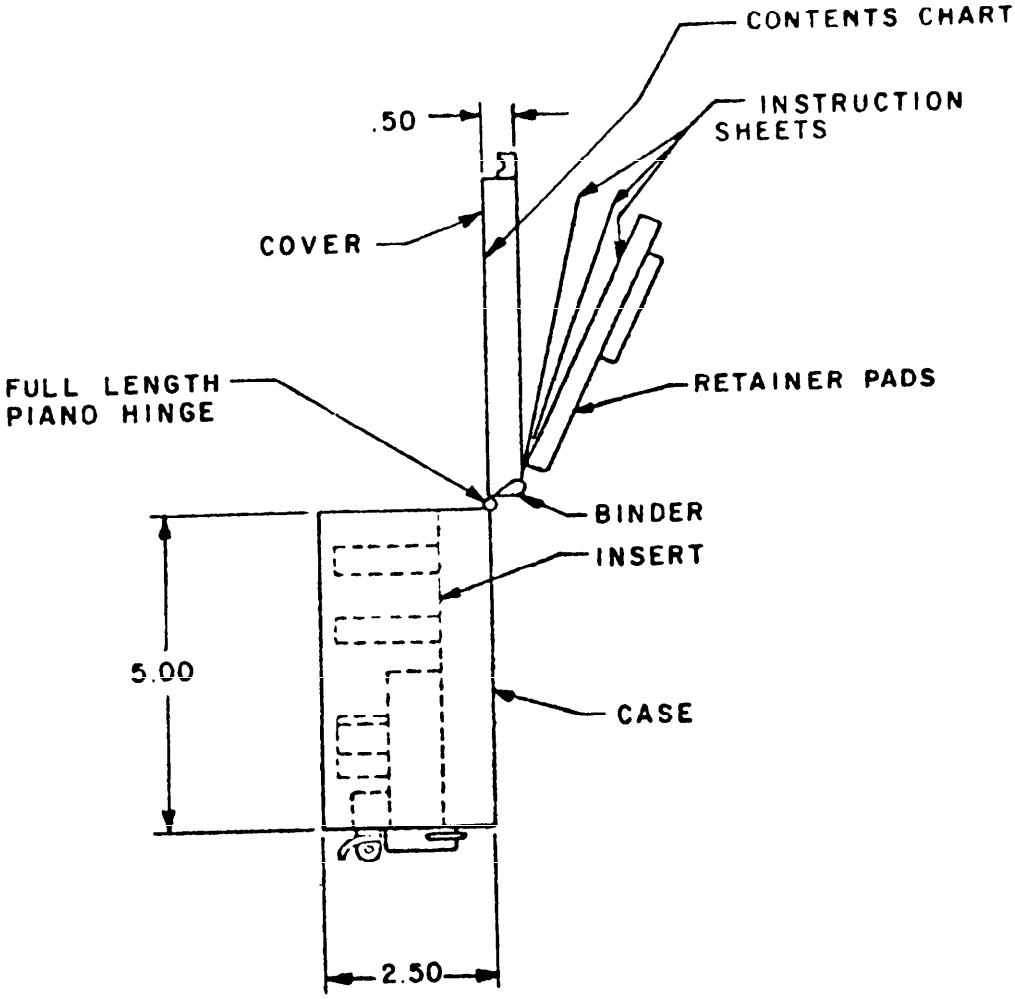

NOTES:
1. See figure 5, note 4.
2. Part number M83507/8-02 for case only (tools not included).


FIGURE 2. Tool case assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:22Z
Check the source to verify that this is the current version before use.

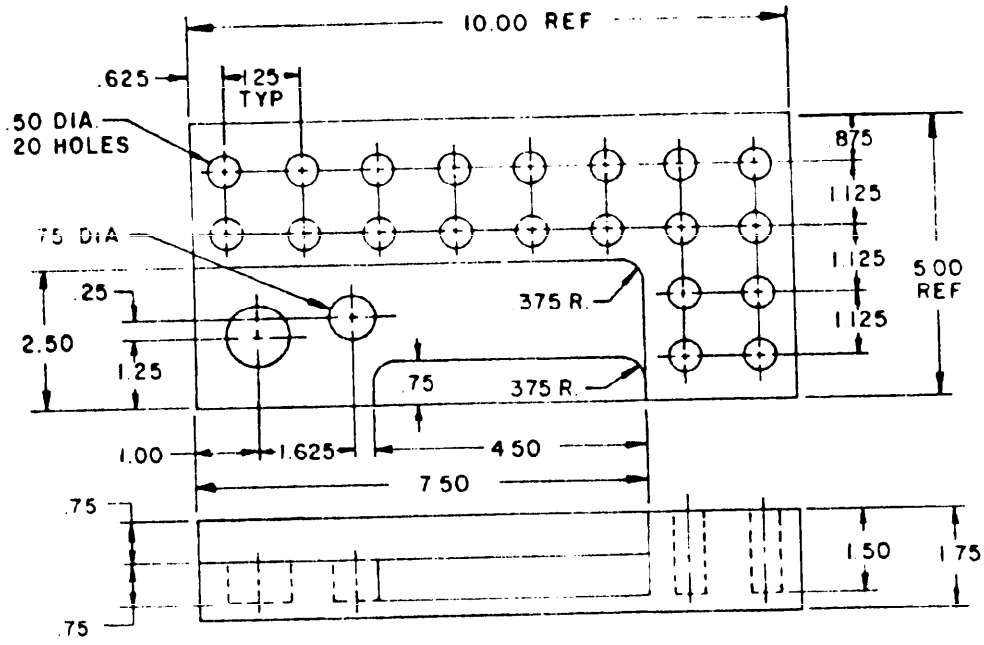

NOTES:
1. For drawing notes and metric equivalents, see figure 5.
2. This insert is part of the tool case assembly (see figure 2).

FIGURE 3. Insert.

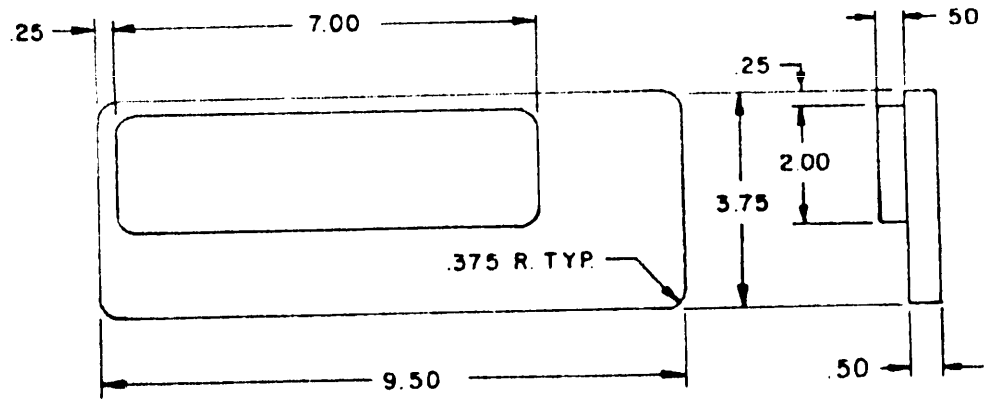

NOTES:
1. For drawing notes and metric equivalents, see figure 5.
2. This retainer is part of the tool case assembly (see figure 2).

FIGURE 4. Retainer.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:22Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.125	3.18	.750	19.05	1.500	38.10	2.625	66.68	7.000	177.80
.250	6.35	.875	22.22	1.625	41.28	3.750	95.25	7.500	190.50
.375	9.52	1.000	25.40	1.750	44.45	4.500	114.30	9.500	241.30
.500	12.70	1.125	28.58	2.000	50.80	5.000	127.00	10.000	254.00
.625	15.88	1.250	31.75	2.500	63.50	5.125	130.18	10.125	257.18

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are ±.031 (.79 mm).
4. Remove all burrs, break sharp edges and corners.


FIGURE 5. Drawing notes and metric equivalents.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:22Z
Check the source to verify that this is the current version before use.

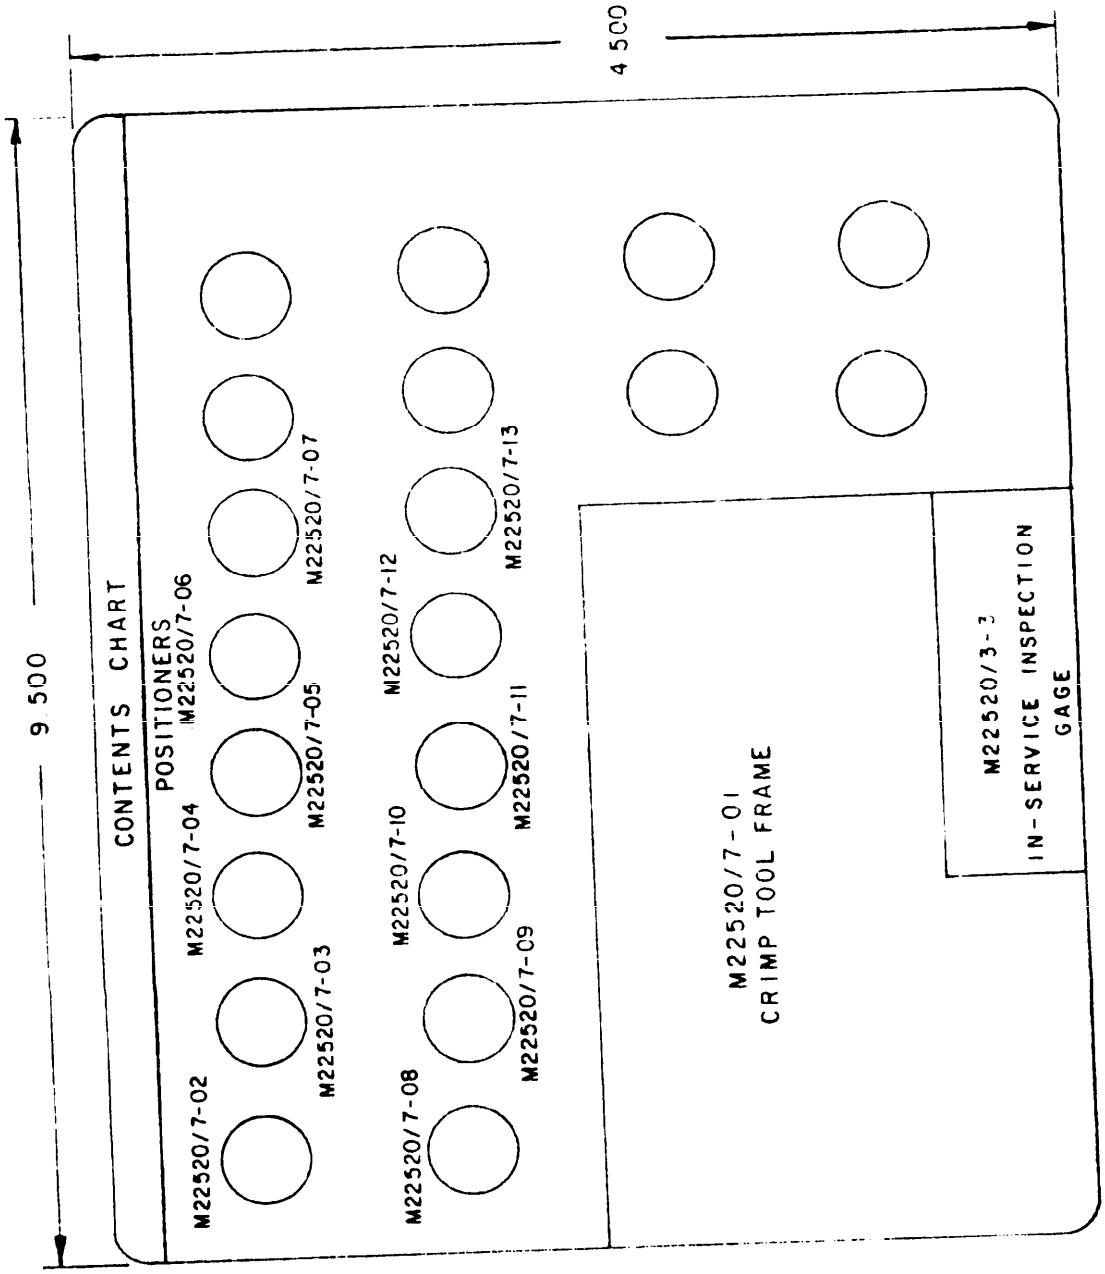


Source: https://assist.dla.mil -- Downloaded: 202610-23T08:22Z
Check the source to verify that this is the current version before use.

INSTRUCTION SHEETS ARE AS FOLLOWS:

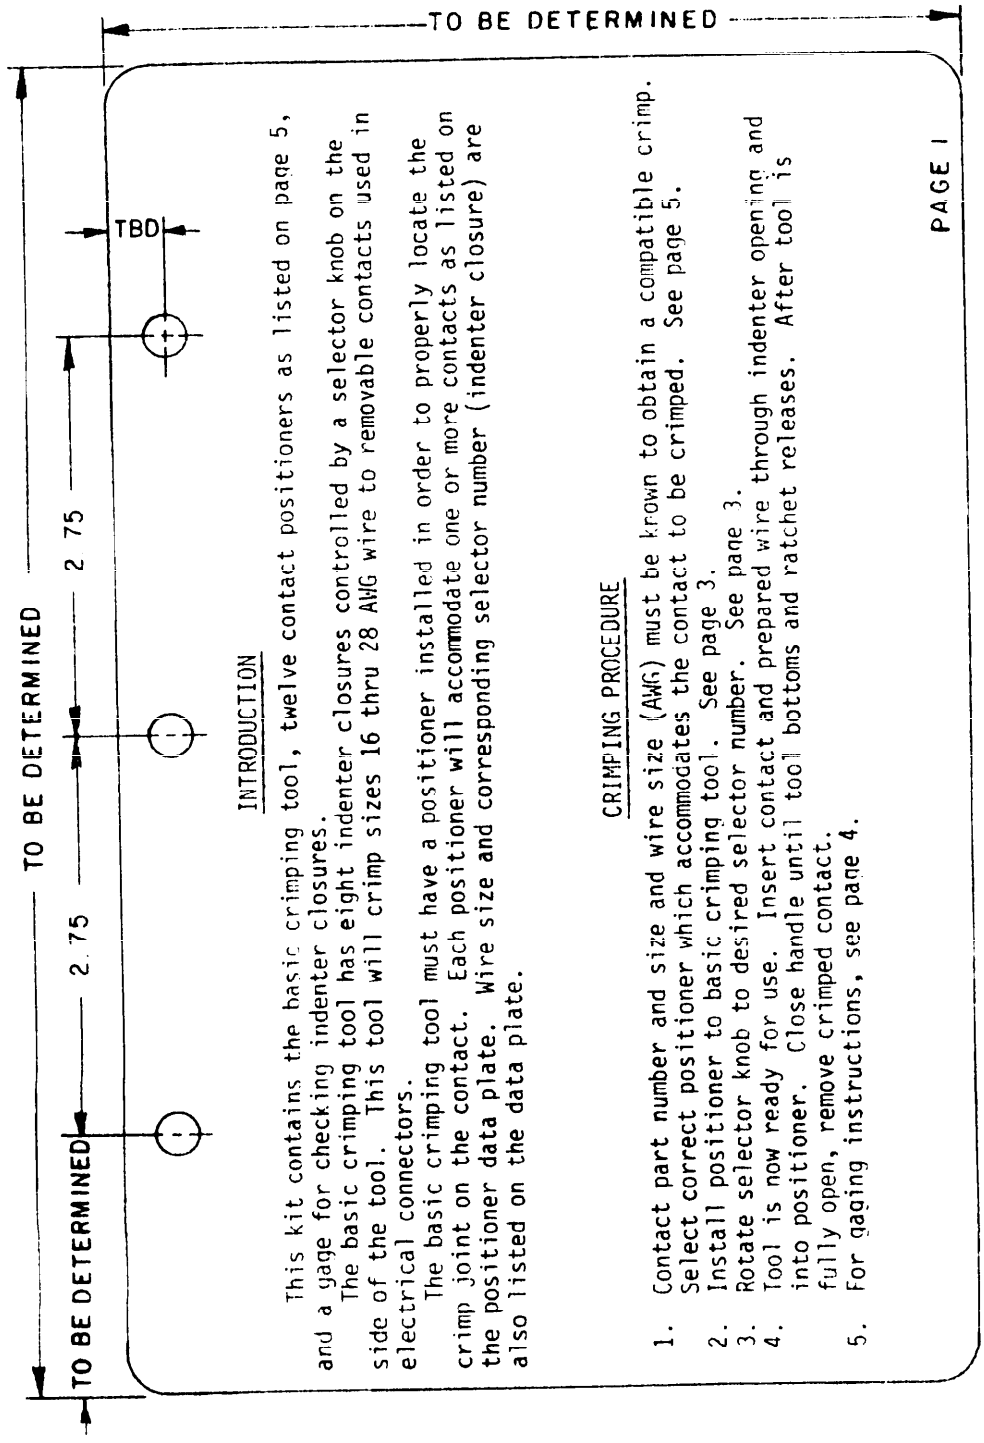

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:22Z
Check the source to verify that this is the current version before use.

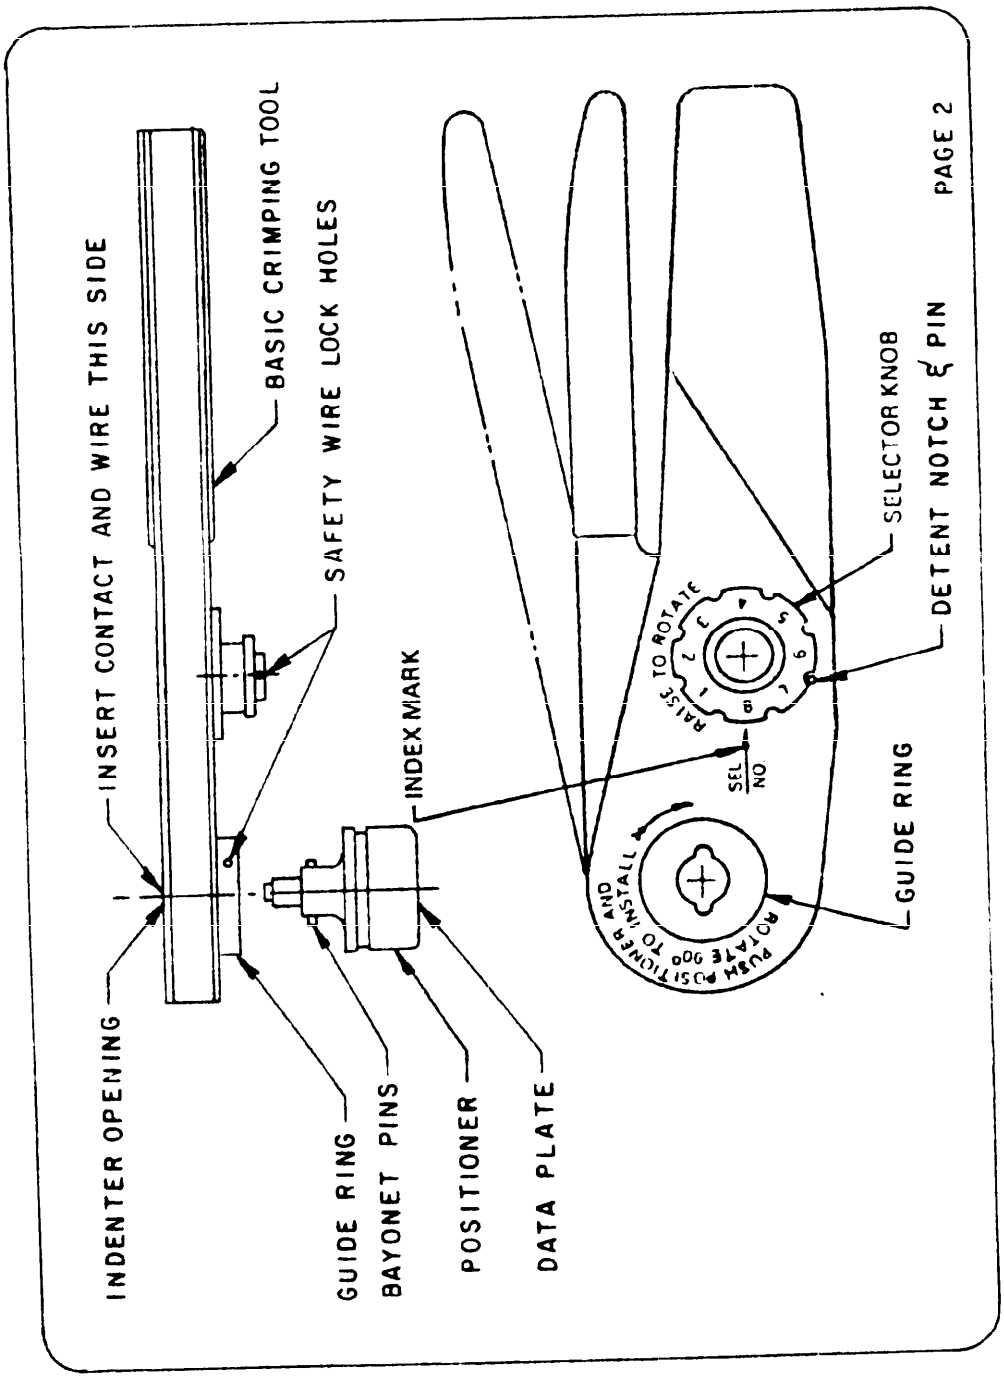

Source: https://assist.dla.mil -- Downloaded: 202610-23T08:22Z
Check the source to verify that this is the current version before use.

GENERAL INSTRUCTIONS

Handle should be in open position when installing positioner and rotating selector knob.

TO INSTALL POSITIONER

Align positioner with guide ring as shown on page 2. Bayonet pins will pass thru notches in guide ring. Rotate positioner clockwise 90° until it stops. Release positioner and it will snap into locking position. Safety wire may be used to prevent removal of positioner by unauthorized personnel.


TO SET SELECTOR KNOB

Determine correct selector number (indenter closure) from data plate on end of positioner. Lift selector knob and rotate until desired number is in line with index mark. Release knob when detent notch is in line with detent pin. Selector knob may be locked in any one position with a safety wire.


TOOL IS NOW READY FOR USE

After removing crimped contact from tool, inspect crimped joint for proper location and determine if wire is visible thru inspection hole in side of contact crimp barrel.


Source: https://assist.dla.mil -- Downloaded: 2026/10-23T08:22Z
Check the source to verify that this is the current version before use.

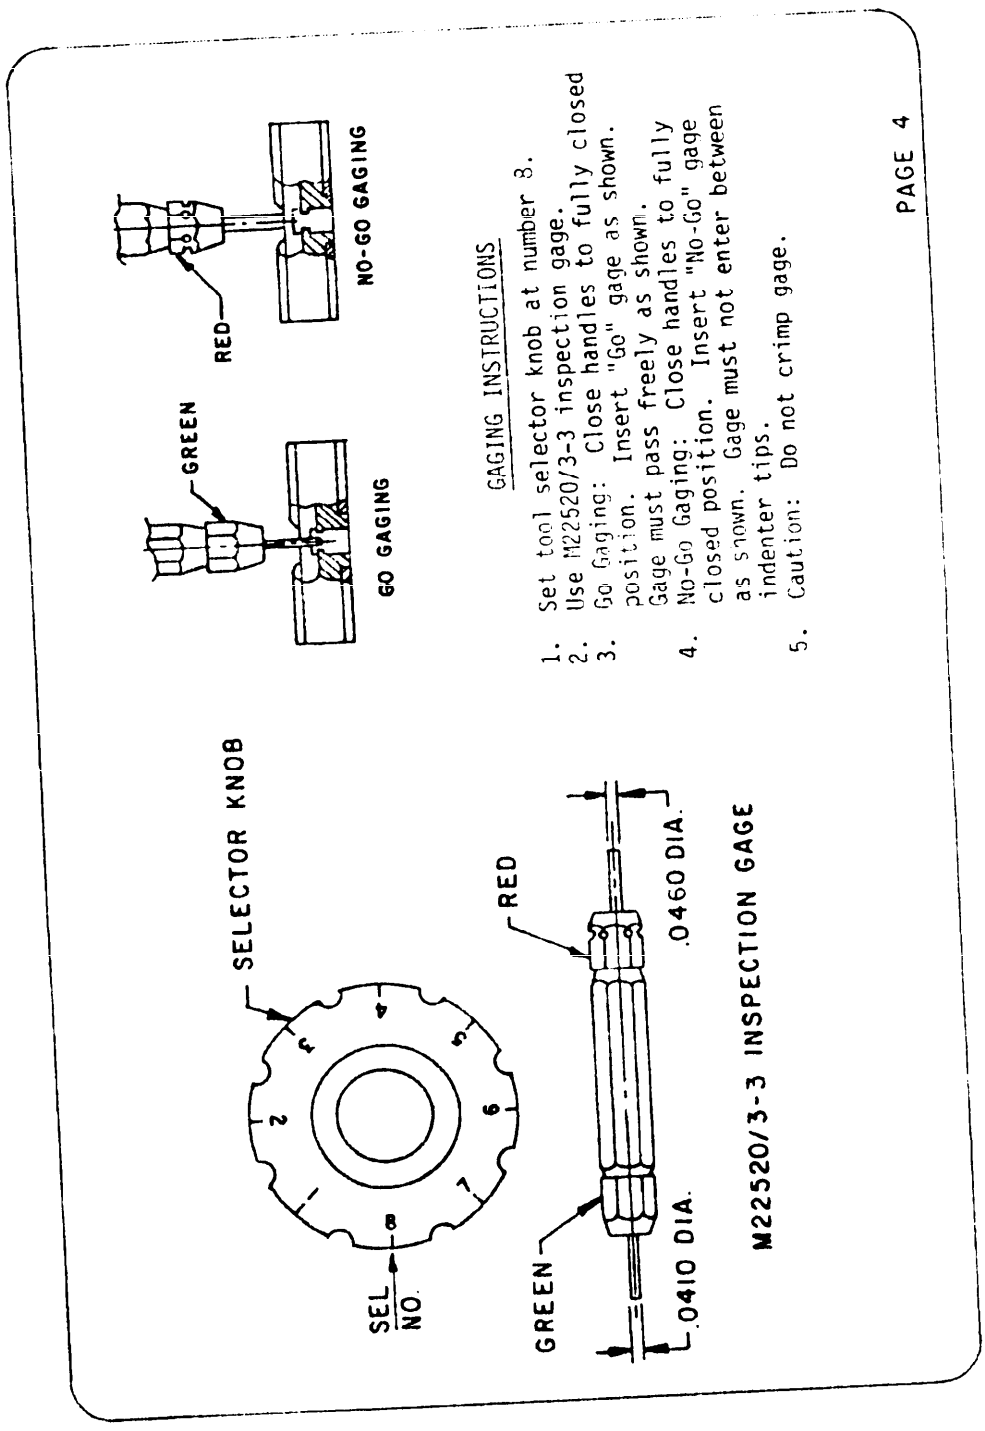


Source: https://assist.dla.mil -- Downloaded: 202610-23T08:22Z
Check the source to verify that this is the current version before use.

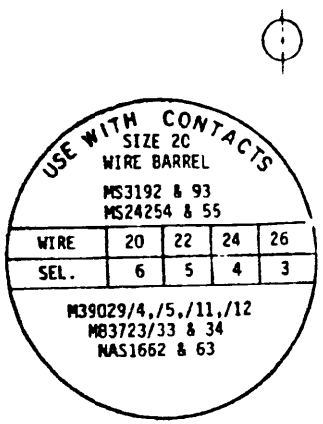


FOR M22520/7-02 POSITIONER

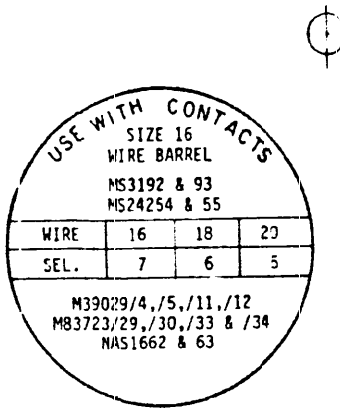


FOR M22520/7-03 POSITIONER

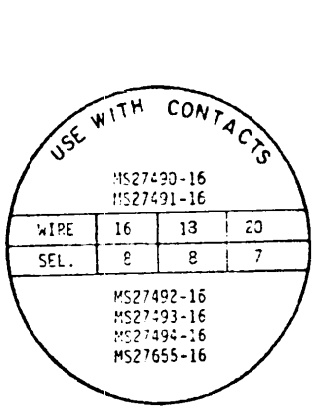


FOR M22520/7-04 POSITIONER

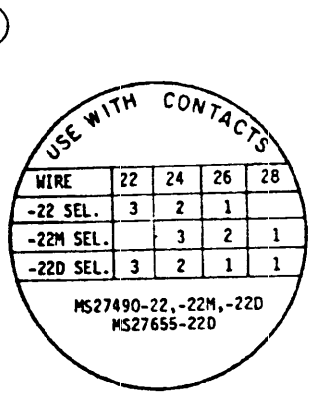

FOR M22520/7-05 POSITIONER



FOR M22520/7-06 POSITIONER




FOR M22520/7-07 POSITIONER

EACH DATA PLATE DEFINES THE CONTACT, AWG, AND SELECTOR NUMBER. CHECK POSITIONER FOR CORRECT DATA PLATE BEFORE USING.


POSITIONER DATA PLATES

Source: https://assist.dla.mil -- Downloaded: 2026-02-23T08:22Z
Check the source to verify that this is the current version before use.


POSITIONER DATA PLATES -




FOR M22520/7-08 POSITIONER




FOR M22520/7-09 POSITIONER




FOR M22520/7-10 POSITIONER



FOR M22520/7-11 POSITIONER



FOR M22520/7-12 POSITIONER



FOR M22520/7-13 POSITIONER

EACH DATA PLATE [illegible]
AND SELECTOR NUMBER. [illegible]
FOR CORRECT DATA PLATE [illegible]

Source: https://assist.dla.mil -- Downloaded: 2026/0-23T08:22Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and configuration: See figures 1 through 5.

Materials:
Case and cover (categroy 3): Sheet metal, 21 gage in accordance with QQ-S-698; gray baked enamel on all metal parts.
Instruction sheets and contents chart: White vinyl 0.020 inch (0.51 mm) thick.
Insert and retainer pad: Fire retardant foamed polyethylene in accordance with LPP-C-1752; color is optional.

Clasps, draw pull type with provision for locking device, handles, and hinges: Suitably plated to resist corrosion.

Nameplate: In accordance with MIL-P-19834.

Binder: Looseleaf, three-ring, 0.562 inch (14.27 mm) ±0.062 inch (1.57 mm) I.D., 2.75 inches (69.9 mm) center distance between rings, securely riveted to inside of cover.

Instruction sheets and contents chart (see pages 6 through 12: Lettering shall be legible and protected with a transparent coating. Contents chart (centered on inside of case cover) shall have pressure sensitive adhesive backing and show the insert cavity configurations and the respective tool part numbers, a list of NSN's will also be supplied.

Part number:
MS85507/8-01 - Tool kit for MIL-C-22520/7 crimping tool and positioners.
MS85507/8-02 - Tool case assembly.

QUALIFICATION:

Qualifying activity - Defense Electronics Supply Center (DESC-E), Dayton, OH 45444.

Custodians:
Army - EL
Navy - AS
Air Force - 85

Review activities:
Army - MI,AR, AV, MC, GL
Navy - SH, EC, OS
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - ME, AT
Navy - MC
Air Force - 19

Preparing activity:
Air Force - 85

(Project 5180-0099)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:22Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:22Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-T-83507/8 Tool Kits, Electrical Connectors, Contacts, and Connector and Cable Accessories FSC 5180

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1426 1 OCT 76 PREVIOUS EDITION WILL BE USED.

Source: https://assist.dla.mil -- Downloaded: 202610-23T08:22Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF AIR FORCE
DOD-318

U.S. MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

AFLC/LOIE/Standardization
Wright-Patterson AFB OH 45433

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:22Z
Check the source to verify that this is the current version before use.