INCH-POUND

MIL-DTL-85667/3B
1 September 2004
SUPERSEDING
MIL-B-85667/3A
28 January 1991

DETAIL SPECIFICATION SHEET

BOLT, SLEEVE, PROTRUDING HEAD, STRAIGHT SHANK, CRES 304 SLEEVE, CRES PH 13-8Mo PIN, 225 KSI Fsu

Inactive for new design after 4 April 1998.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-B-85667.

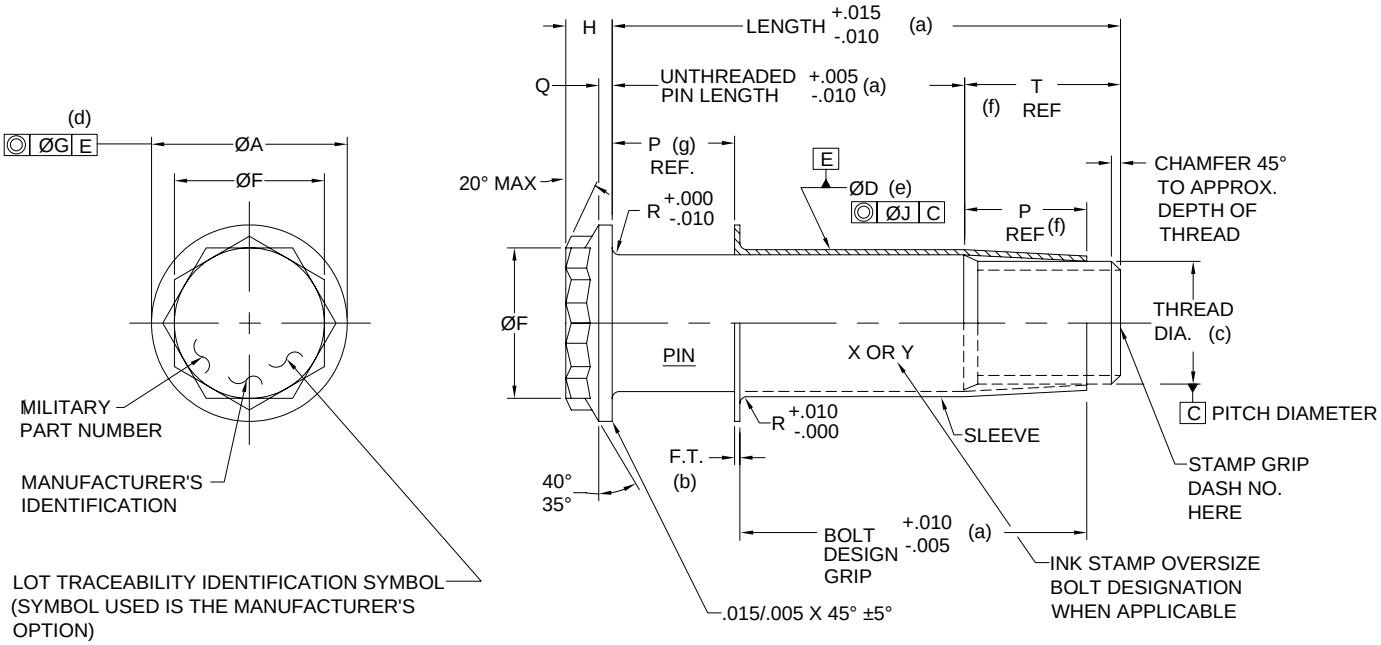


FIGURE 1. Flanged tension head bolt.

(a) Grip lengths are available in .0625 increments.
(b) Dimension of non-structural flange thickness is established by sleeve bolt assembly installation requirements allowing no threads in bearing.
(c) Threads shall be in accordance with AS8879. Thread major diameter (T.D.) shall be in accordance with Table I.
(d) 1. For sizes .190 thru .375, dimension "∅G" shall be .008 FIM.
2. For sizes .437 thru .625, .012 FIM.
3. For sizes .750 thru 1.000, .020 FIM.
(e) 1. For sizes .190 thru .375, dimension "∅J" shall be .006 FIM.
2. For sizes .437 thru .1.000, .010 FIM.
(f) Reference dimensions are for design purposes only and are not an inspection or manufacturing requirement.
(g) Protrusion will vary according to taper to provide expansion as given in Table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:19Z
Check the source to verify that this is the current version before use.

TABLE I. Bolt dimensions.

Size Nos.	Group	Grip Dash Numbers	Thread Per SAE-AS8879 UNJF-3A	∅A	H Head Height	∅F	Sleeve F.T. +.015 (b -.000 (b)	Q	P REF (g)	R Fillet Radius	T. D. Thread Dia.	T Thread Length REF	∅D Dimension Uninstalled Sleeve (a)(b)			∅D Dimension Expanded Sleeve (a)(b)			Minimum Installation Hole Size Diameter		
													Std.	X O/S	Y O/S	Std.	X O/S	Y O/S	Std.	X O/S	Y O/S
-3	1	-5 thru –8	.1900-32	.409 .399	.128 .118	.313 .305	.010	.030 .020	.175 .225 .215	.025	.1840 .1810	.343	.2365 .2360	.2425 .2420	.2485 .2480	.2455 .2445	.2515 .2505	.2575 .2565	.237	.243	.249
	2	-9 thru -16							.432 .422				.2365 .2360	.2425 .2420	.2485 .2480	.2455 .2445	.2515 .2505	.2575 .2565	.237	.243	.249
	3	-17 thru -22							.432 .422				.2485 .2480	.2555 .2550	.2625 .2620	.2575 .2565	.2645 .2635	.2715 .2705	.249	.256	.263
-4	1	-5 thru -8	.2500-28	.516 .506	.138 .126	.376 .367	.010	.045 .035	.175 .225 .215	.025	.2440 .2410	.406	.3005 .3000	.3115 .3110	.3175 .3170	.3095 .3085	.3205 .3195	.3265 .3255	.301	.312	.318
	2	-9 thru -17							.432 .422				.3005 .3000	.3115 .3110	.3175 .3170	.3095 .3085	.3205 .3195	.3265 .3255	.301	.312	.318
	3	-18 thru -28							.432 .422				.3145 .3140	.3215 .3210	.3305 .3300	.3235 .3225	.3305 .3295	.3395 .3385	.315	.322	.331
-5	1	-6 thru -8	.3125-24	.636 .624	.173 .161	.502 .492	.015	.050 .040	.225 .215	.030	.3060 .3020	.484	.3665 .3660	.3735 .3730	.3805 .3800	.3755 .3745	.3825 .3815	.3895 .3885	.367	.374	.381
	2	-9 thru -20							.432 .422				.3665 .3660	.3735 .3730	.3805 .3800	.3755 .3745	.3825 .3815	.3895 .3885	.367	.374	.381
	3	-21 thru -31							.432 .422				.3805 .3800	.3885 .3880	.3955 .3950	.3895 .3885	.3975 .3965	.4045 .4035	.381	.389	.396
-6	1	-6 thru -8	.3750-24	.718 .704	.187 .175	.564 .553	.015	.053 .043	.225 .215	.030	.3680 .3640	.562	.4315 .4310	.4395 .4390	.4515 .4510	.4405 .4395	.4485 .4475	.4605 .4595	.432	.440	.452
	2	-9 thru -22							.432 .422				.4315 .4310	.4395 .4390	.4515 .4510	.4405 .4395	.4485 .4475	.4605 .4595	.432	.440	.452
	3	-23 thru -34							.432 .422				.4475 .4470	.4555 .4550	.4635 .4630	.4565 .4555	.4645 .4635	.4725 .4715	.448	.456	.464
-7	1	-6 thru -8	.4375-20	.808 .792	.218 .206	.627 .616	.020	.056 .046	.225 .215	.040	.4310 .4260	.625	.4985 .4980	.5105 .5100	.5185 .5180	.5075 .5065	.5195 .5185	.5275 .5265	.499	.511	.519
	2	-9 thru -26							.432 .422				.4985 .4980	.5105 .5100	.5185 .5180	.5075 .5065	.5195 .5185	.5275 .5265	.499	.511	.519
	3	-27 thru -40							.432 .422				.5185 .5180	.5295 .5290	.5415 .5410	.5275 .5265	.5385 .5375	.5505 .5495	.519	.530	.542
-8	1	-6 thru -8	.5000-20	.893 .877	.252 .240	.690 .679	.020	.060 .050	.225 .215	.040	.4930 .4880	.703	.5695 .5690	.5795 .5790	.5895 .5890	.5785 .5775	.5885 .5875	.5985 .5975	.570	.580	.590
	2	-9 thru -30							.432 .422				.5695 .5690	.5795 .5790	.5895 .5890	.5785 .5775	.5885 .5875	.5985 .5975	.570	.580	.590
	3	-31 thru -46							.432 .422				.5895 .5890	.5995 .5990	.6085 .6080	.5985 .5975	.6085 .6075	.6175 .6165	.590	.600	.609
-9	1	-10 thru -23	.5625-18	1.096 1.079	.280 .268	.877 .865	.025	.070 .065	.432 .422	.073	.5550 .5500	.781	.6395 .6390	.6545 .6540	.6675 .6670	.6485 .6475	.6635 .6625	.6765 .6755	.640	.655	.668
	2	-24 thru -48											.6705 .6700	.6865 .6860	.7015 .7010	.6795 .6785	.6955 .6945	.7105 .7095	.671	.687	.702
	3	-49 thru -72					.030						.7015 .7010	.7175 .7170	.7325 .7320	.7105 .7095	.7265 .7255	.7415 .7405	.702	.718	.733
-10	1	-10 thru -25	.6250-18	1.191 1.175	.324 .312	.940 .928	.025	.075 .060	.432 .422	.073	.6180 .6120	.843	.7075 .7070	.7265 .7260	.7465 .7460	.7165 .7155	.7355 .7345	.7555 .7545	.708	.727	.747
	2	-26 thru -52											.7465 .7460	.7645 .7640	.7795 .7790	.7555 .7545	.7735 .7725	.7885 .7875	.747	.765	.780
	3	-53 thru -78					.030						.7795 .7790	.7955 .7950	.8115 .8110	.7885 .7875	.8045 .8035	.8205 .8195	.780	.796	.812
-12	1	-10 thru -29	.7500-16	1.386 1.370	.392 .378	1.064 1.052	.030	.080 .065	.432 .422	.073	.7430 .7370	1.000	.8425 .8420	.8575 .8570	.8735 .8730	.8515 .8505	.8665 .8655	.8825 .8815	.843	.858	.874
	2	-30 thru -60											.8845 .8840	.9045 .9040	.9205 .9200	.8935 .8925	.9135 .9125	.9295 .9285	.885	.905	.921
	3	-61 thru -90					.035						.9205 .9200	.9365 .9360	.9515 .9510	.9295 .9285	.9455 .9445	.9605 .9595	.921	.937	.952
-14	1	-15 thru -26	.8750-14	1.589 1.573	.470 .454	1.252 1.239	.030	.090 .075	.432 .422	.073	.8680 .8610	1.156	.9825 .9820	.9985 .9980	1.0145 1.0140	.9915 .9905	1.0075 1.0065	1.0235 1.0225	.983	.999	1.015
	2	-27 thru -67					.030		.900 .890				.9825 .9820	.9985 .9980	1.0145 1.0140	.9915 .9905	1.0075 1.0065	1.0235 1.0225	.983	.999	1.015
	3	-68 thru -108					.035		.900 .890				1.0455 1.0450	1.0615 1.0610	1.0765 1.0760	1.0545 1.0535	1.0705 1.0695	1.0855 1.0845	1.046	1.062	1.077
-16	1	-15 thru -26	1.0000-12	1.788 1.722	.538 .522	1.440 1.427	.031	.100 .085	.432 .422	.073	.9930 .9860	1.312	1.1235 1.1230	1.1395 1.1390	1.1545 1.1540	1.1325 1.1315	1.1485 1.1475	1.1635 1.1625	1.124	1.140	1.155
	2	-27 thru -70					.031		.900 .890				1.1235 1.1230	1.1395 1.1390	1.1545 1.1540	1.1325 1.1315	1.1485 1.1475	1.1635 1.1625	1.124	1.140	1.155
	3	-71 thru -112					.038		.900 .890				1.1865 1.1860	1.2015 1.2010	1.2175 1.2170	1.1955 1.1945	1.2105 1.2095	1.2265 1.2255	1.187	1.202	1.218

(a) ∅D shall be verified within the grip bearing portion befor expansion; when sleeve is pushed to pin head, the "∅D" shall be within the expanded "∅D" limits.

(b) The bolt is manufactured as a precision assembly. Removal of sleeve from pin by user will result in loss of the bolt's ability to meet min/max expansion limits.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:19Z
Check the source to verify that this is the current version before use.

TABLE II. Mechanical properties.

Dia Dash Number	Ultimate Tensile Strength Lbs-Min (b)	Thread Area In^2 (b)	Double Shear Strength Lbs-Min (a)	Pin Test Diameter (± .0005) In (a)	Pin Test Dia Area In^2 (a)	Max Install Torque In-Lbs	Fatigue Test Loading Lbs ± 2% (c)	
							Max	Min
-3	4,970	.0226	7,080	.1900	.0284	60	2,290	229
-4	8,870	.0404	12,300	.2500	.0491	115	3,800	380
-5	14,100	.0640	19,200	.3125	.0767	185	6,500	650
-6	20,900	.0951	27,600	.3750	.1104	335	9,620	962
-7	28,300	.1288	37,500	.4375	.1503	540	13,000	1,300
-8	37,800	.1717	49,200	.5000	.1963	805	17,400	1,740
-9	47,900	.2176	62,200	.5625	.2485	1,080	22,000	2,200
-10	59,900	.2724	76,700	.6250	.3068	1,560	27,600	2,760
-12	86,900	.3953	110,000	.7500	.4418	2,930	40,000	4,000
-14	119,000	.5392	150,000	.8750	.6013	4,340	54,700	5,470
-16	155,000	.7027	196,000	1.0000	.7854	6,100	71,300	7,130

(a) Shear test performed on pins ground to pin test diameter. The shear values are based on a minimum shear strength of 125 ksi and the stress area at the test diameter.
(b) The ultimate tensile strength values are calculated on the basic pitch diameter of the external thread.
(c) Maximum fatigue load is based on 46% of the ultimate tensile strength. Minimum fatigue load is 10% of maximum fatigue load.

TABLE III. Bolt grips and lengths.

Grip Number	Bolt Design Grip	-3 Diameter		-4 Diameter		-5 Diameter	
		Unthreaded Pin Length (See Figure 1)	Bolt Length	Unthreaded Pin Length (See Figure 1)	Bolt Length	Unthreaded Pin Length (See Figure 1)	Bolt Length
5	.312	.353	..696	.353	.759	.420	.904
6	.375	.415	.758	.415	.821	.483	.967
7	.438	.478	.821	.478	.884	.545	1.029
8	.500	.540	.883	.540	.946	.608	1.092
9	.562	.603	.946	.603	1.009	.670	1.154
10	.625	.665	1.008	.665	1.071	.733	1.217
11	.688	.728	1.071	.728	1.134	.795	1.297
12	.750	.790	1.133	.790	1.196	.858	1.342
13	.812	.853	1.196	.853	1.259	.920	1.404
14	.875	.915	1.258	.915	1.321	.983	1.467
15	.938	.978	1.321	.978	1.384	1.045	1.529
16	1.000	1.040	1.383	1.040	1.446	1.108	1.592
17	1.062	1.103	1.446	1.103	1.509	1.170	1.654
18	1.125	1.165	1.508	1.165	1.571	1.233	1.717
19	1.188	1.228	1.571	1.228	1.634	1.295	1.779
20	1.250	1.290	1.633	1.290	1.696	1.358	1.842
21	1.312	1.353	1.696	1.353	1.759	1.420	1.904
22	1.375	1.415	1.758	1.415	1.821	1.483	1.967
23	1.438				1.884	1.545	2.029
24	1.500				1.946	1.608	2.092
25	1.562				2.009	1.670	2.154
26	1.625				2.071	1.733	2.217
27	1.688				2.134	1.795	2.279
28	1.750				2.196	1.858	2.342
29	1.812					1.920	2.404
30	1.875					1.983	2.467

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:19Z
Check the source to verify that this is the current version before use.

TABLE III. Bolt grips and lengths (continued).

Grip Number	Bolt Design Grip	-6 Diameter		-7 Diameter		-8 Diameter	
		Unthreaded Pin Length (See Figure 1)	Bolt Length	Unthreaded Pin Length (See Figure 1)	Bolt Length	Unthreaded Pin Length (See Figure 1)	Bolt Length
6	.375	.420	.982	.425	1.050	.425	1.128
7	.438	.483	1.045	.488	1.113	.488	1.191
8	.500	.545	1.107	.550	1.175	.550	1.253
9	.562	.608	1.170	.613	1.238	.613	1.316
10	.625	.670	1.232	.675	1.300	.675	1.378
11	.688	.733	1.295	.738	1.363	.738	1.441
12	.750	.795	1.357	.800	1.425	.800	1.503
13	.812	.858	1.420	.863	1.488	.863	1.566
14	.875	.920	1.482	.925	1.550	.925	1.628
15	.938	.983	1.545	.988	1.613	.988	1.691
16	1.000	1.045	1.607	1.050	1.675	1.050	1.753
17	1.062	1.108	1.670	1.113	1.738	1.113	1.816
18	1.125	1.170	1.732	1.175	1.180	1.175	1.878
19	1.188	1.233	1.795	1.238	1.863	1.238	1.941
20	1.250	1.295	1.857	1.300	1.925	1.300	2.003
21	1.312	1.358	1.920	1.363	1.988	1.363	2.066
22	1.375	1.420	1.982	1.425	2.050	1.425	2.128
23	1.438	1.483	1.483	1.488	2.113	1.488	2.191
24	1.500	1.545	2.107	1.550	2.175	1.550	2.253
25	1.562	1.608	2.170	1.613	2.238	1.613	2.316
26	1.625	1.670	2.232	1.675	2.300	1.675	2.378
27	1.688	1.733	2.295	1.738	2.363	1.738	2.441
28	1.750	1.795	2.357	1.800	2.425	1.800	2.503
29	1.812	1.858	2.420	1.863	2.488	1.863	2.566
30	1.875	1.920	2.482	1.925	2.550	1.925	2.628
31	1.938	1.983	2.545	1.988	2.613	1.988	2.691
32	2.000	2.045	2.607	2.050	2.675	2.050	2.753
33	2.062	2.108	2.670	2.113	2.738	2.113	2.816
34	2.125	2.170	2.732	2.175	2.800	2.175	2.878
35	2.188			2.238	2.863	2.238	2.941
36	2.250			2.300	2.925	2.300	3.003
37	2.312			2.363	2.988	2.363	3.066
38	2.375			2.425	3.050	2.425	3.128
39	2.438			2.488	3.113	2.488	3.191
40	2.500			2.550	3.175	2.550	3.253
41	2.562					2.613	3.316
42	2.625					2.675	3.378
43	2.688					2.738	3.441
44	2.750					2.800	3.503
45	2.812					2.863	3.566
46	2.875					2.925	3.628

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:19Z
Check the source to verify that this is the current version before use.

TABLE III. Bolt grips and lengths (continued).

Grip Number	Bolt Design Grip	-9 Diameter		-10 Diameter		-12 Diameter	
		Unthreaded Pin Length (See Figure 1)	Bolt Length	Unthreaded Pin Length (See Figure 1)	Bolt Length	Unthreaded Pin Length (See Figure 1)	Bolt Length
10	.625	.680	1.461	.680	1.523	.685	1.685
11	.688	.743	1.524	.743	1.586	.748	1.748
12	.750	.805	1.586	.805	1.648	.810	1.810
13	.812	.868	1.649	.868	1.711	.873	1.873
14	.875	.930	1.711	.930	1.773	.935	1.935
15	.938	.993	1.774	.993	1.836	.998	1.998
16	1.000	1.055	1.836	1.055	1.898	1.060	2.060
17	1.062	1.118	1.899	1.118	1.961	1.123	2.123
18	1.125	1.180	1.961	1.180	2.023	1.185	2.185
19	1.188	1.243	2.024	1.243	2.086	1.248	2.248
20	1.250	1.305	2.086	1.305	2.148	1.310	2.310
21	1.312	1.368	2.149	1.368	2.211	1.373	2.373
22	1.375	1.430	2.211	1.430	2.273	1.435	2.435
23	1.438	1.493	2.274	1.493	2.336	1.498	2.498
24	1.500	1.555	2.336	1.555	2.398	1.560	2.560
25	1.562	1.618	2.399	1.618	2.461	1.623	2.623
26	1.625	1.680	2.461	1.680	2.523	1.685	2.685
27	1.688	1.743	2.524	1.743	2.586	1.748	2.748
28	1.750	1.805	2.586	1.805	2.648	1.810	2.810
29	1.812	1.868	2.649	1.868	2.711	1.873	2.873
30	1.875	1.930	2.711	1.930	2.773	1.935	2.935
31	1.938	1.993	2.774	1.993	2.836	1.998	2.998
32	2.000	2.055	2.836	2.055	2.898	2.060	3.060
33	2.062	2.118	2.899	2.118	2.961	2.123	3.123
34	2.125	2.180	2.961	2.180	3.023	2.185	3.185
35	2.188	2.243	3.024	2.243	3.086	2.248	3.248
36	2.250	2.305	3.086	2.305	3.148	2.310	3.310
37	2.312	2.368	3.149	2.368	3.211	2.373	3.373
38	2.375	2.430	3.211	2.430	3.273	2.435	3.435
39	2.438	2.493	3.274	2.493	3.336	2.498	3.498
40	2.500	2.555	3.336	2.555	3.398	2.560	3.560
41	2.562	2.618	3.399	2.618	3.461	2.623	3.623
42	2.625	2.680	3.461	2.680	3.523	2.685	3.685
43	2.688	2.743	3.524	2.743	3.586	2.748	3.748
44	2.750	2.805	3.586	2.805	3.648	2.810	3.810
45	2.812	2.868	3.649	2.868	3.711	2.873	3.873
46	2.875	2.930	3.711	2.930	3.773	2.935	3.935
47	2.938	2.993	3.774	2.993	3.836	2.998	3.998
48	3.000	3.055	3.836	3.055	3.898	3.060	4.060
49	3.062	3.118	3.899	3.118	3.961	3.123	4.123

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:19Z
Check the source to verify that this is the current version before use.

TABLE III. Bolt grips and lengths (continued).

Grip Number	Bolt Design Grip	-9 Diameter		-10 Diameter		-12 Diameter	
		Unthreaded Pin Length (See Figure 1)	Bolt Length	Unthreaded Pin Length (See Figure 1)	Bolt Length	Unthreaded Pin Length (See Figure 1)	Bolt Length
50	3.125	3.185	3.966	3.180	4.023	3.185	4.185
51	3.188	3.248	4.029	3.243	4.068	3.248	4.248
52	3.250	3.310	4.091	3.305	4.148	3.310	4.310
53	3.312	3.373	4.154	3.373	4.216	3.373	4.373
54	3.375	3.435	4.216	3.435	4.278	3.435	4.435
55	3.438	3.498	4.279	3.498	4.341	3.498	4.498
56	3.500	3.560	4.341	3.560	4.403	3.560	4.560
57	3.562	3.623	4.404	3.623	4.466	3.623	4.623
58	3.625	3.685	4.466	3.685	4.528	3.685	4.685
59	3.688	3.748	4.529	3.748	4.591	3.748	4.748
60	3.750	3.810	4.591	3.810	4.653	3.810	4.810
61	3.812	3.873	4.654	3.873	4.716	3.878	4.878
62	3.875	3.935	4.716	3.935	4.778	3.940	4.940
63	3.938	3.998	4.779	3.998	4.841	4.003	5.003
64	4.000	4.060	4.841	4.060	4.903	4.065	5.065
65	4.062	4.123	4.904	4.123	4.966	4.128	5.128
66	4.125	4.185	4.966	4.185	5.028	4.190	5.190
67	4.188	4.248	5.029	4.248	5.091	4.253	5.253
68	4.250	4.310	5.091	4.310	5.153	4.315	5.315
69	4.312	4.373	5.154	4.373	5.216	4.378	5.375
70	4.375	4.435	5.216	4.435	5.278	4.440	5.440
71	4.438	4.498	5.279	4.498	5.341	4.503	5.503
72	4.500	4.560	5.341	4.560	5.403	4.565	5.565
73	4.562			4.623	5.466	4.628	5.628
74	4.625			4.685	5.528	4.690	5.690
75	4.688			4.748	5.591	4.753	5.753
76	4.750			4.810	5.653	4.815	5.815
77	4.812			4.873	5.716	4.878	5.878
78	4.875			4.935	5.778	4.940	5.940
79	4.938					5.003	6.003
80	5.000					5.065	6.065
81	5.062					5.128	6.128
82	5.125					5.190	6.190
83	5.188					5.253	6.253
84	5.250					5.315	6.315
85	5.312					5.378	6.378
86	5.375					5.440	6.440
87	5.438					5.503	6.503
88	5.500					5.565	6.565
89	5.562					5.628	6.628
90	5.625					5.690	6.690

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:19Z
Check the source to verify that this is the current version before use.

TABLE III. Bolt grips and lengths (continued).

Grip Number	Bolt Design Grip	-14 Diameter		-16 Diameter	
		Unthreaded Pin Length (See Figure 1)	Bolt Length	Unthreaded Pin Length (See Figure 1)	Bolt Length
15	.938	.998	2.154	.999	2.311
16	1.000	1.060	2.216	1.062	2.373
17	1.062	1.123	2.279	1.124	2.436
18	1.125	1.185	2.341	1.186	2.498
19	1.188	1.248	2.404	1.249	2.561
20	1.250	1.310	2.466	1.311	2.623
21	1.312	1.373	2.529	1.374	2.686
22	1.375	1.435	2.591	1.436	2.748
23	1.438	1.498	2.654	1.499	2.811
24	1.500	1.560	2.716	1.561	2.873
25	1.562	1.623	2.779	1.624	2.936
26	1.625	1.685	2.841	1.686	2.998
27	1.688	1.748	2.904	1.749	3.061
28	1.750	1.810	2.966	1.811	3.123
29	1.812	1.873	3.029	1.874	3.186
30	1.875	1.935	3.091	1.936	3.248
31	1.938	1.998	3.154	1.999	3.311
32	2.000	2.060	3.216	2.061	3.373
33	2.062	2.123	3.279	2.124	3.436
34	2.125	2.185	3.341	2.186	3.498
35	2.188	2.248	3.404	2.249	3.561
36	2.250	2.310	3.466	2.311	3.623
37	2.312	2.373	3.529	2.374	3.686
38	2.375	2.435	3.591	2.436	3.748
39	2.438	2.498	3.654	2.499	3.811
40	2.500	2.560	3.716	2.561	3.873
41	2.562	2.623	3.779	2.624	3.936
42	2.625	2.685	3.841	2.686	3.998
43	2.688	2.748	3.904	2.749	4.061
44	2.750	2.810	3.966	2.811	4.123
45	2.812	2.873	4.029	2.874	4.186
46	2.875	2.935	4.091	2.936	4.248
47	2.938	2.998	4.154	2.999	4.311
48	3.000	3.060	4.216	3.061	4.373
49	3.062	3.123	4.279	3.124	4.436
50	3.125	3.185	4.341	3.186	4.498
51	3.188	3.248	4.404	3.249	4.561
52	3.250	3.310	4.466	3.311	4.623

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:19Z
Check the source to verify that this is the current version before use.

TABLE III. Bolt grips and lengths (continued).

Grip Number	Bolt Design Grip	-14 Diameter		-16 Diameter	
		Unthreaded Pin Length (See Figure 1)	Bolt Length	Unthreaded Pin Length (See Figure 1)	Bolt Length
53	3.312	3.373	4.529	3.374	4.686
54	3.375	3.435	4.591	3.436	4.748
55	3.438	3.498	4.654	3.499	4.811
56	3.500	3.560	4.716	3.561	4.873
57	3.562	3.623	4.779	3.624	4.936
58	3.625	3.685	4.841	3.686	4.998
59	3.688	3.748	4.904	3.749	5.061
60	3.750	3.810	4.966	3.811	5.123
61	3.812	3.873	5.029	3.874	5.186
62	3.875	3.935	5.091	3.936	5.248
63	3.938	3.998	5.154	3.999	5.311
64	4.000	4.060	5.216	4.061	5.373
65	4.062	4.123	5.279	4.124	5.436
66	4.125	4.185	5.341	4.186	5.498
67	4.188	4.248	5.404	4.249	5.561
68	4.250	4.315	5.471	4.311	5.623
69	4.312	4.378	5.534	4.374	5.686
70	4.375	4.440	5.596	4.436	5.748
71	4.438	4.503	5.659	4.506	5.818
72	4.500	4.565	5.721	4.568	5.880
73	4.562	4.628	5.784	4.631	5.943
74	4.625	4.690	5.846	4.693	6.005
75	4.688	4.753	5.909	4.756	6.068
76	4.750	4.815	5.971	4.818	6.130
77	4.812	4.878	6.034	4.881	6.193
78	4.875	4.940	6.096	4.943	6.255
79	4.938	5.003	6.159	5.006	6.318
80	5.000	5.065	6.221	5.068	6.380
81	5.062	5.128	6.284	5.131	6.443
82	5.125	5.190	6.346	5.193	6.505
83	5.188	5.253	6.409	5.256	6.568
84	5.250	5.315	6.471	5.318	6.630
85	5.312	5.378	6.534	5.381	6.693
86	5.375	5.440	6.596	5.443	6.755
87	5.438	5.503	6.659	5.506	6.818
88	5.500	5.565	6.721	5.568	6.880
89	5.562	5.628	6.784	5.631	6.943
90	5.625	5.690	6.846	5.693	7.005

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:19Z
Check the source to verify that this is the current version before use.

TABLE III. Bolt grips and lengths (continued).

Grip Number	Bolt Design Grip	-14 Diameter		-16 Diameter	
		Unthreaded Pin Length (See Figure 1)	Bolt Length	Unthreaded Pin Length (See Figure 1)	Bolt Length
91	5.688	5.753	6.909	5.756	7.068
92	5.750	5.815	6.971	5.818	7.130
93	5.812	5.878	7.034	5.881	7.193
94	5.875	5.940	7.096	5.943	7.255
95	5.938	6.003	7.159	6.006	7.318
96	6.000	6.065	7.221	6.068	7.380
97	6.062	6.128	7.284	6.131	7.443
98	6.125	6.190	7.346	6.193	7.505
99	6.188	6.253	7.409	6.256	7.568
100	6.250	6.315	7.471	6.318	7.630
101	6.312	6.378	7.534	6.381	7.693
102	6.375	6.440	7.596	6.443	7.755
103	6.438	6.503	7.659	6.506	7.818
104	6.500	6.565	7.721	6.658	7.880
105	6.562	6.628	7.784	6.631	7.943
106	6.625	6.690	7.846	6.693	8.005
107	6.688	6.753	7.909	6.756	8.068
108	6.750	6.815	7.971	6.818	8.130
109	6.812			6.881	8.193
110	6.875			6.943	8.255
111	6.938			7.006	8.318
112	7.000			7.068	8.380
113	7.062			7.131	8.443
114	7.125			7.193	8.505
115	7.188			7.256	8.568
116	7.250			7.318	8.630
117	7.312			7.381	8.693
118	7.375			7443	8.755
119	7.438			7.506	8.818
120	7.500			7.658	8.880
121	7.562			7.631	8.943
122	7.625			7.693	9.005
123	7.688			7.756	9.068
124	7.750			7.818	9.130
125	7.812			7.881	9.193
126	7.875			7.943	9.255
127	7.938			8.006	9.318
128	8.000			8.068	9.380

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:19Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Application criteria. The sleeve bolt shall be used to provide a precision net fit or controlled interference fit. The sleeve bolts shall be used in accordance with the limitations MIL-B-85667/1. The sleeve bolts shall not be degreased and cetyl alcohol shall not be removed before installation.

Companion and accessory parts. Nuts in accordance with NASM85730 shall be used with the sleeve bolts.

Oversize bolts. First and second oversize sleeve bolts may replace MIL-DTL-85667/3 sleeve bolts for first and second repair operations.

Installation. Installation shall be in accordance with MIL-HDBK-271/104.

Material. Pin material shall be CRES PH 13-8Mo (UNS S13800) age-hardenable steel in accordance with AMS 5629.

Sleeve material shall be corrosion resistant steel, AISI 304 (UNS S30400), in accordance with MIL-T-8504 (chemistry only) or ASTM A269 (chemistry only).

Heat treatment. Pin shall be solution treat in air, vacuum or inert gas atmosphere at 1700 ± 25°F for one hour. Air or oil cool; when solution treating in a vacuum or inert gas atmosphere, inert gas or nitrogen may be used for cooling. Material shall be cooled at -100°F for two hours within 24 hours after solution treatment. Precipitation harden 4 hours minimum at the highest temperature (950 - 1000°F) necessary to achieve the required strength level. No subsequent stress relief is permitted. However, low temperature embrittlement relief treatment may be used if applicable. Pin hardness shall not be greater than 48 HRC.

Surface texture. Surface texture shall be 32 microinches Ra in accordance with ASME B46.1.


Coatings or surface treatment. Pin shall be dry-film lubricated in accordance with MIL-PRF-46010, Type I, .0003 / .0005 thick.

Sleeve - None.

Lubricants. .0001 inch overspray allowed on head and threads. After application of dry lubrication, the pin outside diameter and sleeve inside diameter shall be lubricated with cetyl alcohol in accordance with MIL-L-87132 or equivalent.

Unless otherwise specified, all dimensions are in inches. Tolerances: Decimals ± .010, angles +2°.

Example of military part number:

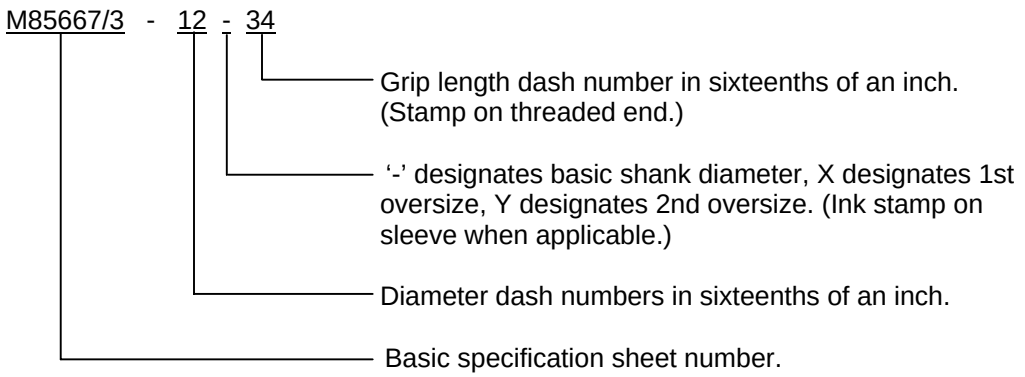

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:19Z
Check the source to verify that this is the current version before use.

In the event of a conflict between the text of this standard and the references cited herein, the text of this standard shall take precedence.

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army – AV
Navy – AS
Air Force – 99

Preparing activity:
DLA – IS
(Project 5306-2725)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at www.dodssp.daps.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:19Z
Check the source to verify that this is the current version before use.