INCH-POUND

MIL-C-48488C(AR)
23 June 1995
(see 6.4)

MILITARY SPECIFICATION

CIRCUIT CARD ASSEMBLY - CONTROL SWITCHING

This specification is approved for use by the U.S. Army Armament, Research, Development and Engineer Center (ARDEC) and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification establishes the requirements and quality assurance provisions for the Circuit Card Assembly - Control, Switching, 11732542 (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards and handbooks. The following specifications, standards and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

MILITARY

MIL-F-13926 - Fire Control Materiel, General Specification Governing the Manufacture and Inspection of

MIL-I-45607 - Inspection Equipment; Acquisition, Maintenance, and Disposition of

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use to improving this document should be addressed to: Commander, U.S. Army ARDEC, ATTN: AMSTA-AR-EDE-S, Picatinny Arsenal, New Jersey 07806-5000 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 1240

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:29Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-100	- Engineering Drawing Practices
MIL-STD-454	- Standard General Requirements for Electronic Equipment
MIL-STD-810	- Environmental Test Methods
MIL-STD-2000	- Standard Requirements for Soldered Electrical and Electronics Assemblies
MIL-STD-2073-1	- Procedures for Development and Application of Packaging Requirements

(Unless otherwise indicated, copies of federal and military specifications, standards and handbooks are available from: DODSSP - Customer Service, Standardization Documents Order Desk, 700 Robbins Avenue, Bldg 4D, Philadelphia, PA 19111-5094.)

2.1.2 Other Government documents, drawings and publications. The following other Government documents, drawings and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issue shall be those in effect on date of the solicitation.

U.S. Army Armament Research Development and Engineering Center (ARDEC)

DRAWINGS

11732542 - Circuit Card Assembly - Control Switching

(Copies of Government drawings required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for related associated detail specifications, specification sheets or MS standards), the text of this document shall take precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained (see contract provisions for additional precedence criteria).

3. REQUIREMENTS

3.1 Fabrication. The Control, Switching Circuit Card assembly, herein referred to as the assembly, shall be manufactured in accordance with Drawing 11732542 and drawings pertaining thereto and, when assembled, shall meet the requirements of this specification (see 4.5.1).

Source: https://assist.dla.mil -- Downloaded: 202640-22T19:29Z
Check the source to verify that this is the current version before use.

3.1.1 Function. The assembly shall provide the following functions:

a. Contain diode and transistor logic for decoding ammo selection signals from the Ballistic Computer Unit under test to provide proper ammo selection signals which are normally generated in the Gunner's Control Unit.

b. Contain diode logic for generating mode selection signals to the Ballistic Computer.

3.1.2 General specifications. (see 4.6.3)

3.1.2.1 Manufacture and inspection. The following provisions of MIL-F-13926 apply:

a. Dimensions and tolerance
b. Effect of protective coating on dimensions (Inorganic type coating)
c. Part identification and marking
d. Workmanship (Including applicable portions of MIL-STD-2000 and MIL-STD-454, Requirement 9)

3.1.2.2 Standards of manufacture.

3.1.2.2.1 Assembly and soldering. The requirements of MIL-STD-2000 shall apply, as a minimum.

3.1.2.2.2 Interchangeability. The assembly shall be manufactured in accordance with interchangeability requirements as specified in MIL-STD-100.

3.1.3 Ambient conditions. Standard ambient conditions shall be as follows:

a.	Temperature	73° ± 18°F
b.	Relative humidity	50 percent ± 30 percent
c.	Atmospheric pressure	28.5 + 2.0/− 3.0 in. Hg.

3.2 First article. When specified in the contract or purchase order (see 6.2), the contractor shall furnish sample units for first article inspection and approval (see 4.4).

3.3 Performance. Unless otherwise specified, the assembly shall meet the performance requirements specified herein under standard ambient conditions of 3.1.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:29Z
Check the source to verify that this is the current version before use.

3.3.1 Terminal resistance. With no power or signals applied to the assembly, the resistance between terminals shall be as specified in Table I (see 4.6.1.1).

TABLE I. Resistance.

Item	Measure Between Pin	Measure Between Pin	Resistance in Ohms
1	P1-A24	P1-A30	45,914 ± 23
2	P1-A25	P1-A30	147,627 ± 73.8
3	P1-A26	P1-B30	1,438,096 ± 719
4	P1-A27	P1-B30	133,460 ± 66.7
5	P1-A28	P1-B30	5,564 ± 2.78
6	P1-A29	P1-B30	14,985 ± 7.49
7	P1-B24	P1-A30	277,408 ± 139
8	P1-B25	P1-A30	12,400 ± 6.2
9	P1-B26	P1-B30	233,529 ± 117
10	P1-B27	P1-B30	12,400 ± 6.2
11	P1-B28	P1-B30	13,927 ± 6.96
12	P1-B29	P1-B30	12,400 ± 6.2
13	P1-B2	P1-A4	51 ± 2.6
14	P1-A2	P1-A1	51 ± 2.6
15	P1-A18	P1-B30	5,564 ± 2.78
16	P1-B10	P1-B30	12,400 ± 6.2
17	P1-B17	P1-B30	23,225 ± 11.6
18	P1-A12	P1-B30	1,343,416 ± 672
19	P1-A15	P1-B30	318,886 ± 159
20	P1-B18	P1-A30	353,134 ± 177
21	P1-A17	P1-A30	73,953 ± 37
22	P1-B12	P1-A30	141,715 ± 70.9

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:29Z
Check the source to verify that this is the current version before use.

3.3.2 Ammo select control switching logic. With the power sources (items 1.1 and 1.2 of Table II) applied, the ammo select control logic shall function as specified in Table III (see 4.6.1.2).

TABLE II. Input power, signals and loads.

Item	Identification	Characteristics	Pin Connector
1.0	Power Sources		
1.1	15V dc	15.00 ± 0.03V dc Ripple: 0.020V p-p max Current: 500 mA min	P1-A1(+) and return to P1-A13
1.2	-15V dc	-15.00 ± 0.03V dc Ripple: 0.020V p-p max Current: 500 mA min	P1-A4(-) and return to P1-A13
2.0	Signal Source		
2.1	AC Reference	5.000 ± 0.005V rms 400 ± 1 Hz sinewave	P1-A30(+) and return to P1-A13
3.0	Load		
3.1	Resistor	5.1 megohm ± 5 percent 1/4 watt	P1-B14 and P1-A13

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:29Z
Check the source to verify that this is the current version before use.

TABLE III. Ammo select control.

	Output Voltage 1/								
	AS4-1/ AS7-1	Ammo Select 21	Ammo Select 22	Ammo Select 23	Ammo Select 24	APDS M392 Select	Ammo Select 6 APDS	Ammo Select 2 HEAT	Ammo Select 5 HEAT
Item	P1-A19	P1-B23	P1-A23	P1-B22	P1-A22	P1-B5	P1-B11	P1-B16	P1-A14
1	-15.00+ 0.15V dc	-15.00+ 0.20V dc	-0.50+ 0.10V dc	-0.50+ 0.10V dc	-0.50+ 0.10V dc	-15.00+ 0.20V dc	0.50+ 0.10V dc	-15.00+ 0.20V dc	-15.00+ 0.20V dc
2	-15.00+ 0.15V dc	-0.50+ 0.10V dc	-15.00+ 0.20V vdc	-0.50+ 0.10V dc	-0.50+ 0.10V dc	-0.50+ 0.10V dc	-15.00+ 0.20V dc	-0.50+ 0.10V dc	-0.50+ 0.10V dc
3	-15.00+ 0.15V dc	-0.50+ 0.10V dc	-0.50+ 0.10V dc	-15.00+ 0.20V dc	-0.50+ 0.10V dc	NA	NA	NA	NA
4	0.00+ 0.50V dc	-0.50+ 0.10V dc	-0.50+ 0.10V dc	-0.50+ 0.10V dc	-15.00+ 0.20V dc	NA	NA	NA	NA

1/ NA means "NOT APPLICABLE".

All voltage values are from the listed pin with respect to P1-A13.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:29Z
Check the source to verify that this is the current version before use.

3.3.3 Mode select control switching logic. With the power sources (items 1.1 and 1.2 of Table II) applied, the mode select control switching logic shall function as specified in Table IV (see 4.6.1.3).

3.3.4 Dot D_L output. With the power sources (items 1.1 and 1.2 of Table II), signal source (item 2.1 of Table II), and load resistor (item 3.1 of Table II) applied and: (see 4.6.1.4)

a. With pin P1-A16 connected to pin P1-A1 (15V dc), the output at pin P1-B14 shall be +4.350 $\pm$ 0.210V rms, 400 $\pm$ 1 Hz, in phase with applied signal source (item 2.1 of Table II), as measured with respect to pin P1-A13.

b. With pin P1-A16 connected to pin P1-A4 (-15V dc), the output at pin P1-B14 shall be less than 0.5V rms, as measured with respect to pin P1-A13.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:29Z
Check the source to verify that this is the current version before use.

TABLE IV. Mode select control switching.

	Inputs 1/						
	PH1-15V	PH3-15V	PH4-15V	PH2-15V	PH5-15V	BIT	Moving Tank
Item	P1-B8	P1-A8	P1-B9	P1-A9	P1-A16	P1-B1	P1-B3
1	+15.00+ 0.15V dc	-15.00+ 0.15V dc	-15.00+ 0.15V dc	-15.00+ 0.15V dc	-15.00+ 0.15V dc	+14.50+ 0.20V dc	-15.00+ 0.20V dc
2	-15.00+ 0.15V dc	+15.00+ 0.15V dc	-15.00+ 0.15V dc	-15.00+ 0.15V dc	-15.00+ 0.15V dc	-15.00+ 0.20V dc	+14.50+ 0.20V dc
3	-15.00+ 0.15V dc	-15.00+ 0.15V dc	+15.00+ 0.15V dc	-15.00+ 0.15V dc	-15.00+ 0.15V dc	-15.00+ 0.20V dc	+14.50+ 0.20V dc
4	-15.00+ 0.15V dc	-15.00+ 0.15V dc	-15.00+ 0.15V dc	+15.00+ 0.15V dc	+15.00+ 0.15V dc	-15.00+ 0.20V dc	-15.00+ 0.20V dc
5	-15.00+ 0.15V dc	-15.00+ 0.15V dc	-15.00+ 0.15V dc	-15.00+ 0.15V dc	+15.00+ 0.15V dc	-15.00+ 0.20V dc	+14.50+ 0.20v dc

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:29Z
Check the source to verify that this is the current version before use.

TABLE IV. Mode select control switching. (Continued)

Item	Outputs 1/						
	Bore-Sight Select P1-A3	Not Man. Wind Select P1-B4	Not Moving Tank P1-A5	Man. Wind Select P1-A6	Not Bore-Sight P1-B6	Not Bit P1-A7	Not Stab P1-B7
1	-15.00± 0.20V dc	+14.50± 0.20V dc	+14.50± 0.20V dc	-15.00± 0.20V dc	+14.50± 0.20V dc	-15.00± 0.20V dc	-15.00± 0.20V dc
2	+14.50± 0.20V dc	+14.50± 0.20V dc	-15.00± 0.20V dc	-15.00± 0.20V dc	-15.00± 0.20V dc	+14.50± 0.20V dc	+14.50± 0.20V dc
3	-15.00± 0.20V dc	-15.00± 0.20V dc	-15.00± 0.20V dc	+14.50± 0.20V dc	+14.50± 0.20V dc	+14.50± 0.20V dc	-15.00± 0.20V dc
4	-15.00± 0.20V dc	-15.00± 0.20V dc	+14.50± 0.20V dc	+14.50± 0.20V dc	+14.50± 0.20V dc	+14.50± 0.20V dc	+14.50± 0.20V dc
5	-15.00± 0.20V dc	+14.50± 0.20v dc	-15.00± 0.20V dc	-15.00± 0.20V dc	-15.00± 0.20V dc	+14.50± 0.20V dc	+14.50± 0.20V dc

1/ All voltage values are from the listed pin with respect to P1-A13.

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:29Z
Check the source to verify that this is the current version before use.

3.3.4 Dot D_L output. With the power sources (items 1.1 and 1.2 of Table II), signal source (item 2.1 of Table II), and load resistor (item 3.1 of Table II) applied and: (see 4.6.1.4)

a. With pin P1-A16 connected to pin P1-A1 (15V dc), the output at pin P1-B14 shall be +4.350 ± 0.210V rms, 400 ± 1 Hz, in phase with applied signal source (item 2.1 of Table II), as measured with respect to pin P1-A13.

b. With pin P1-A16 connected to pin P1-A4 (-15V dc), the output at pin P1-B14 shall be less than 0.5V rms, as measured with respect to pin P1-A13.

3.4 Environmental.

3.4.1 Temperature. The assembly shall be capable of operating as specified herein over the operating temperature range of +40°F to 100°F and shall not be damaged when subjected to the storage conditions ranging from -65°F to 160°F (see 4.6.2.1 and 4.6.2.2).

3.4.2 Vibration. The assembly shall be capable of operating as specified herein after withstanding exposure under the conditions of 3.1.3 to a sinusoidal vibration displacement of .03 inch double amplitude, 10 - 55 Hz in accordance with Figure 1. Duration of exposure shall not be less than 80 minutes in each of three mutually perpendicular axes (see 4.6.2.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:29Z
Check the source to verify that this is the current version before use.

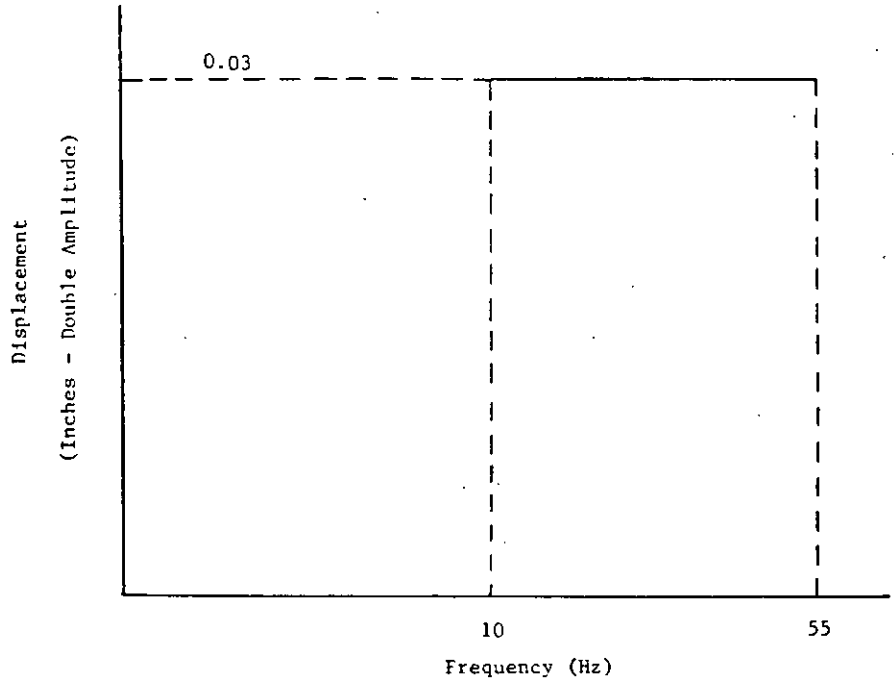


FIGURE 1. Vibration Curve.

3.4.2 Shock. The assembly shall be capable of operating as specified herein after withstanding exposure under the conditions of 3.1.3 to three half sine wave shock pulses of 40 ± 4 gravity units (g) for a duration of 18 ± 3 milliseconds (msec) applied in each direction along three mutually perpendicular axes. In addition, the assembly shall be capable of withstanding half sine wave shock pulses of 100.0 ± 10.0 g for a duration of 1.5 ± 0.2 msec applied in each direction along three mutually perpendicular axes (see 4.6.2.4).

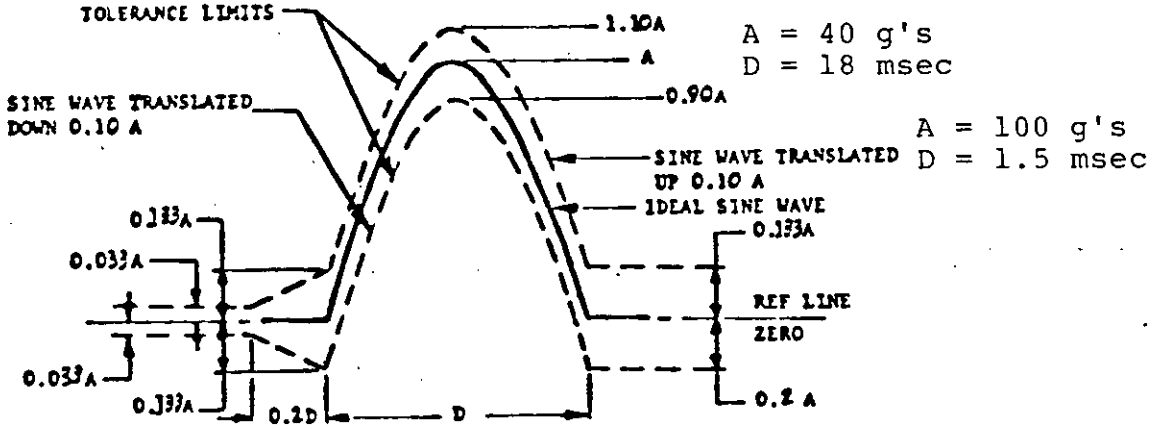


FIGURE 2. Shock Pulse.

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:29Z
Check the source to verify that this is the current version before use.

3.4.4 Temperature cycling. The assembly shall be capable of operating as specified herein after withstanding exposure to temperature cycling and soaking between the temperatures of -25°F and 140°F in accordance with Figure 3 (see 4.6.2.5).

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspections set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, a part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 Inspection equipment. Unless otherwise specified in the contract, the contractor shall supply, maintain and calibrate inspection equipment in accordance with the provisions of MIL-I-45607 and standard commercial practice. Contractor inspection system designs shall be submitted for Government approval as spedified in the contract (see 6.5).

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.4).
b. Quality conformance inspection (see 4.5 and 6.8).

4.3 Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with the quality assurance provisions of MIL-F-13926 and the conditions of 3.1.3.

4.4 First article inspection. The requirements for first article approval and the designation of responsibility for first article inspection to either the Government or the contractor

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:29Z
Check the source to verify that this is the currentversion before use.

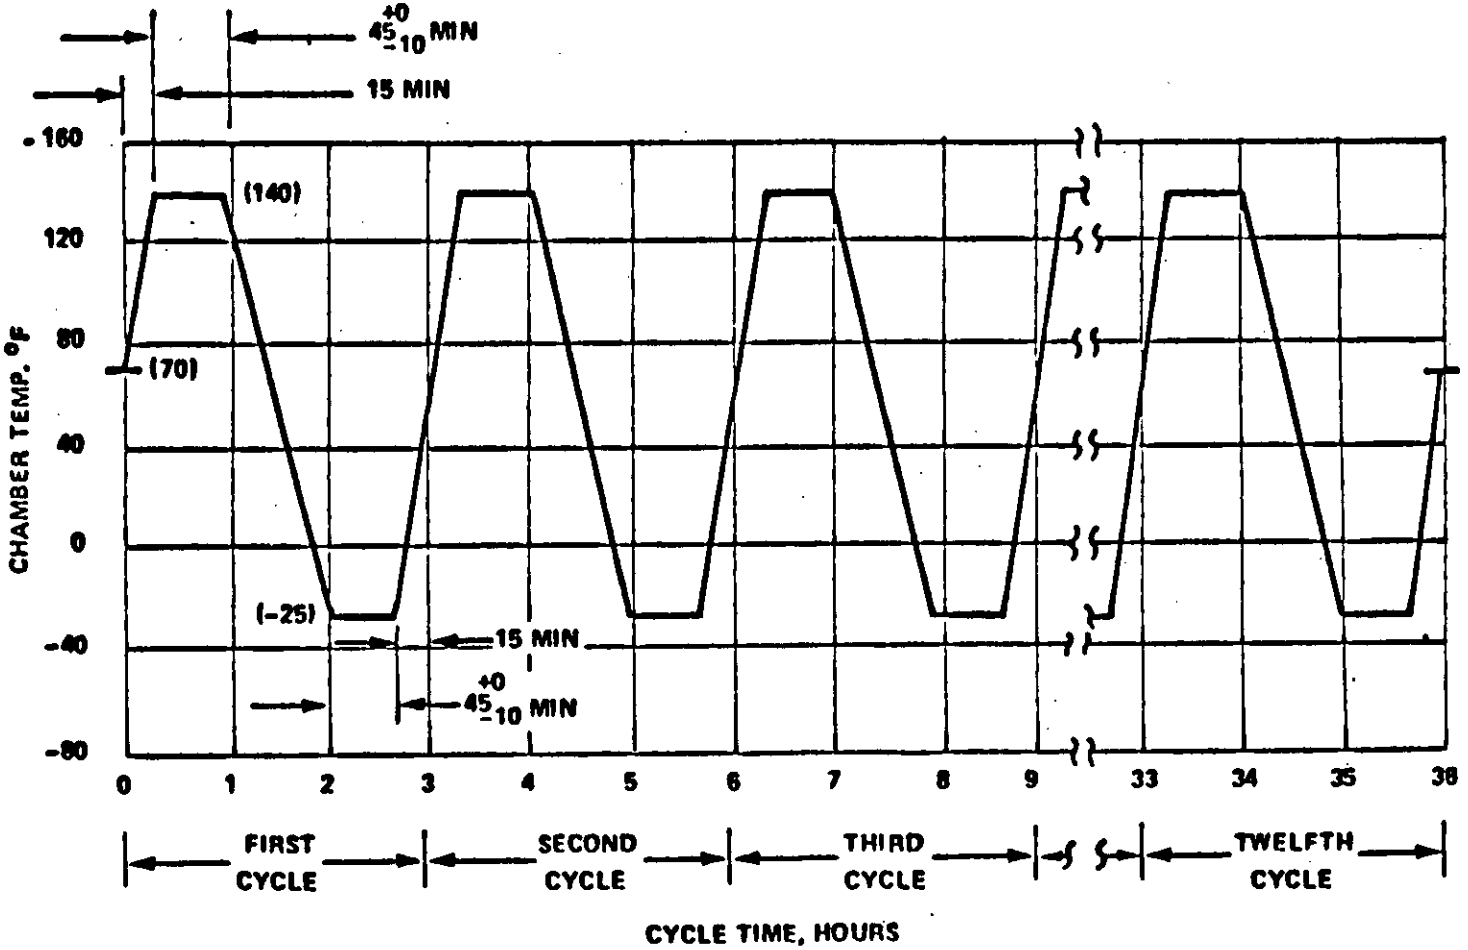


FIGURE 3. Temperature cycling.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:29Z
Check the source to verify that this is the current version before use.

shall be specified in the contract (see 6.3).

4.4.1 Sample. The contractor shall submit a first article sample as designated by the Contracting Officer for evaluation in accordance with the provisions of 4.4.2. The first article sample shall consist of two assemblies.

4.4.2 Inspection. Two assemblies shall be subjected to all the inspections specified in Tables V, VI, and VII. Tests 301 and 302 of Table VII shall be performed first.

TABLE V. Performance tests.

Item	Characteristic	Requirement	Test Procedure
101	Terminal resistance	3.3.1	4.6.1.1
102	Ammo select control switching logic	3.3.2	4.6.1.2
103	Mode select control switching logic	3.3.3	4.6.1.3
104	Dot D_L output	3.3.4	4.6.1.4

TABLE VI. Environmental tests.

Item	Characteristic	Requirement	Test Procedure
201	High Temperature	3.4.1	4.6.2.1
202	Low Temperature	3.4.1	4.6.2.2
203	Vibration	3.4.2	4.6.2.3
204	Shock	3.4.3	4.6.2.4
205	Temperature cycling	3.4.4	4.6.2.5

TABLE VII. General tests.

Item	Characteristics	Requirement	Test Procedure
301	Fabrication	3.1	Applicable drawings - Visual
302	General specifications	3.1.2	4.6.3 - Visual
303	Packaging inspection	5.1	4.6.4 - Visual

4.4.3 Failure. Failure of any assembly to meet any requirement shall be cause for refusal to grant first article approval. The Government reserves the right to terminate first article inspection upon any failure of any assembly to comply with

Source: https://assist.dla.mil -- Downloaded: 202640-22T19:29Z
Check the source to verify that this is the currentversion before use.

any stated requirement.

4.4.4 Responsibility. The contractor, whether or not responsible, shall inspect the sample for conformance to all contractual requirements and shall submit a record of this inspection and certificates of conformance for materials. The Government reserves the right to witness inspections performed by the contractor.

4.5 Quality conformance inspection.

4.5.1 Procurement conditions. The following inspection plans shall apply where the assembly is procured for use as a:

	Use	Plan
a.	Logistics spare assembly apart from the next higher assembly	A, B and C
b.	Component assembly of the next higher assembly	B and C

4.5.2 Inspection plan A.

4.5.2.1 Environmental sample and tests. One assembly, as a control sample, shall be selected at random by the Government representative from the first 50 assemblies produced or from each month's production, whichever occurs first. All the tests in Table VI shall be applied separately to the assembly.

4.5.2.2 Acceptance. When the sample assembly of the produced quantity fails to meet any specified requirement, the lot shall be rejected. Rejected lots shall be resubmitted for reinspection only after all assemblies are re-examined or retested and all defective assemblies are removed or defects corrected.

4.5.3 Inspection plan B.

4.5.3.1 Sample and tests. The sample shall be selected by the Government representative. All tests in Table VII and only the test of item 205 in Table VI shall apply. The following sampling plan (except that the visual examination for completeness, improper assembly and evidence of poor workmanship per items 301 and 302 shall be performed 100%) shall be utilized:

100%, c=0 for lot sizes of 10 or less
n=10, c=0 for lot sizes of 11 to 150
n=32, c=0 for lot sizes greater than 150

where, n=sample size and c=0 requires zero defects during inspection for acceptance

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:29Z
Check the source to verify that this is the current version before use.

4.5.3.2 Acceptance. Where any one assembly in the sample fails to meet any specified requirement, the lot shall be rejected. Rejected lots shall be resubmitted as above.

4.5.4 Inspection plan C.

4.5.4.1 Sample and tests. Each assembly in every lot shall be subjected to all the tests in Table V and shall be examined visually for completeness, improper assembly and evidence of poor workmanship per items 301 and 302 of Table VII. The conditions of 3.1.3 apply.

4.5.4.2 Acceptance. Where any one assembly fails to meet any specified requirement, the defective assembly shall be removed from the lot and resubmitted only after all defects have been corrected.

4.6 Methods of inspection.

4.6.1 Performance tests.

4.6.1.1 Terminal resistance. Verify resistance values as specified in 3.3.1.

4.6.1.2 Ammo select control switching logic. Apply power sources and inputs per 3.3.2. Measure the outputs and verify compliance with the requirements of 3.3.2.

4.6.1.3 Mode select control switching logic. Apply power sources and inputs per 3.3.3. Measure the outputs and verify compliance with the requirements of 3.3.3.

4.6.1.4 Dot D_L output. Apply power sources, signal source, load and load resistor per 3.3.4. Measure the output and verify compliance with the requirements of 3.3.4.

4.6.2 Environmental tests.

4.6.2.1 High temperature. Subject the assembly to the high temperature test specified in MIL-STD-810, Method 501 except storage temperature shall be 160°F for 48 hours. At the conclusion of the storage temperature test, stabilize the assembly at 100°F and subject it to the performance tests of Table V. After testing, return the assembly to room temperature and subject it to the performance tests of Table V.

4.6.2.2 Low temperature. Subject the assembly to the low temperature test specified in MIL-STD-810, Method 502. Maintain the temperature at -65°F for a period of 12 hours minimum. At the conclusion of the storage test, stabilize the assembly at 40°F and subject it to the performance tests of Table V. After testing, return the assembly to room temperature and subject the assembly to the performance tests of Table V.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:29Z
Check the source to verify that this is the current version before use.

4.6.2.3 Vibration. Vibration A as specified in 4.6.2.3.1 shall be conducted only for first article inspection. Vibration B as specified in 4.6.2.3.2 shall be conducted only for quality conformance inspection.

4.6.2.3.1 Vibration A. Mount the assembly in a suitable vibration fixture and subject the assembly to the vibration test specified in MIL-STD-810, Method 514, General Procedures, and 3.4.2. The vibration amplitude shall have a tolerance of ±10%. The tolerance of the vibration frequency shall be ±2%, or ±1/2 Hz for frequencies below 25 Hz. Vibration sweeps shall be conducted with the duration of exposure not less than 80 minutes in each of three mutually perpendicular axes. At the conclusion of this test, subject the assembly to the performance tests of Table V.

4.6.2.3.2 Vibration B. This test shall be conducted as in 4.6.2.3.1 except that the period of vibration shall be not less than 15 minutes in each axis.

4.6.2.4 Shock. Mount the assembly in a suitable shock fixture and subject it to the functional shock test for ground equipment specified in MIL-STD-810, Method 516, for a total of three half sine wave shock pulses in both directions along three mutually perpendicular axes (18 shocks). Peak amplitude shall be 40 ± 4 g's with a time duration of 18 ± 3 msec in accordance with Figure 2. At the conclusion of this test, subject the assembly to the performance tests of Table V. Repeat this test with peak amplitude of 100.0 ± 10.0 g's with a time duration of 1.5 ± 0.2 msec in accordance with Figure 2.

4.6.2.5 Temperature cycling. With power and loads of Table I applied, subject the assembly to the temperature profile specified in Figure 3. At the conclusion of this test, subject the assembly to the performance tests of Table V.

4.6.3 General specifications. Verification shall be provid by examination, visually or through the use of standard measuring equipment, in accordance with 3.1.2.

4.6.4 Packaging inspection. The sampling and inspection of the preservation, packaging, packing and container marking shall be in accordance with MIL-STD-2073-1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:29Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging, packing and marking. Packaging, packing and marking shall be in accordance with MIL-STD-2073-1. The level of protection shall be as specified in the procurement document (see 4.6.4 and 6.2d).

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The Switching Control circuit card (A12) assembly is intended for use in the Field Test Set, 11733200, which is used in the field for test of all of the M21 Computer subsystem components.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number and date of this specification.

b. Issues of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1).

c. Inspection provisions for first article (see 6.3).

d. Applicable levels of preservation, packaging, packing and container marking (see 5.1 and 6.7).

6.3 First article. The contracting officer should provide specific guidance to offerors for the submission of a first article sample to be tested as specified in 4.4.2. The contracting officer should also include specific instructions in acquisition documents regarding arrangements for examinations, approval of first article test results, and disposition of first articles. Invitations for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offer such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract. Bidders should not submit alternate bids unless specifically requested to do so in the solicitation.

6.4 Supersession. Previous revisions of MIL-C-48488(AR) were for the US Army Armament, Research, Development and Engineering Center's Internal Use Only, and were not forwarded to the Naval Publications and Form Center for publication.

Source: https://assist.dla.mil -- Downloaded: 202640-22T19:29Z
Check the source to verify that this is the currentversion before use.

6.5 Submission of contractor inspection equipment designs for approval. Submit copies of designs as required to: Commander, U.S. Army ARDEC, ATTN: AMSTA-AR-QAC-F, Picatinny Arsenal, NJ 07806-5000. This address will be specified on the Contract Data Requirements List, DD Form 1423 in the contract.

6.6 Drawings. Drawings listed in Section 2 of this specification under the heading U.S. Army Armament, Research, Development and Engineering Center (ARDEC) may also include drawings prepared by, and identified as U.S. Army Armament, Research and Development Command (ARRADCOM), Frankford Arsenal, Rock Island Arsenal or Picatinny Arsenal. Technical data originally prepared by these activities is now under the cognizance of ARDEC.

6.7 Levels of packaging. The following definitions describe the three levels of packaging in accordance with MIL-STD-2073-1.

a. Level A - Adequate protection for indeterminate storage and worldwide distribution.

b. Level B - Adequate protection for known shipment conditions and storage conditions normally not exceeding one year.

c. Level C - Adequate protection for shipment to a known site for immediate use.

6.8 Alternative quality conformance provisions. Alternative quality conformance procedures, methods, or equivalent, such as statistical process control, tool control, other types of sampling procedures, etc., may be used by the contractor when they provide, as a minimum, the level of quality assurance required by the provisions specified herein. Prior to applying such alternative procedures, methods, or equivalent, the contractor shall describe them in a written proposal submitted to the Government for evaluation. When required, the contractor shall demonstrate that the effectiveness of each proposed alternative is equal to or better than the specified quality assurance provision(s) herein. In cases of dispute as to whether the contractor's proposed alternative(s) provides equivalent assurance, the provisions of this specification shall apply. All approved alternative provisions shall be specifically incorporated into the contractor's quality program or detailed inspection system, as applicable. Unless otherwise specified in the contract, proposed alternative quality conformance provisions will be submitted by the contractor for evaluation by the technical activity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:29Z
Check the source to verify that this is the current version before use.

6.9 Subject term (key word) listing.

Computer, M21
Fire Control
Tank, M60A3

Custodian:
Army-AR

Preparing activity:
Army-AR

(Project 1240-0014)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:29Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-C-48488C (AR)	950623

3. DOCUMENT TITLE: CIRCUIT CARD ASSEMBLY - CONTROL SWITCHING

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets if needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)	
U.S. ARMY ARDEC STANDARDIZATION OFFICE	(1) Commercial 201-724-6629	(2) AUTOVON DSN-880-6629
c. ADDRESS (Include Zip Code) ATTN: AMSTA-AR-EDE-S PICATINNY ARSENAL, NJ 07806-5000	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

DD Form 1426, OCT 89 *Previous editions are obsolete.* 198/290

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:29Z
Check the source to verify that this is the current version before use.