MILITARY SPECIFICATION

TRACTORS, FULL-TRACKED, LOW SPEED, DED
HEAVY DRAWBAR PULL, SIZE T-11
COMMERCIAL CONSTRUCTION EQUIPMENT (CCE)

This specification is approved for use by the Mobility Equipment Research and Development Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers a commercial model, full-tracked, low speed, diesel-engine-driven, heavy drawbar pull, Size T-11, crawler tractor.

1.2 Classification. Crawler tractors shall be of the following types as specified (see 6.2):

Type I - Tractor equipped with semi-U-tilt type blade, Roll-Over-Protective-Structure and ripper.
Type II - Tractor equipped with angle blade, winch and Roll-Over-Protective-Structure.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

SPECIFICATIONS

MILITARY

MIL-L-2104	- Lubricating Oil, Internal Combustion Engine, Tactical Service.
MIL-L-2105	- Lubricating Oil, Gear, Multipurpose.
MIL-M-7866	- Molybdenum Disulfide, Technical, Lubrication Grade.
MIL-G-10924	- Grease, Automotive and Artillery.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

MIL-G-23827	- Grease, Aircraft and Instrument, Gear and Actuator Screw.
MIL-A-46153	- Antifreeze, Ethylene Glycol, Inhibited, Heavy Duty, Single Package.
MIL-L-46167	- Lubricating Oil, Internal Combustion Engine, Arctic.
MIL-E-52798	- Enamel, Alkyd, Camouflage.

(Copies of specifications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

TECHNICAL INFORMATION PACKAGE

(Application for copies should be addressed to US Army Mobility Equipment Research and Development Command, ATTN: DRXFB-H, Fort Belvoir, VA 22060.)

SOCIETY OF AUTOMOTIVE ENGINEERS (SAE)

SAE Handbook.

(Application for copies should be addressed to the Society of Automotive Engineers, 400 Commonwealth Drive, Warrendale, PA 15096.)

3. REQUIREMENTS

3.1 General. The tractor shall be the latest model of the standard product of the contractor and shall have demonstrated industry acceptability by having been manufactured, marketed, and sold in significant numbers to the commercial public; for the same or similar application, interfacing with the same or similar components; for at least 1 year prior to the invitation for bids or request for proposal or, in the case of a recently introduced item, the supplier will submit sufficient valid industrial operational/test data to demonstrate the acceptability of the item. Product improvements incorporated in the commercial production units in this 1 year period are acceptable. When specific requirements are not stated herein, all items listed as standard equipment in the contractor's published specification brochures and catalogs, or normally furnished to commercial customers

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

as standard equipment, except tracks, shall be furnished. The tractor shall be equipped with any optional equipment necessary to comply with requirements specified herein. Optional equipment is defined as equipment not standard with the tractor but which has been furnished to the commercial customer, such as special features or allied equipment. The tractor shall be equipped with all components necessary to enable the tractor to function reliably and efficiently in sustained operation. The tractor shall conform to all Federal laws and regulations governing safety, noise levels, and pollution, which are in effect on the date of manufacture.

3.2 Description. The tractors shall be diesel-engine-driven, crawler type, with oscillating tracks and a hydraulic system for operation of attachments. The Type I tractor shall be equipped with a Roll-Over-Protective-Structure (ROPS), a semi-U-type tilt blade and a 3-shank ripper bar equipped with two ripper shanks unless otherwise specified (see 6.2). The Type II tractor shall be equipped with an angle blade, towing winch, and a Roll-Over-Protective-Structure (ROPS).

3.3 Physical characteristics.

3.3.1 Weight limits. The Type I tractor, fully serviced, with dozer blade, ROPS and ripper with two shanks shall weigh not less than 78,000 pounds. The Type II tractor, fully serviced, with angle blade, ROPS and winch with wire rope shall weigh not less than 70,000 pounds.

3.3.2 Track gage. The track gage shall be not less than 84 inches.

3.3.3 Ground clearance. The ground clearance of the tractor, excluding grouser height, shall be not less than 16 inches.

3.3.4 Stability. The Type II tractor shall be capable of dozing on 30 percent side slopes and 60 percent longitudinal slopes and negotiating these slopes in both forward and reverse.

3.3.5 Transportability. The tractors shall be capable of being transported by surface, rail, and air transportable by C-5A aircraft. Removal of any components to meet these requirements shall be clearly defined in the operating or shipping instructions. Cargo envelope of C-5A aircraft is shown in Figure 1. Suitable procedures and markings for tiedown and lifting for transportation by surface, rail, and air shall be provided. Instruction plates or decals containing diagrams and instructions for use of the lifting and tiedown provisions shall be permanently affixed to the tractor. Stencil or decal markings shall be applied to the vehicles at each lifting and tiedown point. The tiedown procedure

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

shall permit tiedown of the vehicles to the floor (or deck) of the transport medium in such a manner as to prevent shifting or movement in any direction. In addition, a Vehicle Classification Data Sheet (see Figures 2 and 3), shall be submitted within the time frame specified (see 6.2). The contractor shall apply the Government-furnished weight classification number as required (see 3.32 and 6.2).

3.4 First article (preproduction model). The contractor shall furnish one of each type tractor for examination and demonstration within the time frame specified (see 6.2). Examination and demonstrations shall be as specified in Section 4 and shall be subject to surveillance and approval by the Government.

3.5 Production tractors. All tractors furnished under this specification shall be physically and mechanically identical to the first article tractors that are approved by the Government, except that product improvements incorporated in the contractor's standard commercial product lines are permitted, subject to the following:


(a) Physical and performance characteristics have not been degraded.
(b) New components involving Government selected repair parts are directly interchangeable with the superseded component or part.
(c) The Government is notified of all changes and alterations a minimum of 45 days in advance of production committment dates. When the changes and alterations have been incorporated in the production tractors, the Government shall be furnished the production effectivity by serial number and dates.
(d) Appropriate changes are issued to the Government validated operating, maintenance, and parts manuals (see 3.28) before delivery.

3.6 Use.

3.6.1 Temperature. The tractor shall start, without an external power source, and operate normally at full capacity for extended periods in temperatures ranging from -25° F to +110° F. The tractors shall be capable of being stored for extended periods in temperatures ranging from -30° F to +160° F without damage. When specified, winterization kits for operation to -50° F shall be provided (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

FORWARD CARGO OPENING C-5A
FORWARD KNEEL POSITION

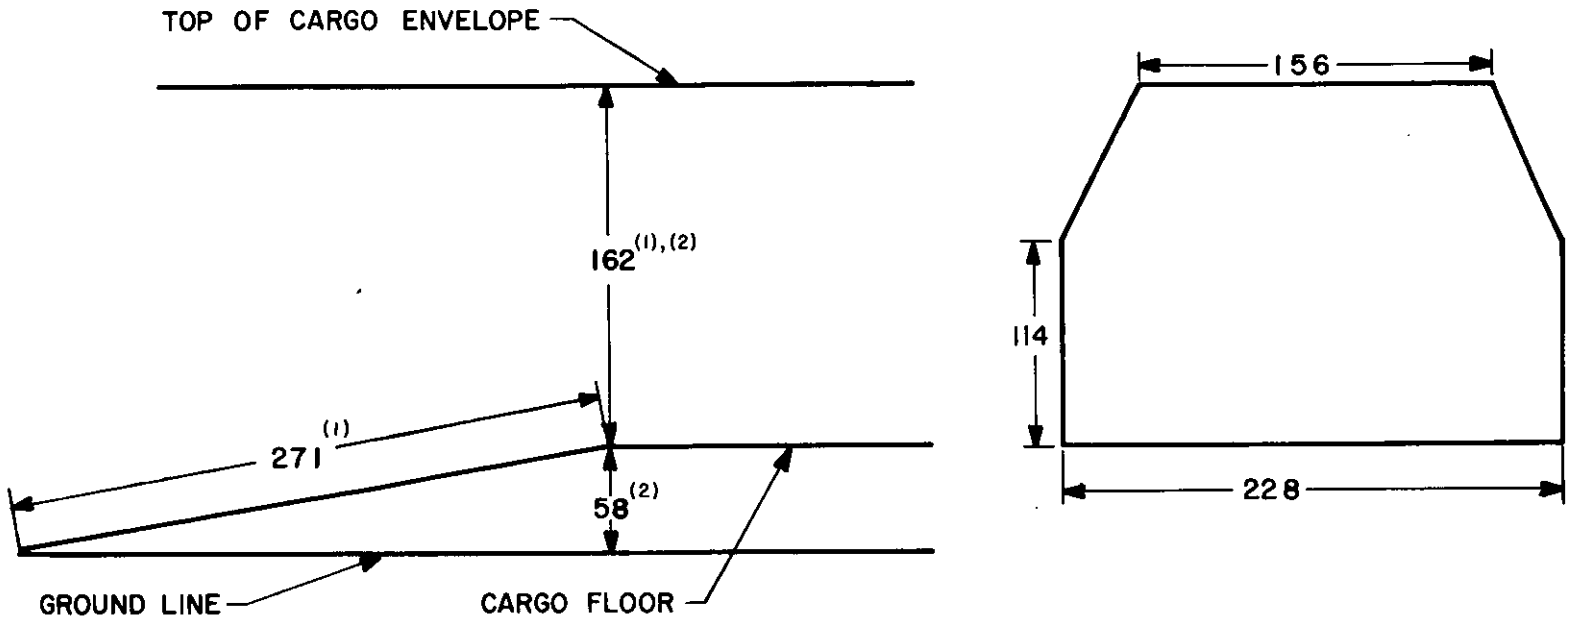

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. REFERENCE: AMCP 706-130, ENGINEERING DESIGN HANDBOOK, DECEMBER 1967.
3. REFERENCE: USATECOM PROJECT NO 4-ES-065-050-004, SERVICE TEST OF C-5A AIRCRAFT, FIRST PARTIAL REPORT BY H.H JOHNSON, JR., CPT., JANUARY 1971.

FIGURE 1. C-5A. cargo envelope.

X-3171A

MIL-T-52907(ME)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.


VEHICLE CLASSIFICATION DATA
TRACTOR, FULL-TRACKED
DATA REQUIRED FOR IDENTIFICATION AND LOAD CLASSIFICATION OF SUBJECT VEHICLE

Load Class		
E	C	H

NOMENCLATURE:

Mfr.	Model No.
NSN	Agency	Stock No.

Traveling Load Category		Total Weight W	Pay Load	Max. Towed Load	Max. Pintle Load
Empty	E		X		
Cross Country or Off Highway	C				
Laden or On Highway	H				

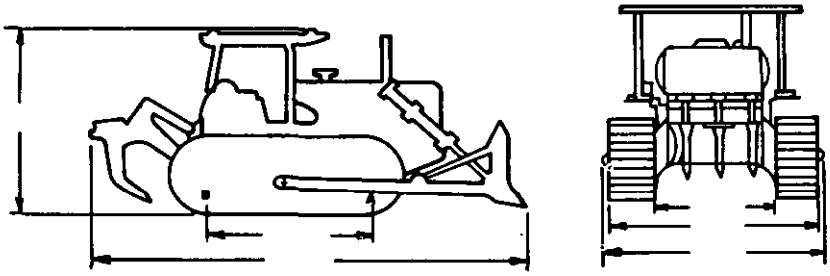

	Load		
Traveling Load Category	A–B	psi A–B	Pintle Max.
Empty E			
Cross Country On or Off Highway C			
Laden or On Highway H			

All loads in short tons.
All loads to include weight of crew and appurtenances.
Class No's. for vehicles over 3,000 lbs.
Longitudinal dimensions in feet.
Vertical and transverse dimensions in inches.

FIGURE 2.

X-3189

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.


Load Class		
E	C	H

VEHICLE CLASSIFICATION DATA
TRACTOR, FULL-TRACKED
DATA REQUIRED FOR IDENTIFICATION AND LOAD CLASSIFICATION OF SUBJECT VEHICLE

NOMENCLATURE:

Mfr.	Model No.	
NSN	Agency	Stock No.

Traveling Load Category		Total Weight W	Pay Load	Max. Towed Load	Max. Pintle Load
Empty	E		X		
Cross Country or Off Highway	C				
Laden or On Highway	H				

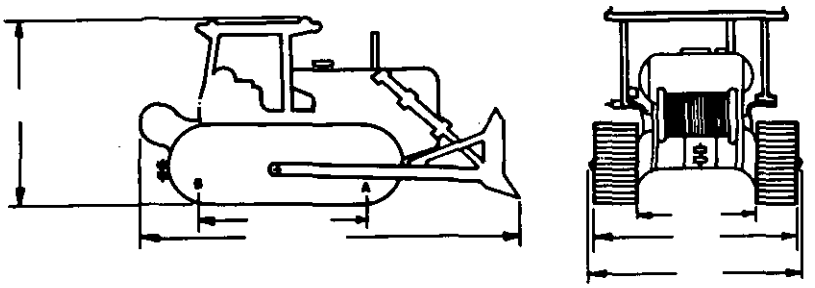

Load			
Traveling Load Category	A–B	psi A–B	Pintle Max.
Empty E			
Cross Country On or Off Highway C			
Laden or On Highway H			

All loads in short tons.
All loads to include weight of crew and appurtenances.
Class No's. for vehicles over 3,000 lbs.
Longitudinal dimensions in feet.
Vertical and transverse dimensions in inches.

FIGURE 3.

X-3190

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

3.6.2 Use Type I. The tractor shall be capable of efficient and reliable tractor operations to include dozing, ripping, cuts and fills, scraper pushing, V-ditching, pit excavation, sidehill cuts, and backfilling.

3.6.3 Use Type II. The tractor shall be capable of efficient and reliable tractor operations to include dozing, winching, cuts and fills, V-ditching, towing, pit excavation, backfilling, and sidehill cuts.

3.7 Performance.

3.7.1 Drawbar pull. In first gear at 1.1 mph on level ground with a 0.90 tractive coefficient, the fully serviced Type I tractor (equipped with semi-U-type blade, parallelogram type ripper with two shanks and a Roll-Over-Protective-Structure) shall be capable of a drawbar pull of not less than 53,500 pounds.

3.7.2 Dozing. The tractors shall be capable of performing all dozing operations. The Type I tractor shall be capable of dozing at a production rate of 6,000 loose-cubic-yards (lcy) per 10 hour shift on a zero grade, and a 100 foot dozing distance.

3.7.3 Ripping. The Type I tractor shall be capable of ripping materials which are considered too hard for dozing and scraper operations.

3.8 Safety. All rotating or reciprocating parts and all parts subject to high operational temperatures that are of such a nature or are so located as to be a hazard to the operating or maintenance personnel shall be substantially guarded or insulated to the extent necessary to eliminate the hazard as furnished on commercial tractors as standard or an option. Supplier's standard grab irons shall be provided.

3.8.1 Sound level. The exterior sound level of the tractor shall not exceed 88 dB(A) when measured in accordance with SAE J88. If the sound level in the area occupied by the operator exceeds 85dB(A) when measured in accordance with SAE J919, a warning plate containing the following shall be permanently affixed to the tractor in a conspicuous protected location. ("CAUTION: EAR PROTECTION REQUIRED WHEN TRACTOR IS OPERATING"). The plate shall have a yellow background with black lettering and shall be on corrosion-resistant material.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

3.8.2 Roll-Over-Protective-Structure (ROPS) and Falling-Object-Protective-Structure (FOPS). The tractor shall be equipped with a removable structure that meets SAE 1040 and SAE 231 for ROPS and FOPS requirements. The rear of the ROPS shall be covered by a protective screen. Front sweeps are not required. A seatbelt shall be installed.

3.9 Hydraulic system. The tractor shall be equipped with the contractor's standard commercial hydraulic system for either the Type I or Type II tractor as applicable and shall provide sufficient force and means for operating all attachments to include the dozer blades, rippers, and related components.

3.10 Electrical system. The tractor shall be equipped with a 24 volt cranking and lighting electrical system including a 50 amp alternator.

3.10.1 Lighting system. The tractor shall operate safely during the hours of darkness using the tractor mounted lighting system. This system shall have a minimum of four lights; two front mounted and two rear mounted.

3.11 Engine. The turbocharged diesel engine, including an air induction system, fuel system, oil cooler, exhaust system with muffler, cooling system with reversible fan, electrical starting system, and lubrication system shall be the contractor's standard engine for the tractor provided. The exhaust stack shall have a rain cap or be curved to prevent the entry of rain or snow. A master switch shall be furnished. Ether start system or glow plugs shall be furnished for starting at minus 25° F.

3.12 Fuel capacity. The tractor shall have a fuel tank of sufficient capacity for 8 hours of normal dozing operation without refueling.

3.13 Transmission. The transmission shall have full power shift between all gears and be in combination with a torque converter. The transmission (or transmission augmented by planetary steering transmission, if provided) shall provide not less than three forward and three reverse speeds, all of which shall be manually selected. A safety device shall be provided to prevent accidental movement of the tractor during starting.

3.14 Steering and braking. Steering and braking shall be accomplished by the contractor's standard systems.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

3.15 Track assemblies.

3.15.1 Tracks and track frames. All tracks and track frames shall be of the extreme service type and shall be the contractor's standard or optional tracks. Seven-roller track frames shall be furnished.

3.15.2 Track shoes and grousers. Track shoes and grousers shall be quarry service, severe or extreme service, not less than 24 inches in width.

3.15.3 Track roller guards. A heavy-duty inner and outer track roller guard shall be furnished for each track assembly. The guards shall provide continuous coverage for the full length of the track frame.

3.16 Sprocket guards. When spoke- or web-type sprockets are furnished, each sprocket shall be protected by an extreme service guard, completely covering the open portion.

3.17 Front idler guards. When spoke- or web-type front idlers are provided, an extreme service inner and outer guard shall be furnished to completely cover the open portion of each front idler above the track frame.

3.18 Tow hook. One or more of the contractor's standard or optional, heavy duty tow hooks shall be furnished on the front of the tractor.

3.19 Rock guards. The underside of the tractor shall be provided with extreme service or heavy-duty rock guards. The rock guards shall protect the engine, all drive line components, and transmission housings and, except for those portions which are part of the tractor frame, shall be removable.

3.20 Radiator guard. A heavy-duty or severe service radiator guard shall be furnished. A protective grid shall be furnished for the radiator core and mounted between the fan and radiator core.

3.21 Toolbox. A suitable lockable storage compartment(s) of sufficient size to hold all tools and equipment required for operation and operator maintenance shall be provided on the tractor.

3.22 Attachments. The following attachments and allied equipment shall be furnished with the tractor, as specified in 1.2 and 3.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

3.22.1 Bulldozer. The semi-U-tilt type dozer shall be hydraulically operated and consist of a reinforced moldboard with push plate, cutting edge(s), end bits, push beams, and adjusting struts. The push plate shall be not less than 38 inches high, 54 inches wide and 5/8 inch thick (skip or fully welded to the moldboard). The overall width, height, drop below ground, lift height and down pressure shall be the contractor's standard design for the dozer. Dozer operating controls shall be located in the operator's compartment. The hydraulic control mechanism shall provide the following movements: Lowering, raising, floating, holding, and tilting. The tilt cylinder may be located on either side of the dozer.

3.22.2 Angle dozer. The angle dozer shall consist of a heavy-duty moldboard, cutting edge(s), end bits, struts, and "C" frame. The overall width, height, drop below ground, and lift height shall be the contractor's standard for the dozer. The hydraulic control mechanism shall provide the following dozer movements: Raising, floating, holding, and lowering. The dozer shall provide for manual tilt and the blade angle to either side shall be at least 25 degrees.

3.22.3 Winch. The winch shall be a single drum, reversible, single speed, hydraulically controlled overwind towing winch. The bare drum line pull shall be not less than 80,000 pounds at a line speed of not less than 80 feet per minute. The winch brake shall have inchmeal control for lowering capacity loads. Winch controls shall be located in the operator's compartment of the tractor. A drawbar or towing coupler (including the standard pin and locking device) integral with the winch shall be furnished. Two-hundred feet of 1-1/8 inch wire rope with hook shall be furnished on the winch.

3.22.4 Ripper. The ripper shall be the parallelogram type and shall consist of a mounting bracket, fixed three shank carrier beam, two straight shanks (unless otherwise specified, see 6.2) with replaceable points, shank protector, have a digging depth of not less than 24 inches with two depth adjustments and hydraulic components necessary for satisfactory operation. The ripper shall provide sufficient force to lift the rear of the tractor clear of the ground and raise the ripper from maximum digging depth to the normal carry position. Ripper controls shall be located in the operator's compartment of the tractor. The ripper, in travel position, shall not be higher than the tractor and shall maintain the overall ground clearance when raised to maximum height.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

3.23 Identification plates and marking. The tractor shall be furnished with an identification plate showing the contractor's model number, NSN, serial number, date of manufacturer and date of delivery. The identification plate shall be permanently affixed to the tractor in a readily accessible and conspicuous location. Instruction or warning plates or decals shall be furnished and mounted. All attachments or components removed or disassembled for shipment shall be matchmarked for proper re-assembly. The tractor and each attachment shall be identified in accordance with the contractor's standard method.

3.24 Lubrication. A lubrication means shall be provided for all moving parts requiring lubrication. The tractor shall be serviced with military lubricants conforming to MIL-L-2104, MIL-L-2105, MIL-L-46167, MIL-M-7866, MIL-G-10924, and MIL-G-23827 as applicable.

3.25 Fungus and moisture resistance. Within the limits of the contractor's standard options, the electrical circuitry shall be protected from the effects of moisture and fungus growth.

3.26 Paint. Normal commercial cleaning, preparation, and priming procedures shall be followed. The finishing coat shall be in accordance with MIL-E-52798, forest green color.

3.27 Stenciling. The Army registration number, center of gravity, and the operating weight of the fully equipped tractor shall be stenciled on both sides of the tractor in such a manner as to be readily identifiable. The color of the stenciling shall be black.

3.28 Technical publications. Such technical publications as are specified (see 6.2) shall be furnished.

3.29 Special tools. Special tools required for operation of the tractor by the operator shall be overpacked with the tractor.

3.30 Basic issue items. Unless otherwise specified, each item in the Basic Issue Item List shall be furnished with each tractor (see 6.2).

3.31 Technical Information Package. The contractor shall complete and submit a Technical Information Package within the time frame specified (see 6.2), depicting the tractor and its components exactly as it will be furnished. The Technical Information Package shall be submitted with all bids and proposals.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

3.32 Government-furnished property. The following items shall be furnished by the Government (see 6.4):

(a) Container complete with logbook, binder, and forms. (The tractor contractors shall furnish the fasteners and shall install the container on the tractor.)
(b) Vehicle classification sign kit. The contractor shall furnish the fasteners and shall install the kit on the tractor.
(c) User Maintenance Support Plan.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

(a) Preproduction inspection (see 4.3).
(b) Quality conformance inspection (see 4.4).

4.3 Preproduction inspection. The first article (preproduction model) tractors (see 6.2), furnished by the contractor shall be examined (see 4.3.1), and demonstrated (see 4.3.2), to determine compliance with the requirements of this specification. Prior to the examination and demonstration of the tractors, the following shall be performed:

(a) Service the tractors with the lubricants specified.
(b) Limber up the tractors as prescribed by the contractor.

4.3.1 Preproduction examination. Prior to the preproduction demonstration, the tractor shall be examined for the defects marked "X" in Column 1 of Table I. Presence of one or more defects shall be cause for rejection. Prior to the preproduction demonstration the tractor shall be examined and compared with this specification, with the contractor's

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

published brochures, with the manuals, and with the completed questionnaire. Any discrepancy between the specification, brochures, manuals, or questionnaire and the preproduction model shall be cause for rejection. Prior to the preproduction demonstration, the calculations, certifications, and certified test reports required by 4.5.2.7, 4.5.2.8, and 4.5.2.9 shall be examined. Incomplete, inaccurate, or otherwise unacceptable calculations, certifications, or certified demonstration reports shall be cause for rejection.

4.3.2 Preproduction demonstration. Upon successful completion of the examination specified in 4.3.1, the preproduction model tractors shall be subjected to the demonstrations marked "X" in Column 1 of Table II. Failure of any test reports shall be cause for rejection.

4.4 Quality conformance inspection.

4.4.1 Individual examination. After successful completion of the demonstration specified in 4.4.2, each tractor shall be examined for the defects marked "X" in Column 2 of Table I. Presence of one or more defects shall be cause for rejection.

4.4.2 Individual demonstration. Each tractor shall be demonstrated as specified in Column 2 of Table II. Failure of any demonstration shall be cause for rejection.

4.5 Inspection schedule.

4.5.1 Examination. The examination shall be in accordance with Table I.

4.5.2 Demonstrations. Demonstrations shall be conducted in accordance with Table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

Table I. Examination Schedule

Preproduction Model(s)	Individual	Defect	Requirement Paragraph
1	2	3	4
X	-	101. Track gage not as specified.	3.3.2
X	-	102. Ground clearance not as specified.	3.3.3
X	X	103. Transportability requirements not as specified.	3.3.5
X	X	104. Safety requirements not as specified.	3.8
X	X	105. Sound level warning plate not as specified.	3.8.1
X	X	106. Hydraulic system not as specified.	3.9
X	X	108. Engine not as specified.	3.11
X	-	109. Fuel capacity not as specified.	3.12
X	X	110. Transmission not as specified.	3.13
X	X	111. Steering and braking system not as specified.	3.14
X	X	112. Track assemblies not as specified.	3.15
X	X	113. Sprocket guards not as specified	3.16
X	X	114. Front idler guards not specified.	3.17
X	X	115. Tow hook not as specified.	3.18
X	X	116. Rock guards not as specified.	3.19
X	X	117. Radiator guard not as specified.	3.20
X	X	118. Toolbox not as specified.	3.21
X	X	119. Bulldozer not as specified.	3.22.1
X	X	120. Angle dozer not as specified.	3.22.2
X	X	121. Winch not as specified.	3.22.3
X	X	122. Ripper not as specified.	3.22.4
X	X	123. Identification plates and marking not as specified.	3.23
X	X	124. Lubrication not as specified.	3.24
X	X	125. Fungus and moisture resistance not as specified.	3.25

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

Table I. Examination Schedule (Cont'd)

1	2	3	4
X	X	126. Paint not as specified.	3.26
X	X	127. Stenciling not as specified.	3.27
X	X	128. Technical publications not as specified.	3.28
X	X	129. Special tools not as specified.	3.29
X	-	130. Technical Information Package incomplete or not up to date.	3.31
X	X	131. Government-furnished equipment not installed.	3.32
X	X	132. Parts or components missing.	Section 3
X	X	133. Assembly incomplete or incorrect.	Section 3
X	X	134. Cracked or broken parts or assemblies.	Section 3
X	X	135. Leaks in coolant, fuel, or oil lines.	Section 3
X	X	136. Permanent deformation of any part or assembly.	Section 3
-	X	137. Material not of same quality as used on preproduction model.	Section 3
X	X	138. Tractors not as specified.	Section 3

Table II. Demonstration Schedule

Preproduction Model	Individual	Test	Test Paragraph	Requirement Paragraph
X	-	Weights	4.5.2.1	3.3.1
X	-	Drawbar Pull	4.5.2.2	3.7.1
X	-	Sound Level	4.5.2.3	3.8.1
X	-	Dozing	4.5.2.4	3.7.2
X	-	Ripping	4.5.2.5	3.7.3
X	-	Winch	4.5.2.6	3.22.3
X	X	Production Run-In	4.5.2.10	Section 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

4.5.2.1 Weight. The weight of the tractors shall be measured with a scale calibrated within 6 months of test. Inability to meet the requirements of 3.3.1 shall constitute failure of this demonstration.

4.5.2.2 Drawbar pull. Tractor drawbar pull shall be demonstrated as as specified in 3.7.1. Inability to meet the requirements as specified shall constitute failure of this demonstration.

4.5.2.3 Sound level. Measure the sound level on both the Type I and Type II tractors. Nonconformance to the requirements of 3.8.1 shall constitute failure of this demonstration.

4.5.2.4 Dozing. Perform dozing operation with the Type I tractor for 30 hours and the Type II tractor for 15 hours. Inability of the Type I tractor to meet the requirements of 3.7.2 or the Type II tractor to perform satisfactorily shall be cause for rejection. The production data and production rate for both the Type I and Type II tractors shall be included in the first article report.

4.5.2.5 Ripping. Perform ripping operation with the Type I tractor for 5 hours in the most severe soil conditions available at the demonstration site using two shanks adjusted to a minimum depth of 20 inches in accordance with 3.7.3. Inability of the ripper to perform as specified shall constitute failure of this demonstration.

4.5.2.6 Winching. Perform winch operation with the Type II tractor for 2 hours by intermittently applying a bare drum line pull of not less than 80,000 pounds at a line speed of not less than 80 feet per minute. Inability of the winch to meet the requirements of 3.22.3 shall constitute failure of this demonstration.

4.5.2.7 Calculations. The contractor shall furnish calculations proving compliance with the fuel capacity requirements of 3.12. Nonconformance shall constitute failure of this demonstration.

4.5.2.8 Certification. The contractor shall certify that the tractor complies with the requirements of 3.3.4, 3.3.5, and 3.6.1. Nonconformance shall constitute failure of these demonstrations.

4.5.2.9 Certified test reports. The contractor shall furnish certified test reports to prove compliance with the ROPS and FOPS requirements of 3.8.2. If certified test reports are not available the ROPS and FOPS shall be demonstrated to prove compliance with 3.8.2. Nonconformance shall constitute failure of these reports and demonstrations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

4.5.2.10 Production run-in. Start and operate each tractor for not less than 2 hours on a skid plate, or on a test track, to assure operation of all components and to allow for minor adjustments. All controls and attachments shall be manipulated and the tractor shall be operated in each gear selection in both forward and reverse directions. Evidence of contamination, leakage, permanent deformation, malfunction, or damage to the hydraulic system or other tractor components, or inability of any tractor control or component to operate as specified shall be cause for rejection of the tractor by the Government until corrected to the Government's satisfaction. The Government may require additional run-in after the deficiency is corrected. Any defect found during production run-in shall be prima facie evidence that tractors previously accepted are similarly defective unless evidence, satisfactory to the contracting officer, is furnished by the contractor that they are not similarly defective.

5. PACKAGING

5.1 Preservation, packing, and marking. The tractor and all items issued with the tractor shall be suitably preserved and packed for retail distribution directly to a using customer and in a manner to assure carrier acceptance and safe delivery to destination at lowest rating in compliance with requirements of carrier rules and regulations applicable to the mode of transportation. In addition, the following specific requirements shall be accomplished. Items with critical surfaces required for fit or function shall be provided protection by the use of preservative coatings, volatile corrosion inhibitors, or dessicated packs. Items requiring protection from physical damage to surfaces, or which are fragile by nature shall be protected by wrapping, pack compartmentization, or cartonizing of the individual item. The cooling system shall be filled with a fresh clean solution of 50 percent water and 50 percent antifreeze conforming to MIL-A-46153, and a tag attached indicating the temperature to which the cooling system can be subjected before damage. All lubrication reservoirs, sumps, etc., shall be filled to the operating level with the grade of military lubricant designated for use in the temperature range at the shipping destination. A tag shall be attached in a conspicuous location to indicate which military lubricant has been used, the temperature range of lubricant used and grade of lubricant used. A deprocessing guide shall be furnished indicating in detail the preservation and packaging materials to be removed and any other servicing required prior to placing the tractor in operation. Marking shall reflect, as a minimum, the item name, National Stock Number, contract or purchase order number, and appropriate address markings on each unpacked item or shipping container. The marking shall be applied with a waterproof ink and shall provide a definite contrast.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. The tractors are intended for dozing, ripping, scraper pushing, V-ditching, pit excavation, backfilling, winching, towing, and sidehill excavation.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Type tractor required (see 1.2).
(c) Time frame for submission of preproduction model(s) (see 3.4).
(d) Preproduction models required:
  (1) One Type I tractor.
  (2) One Type II tractor.
(e) Number of ripper shanks required for the Type I tractor (see 3.2).
(f) Technical publications required (see 3.28).
(g) When Basic Issue Items are not to be furnished (see 3.30).
(h) Time frame for completing and submitting a Technical Information Package (see 3.31).
(i) Time frame for submission of Vehicle Classification Sheet and application of kits (see 3.3.5 and 3.32).
(j) Winterization kits required (see 3.6.1).

6.3 Government-furnished property. The contracting officer should arrange to furnish the property specified in 3.32.

Custodian:
Army - ME

Preparing activity:
Army - ME

Project 2410-A037

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
US Army Mobility Equipment Research
and Development Command
ATTN: DRXFB-DS
Ft. Belvoir, VA 22060

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE MIL-T-52907(ME) Tractors, Full-Tracked, Low Speed, DED Heavy Drawbar Pull, Size T-11 Commercial Construction Equip (CCE)

NAME OF ORGANIZATION AND ADDRESS	CONTRACT NUMBER
	MATERIAL PROCURED UNDER A ☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?
   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*	TELEPHONE NO.
	DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.