MILITARY SPECIFICATION SHEET

FUSE BOXES, FEEDER DISTRIBUTION, TOTALLY ENCLOSED, 450 VOLTS, ALTERNATING CURRENT, THREE PHASE BUSES, SINGLE AND THREE PHASE BRANCHES, 0-30 AND 31-60 AMPERE FUSES, SYMBOLS 543, 544, 545, 546 and 547

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the fuse boxes described herein shall consist of this document and the latest issue of MIL-F-24646(SH).

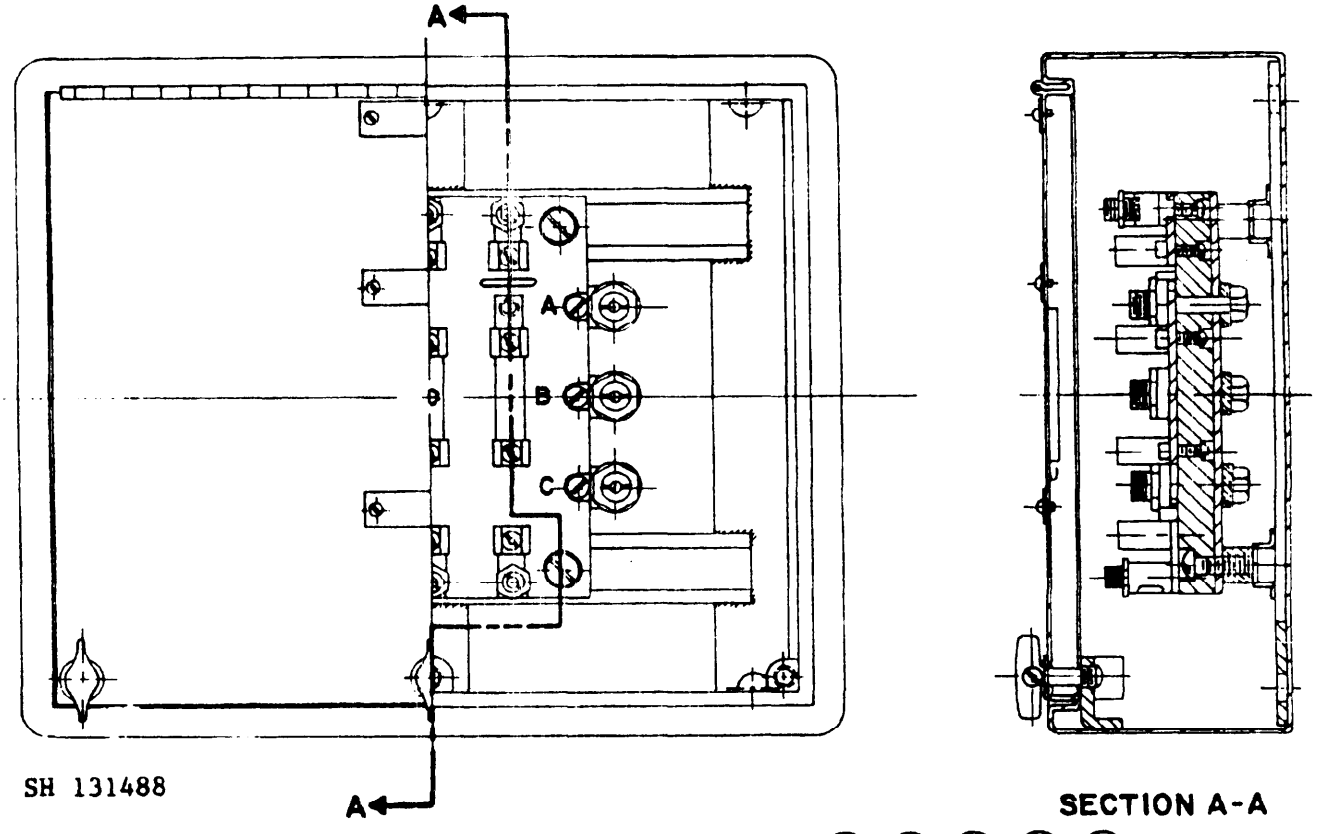


FIGURE 1. Fuse box assembly, typical. 01 02 03 04 05
(Symbol 543 shown)

NOTES:

1. Dimensions are in inches.
2. Unless otherwise specified herein, tolerances shall be as follows:
   Two place decimals - plus or minus 0.02.
   Three place decimals - plus or minus 0.005.

FSC 5920

Source: https://assist.dla.mil -- Downloaded: 20261O-20T00:28Z
Check the source to verify that this is the current version before use.

SYMBOL NO	DIMENSIONS (REF) A	B	C
543	14.16	12.16	4.75
544	18.16	12.16	4.75
545	22.16	12.16	4.75
546	18.16	14.16	4.75
547	22.16	14.16	4.75


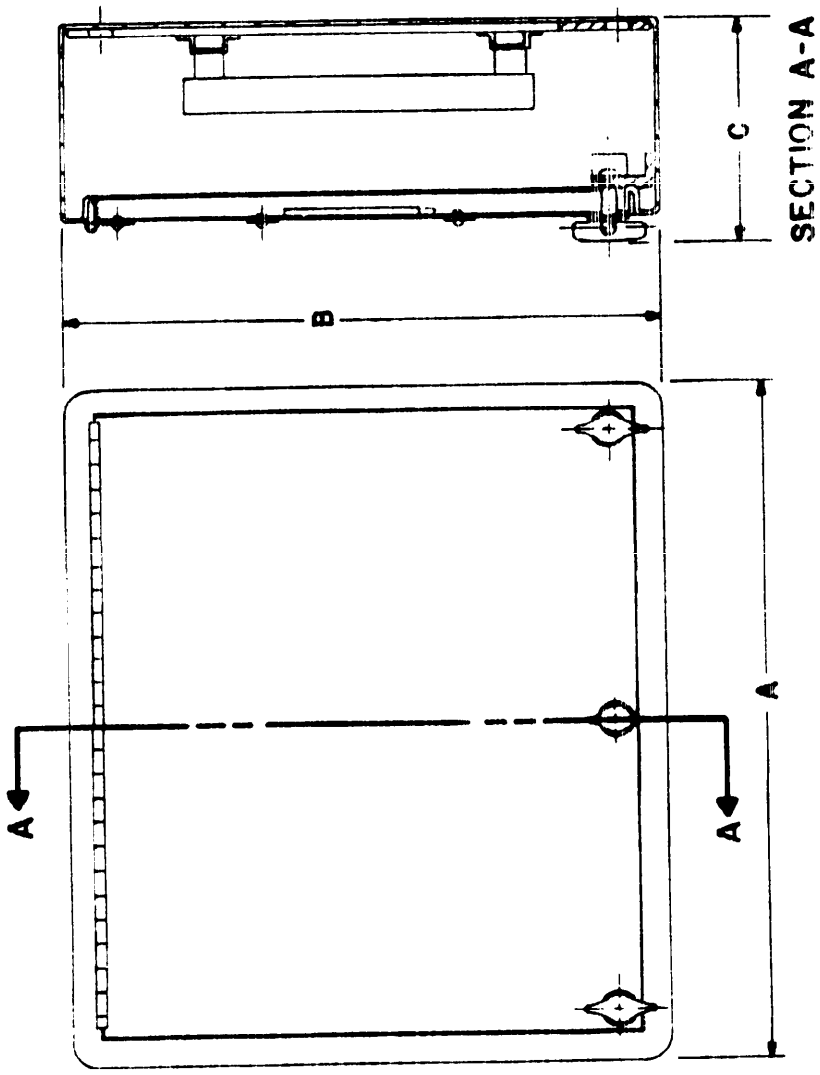


FIGURE 2. Enclosure, overall dimensions. (06) (07) (08) (09)
(Symbols 543, 544, 545, 546 and 547)

SH 131489


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:28Z
Check the source to verify that this is the current version before use.

SYMBOL NO	DIMENSIONS A	B
543	5.50	11.00
544	7.00	14.00
546	6.00	12.00

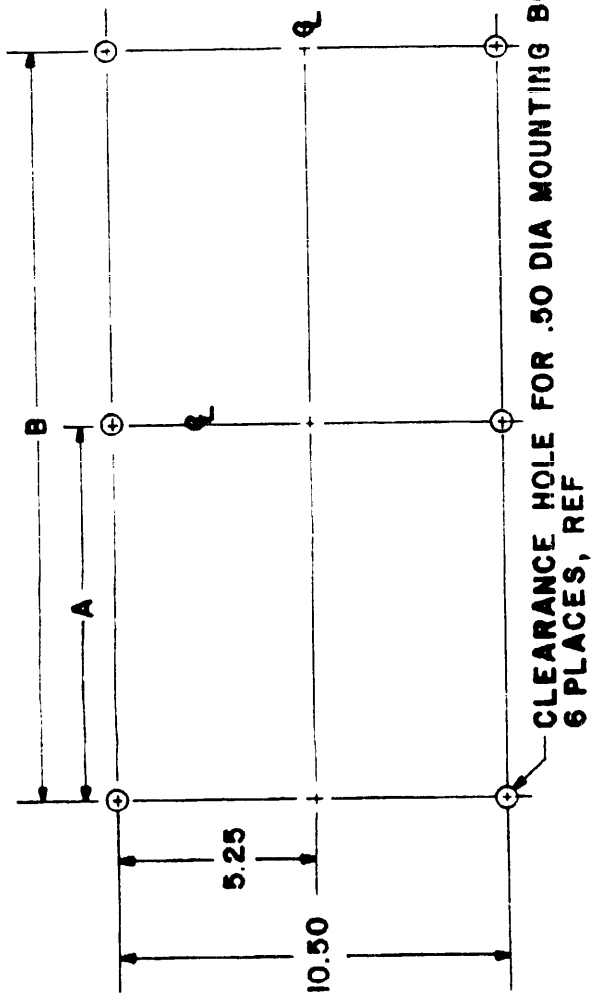

A. Symbols 543, 544 and 546

SYMBOL NO	DIMENSIONS A	B
545	5.25	10.50
547	6.25	12.50

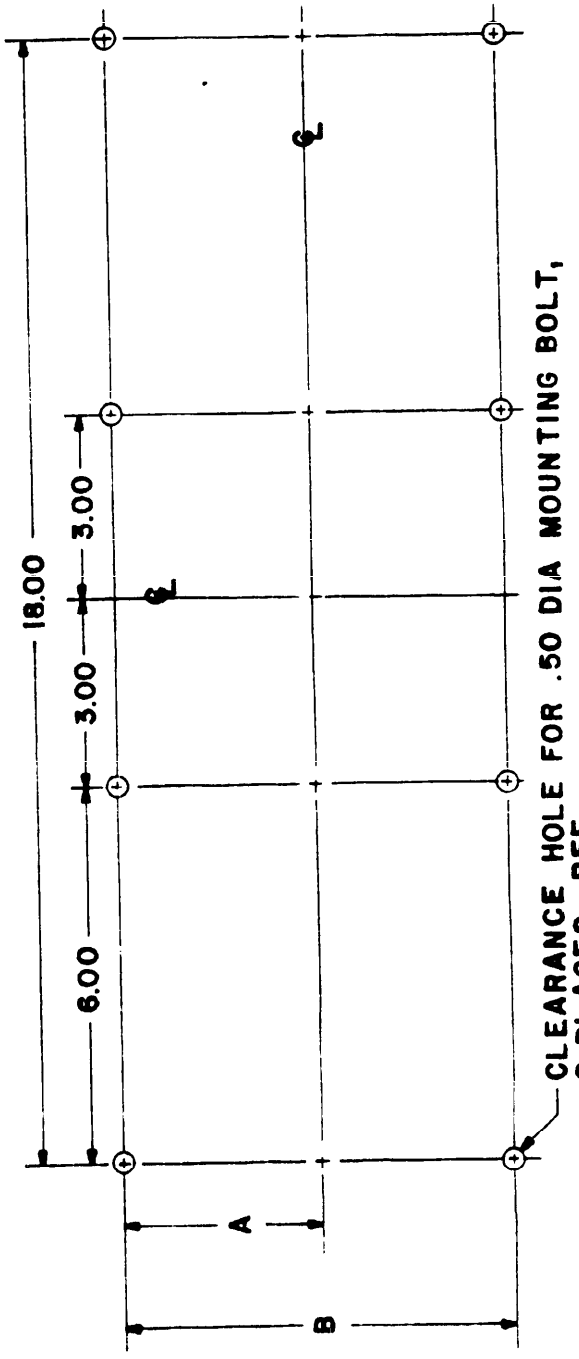


B. Symbols 545 and 547

FIGURE 3. Mounting dimensions, ref.

SH 131490

Source: https://assist.dla.mil -- Downloaded: 202610-20T00:28Z
Check the source to verify that this is the currentversion before use.

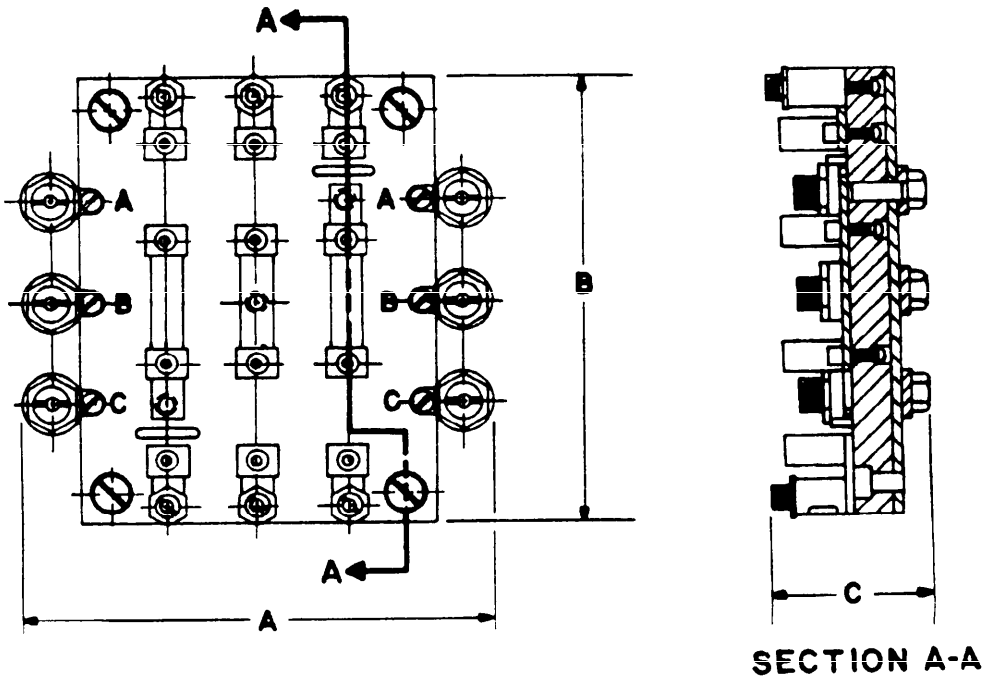


SYMBOL NO	DIMENSIONS(MAX) A	B	C
543	7.62	7.12	2.80
544	11.62	7.12	2.80
545	16.12	7.12	2.70
546	8.62	8.19	2.80
547	14.12	8.38	2.80

SH 131491


FIGURE 4. Fuse block assembly, typical. (10) (11) (12) (13) (14)

(Symbols 543, 544, 545, 546 and 547)


Source: https://assist.dla.mil -- Downloaded: 2026l0-20T00:28Z
Check the source to verify that this is the currentversion before use.

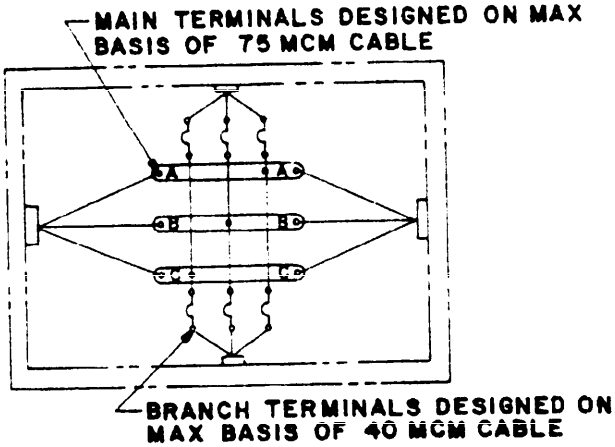


A. Two 3-phase branches (Symbol 543)

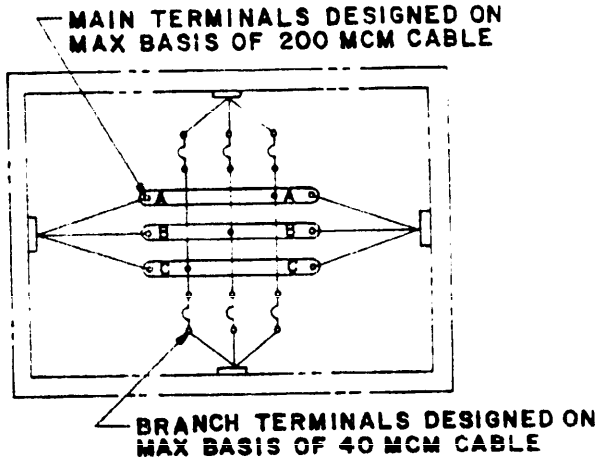


B. Two 3-phase branches (Sym 546)

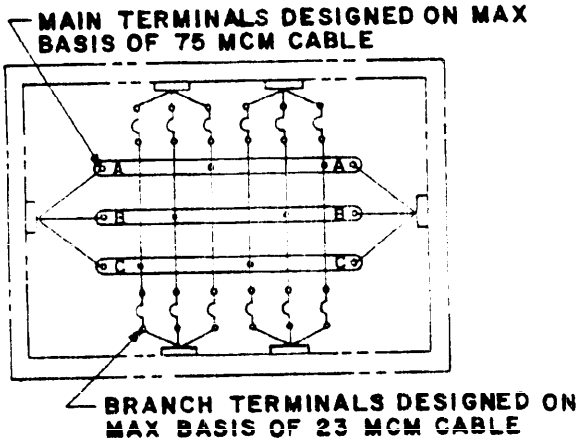


C. Four 3-phase branches (Symbol 544)

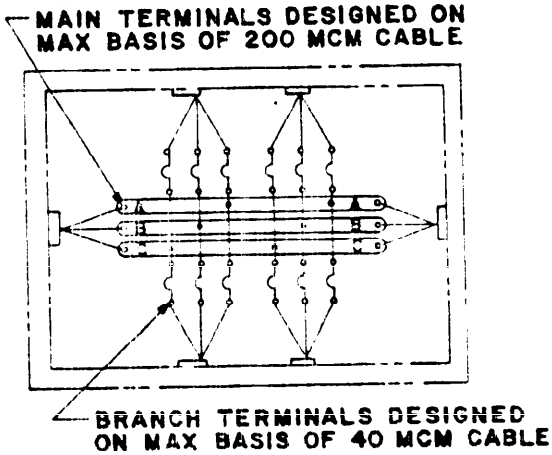

D. Four 3-phase branches (Symbol 547)

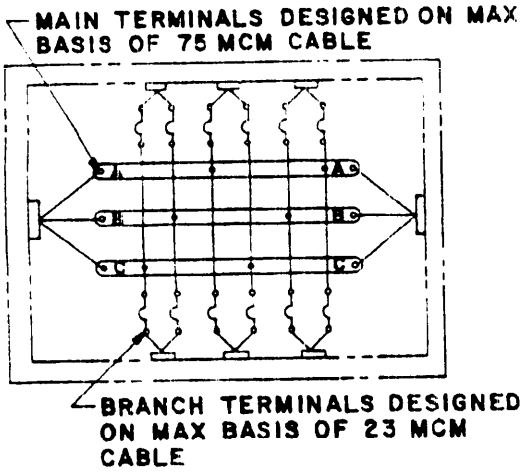

E. Six single-phase branches (Symbol 544)

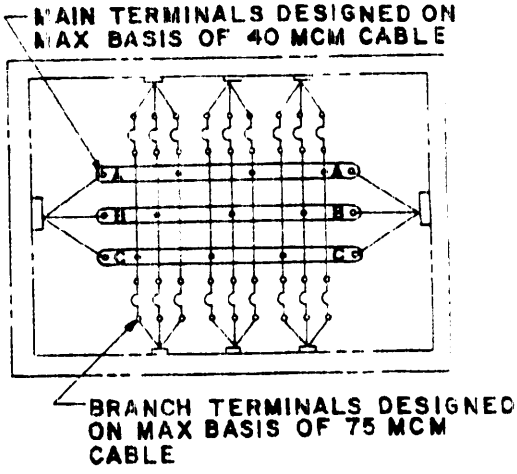

F. Six 3-phase branches (Symbol 545)

SH 131492

FIGURE 5. Wiring diagrams. (15) (16) (17) (18) (19)

Source: https://assist.dla.mil -- Downloaded: 202610-20T00:28Z
Check the source to verify that this is the currentversion before use.

REQUIREMENTS:

Symbol numbers: See table I.

Design:

Electrical rating: 450 volts alternating current, 0-30 and 31-60 ampere, 60 hertz.
Dimensions and configuration: See figures 1, 2, 3 and 4.
Wiring diagrams: See figure 5.
Mounting dimensions: See figure 3.
Degree of enclosure: Totally enclosed.
Designation and marking: See MIL-F-24646(SH).
Parts: The parts listed in table II and specified in MIL-F-24646(SH) shall be used in the construction of the fuse boxes specified herein.

General information:

Military part numbers and general information are as specified in table I.

TABLE I. Military part numbers and general information.

Military part no.	Symbol no.	Weight in pounds	No. of circuits	Feeder MCM	Branch MCM	Fuse size	Bus bar size	Supersedes	
								Drawing no.	Type
M24646/4-001	543	14.0	2	75	40	0-30A	1.00 x 0.25	9-S-4875-L	-
M24646/4-002	544	23.1	4 6	75	23	0-30A 0-30A	.75 x .25	9-S-4876-L	-
M24646/4-003	545	28.8	6	75	23	0-30A	.75 x .19	9-S-4877-L	-
M24646/4-004	546	28.6	2	200	40	31-60A	1.00 x .25	9000-S-6202-73215	E E-1
M24646/4-005	547	40.8	4	200	40	31-60A	1.00 x .25	9000-S-6202-73216	-

Source: https://assist.dla.mil -- Downloaded: 202610-20T00:28Z
Check the source to verify that this is the current version before use.

TABLE II. Parts list.

Item no.1/	Description	QTY M /-					Material/spec	Remarks
		001	002	003	004	005		
01	Fuse box assembly (sym 543)	-					MIL-F-24646/4	See figure 1
02	Fuse box assembly (sym 544)		-				MIL-F-24646/4	See figure 1
03	Fuse box assembly (sym 545)			-			MIL-F-24646/4	See figure 1
04	Fuse box assembly (sym 546)				-		MIL-F-24646/4	See figure 1
05	Fuse box assembly (sym 547)					-	MIL-F-24646/4	See figure 1
06	Enclosure (12 x 14 x 4)	1					M24142/16-004	See figure 2
07	Enclosure (12 x 18 x 4)		1				M24242/16-006	See figure 2
08	Enclosure (12 x 22 x 4)			1			M24142/18-004	See figure 2
09	Enclosure (14 x 22 x 4)				1	1	M24142/18-005	See figure 2
10	Fuse block assembly	1					MIL-F-24646/4	See figure 4
11	Fuse block assembly		1				MIL-F-24646/4	See figure 4
12	Fuse block assembly			1			MIL-F-24646/4	See figure 4
13	Fuse block assembly				1		MIL-F-24646/4	See figure 4
14	Fuse block assembly					1	MIL-F-24646/4	See figure 4
15	Wiring diagram	1					MIL-E-2036	See figure 5
2/16	Wiring diagram		2				MIL-E-2036	See figure 5
17	Wiring diagram			1			MIL-E-2036	See figure 5
18	Wiring diagram				1		MIL-E-2036	See figure 5
19	Wiring diagram					1	MIL-E-2036	See figure 5
21	Fuse clip (0-30A)	2	24	36	-	-	M21346/1-06	----
22	Fuse clip (31-60A)	-	-	-	12	24	M21346/1-08	----
23	Identification plate	1	1	1	1	1	Brass, QQ-B-613	----
24	Information plate	2	2	4	4	6	Brass, QQ-B-613	----

1/ Numbers in circles shown on the figures are the same as the item numbers shown in this table.

2/ Unless otherwise specified, both single phase and three phase wiring diagrams shall be furnished.

Preparing activity:
Navy - SH
(Project 5920-N163-4)

Source: https://assist.dla.mil -- Downloaded: 20261O-20T00:28Z
Check the source to verify that this is the currentversion before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:28Z
Check the source to verify that this is the current version before use.