
MILITARY SPECIFICATION SHEET

FUSE BOXES, FEEDER DISTRIBUTION, SUBMERSIBLE (15 FEET), 125 VOLTS, ALTERNATING CURRENT, SINGLE PHASE BUSES, 0-30 AMPERE MIDGET FUSES, SYMBOLS 635.1, 653.1 AND 654.1

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the fuse boxes described herein shall consist of this document and the latest issue of MIL-F-24646(SH).

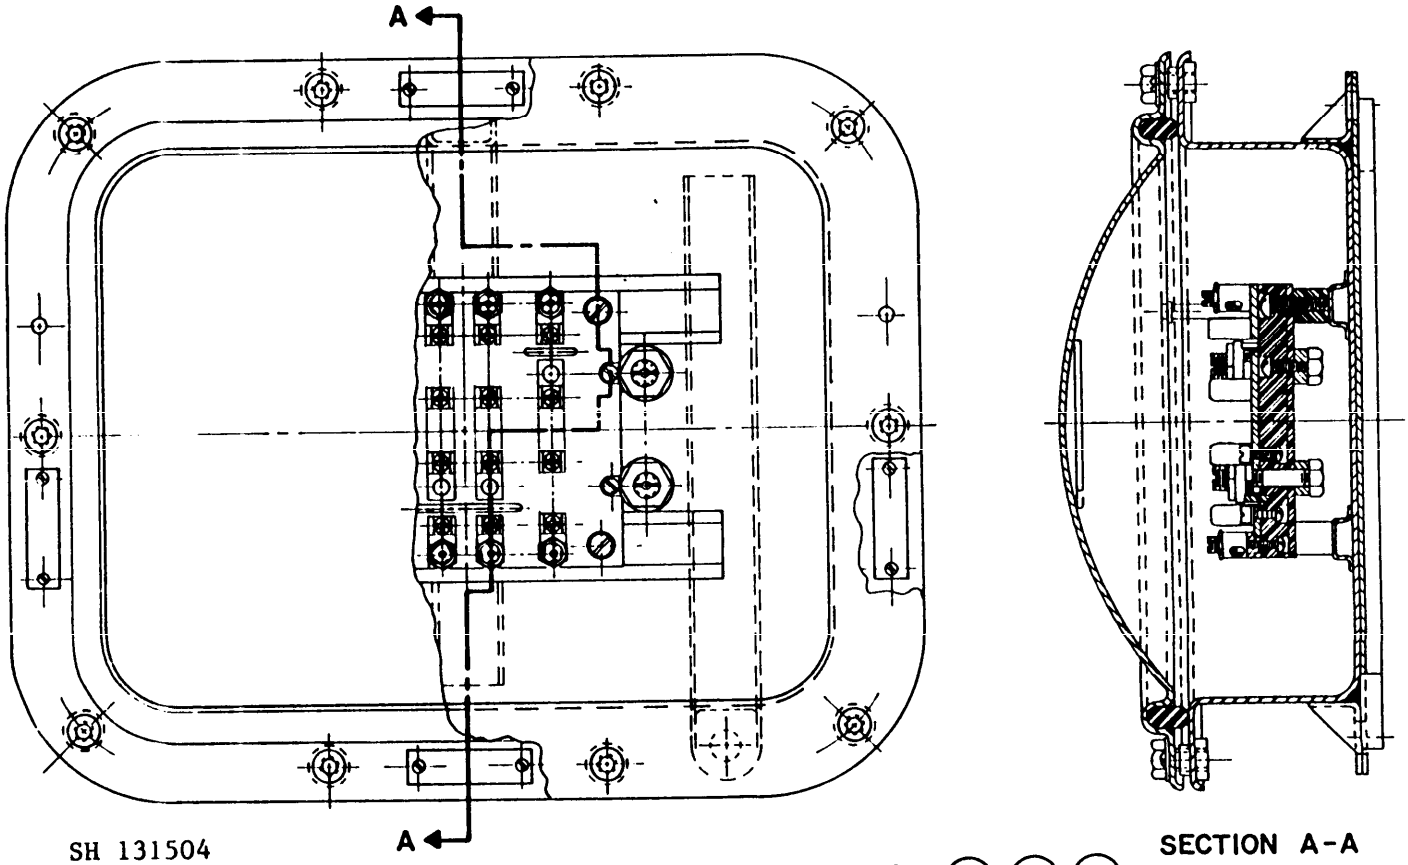

SH 131504

FIGURE 1. Fuse box assembly, typical. (01) (02) (03)
(Symbol 635.1 shown)

NOTES:

1. Dimensions are in inches.
2. Unless otherwise specified herein, tolerances shall be as follows:
   Two place decimals - plus or minus 0.02.
   Three place decimals - plus or minus 0.005.

FSC 5920

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:31Z
Check the source to verify that this is the current version before use.

SYMBOL NO	DIMENSIONS (REF) A	B	C
635.1	16.38	13.38	5.62
654.1	19.38	13.38	5.62
653.1	27.38	15.38	5.62


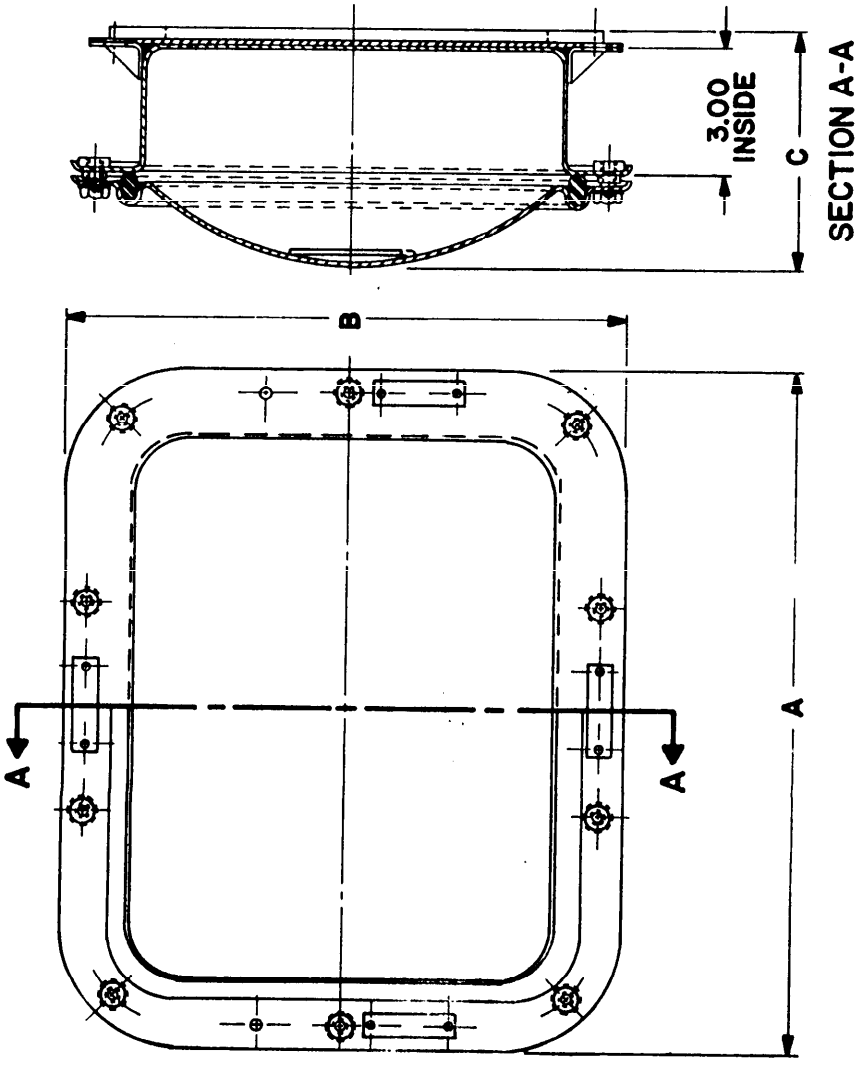



FIGURE 2. Enclosure, overall dimensions. (04) (05) (06)
(Symbols 635.1, 654.1 and 653.1)

SH 131505

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:31Z
Check the source to verify that this is the current version before use.

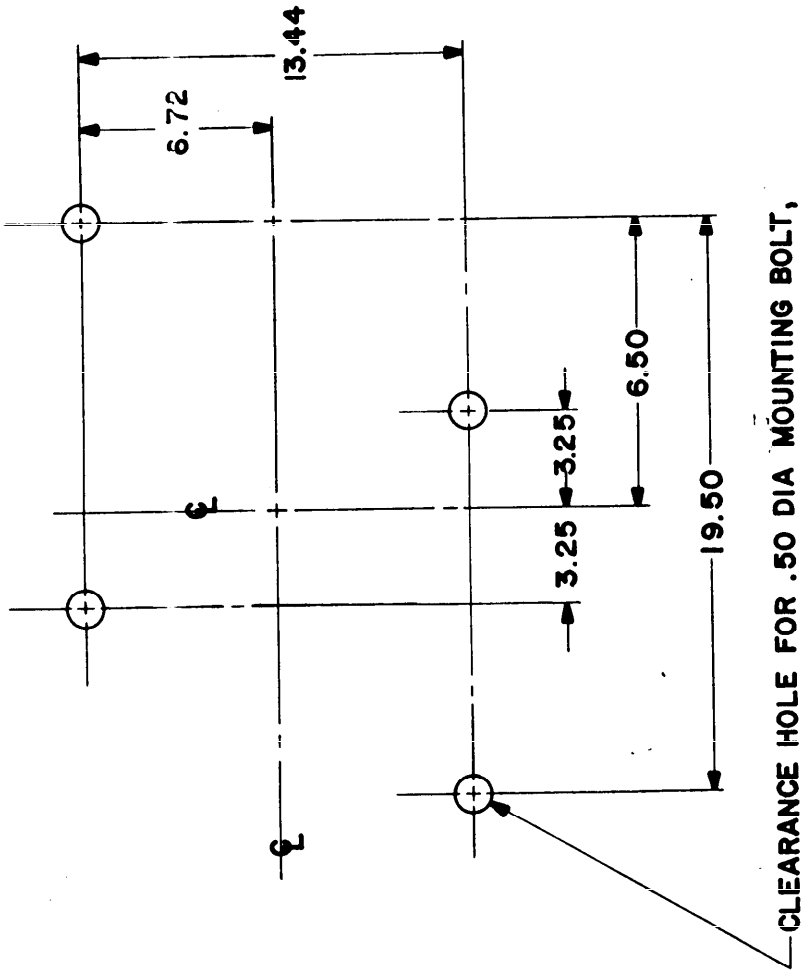

B. Symbol 653.1

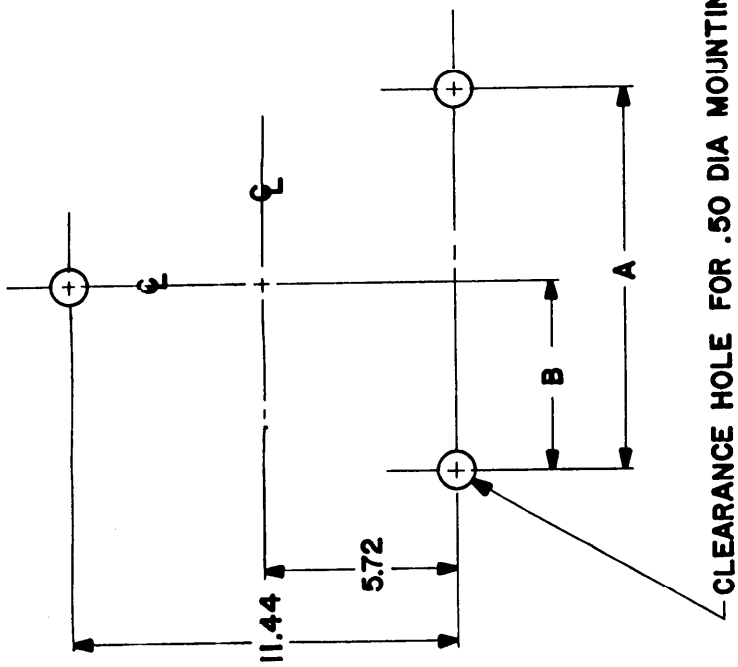


SYMBOL NO	DIMENSIONS	
	A	B
635.1	9.25	4.62
654.1	11.75	5.88

A. Symbols 635.1, and 654.1

FIGURE 3. Mounting dimensions, ref.

SH 131506

Source: https://assist.dla.mil -- Downloaded: 202610-20T00:31Z
Check the source to verify that this is the currentversion before use.

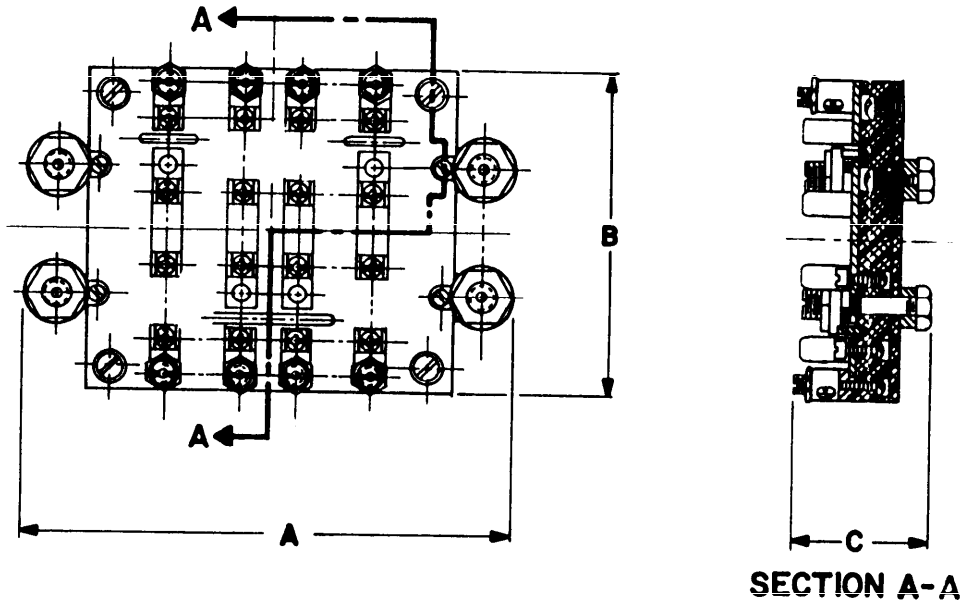


SYMBOL NO	DIMENSIONS (MAX)		
	A	B	C
635.1	7.25	5.00	2.30
654.1	12.38	5.00	2.30
653.1	20.00	6.38	2.30

SH 131507


FIGURE 4. Fuse block assembly, typical. (07) (08) (09)

(Symbols 635.1, 654.1 and 653.1)


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:31Z
Check the source to verify that this is the current version before use.

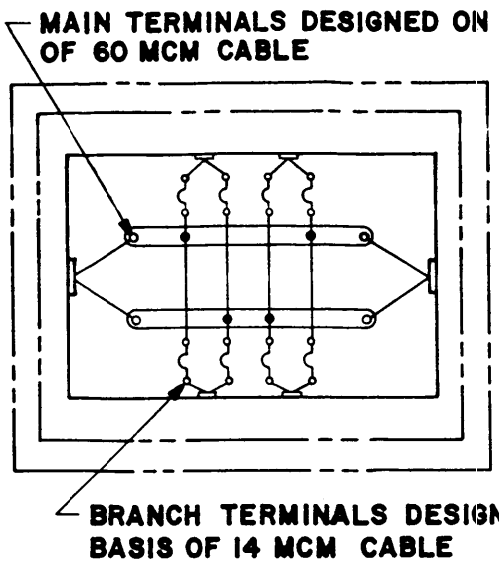

A. Four single-phase branches
(Symbol 635.1)

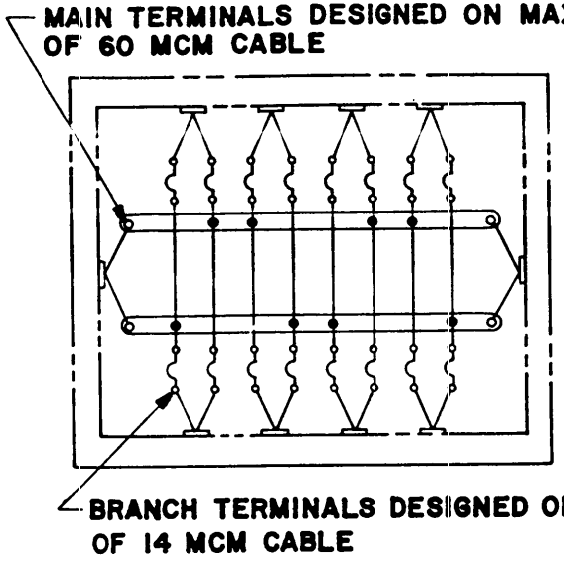

B. Eight single-phase branches
(Symbol 654.1)

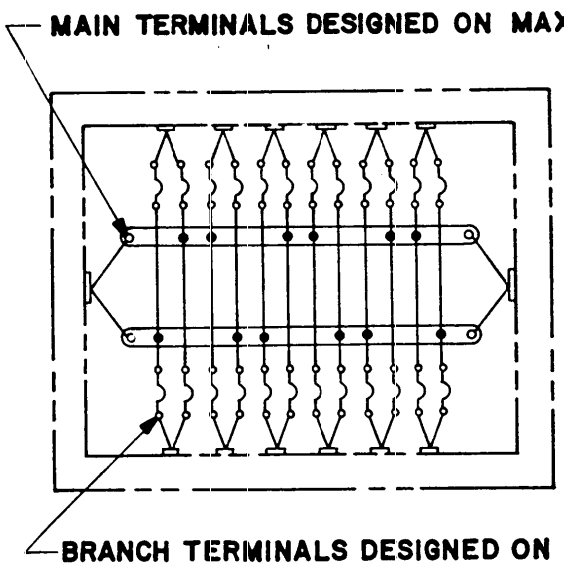

C. Twelve single-phase branches
(Symbol 653.1)

SH 131508

FIGURE 5. Wiring diagrams. (10) (11) (12)

Source: https://assist.dla.mil -- Downloaded: 2026-02-20T00:31Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Symbol numbers: See table I.

Design:

Electrical rating: 125 volts alternating current, 0-30 ampere, 60 hertz.
Dimensions and configuration: See figures 1, 2, 3 and 4.
Wiring diagrams: See figure 5.
Mounting dimensions: See figure 3.
Degree of enclosure: Submersible (15 feet).
Designation and marking: See MIL-F-24646(SH).
Parts: The parts listed in table II and specified in MIL-F-24646(SH) shall be used in the construction of the fuse boxes specified herein.

General information:

Military part numbers and general information are as specified in table I.

TABLE I. Military part numbers and general information.

Military part no.	Symbol no.	Weight in pounds	No. of circuits	Feeder MCM	Branch MCM	Fuse size	Bus bar size	Supersedes	
								Drawing no.	Type
M24646/7-001	635.1	23.5	4	60	14	midget 0-30A	0.62 x 0.25	9-S-74200	-
M24646/7-002	654.1	33.3	8	60	14	midget 0-30A	.62 x .25	9-S-5305	XXXV
M24646/7-003	653.1	52.6	12	75	14	midget 0-30A	.62 x .25	9-S-5306	XXXV

Source: https://assist.dla.mil -- Downloaded: 20260-20T00:31Z
Check the source to verify that this is the current version before use.

TABLE II. Parts list.

Item no. 1/	Description	QTY M /- 001	002	003	Material/spec	Remarks
01	Fuse box assembly (sym 635.1)	-			MIL-F-24646/7	See figure 1
02	Fuse box assembly (sym 654.1)		-		MIL-F-24646/7	See figure 1
03	Fuse box assembly (sym 653.1)			-	MIL-F-24646/7	See figure 1
2/04	Enclosure (10 x 13 x 3)	1			M24142/6-004	See figure 2
2/05	Enclosure (10 x 16 x 3)		1		M24242/6-005	See figure 2
2/06	Enclosure (12 x 24 x 3)			1	M24142/6-010	See figure 2
07	Fuse block assembly	1			MIL-F-24646/7	See figure 4
08	Fuse block assembly		1		MIL-F-24646/7	See figure 4
09	Fuse block assembly			1	MIL-F-24646/7	See figure 4
10	Wiring diagram	1			MIL-E-2036	See figure 5
11	Wiring diagram		1		MIL-E-2036	See figure 5
12	Wiring diagram			1	MIL-E-2036	See figure 5
13	Fuse clip (midget 0-30A)	16	32	48	M21346/1-04	----
14	Identification plate	1	1	1	Brass, QQ-B-613	----
15	Information plate	4	8	12	Brass, QQ-B-613	----

1/ Numbers in circles shown on the figures are the same as the item numbers shown in this table.
2/ Enclosure is same as MIL-E-24142/6(SH), except for inside depth which is 3 inches instead of 5 inches shown.

Preparing activity:
Navy - SH
(Project 5920-N163-7)

Source: https://assist.dla.mil -- Downloaded: 202610-20T00:31Z
Check the source to verify that this is the current version before use.