
MILITARY SPECIFICATION SHEET

FUSE BOXES, FEEDER DISTRIBUTION, TOTALLY ENCLOSED, 500 VOLTS, DIRECT CURRENT, TWO WIRE BUSES, 0-30 AND 31-60 AMPERE FUSES, SYMBOLS 626 and 627

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the fuse boxes described herein shall consist of this document and the latest issue of MIL-F-24646(SH).

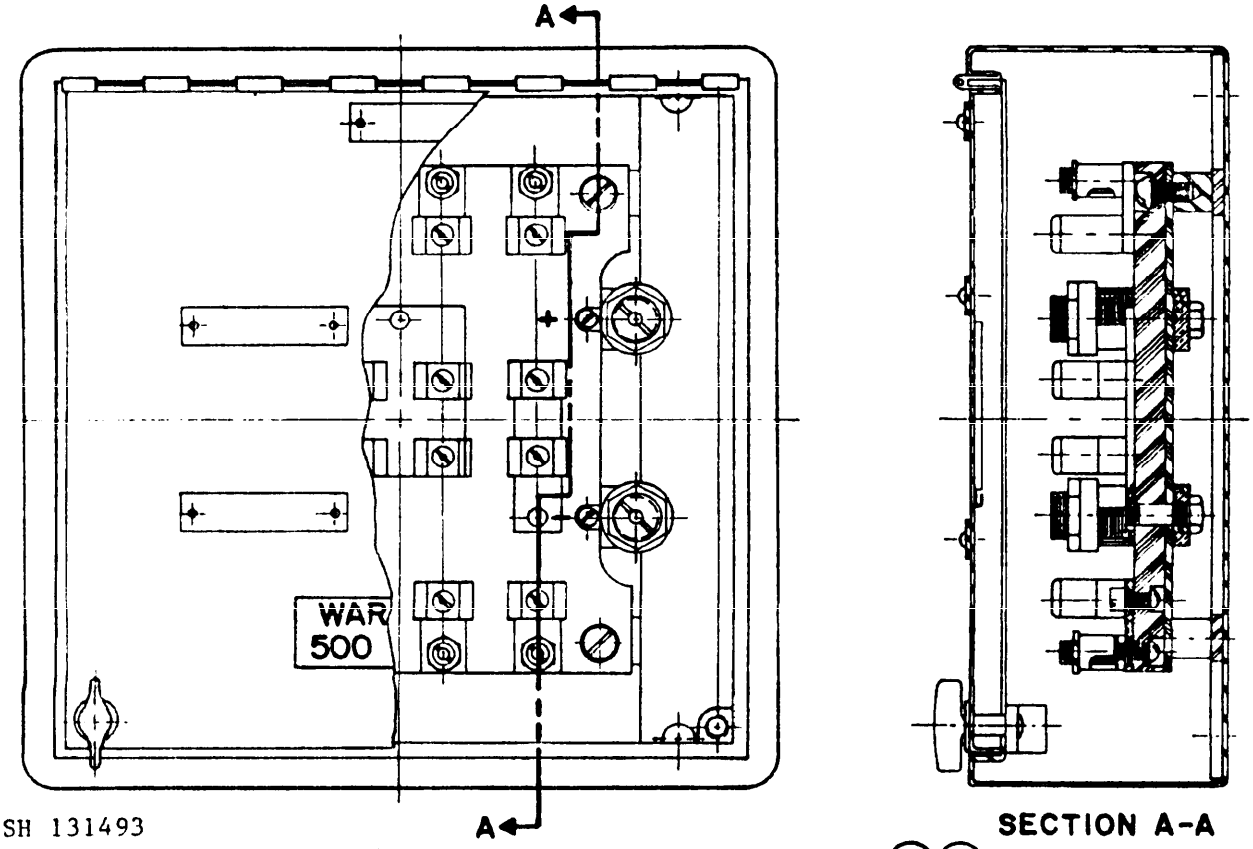

SH 131493


FIGURE 1. Fuse box assembly, typical. 01 02
(Symbol 627 shown)

NOTES:

1. Dimensions are in inches.
2. Unless otherwise specified herein, tolerances shall be as follows:
   Two place decimals - plus or minus 0.02.
   Three place decimals - plus or minus 0.005.

FSC 5920


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:28Z
Check the source to verify that this is the current version before use.

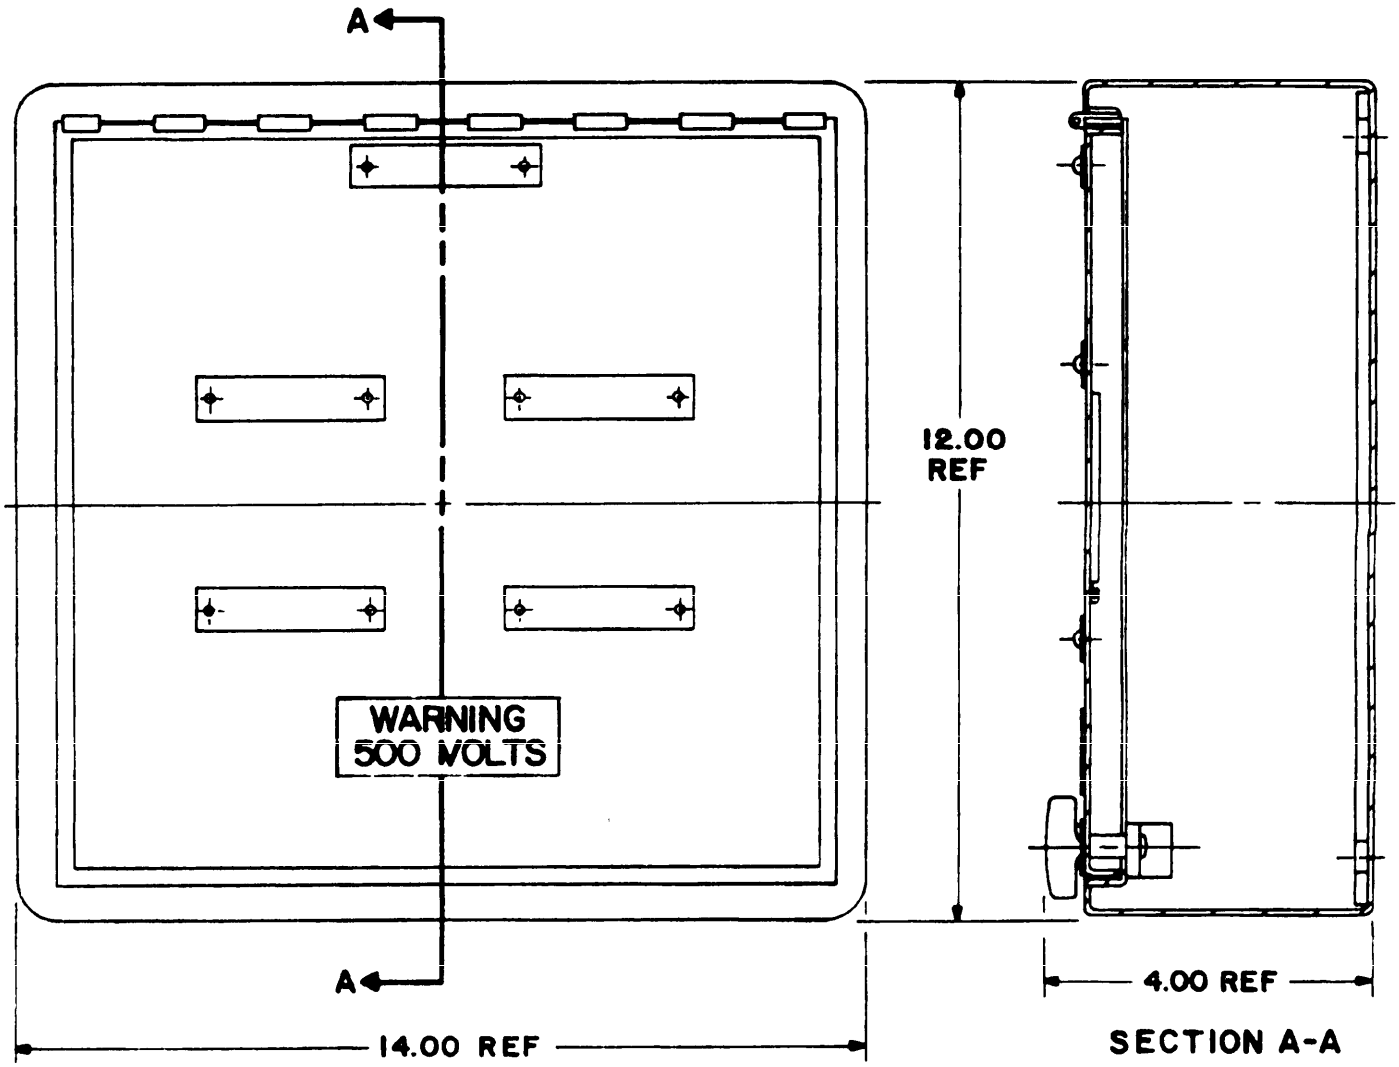

SH 131494

FIGURE 2. Enclosure, overall dimensions. (03)
(Symbols 626 and 627)


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:28Z
Check the source to verify that this is the current version before use.

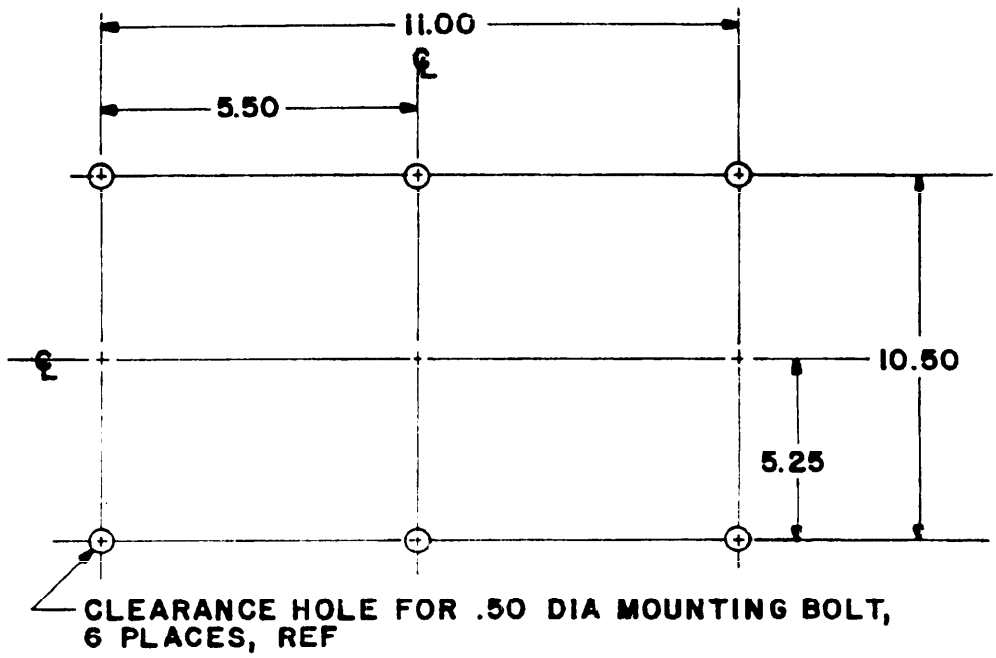

SH 131495

FIGURE 3. Mounting dimensions, ref.
(Symbols 626 and 627)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:28Z
Check the source to verify that this is the current version before use.

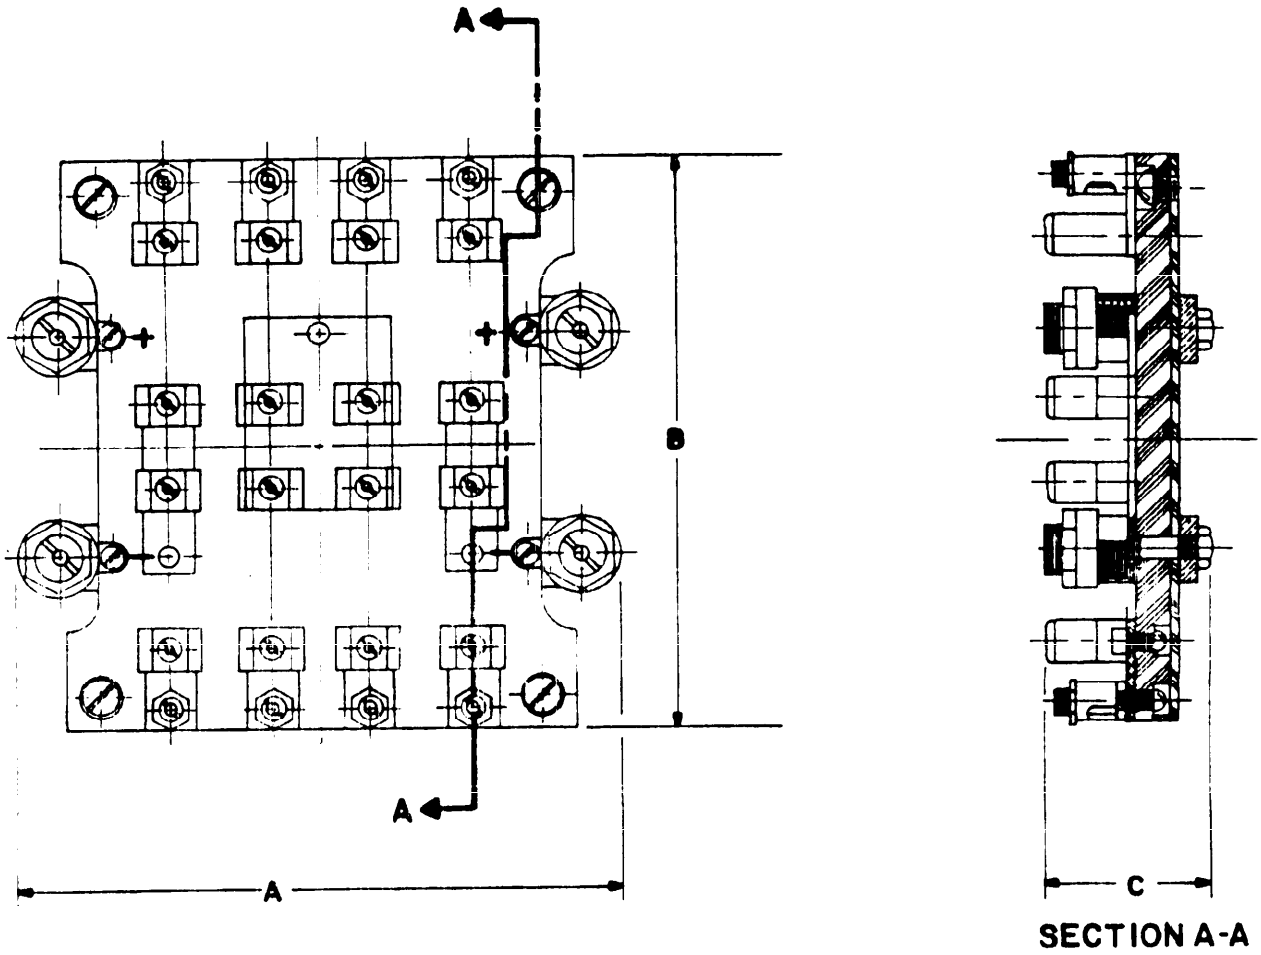


SYMBOL NO	DIMENSIONS (MAX)		
	A	B	C
626	8.63	8.38	2.64
627	7.38	8.38	2.64


SH 131496

FIGURE 4. Fuse block assembly, typical. (04) (05)
(Symbols 626 and 627)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:28Z
Check the source to verify that this is the current version before use.

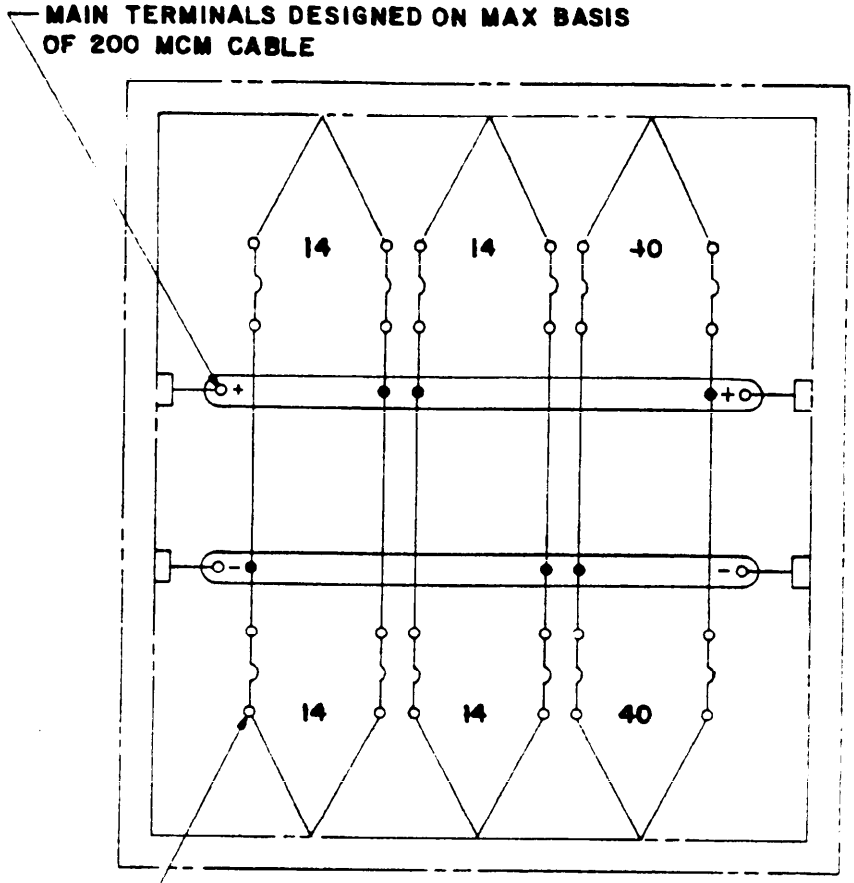

A. Six 2-wire branches (Symbol 626)

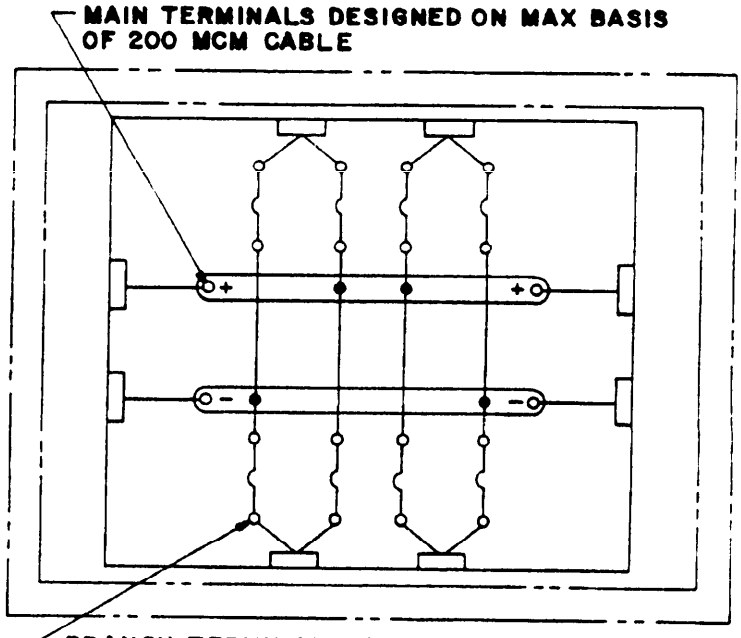

B. Four 2-wire branches (Symbol 627)

SH 131497

FIGURE 5. Wiring diagrams. (06) (07)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:28Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Symbol numbers: See table I.

Design:
Electrical rating: 500 volts direct current, 0-30 and 31-60 ampere.
Dimensions and configuration: See figures 1, 2, 3 and 4.
Wiring diagrams: See figure 5.
Mounting dimensions: See figure 3.
Degree of enclosure: Totally enclosed.
Designation and marking: See MIL-F-24646(SH).
Parts: The parts listed in table II and specified in MIL-F-24646(SH) shall be used in the construction of the fuse boxes specified herein.

General information:
Military part numbers and general information are as specified in table I.

TABLE I. Military part numbers and general information.

Military part no.	Symbol no.	Weight in pounds	No. of circuits	Feeder MCM	Branch MCM	Fuse size	Bus bar size	Supersedes	
								Drawing no.	Type
M24646/5-001	626	25.0	6	200	4-14 2-40	0-30A 31-60A	1.00 x 0.25	815-74462	D-45A
M24646/5-002	627	22.0	4	200	40	31-60A	1.00 x .25	815-74463	B-47A

TABLE II. Parts list.

Item no.1/	Description	QTY M /-		Material/spec	Remarks
		001	002		
01	Fuse box assembly (sym 626)	-		MIL-F-24646/5	See figure 1
02	Fuse box assembly (sym 627)		-	MIL-F-24646/5	See figure 1
03	Enclosure (12 x 14 x 4)	1		M24142/16-004	See figure 2
04	Fuse block assembly	1		MIL-F-24646/5	See figure 4
05	Fuse block assembly		1	MIL-F-24646/5	See figure 4
06	Wiring diagram	1		MIL-E-2036	See figure 5
07	Wiring diagram		1	MIL-E-2036	See figure 5
08	Fuse clip (0-30A)	16	-	M21346/1-06	----
09	Fuse clip (31-60A)	8	16	M21346/1-08	----
10	Identification plate	1	1	Brass, QQ-B-613	----
11	Information plate	6	4	Brass, QQ-B-613	----
2/ 12	Warning plate	1	1	Brass, QQ-B-613	----

1/ Numbers in circles shown on the figures are the same as the item numbers shown in this table.
2/ Engrave as shown and fill with red enamel.

Preparing activity:
Navy - SH
(Project 5920-N163-5)

Source: https://assist.dla.mil -- Downloaded: 20261O-20T00:28Z
Check the source to verify that this is the current version before use.