MIL-D-52916A(ME)
7 December 1989
SUPERSEDING
MIL-D-52916(ME)
29 NOVEMBER 1976

MILITARY SPECIFICATION

DISTRIBUTOR, BITUMINOUS MATERIAL, TRUCK MOUNTED, COMMERCIAL CONSTRUCTION EQUIPMENT (CCE)

This specification is approved for use within the USA Belvoir Research, Development and Engineering Center, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a commercial, truck-mounted, bituminous distributor.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbook form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

Beneficial comments, (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: USA Belvoir Research, Development and Engineering Center, ATTN: STRBE-TSE, Fort Belvoir, VA 22060-5606 by using the self addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 3895

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

VV-F-800	- Fuel Oil, Diesel.

MILITARY

MIL-V-173	- Varnish, Moisture and Fungus Resistant.
MIL-P-514	- Plates, Identification, Instruction and Marking, Blank.
MIL-I-631	- Insulation, Electrical, Synthetic-Resin Composition, Nonrigid.
MIL-T-704	- Treatment and Painting of Materiel.
MIL-D-771	- Distributor, Bitumen and Water, Packaging of.
MIL-C-1283	- Can, Gasoline, Military, 5-Gallon.
MIL-S-8660	- Silicone Compound, NATO Code Number S-736.
MIL-C-13486	- Cable, Special Purpose, Electrical: Low-Tension, Heavy Duty Single Conductor and Multiconductor.
MIL-I-15126	- Insulation, Tape, Electrical Pressure Sensitive Adhesive and Pressure Sensitive Thermosetting Adhesive.
MIL-C-24066	- Clip, Component, Non-Electrical; General Specification For.
MIL-C-24066/2	- Clip, Solid, Spring Tension.
MIL-B-43436	- Band Markers, Blank, General Specifications For.
MIL-B-43436/1	- Band Markers, Blank: Single Crimp Style Band.
MIL-C-46168	- Coating, Aliphatic, Polyurethane, Chemical Agent Resistant.
MIL-T-83133	- Turbine Fuel, Aviation, Kerosene Type, JP-8.

STANDARDS

MILITARY

MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-130	- Identification Marking of US Military Property.
MIL-STD-209	- Slinging and Tiedown Provisions for Lifting and Tying Down Military Equipment.
MIL-STD-810	- Environmental Test Methods and Engineering Guidelines.
MIL-STD-838	- Lubrication OF Military Equipment.
MIL-STD-889	- Dissimilar Metals.
MIL-STD-1474	- Noise Limits for Army Materiel.
MIL-STD-1791	- Designing for Internal Aerial Delivery in Fixed Wing Aircraft.
MS21322	- Clamp, Loop-Aluminum, Plain and Cushioned.
MS21333	- Clamp, Loop-Steel, Plain and Cushioned.
MS21334	- Clamp, Loop-Double, Cable or Tube, Steel, Plain and Cushioned.
MS27142	- Connector, Plug, Electrical: Pin Contact No. 12, 14 and 16 A.W.G., Waterproof.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

MS27143	- Connector, Plug, Electrical: Socket Contact, No. 12 A.W.G., Waterproof.
MS27144	- Connector, Plug, Electrical: Socket Contact, No. 14 and 16 A.W.G., Waterproof.
MS27145	- Connector, Plug, Electrical: No. 14 A.W.G. Double Contact, Waterproof.
MS27146	- Connector, Receptacle, Electrical: Double Contact, Waterproof.
MS27147	- Adaptor, Connector - 3 Way No. 12, 14 and 16 A.W.G., Waterproof.
MS27148	- Contact, Pin; Electrical Connector: No. 12, 14, and 16 A.W.G.
MS33800	- Connector, Receptacle, Electrical – Pin Contact, No. 12, 14 and 16 A.W.G., Waterproof.
MS35387	- Reflector, Indicating, Clearance.
MS35422	- Lampholder, Light, Marker, Clearance.
MS35423	- Light, Marker, Clearance – Service.
MS35424	- Light, Marker, Clearance – Blackout, 24 Volt.
MS51330	- Stop Light - Taillight, Vehicular – 24 Volt, Blackout Tail, Blackout Stop.
MS53052	- Bracket Assembly, Liquid Container, Five Gallon.

HANDBOOKS

MILITARY

MIL-HDBK-113	- Guide for the Selection of Lubricants, Functional Fluids, Preservatives and Specialty Products for Use in Ground Equipment Systems.

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Naval Publications and Forms Center, (ATTN: NPODS), 5801 Tabor Avenue, Philadelphia, PA 19120-5099.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

The Military Traffic Management Command/Transportation Engineering Agency (MTMC/TEA) pamphlet 70-1.

(Application for copies should be addressed to: The Military Traffic Management Command Transportation Engineering Agency (MTMC/TEA), ATTN: MIT-TR, P.O. Box 6276, Newport News, VA 23606-0276.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF TRANSPORTATION (DOT)

DOT Motor Carrier Safety Regulations.

(Application for copies should be addressed to the Superintendent of Documents, U.S. Government Printing Office, 701 North Capitol Street, N.W., Washington, DC 20402.)

2.2 Non-Government publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN SOCIETY OF MECHANICAL ENGINEERS (ASME)

ASME Boiler and Pressure Vessel Code, Section IX. Qualified Standard for Welding and Brazing Procedures, Welders, Brazers, and Welding and Brazing Operators.

(Application for copies should be addressed to the American Society of Mechanical Engineers, United Engineering Center, 345 East 47th Street. New York, NY 10017.)

AMERICAN WELDING SOCIETY (AWS)

AWS D1.1 - Structural Welding Code – Steel.

(Application for copies should be addressed to the American Welding Society Inc., 550 N.W. LeJuene Road, Miami, FL 33126.)

ASSOCIATION OF AMERICAN RAILROADS (AAR)

Rules Governing the Loading of Commodities on Open-Top Cars.

(Application for copies should be addressed to the Association of American Railroads, American Railroads Building, 50 F Street NW, Washington, DC 20001.)

SOCIETY OF AUTOMOTIVE ENGINEERS (SAE)

J551 – Measurement of Electromagnetic Radiation from Vehicles and Devices.
J561 – Electrical Terminals – Eyelet and Spade Type.
J562 – Nonmetallic Loom.
J759 – Lightning Identification Code.
J910 – Hazard Warning Signal Switch.
J945 – Vehicular Hazard Warning Signal.

(Application for copies should be addressed to the Society of Automotive Engineers, 400 Commonwealth Drive, Warrendale, PA 15096.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

(Non-Government standards and other publications are normally available from the organization that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, (except for associated detail specifications, specification sheets or MS standards) the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Description. This specification covers a truck mounted, bituminous distributor with a hydrostatically driven bituminous pump. The distributor shall consist of an insulated tank, tank heating system, full circulating spray bar, hand spray attachment, and all equipment necessary to make a complete distributor mounted on a military truck chassis, as specified herein. The overall width of the distributor, in the travel position, shall not exceed 97 inches (2463.8 mm).

3.2 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 6.3) in accordance with 4.3.

3.3 Materials. Materials shall be as specified herein. Materials not specified shall be selected by the contractor and shall be subjected to all provisions of this specification.

3.3.1 Material deterioration prevention and control. The distributor shall be fabricated from compatible materials, inherently corrosion resistant or treated to provide against the various forms of corrosion and deterioration that may be encountered in any of the applicable operating and storage environments to which the distributor may be exposed.

3.3.1.1 Dissimilar metals. Dissimilar metals shall not be used in intimate contact with each other unless protected against galvanic corrosion. Dissimilar metals and methods of protection are defined and detailed in MIL-STD-889.

3.3.1.2 Identification of materials and finishes. The contractor shall identify the specific material, material finish or treatment for use with component and subcomponent, and shall make information available upon request to the contracting officer or designated representative.

3.3.2 Recovered materials. For the purpose of this requirement, recovered materials are those materials which have been collected from solid waste and reprocessed to become a source of raw materials, as distinguished from virgin raw materials. The components, pieces and parts incorporated in the distributor may be newly fabricated from recovered materials to the maximum extent practicable, provided the distributor produced meets all other requirements of this specification. Used, rebuilt or remanufactured components, pieces and parts shall not be incorporated in the distributor.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

3.4 Tank. The tank shall have a capacity of 1500 gallons (5678 L), plus not less than 5 percent for contents expansion. The tank shall be of welded construction with the shell and surge plates not lighter than 12-gage steel and the heads not lighter than 10-gage steel. A manhole with a diameter of no less than 30 inches (762 mm) shall be provided. The manhole shall be equipped with a basket-type, removable steel strainer. A hinged, quick-opening, bitumen-tight manhole cover shall be provided. A well for a thermometer shall be provided in one side of the tank, shall be inclined at a slight angle from the horizontal, and shall be located so that the thermometer inserted in the well will register the average temperature reading of the contents of the tank. A well cap shall be furnished, shall be screwed on the outside of the well tube, and shall be provided with a retaining chain. A thermometer shall be secured to the well cap. The thermometer shall be an armored pencil-type and shall have a range of 50 to 450ºF (10 to 232ºC). A 3-inch (76.2 mm) minimum diameter overflow shall be provided and located so all the overflow drainage will be to the ground. A 3-inch (76.2 mm) outlet valve that will completely drain the tank shall be provided at such a location that the discharge will clear the distributor. The tank shall be insulated with a minimum of 1.50-inch (38.1 mm) rock wool bat type insulation and shall be covered with a water-tight metal jacket equal to the strength of 20-gage steel.

3.4.1 Tank gage. The tank shall be equipped with a float-operated contents gage. The gage dial shall be a minimum of 8-inch (203.2 mm) diameter with increment markings not over 50 gallons (189 L) per mark. The gage shall be visible and clearly readable from the distributor's operator platform.

3.5 Steps. Steps shall be provided on both sides of the distributor for access to the operator's platform, and when the catwalks and the operator's platform are on different elevations, steps shall be provided between platform and catwalks. Steps shall not be less than 10 inches (254 mm) wide and shall be flanged. A ladder or rungs shall be provided on the tank for access from the catwalk to the manhole on top of the tank.

3.6 Operator's platform. An operator's platform shall be provided at the rear of the distributor so all controls are within easy reach of the operator. The platform shall be constructed of nonskid materials and shall be equipped with a guardrail for operator safety.

3.6.1 Guardrails. Guardrails shall be installed at a height of not less than 42 inches (1066.8 mm) around the perimeter of the operator's platform. Intermediate rails shall be placed at 21 inches (533.4 mm) above the platform. Guardrails need not be installed at perimeter locations where distributor equipment restricts access by the operator. Guardrails shall have openings at step locations to provide access to, and from the platform and catwalks, and to and from the ground and platform.

3.7 Fenders. The fenders for the rear wheels on each side of the truck shall be constructed of a minimum of 11-gage sheet steel. The fender clearance shall be determined on a level surface when the distributor is truck-mounted and the tank is filled. The fender clearance shall be not less than 11 inches (299.4 mm) above the chassis frame at centerline of the rear wheels, and not less than 5 inches (127 mm) between the rear of the rear tire and the fender. The rear

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

mudguard portion of the fender shall be rigidly mounted, shall extend the full width of the tires, and shall extend downward to at least the centerline elevation of the tires. The front mudguard portion of the fender shall be formed by connecting the fender to the vertical sheet steel furnished on the truck chassis and located just to the rear of the fuel tanks. The fenders shall cover the width of the tires.

3.8 Hydrostatic transmission. The bituminous pump shall be driven by a hydrostatic transmission. The power take-off (PTO) control shall be located to be engaged or disengaged by the operator in the truck cab. The control that varies the speed of the hydrostatic transmission shall be located in the truck cab with override controls provided at the rear platform. The control shall be labeled according to function (PTO, PUMP RATE) and to indicate the functional result of control movements (ON, OFF). Valve controls shall be provided with double-ended arrows showing the direction of operations and labeled at each end to indicate the functional result (open and close).

3.9 Heating system. The heating system shall consist of two U-tube type heating flues and two low-pressure, air-atomizing burners, fuel pump, fuel tank with a capacity of not less than 20 gallons (76 L), and blower. Each burner shall have a rating of not less than 500,000 Btu/hr (146535.55 W) and shall be capable of operating on standard army diesel fuel in accordance with VV-F-800 and MIL-T-83133. The burner system fuel pump shall be connected to the power source so that it will operate only when the blower is operating. The blower operation shall be independent of the bituminous pump.

3.9.1 Portable burner. A portable generating-type burner that burns no. 2 grade diesel fuel shall be furnished. The burner shall be used for heating the pump or the tank-car connections. The burner shall have a fuel-tank capacity of not less than 4 gallons (15 L). The tank shall be marked: “FILL WITH DIESEL FUEL ONLY”. Provisions shall be made for carrying the burner on the distributor.

3.10 Spraying system. The spraying system shall include a positive-displacement, rotary-type bituminous pump having a capacity of not less than 375 gallons (1420 L) per minute. The pump shall be equipped with a bypass or other means to prevent damage to the lines when the discharge is closed. The pump drive-shaft coupling shall be secured with a connection that will protect against damage to the pump or transmission. The pump system shall be provided with a dial-type pump meter which reads in gallons per minute. The bituminous pump, in conjunction with the PTO hydrostatic transmission (see 3.8), shall provide bitumen to the spray bar that will produce application rates from 0.1 gal/sq yd (.38 L/.84 sq m) to not less than 1.0 gal/sq yd (3.78 L/.84 sq m) through the 24-foot (7.32 m) spraybar. The actual rate of application shall be within 10 percent of the intended rate. The spraybar shall be of the full circulating type and shall consist of a center section approximately 8 feet in length plus turnup type extension ends. Each spray bottle shall be capable of independent operation or simultaneous operation with all nozzles. Remote type controls shall be provided in the truck cab and at the rear operator’s platform to (a) turn bitumen flow from the spraybar on or off, (b) shift spraybar laterally, and (c) vertically raise or turn the spraybar as applicable. The controls shall be labeled according to function ASPHALT FLOW, SPRAY BAR POSITION) and to indicate

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

the functional result of control movements (ON, OFF, RAISE, LOWER, LEFT, RIGHT). Valve controls shall be provided with double-ended arrows showing the direction of operations and labeled at each end to indicate the functional result (open and close). Distributors having the turnup feature shall be provided with mechanical means to vertically adjust spray height when desired. Spraybar extensions that allow spraying to 24 feet (7.32 m) in width shall be provided. Each extension section shall be no greater than 2 feet (.6096 m) in length. Lateral movement shall not be less than 8 inches (203.2 mm) each way from center. The spraybar shall be provided with a breakaway feature to protect it from damage in the event an obstruction is hit by the spraybar.

3.11 Attachments. The following attachments shall be provided and shall be the latest model of the standard product of the offeror:

a. Two 15-foot (4.57 m) sections of filling hose equipped with quick-disconnect fittings.

b. Bitumeter wheel.

c. Control in the cab to raise and lower the bitumeter wheel.

d. Box for storage of spraybar extension sections.

e. A hand-spray attachment with not less than 25 feet (7.62 m) of hose.

f. Signal gong for rear operator-driver communication.

g. Distribution charts encased in a transport protective material.

h. Strainers (manhole, asphalt fill line, asphalt pump).

i. Pump tachometer, calibrated in gallons per minutes, in truck cab.

j. Speed and distance indicator reading in feet per minute, located in truck cab.

k. Toolbox with hasp.

3.12 Special tools. Any special tools required for operation and operator maintenance of the distributor, except chassis, shall be provided with each truck-mounted distributor (see 6.2). Special tools shall be securely mounted in a readily accessible location.

3.13 Maintenance characteristics. The truck mounted distributor design, together with the accessories, shall permit ready access to all items requiring periodic maintenance service in the field. Periodic maintenance will be accomplished with the use of conventional general-purpose tools normally associated with equipment of this type. The adjustment of components and accessories shall be accomplished with minimum drainage requirements and minimum disturbance to other elements of the distributor.

3.14 Mounting. The distributor shall be mounted on a Government-furnished 5-ton truck chassis with not less than 4 mounting devices per side (see 6.2). Each mounting device shall

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

consist of one U-bolt, or two twin studs, with tie plates and nuts and washers as required. Hardwood filler blocks shall be placed in chassis sill channels at each mounting point. Each filler block shall be retained in the channel by the use of keeper straps or by use of grooves around mounting bolt or stud. A hardwood breaker strip shall be installed between the longitudinal distributor sills and longitudinal chassis sills, and shall run the full length of the chassis sills. Additional mounting devices of a type required to restrict traverse and longitudinal movement between distributor and chassis shall be installed. The truck chassis frame shall not be welded to or extended. The distributor shall be mounted without drilling holes in the chassis, unless prior approval is obtained from the contracting officer. The alignment between the truck chassis and distributor shall be maintained, and the mounting devices shall not be permanently deformed or broken when the fully loaded truck mounted distributor is subjected to travel over paved and gravel roads and subjected to sudden stops when traveling at forward speeds up to 10 mph (16 kmph) and at maximum, high-range reverse speeds. When unmounted distributors are furnished (see 6.2), all components required for mounting and an illustrated step-by-step mounting procedure shall be supplied with each distributor.

3.15 Transportability. The distributor shall be capable of being transported by military or commercial trailers, trains, vessels, aircrafts and of withstand the impact forces encountered in shipment without damage or permanent deformation. The distributor shall be equipped with tiedown and slinging provisions.

3.15.1 Tiedown provisions. The tiedown provisions shall be in accordance with MIL-STD-209, for type III equipment, class 3 provisions and MIL-STD-1791, for equipment restraint criteria. The tie down provisions shall satisfactorily complete the pull testing as specified without weld failure, permanent deformation, cracking, loosening, or breaking of the provision or its connecting structural components.

3.15.2 Slinging provisions. The slinging provisions shall be in accordance with MIL-STD-209, class 3, type III. The provisions shall enable the complete distributor to be lifted in the normal operating position. The provisions shall be located so not less than 1-inch clearance is maintained between slings and all exterior parts and shall be fastened to members which will withstand stresses in the amount and direction of pull specified for the provisions without weld failure, permanent deformation, cracking, loosening, or breaking of the provision or its connecting structural components. Slinging provisions may also be used as tiedown provisions when such provisions meet the requirements specified in 3.15.1. All slinging/tiedown provisions shall be labeled “LIFT”, “TIEDOWN”, or “LIFT TIEDOWN”, as appropriate, in 1-inch high (2.54 cm) letters.

3.15.3 Air transportability. Disassembly to achieve air transportable configuration shall be accomplished in not more than 2 hours, and reassembly shall be accomplished in not more than 2 hours, using only 2 people and common tools and lifting devices available in the military unit. The distributors shall meet the requirements of MIL-STD-1791 for air transport.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

3.15.4 Rail transportability. The distributor shall be rail transportable in CONUS and NATO countries without restrictions. The distributors shall have a dimensional profile within the Gabarit International de Chargement (GIC) (see figure 1), outline diagram when loaded on a 50-inch (127 cm) high rail car. The distributors shall be capable of withstanding shock loads resulting from rail impact testing in accordance with 4.5.2.6.4 without failure, damage, or permanent deformation.

3.15.5 Highway transportability. The distributor, when loaded on a semitrailer/tractor, shall be within the highway permit limits of all states.

3.16 Lifting and tiedown instruction plates. Instructions for use of the attachments or procedures shall be included on a noncorrosive metal plate permanently affixed to the distributor. The plate shall include a silhouette of the item together with the center of gravity.

3.17 Performance. The distributor shall be capable of performing the following functions:

a. Pump bitumen from an external source into the bitumen tank without bitumen entering the spraybar.

b. Pump bitumen from an external source to another external source without bitumen entering the tank or the spraybar.

c. Pump bitumen from the bitumen tank back to the bitumen tank without the bitumen entering the spraybar.

d. Pump bitumen from the bitumen tank through the spraybar back to the bitumen tank.

e. Pump bitumen out the bitumen tank to an external source without the bitumen entering the spraybar.

f. Uniformly apply bitumen at rates from 0.1 gal/sq yd (.38 L/sq m) to not less than 1.0 gal/sq yd (3.78 L/.84 sq m) and at any rate in between without streaking or puddling.

g. Pump bitumen out of the bitumen tank to the hand-spray attachment.

h. Withdraw bitumen from the spraybar and all piping and return to the bitumen tank.

i. Pump flushing oil through all piping and the spraybar without the flushing oil entering the bitumen tank.

j. Withdraw bitumen from the hand-spray attachment or blow-out bitumen from hand spray attachment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

3.18 Noise limits. The noise produced by the distributor shall conform with MIL-STD-1474 requirements, with the exception of MIL-STD-1474, 5.2, 5.3 and 5.4, when tested in accordance with 4.5.2.7. The provision of MIL-STD-1474, 4.3 and 4.4, shall be provided if and only if MIL-STD-1474, 5.1.1.2 procedures have been pursued and documented to the satisfaction of the procuring activity and written permission to exceed the 85 dB(A) limit is obtained from the procuring activity. Hazard signs shall conform with MIL-STD-1474, 4.3, except the sign will state "HEARING PROTECTION REQUIRED WITHIN (specify) FEET". The sign shall be readable at a distance indicated on the sign.

3.19 Safety. All rotating or reciprocating parts and other parts subject to high operational temperatures that are of such a nature or are located to be or be a hazard to the operating or attending personnel, shall be substantially guarded or installed to the extent necessary to eliminate the hazard. External equipment including catwalks, handrails, fenders and bumpers will be designed for durability and operator safety. All catwalks shall be provided with antiskid surfacing. All platform steps and handholds shall be of such design to permit unhampered and nonhazardous access to and from the distributor.

3.20 Electrical system. The distributor shall be equipped with a waterproof, 24-volt vehicular electrical system for service and blackout night travel. All components and wiring shall be located and guarded to prevent damage and permanent deformation, and to provide maximum protection from shock and vibration. The components and wiring shall be accessible for replacement without disturbing permanently installed housings and guards. The electrical system shall be in accordance with table I. Item quantities, that are not specified shall be furnished as required (AR) for each distributor.

TABLE I. Electrical system.

Description	Requirement	Quantity
Service lamps: Clearance, side-marker, and identi-fication	MS35423	14 ea., min.
Blackout lamps: Clearance and sidemarker	MS35424	8 ea.
Installation	Horizontal, using information on MS35422	AR
Service turn signal lamps, front	Commercial, SAE I (SAE J759), pedestal mount, waterproof	2 ea
Service combination lamps, rear	Commercial, SAE STI (SAE J759), recess or flush mount, waterproof	2 ea.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical system - Continued.

Description	Requirement	Quantity
Blackout combination lamps, rear	Military type, MS51330	2 ea.
Reflectors	MS35387	8 ea., min.
Low tension cable	MIL-C-13486, 14 A.W.G. Min.	AR
Harness insulation	MIL-I-631 & MIL-I-15126	AR
Loom	Semitrailer type polyethylene tubing or oil proof SAE J562 loom	AR
Conduit	Commercial, thinwall type	AR
Cushioned support clamps	MS21322, MS21333, MS21334	AR
Circuit number bands	MIL-B-43436 & MIL-B-43436/1	AR
Friction connectors	MS 27142 through MS27148 & MS33800 waterproof	AR
Connector lubricant	MIL-S-8660	AR
Connector holder clip	Plastic or spring clip, similar to MIL-C-24066 & MIL-C-24066/2-329	AR
Terminal connectors	Spade type per SAE J561 with heat Shrinkable or integral insulator sleeves	AR
Hazard warning signal	DOT Regulations, SAE J910, and SAE J945	1 assy

3.20.1 Wiring. The wiring for both the service and blackout light systems shall be in accordance with the figure furnished by the contracting officer (see 3.26 and 6.4). The wiring shall be protected from road splash. The wiring jacket shall not be fabricated from poly vinyl chloride (PVC). Cushion clamps, loom, thinwall conduit and grommets shall be provided to prevent whipping, chafing and other mechanical and heat damage. Wiring shall be fastened to the frame at intervals not to exceed 3 feet (.9144 m). Two or more cables following the same routing shall be enclosed in loom or conduit having each end waterproofed, or shall be bound together in harness with 0.5 overlapping wraps of plastic tape. Splices shall be waterproofed. Mechanical splicing devices , if used, shall be fastened to the frame members with the interior of the device waterproofed with silicon sealant. All connections shall be varnished according to MIL-V-173. All circuits shall be identified by number coding as specified in the Government furnished diagrams (see 3.26 and 6.4). The circuit number bands shall be installed near each connection. The mating surfaces of the elastomer friction connectors shall be sealed with silicon sealant prior to assembly. The assembled friction connectors shall be secured to the frame with

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

holder clips to prevent cable fatigue breakage. Terminal connectors shall be of the ring type, and application shall be limited to the use as component ground leads. The connections of this additional wiring to the wiring of the truck chassis-cab shall be made at the tail lamp friction connectors under the front fenders.

3.20.2 Lighting. All lamps shall operate as specified herein on 24 volts. The two lighting systems, service and blackout, shall be separate systems except for having common ground returns. The two front service turn signal lamps shall be symmetrically pedestal mounted on the top of the horizontal portion of the front fenders. The lamps shall be double faced, amber front and red rear lenses, having either sealed units or bulbs and lenses in a nonferrous housing. If furnished, bulbs shall be of the single contact base type, trade no. 1683. Under fender boots, filled with silicon sealant, shall be furnished to waterproof the lamp. Friction retainment connectors shall be furnished on the pigtail leads. Each front lamp shall be equipped with brush guards and installed as shown in government furnished diagrams (see 3.26 and 6.4). The service, clearance, sidemarker and identification lamps (MS35423) shall be amber forward and red rearward. One clearance lamp shall be mounted at each corner of the body and one service sidemarker lamp shall be mounted at each corner, for a total of eight lamps. Three service identification lamps shall be mounted on the front and on the rear, for a total of six lamps. At the rear, two service combination lamps shall be symmetrically flush or recess mounted, as far apart as practicable, within industry standards 4.5-inch (114.3 m) diameter holes, to permit replacement of assemblies. These combination lamps shall be either sealed units inserted in elastomer rings, or bulb and lens mounted in an elastomer housing. If furnished, bulbs shall be double contact indexing base type, trade no. 1662. Grounding pigtail leads shall be required. Friction retainment connectors shall be furnished on the pigtail leads for tail, stop, and turn. The wires and forward side of these lamps shall be shielded to prevent damage from road splash and mud. One blackout clearance lamp and one blackout sidemarker lamp shall be mounted immediately below or alongside the corresponding service clearance and sidemarker lamps, for a total of eight. The colors of the blackout lamp lenses shall correspond to those of the service lamps. The two blackout combination lamps shall be mounted inboard or under the rear service combination lamps. These blackout lamps shall be centered and recessed within 6-inch (152.4 mm) diameter holes such that their lens doors are within 1-inch (25.4 mm) tolerance of the service combination lamp lenses. The blackout combination lamps shall be protected with guards equal to 6-inch (152.4 mm) diameter, schedule 40 steel pipe over at least the upper half of the lamp diameter.

3.20.3 Hazard warning operating unit. The hazard warning operating unit shall have a load capacity to flash all four truck service turn signal lamps, plus a minimum of two additional turn signal lamps of a trailer equipped with rear lamps having the same current draw as those furnished on the truck, in accordance with DOT Motor Carrier Safety Regulations. The hazard warning unit shall include a heavy duty-flasher, a multiple contact switch, and an indicator light. The 24-volt flasher shall be waterproof, of either the electromechanical type or of the solid state type. The switch shall function with the truck's turn-signal-system which includes stop and turn circuits using the same lamp filament.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

3.21 Lubrication. The truck mounted distributor shall be capable of operating using standard military lubricants without deleterious effects due to lubrication. All components requiring lubrication shall be provided with means of lubrication. Initial servicing of each truck-mounted distributor shall be with military lubricants.

3.21.1 Lubricants. The procedure for the selection of lubricants shall be in accordance with MIL-STD-838, section 5. Lubricants selected shall be in accordance with MIL-HDBK-113, chapter 2. When the specification of the lubricant selected includes a requirement for a Qualified Products List (QPL), the lubricant supplied shall be from a source that is listed on the applicable QPL.

3.22 Electromagnetic interference. The electromagnetic interference emission characteristics of the distributor shall conform to the requirements of SAE J551.

3.23 Decontaminating apparatus, portable (DAP), M13. The DAP mounting bracket (MS53052-1) shall be installed in a manner which shall not interfere with the normal operation of the equipment. The DAP has the approximate dimensions of a standard issue five gallon can in accordance with MIL C-1283 with a weight of 54 pounds (24.5 Kg). An upright installation is preferred. Horizontal mounting shall be used only with the approval of the contracting officer. The DAP device has a flash point of 165 ºF (74 ºC) and shall be installed away from the exhaust or heat sources.

3.24 Treatment and painting. The portions of the distributor normally painted, internally and externally, shall be cleaned, treated, and painted in accordance with MIL-T-704, type F or G, as applicable. Unless otherwise specified (see 6.2), topcoat shall be camouflage green 383 in accordance with MIL-C-46168. When specified (see 6.2), the distributor shall be overcoated in accordance with the Government furnished camouflage patterns with MIL-C-46168 top coat of the colors specified in the camouflage patterns except the first article may be camouflage green 383.

3.24.1 Camouflage pattern data. When specified (see 6.2), the contractor shall provide camouflage pattern data.

3.25 Identification marking. Each distributor shall be identified in accordance with MIL-STD-130. Marking shall be applied to the distributor on identification plates in accordance with MIL-P-514, type I, style 1, composition C, type I, grade A, class 1 material. Plates shall be attached by screws, bolts, or rivets in a conspicuous, protected location.

3.25.1 Shipping data plates. Each distributor shall be provided with two shipping data plates in accordance with MIL-P-514, type III, composition C, type I, grade A, class 1 material. One plate shall indicate shipping data for the unmounted distributor and shall be entitled "SHIPPING DATA FOR DISTRIBUTOR". The other plate, showing distributor shipping data, shall contain a warning to indicate that distributor lifting attachments are not to be used to lift the truck-mounted distributor. One plate shall show the silhouette of the distributor in transport position, indicating the center of gravity and the location and capacity of the lifting and tiedown

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

attachments. The other plate shall show the silhouette of the truck-mounted distributor in the transport position, indicating the center of gravity. The recommended tiedown arrangement shall also be shown on the plates. The plates shall be attached by screws, bolts, or rivets in a conspicuous, protected location.

3.25.2 Instruction plates. Each distributor shall be equipped with instruction plates or diagrams, including warnings and cautions, describing any special or important procedures to be followed in assembling, operating, or servicing the distributor. Instruction plates shall be in accordance with MIL-P-514, type III, composition C, type I, grade A, class 1 material. Plates shall be attached by bolts, screws, or rivets in a conspicuous, protected location, and be readable from the operator's normal position.

3.25.3 Stenciling. The gross vehicle weight of the truck-mounted distributor shall be applied on each side of the distributor. When the distributors are furnished unmounted, the gross vehicle weight of the truck-mounted distributor shall not be applied to the distributor, but shall be furnished with mounting procedures (see 3.14). The prescribed tire pressure shall be stenciled near each tire. Lifting and tiedown attachments shall be marked "LIFT DISTRIBUTOR HERE" and "TIEDOWN DISTRIBUTOR HERE", as applicable.

3.26 Government furnished property. When specified (see 6.2), the following property in the quantity indicated will be furnished by the Government (see 6.4).

Item No.	Description	quantity
1	Paint pattern	As required
2	Chassis drawings	As required
3	Wiring diagrams	As required
4	5-ton truck chassis	As required

3.27 Workmanship.

3.27.1 Steel fabrication. Steel used in the fabrication of the distributor shall be free from kinks and sharp bends. Steel plate shall not be warped. The straightening of material shall be done by methods that will not cause injury to the metal. Corners shall be square and true. Flame cutting may be employed instead of shearing or sawing. Burned surfaces of flame-cut material shall be ground or machined to remove ash and cooling checks. All bends of a major character shall be made with metal dies or fixtures to ensure uniformity of size and shape.

3.27.2 Bolted connections. Bolt holes shall be accurately punched or drilled and shall have the burrs removed. Washers or lockwashers shall be provided and all bolts, nuts, and screws shall be tight.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

3.27.3 Riveted connections. Rivet holes shall be accurately punched or drilled and shall have the burrs removed. Rivets shall completely fill the holes. Rivet heads shall be full and concentric with the rivet holes, and in full contact with the surface of the member.

3.28 Welders and welding.

3.28.1 Welders. Before assigning any welder or welding operator to welding work covered by this specification, the contractor shall obtain certification that the welder or welding operator has passed qualification tests as prescribed by either of the following listed codes for the type of welding operations to be performed, and that such qualifications are effective as defined by the particular code:

AWS D1.1 – Structural Welding Code – Steel, Section IX, Welding and Brazing Qualifications.
ASME Boiler and Pressure Vessel Code.

Contractors who make only horizontal welds need not qualify welders for "all position welding". Certification shall be made available for review, upon request, by the contracting officer or designated representative. The Government reserves the right to require the recertification of any welder or welding operator.

3.28.2 Welding. The surfaces of parts to be welded shall be free from rust, scale, paint, grease, mill scale and other foreign matter that can be removed by chipping and wire brushing. Parent materials, weld filler metals and fabrication techniques shall be as required to enable the distributor to be as specified in the examination and test requirements specified in section 4. Parts to be joined by fillet welds shall be brought into as close contact as possible and in no event shall be separated by more than 0.187 inch (4.75 mm) unless appropriate bridging techniques are used. Unless otherwise specified (see 6.2), the welding process used in fabrication of the pump unit shall be the option of the contractor.

2.28.3 Surfaces. All parts, components, and assemblies including castings, forgings, molded parts, stampings, bearings, seals, machined surfaces, and welded parts shall be cleaned and free of sand, dirt, fins, pits, sprues, scale, flux and other harmful or extraneous materials. External surfaces shall be smooth, and all edges shall be rounded or beveled.

3.29 Fire extinguisher. A fire extinguisher of 10 BC rating shall be mounted where it is easy to access by the operator.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of section 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all the requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Component and material inspection. The contractor is responsible for ensuring that components and materials are manufactured, examined, and tested in accordance with referenced specifications and standards, as applicable.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).

b. Quality conformance inspection (see 4.4).

c. Inspection of packaging (see 4.7).

4.3 First article inspection.

4.3.1 First article examination. The first article distributor shall be examined as specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.3.2 First article tests. The first article distributor shall be tested as specified in 4.5.2.1 through 4.7. All first article tests shall be conducted using fuel conforming to MIL-T-83133. Failure of any test shall be cause for rejection.

4.4 Quality conformance inspection.

4.4.1 Examination. Each distributor shall be examined as specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.4.2 Tests. Each distributor shall be tested as specified in 4.6 and 4.7. Failure of the test shall be cause for rejection.

4.5 Inspection procedure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

4.5.1 Examination. The distributor shall be examined as specified herein for the following defects:

Major

101. Dimensions not as specified (see 3.1).
102. Parts or components missing, damaged, or do not function (see 3.1).
103. Assembly incomplete or incorrect (see 3.1).
104. Materials not as specified (see 3.3).
105. Material deterioration prevention and control not as specified (see 3.3.1).
106. Dissimilar metals not as specified (see 3.3.1.1).
107. Identification of materials and finishes not as specified (see 3.3.1.2).
108. Used, rebuilt or remanufactured components, pieces, or parts incorporated in the distributor (see 3.3.2).
109. Tank not as specified (see 3.4).
110. Tank gage not as specified (see 3.4.1).
111. Steps not as specified (see 3.5).
112. Operators platform not as specified (see 3.6).
113. Guard rails not as specified (see 3.6.1).
114. Fenders not as specified (see 3.7).
115. Hydrostatic transmission not as specified (see 3.8).
116. Heating system not as specified (see 3.9).
117. Portable burner not as specified (see 3.9.1).
118. Spraying system not as specified (see 3.10).
119. Attachments not as specified (see 3.11),
120. Special tools not as specified (see 3.12).
121. Maintenance characteristics not as specified (see 3.13).
122. Distributor mounting not as specified (see 3.14).
123. Transportability not as specified (see 3.15).
124. Tiedown provisions not as specified (see 3.15.1).
125. Slinging provisions not as specified (see 3.15.2).
126. Air transportability requirements not as specified (see 3.15.3).
127. Rail transportability requirements not as specified (see 3.15.4).
128. Highway transportability requirements not as specified (see 3.15.5).
129. Lifting and tiedown instruction plates not as specified (see 3.16).
130. Safety provisions not as specified (see 3.19).
131. Electrical system not as specified (see 3.20).
132. Wiring not as specified (see 3.20.1).
133. Lighting not as specified (see 3.20.2).
134. Hazard warning operating unit not as specified (see 3.20.3).
135. Lubrication not as specified (see 3.21).
136. Lubrication not as specified (see 3.21.1).
137. Electromagnetic interference not as specified (see 3.22).
138. Decontaminating apparatus, portable (DAP) not as specified (see 3.23).
139. Treatment and painting not as specified (see 3.24).
140. Color not as specified (see 3.24).
141. Overcoating with camouflage pattern not as specified, if required (see 3.24).
142. Camouflage pattern data not provided when specified (see 3.24.1).
143. Identification marking not as specified (see 3.25).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

144. Shipping data plates not as specified (see 3.25.1).
145. Instruction plates not as specified (see 3.25.2).
146. Stenciling not as specified (see 3.25.3).
147. Steel fabrication not as specified (see 3.27.1).
148. Bolted connection not as specified (see 3.27.2).
149. Riveted connections not as specified (see 3.27.3).
150. Welders or welding operators not certified as specified (see 3.28.1).
151. Welding not as specified (see 3.28.2).
152. Surfaces not as specified (see 3.28.3).
153. Fire extinguishers not as specified (see 3.29).

4.5.2 Tests.

4.5.2.1 Performance. Test the distributor's ability to perform the functions listed in 3.17 (except item f). Also, adjust the spraybar laterally and vertically (or turnup) using the controls provided. Failure to perform any function, or malfunction of any control shall be cause for rejection.

4.5.2.2 Distribution. Materials used for this test shall be any bituminous material normally used in distribution operations heated to recommended spraying temperature. Operate the distributor to apply the bitumen through the 12-foot (3.66 m) spraybar at rates of 0.1 (.38 L), 0.4 (1.51 L) and 0.8 gal/sq yd (3.03 L/.84 sq m) and through the 24-foot (7.32 m) spraybar at a rate of not less than 1.0 gal/sq yd (3.78 L/sq m). The above application rates shall be applied over a predetermined distance of not less than 100 feet (30.48 m) for each rate. The following sequence shall be followed for each rate:

a. Weigh the loaded distributor

b. Apply the bitumen over the predetermined distance at the required rate of application. Travel speed and pump setting shall be obtained from the application chart).

c. Reweigh the distributor.

d. Determine the amount of bitumen applied by difference in weight beforeand after test and convert to gallons. (Use applicable specific gravity versus temperature curve).

.

e. Compute rate of application in gallons per square yard by utilizing the amount of bitumen applied, travel distance, and spraybar width. Any rate not within10 percent of the intended rate shall be cause for rejection.

4.5.2.3 Axle loads. Determine, by weighing, the loads on the front axle and rear tandem with the distributor and all tanks and reservoirs fully loaded. Record the results.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

4.5.2.4 Mounting.

a. Accelerate the fully loaded distributor forward from rest to 10 mph (16 Km/hr) as quickly as possible, then apply brakes to stop suddenly. When forward motion has stopped, immediately accelerate to 10 mph (16 Km/hr). Repeat the forward-acceleration and sudden-stop procedure 10 consecutive times.

b. Accelerate backwards from rest to maximum reverse high range speed as quickly as possible, then apply the brakes to stop suddenly. When reverse motion has stopped, immediately accelerate to maximum high range reverse speed. Repeat the reverse-acceleration and sudden-stop procedure 10 consecutive times.

c. Operate the distributor fully loaded with bitumen on primary and secondary highways for 250 miles each, respectively.

Any breakage or permanent deformation of the mounting devices or any misalignment between distributor and chassis shall be cause for rejection.

4.5.2.5 Electromagnetic interference. The distributor shall be tested in accordance with 3.22. The supplier shall furnish a report showing permissible interference limits and the recorded level of interference. Nonconformance to the requirements of 3.22 shall constitute failure of this test.

4.5.2.6 Transportability test.

4.5.2.6.1 Tiedown provisions test. The tiedown provisions shall be tested in accordance with MIL-STD-209 to prove conformance to 3.15.1. Inability to meet the requirements of 3.15.1 shall constitute failure of this demonstration.

4.5.2.6.2 Slinging provisions test. The slinging provisions shall be tested in accordance with MIL-STD 209 to prove conformance to 3.15.2. Inability to meet the requirements of 3.15.2 shall constitute failure of this demonstration.

4.5.2.6.3 Air transport test. The distributor shall be tested in accordance with MIL-STD-1791 to prove conformance to 3.15.3. Inability to meet the requirements of 3.15.3 shall constitute failure of this demonstration.

4.5.2.6.4 Rail impact test. The first article distributor shall be tested in accordance with MIL-STD 810 to prove conformance to 3.15.4. Inability to meet the requirements of 3.15.4 shall constitute failure of this demonstration.

4.5.2.6.5 Highway transport test. Inability to meet the requirements of 3.15.5 shall constitute failure of this demonstration.

4.5.2.7 Noise level test. Noise levels shall be measured in accordance with MIL-STD-1474 requirements and reported in the format indicated by MIL-STD-1474, figure 7. As a minimum noise levels shall be measured when equipment is operating under full load. MIL-STD-1474, 5.1.2.1.4 contours shall be taken at not fewer than 12 equal (horizontal) arc increments, one

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

increment shall include data from the noisiest position. Additionally, the noise level at the typical operating position shall be provided as dB(A) level. Failure to comply with MIL-STD-1474 provisions shall constitute failure of this test.

4.6 Run-in. Each distributor shall be run-in in accordance with the manufacturer's standard practice. The run-in shall be of a 20 minute duration. The standard practice procedure, with appropriate failure criteria, must be approved by the Government. Any failure during the run-in shall be cause for rejection of the distributor.

4.7 Inspection of packaging. The preservation, packaging and marking of the truck and equipment shall be examined to determine compliance with the applicable quality assurance provisions of MIL-D-771 and the addition requirements in section 5 specified herein.

5 PACKAGING

5.1 Preservation. Preservation shall be level A, B, or C as specified (see 6.2).

5.1.1 Level A and B. Each complete distributor shall be preserved in accordance with the applicable level A or B requirements of MIL-D-771.

5.1.2 Level C. The critical surfaces required for fit or function shall be protected by preservation coatings, volatile corrosion inhibitors or dessicated packs. A guide shall be furnished indicating the preservation materials to be removed, in detail, and any other servicing required prior to placing the distributor in operation.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A and B. Each complete distributor, preserved as specified in 5.1, shall be packed in accordance with the applicable level A or B requirements of MIL-D-771.

5.2.2 Level C. Each complete distributor shall be suitably packed for retail distribution directly to a using customer and in a manner to assure carrier acceptance and safe delivery to the destination at lowest ratings in compliance with carrier rules and regulations applicable to the mode of transportation

5.3 Marking. In addition to any special marking specified in the contract or purchase order (see 6.2), marking shall be in accordance with MIL-STD-129.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but not mandatory.)

6.1 Intended use. The truck-mounted distributor is intended for distributing liquid bitumen for road and airfield construction.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).

c. When a first article is not required (see 3.2).

d. Time frame required for submission of first article model (see 3.2).

e. When specified tools are required for operation and maintenance (see 3.12).

f. Type of chassis to be furnished (see 3.14).

g. When distributor is to be furnished unmounted (see 3.14).

h. Color required other than specified (see 3.24).

i. When overcoating with camouflage pattern is required (see 3.24).

j. When camouflage pattern data is required (see 3.24.1 and 6.4).

k. Quantity of Government-furnished property (see 3.26).

l. When specified, welding process used in fabrication of pump unit (see 3.28.2).

m. Levels of preservation and packing required (see 5.1 and 5.2).

n. Any special marking (see 5.3).

o. When transportability report is required (see 6.6).

6.2.1 Consideration of data requirements. The following data requirements must be listed, as applicable, on the Contract Data Requirements List (DD Form 1423) when this specification is applied on a contract, in order to obtain the data, except where DOD FAR Supplement 27.745-1 exempts the requirement for a DD Form 1423.

Referenced paragraph	DID Number	DID Title
a. 3.24.1	DI-MISC-80192	Color photograph prints
b. 3.24.1	DI-MISC-80176	Camouflage line art data

The above DID'S were those cleared as of the date of this specification. The current issue of DOD 5010.12-L, Acquisition Management Systems and Data Requirements Control List (AMSDL), must be researched to ensure that only current, cleared DID'S are cited on the DD Form 1423.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

6.3 First article. When a first article inspection is required, the item(s) should be a preproduction model. The first article should consist of one or more units. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, tests and approval of the first article test results and disposition of the first articles. Invitation for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract. Bidders should not submit alternate bids unless specifically requested to do so in the solicitation.

6.4 Government-furnished property. The contracting officer should arrange to furnish the property listed in 3.26.

6.5 Lubricants. MIL-STD-838 prescribes the policy for using specification-type products wherever possible and provides specific requirements for potential use of non-standard proprietary products. MIL-STD-838 is implemented by MIL-HDBK-113. The contracting officer should note that unless otherwise authorized by the US Army Belvoir Research, Development and Engineering Center (ATTN: STRBE-VF), Fort Belvoir, VA 22026-5606, lubricants, fluids, and greases for ground equipment systems must be restricted to those listed under MIL-HDBK-113, chapter 2.

6.6 Transportability report. When specified (see 6.2), the contracting officer should arrange for the contractor to furnish a transportability report in accordance with AR-70-47 and S.O.P. 70-38 for the distributors, 95 days prior to delivery of the first article distributor.

6.7 AOL certification. This specification is certified to be in compliance with current Army Material Command (AMC) policy for the elimination of AQL's/LTPD's (Acceptable Quality Levels/Lot Tolerance Percent Defectives) from military specifications.

(Certified by/date: M. E. Taylor 12/2/89.)

6.8 Subject term (key word) listing.

Distributor, asphalt
Distributor, bituminous material
Distributor, tank type
Distributor, truck mounted

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

6.9 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.


Custodian:
Army – ME

Preparing activity:
Army – ME

Review activity:
Army – AT

Project: 3895-A250

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

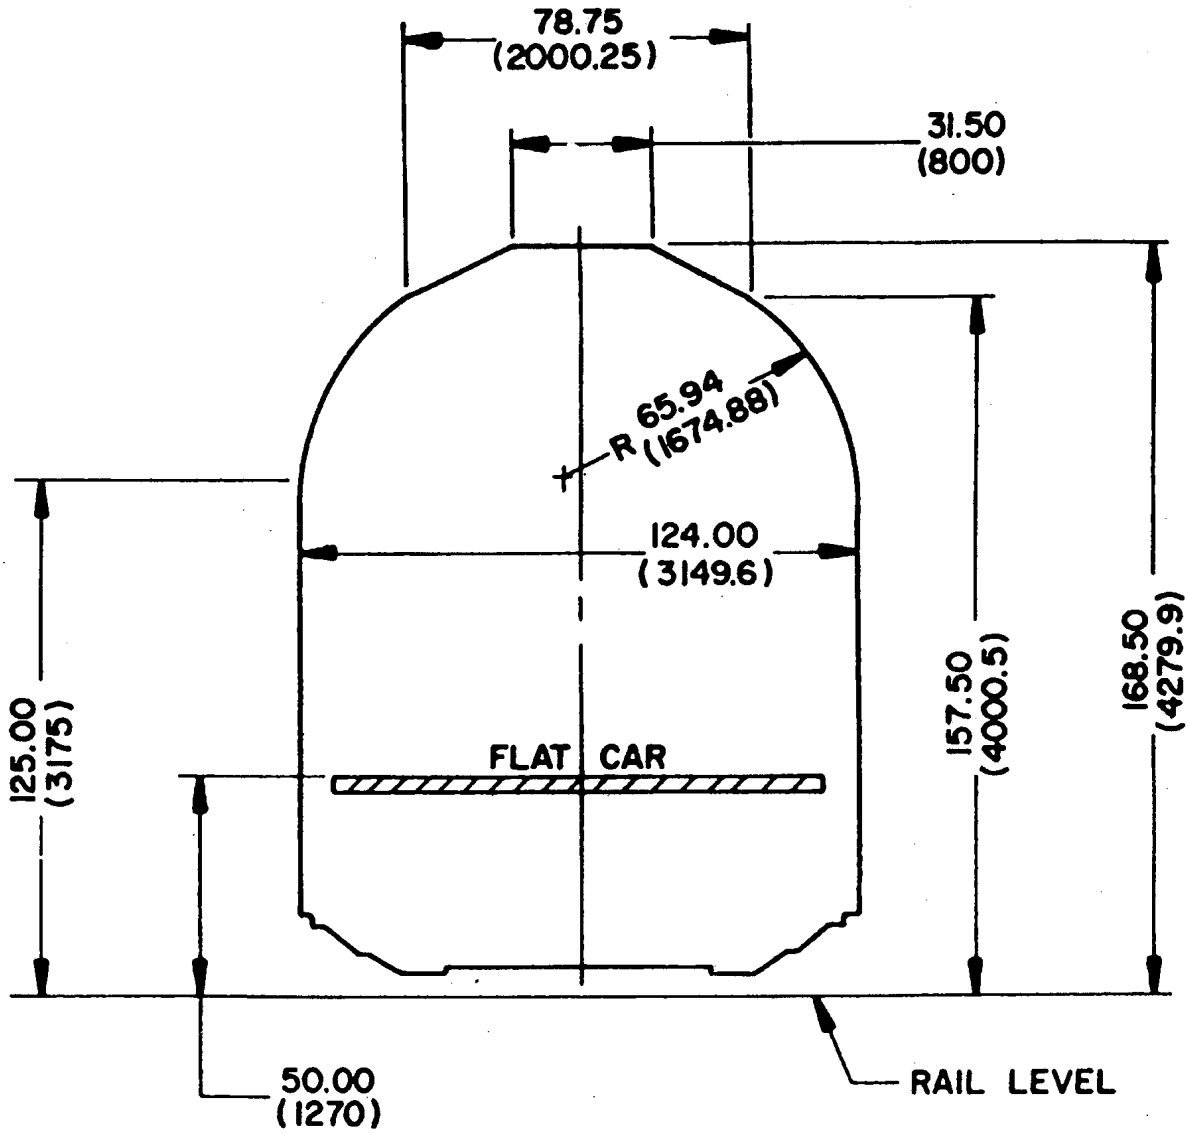

NOTE: DIMENSIONS SHOWN: INCHES (MILLIMETERS)

FIGURE 1. Gabarit International De Chargement (GIC) clearance diagram.

X-4093C

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.