INCH-POUND

MIL-PRF-49471/11(ER)
2 June 1995

PERFORMANCE SPECIFICATION SHEET

BATTERY, NON-RECHARGEABLE, HIGH PERFORMANCE, BA-X800/U

This specification is approved for use within Army Research Laboratory, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-PRF-49471(ER).

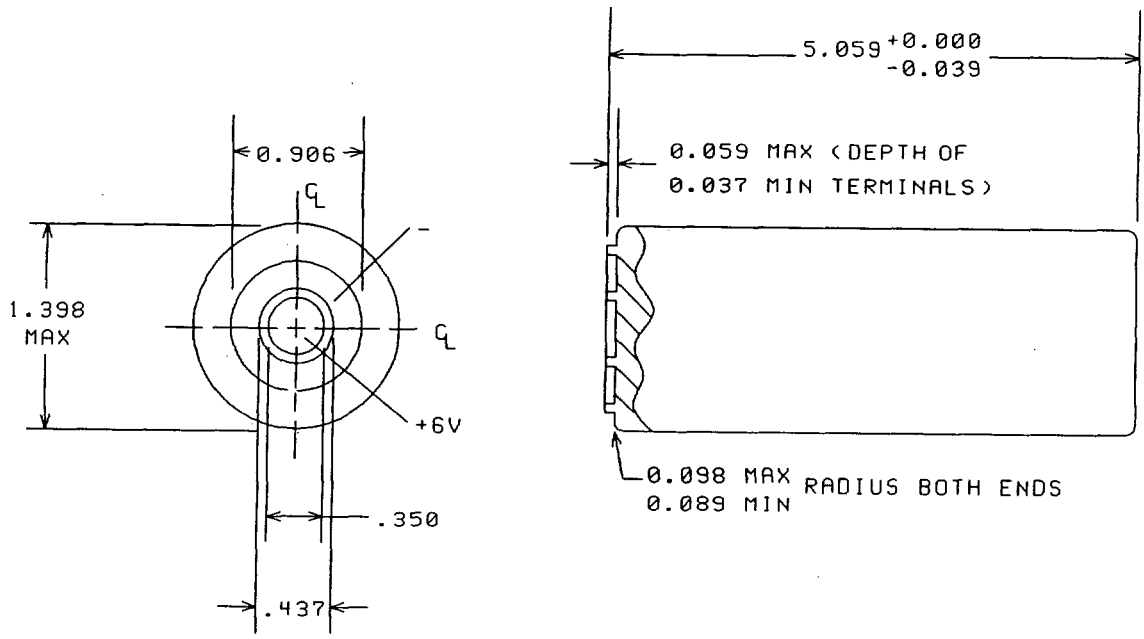


Figure 1. Battery dimensions.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:12Z
Check the source to verify that this is the current version before use.

NOTES:

1. All dimensions are in inches.

2. Tolerances are as follows (except as noted on Figure 1):
X.XXX ±0.004

3. Electrical terminal contacts are 0.01 inches thick.

REQUIREMENTS:

Dimensions and configuration: See Figure 1.

Maximum voltage: 6.10 volts.

Minimum voltage for capacity: 4.00 volts.

Safety features: Applicable.

Charge protection device: Applicable.

High temperature device: Applicable.

Weight (maximum): 0.48 pound (220 grams).

Complete discharge device: Applicable.

Capacity tests: When the battery is tested in accordance with the method of examination and tests of this specification, the minimum capacity requirements shall be as specified below:

Capacity Test	Minimum Capacity Requirements in Hours to 4.00 volts
I	3.2
L	1.7
H	5.6
HT	5.4
LT	1.5
IT	2.8

Initial voltage delay: During the I, H, HT, and IT discharge test, initial voltage below 4.00 volts cannot exceed a 5.0 second duration. During the L and LT discharge tests, initial voltages below 3.80 volts cannot exceed a 60.0 second duration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:12Z
Check the source to verify that this is the current version before use.

METHODS OF EXAMINATION AND TESTS:

Capacity test:

(1) Storage:

Details on storage conditions for all capacity tests are specified in the basic specification.

(2) Discharge:

Cells (forced discharge): Two cells shall be discharged at 2.0 amperes at 70±5°F to 2/3 of open-circuit voltage. Each discharged cell shall then be connected in series to one fresh cell. Each string shall be discharged at 2.0 amperes at 70±5°F to 2/3 open-circuit voltage of the one fresh cells.

Batteries: For all capacity tests, except the H and HT, the batteries shall be discharged at two amperes constant current to zero volts. For the H and HT capacity tests the batteries shall be discharged through two amperes constant current for five minutes followed by open circuit for five minutes. This cycle shall be repeated until the closed-circuit voltage reaches zero volts. There shall be no venting, fire or explosion when the batteries are discharged.

Closed-circuit voltage test: Load resistance of 5 ohms shall be used. Voltage shall be above 4.00 volts within 5 seconds.

Custodian:
Army - ER

Preparing Activity:
Army - ER

(Project 6135-A274-11)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:12Z
Check the source to verify that this is the current version before use.