
MILITARY SPECIFICATION SHEET

SHIM, LAMINATED, ROUND, CLASS 1 (.002) LAMINATES

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the shims described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation:
MIL-S-70344

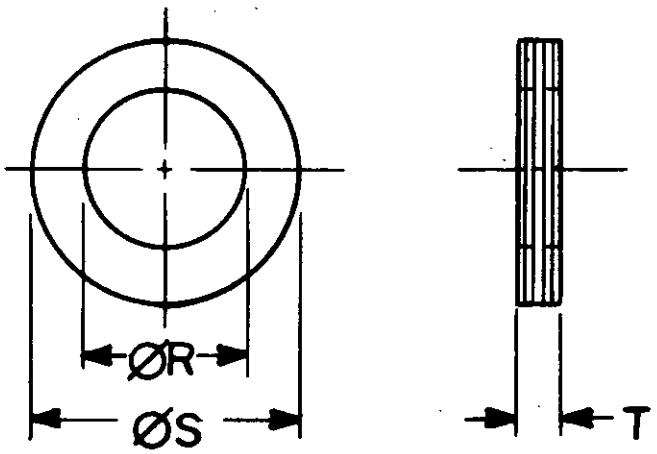


NOTES:
1. All dimensions are in inches.
2. Dimensional data is specified in Table I herein.
3. Shim to be free of burrs.

FIGURE 1. SHIM, LAMINATED, ROUND, CLASS 1 (.002) LAMINATES



DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-23T03:25Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Material:
   Aluminum Alloy
   Brass
   CRES

2. Tolerances: Unless otherwise specified, tolerances shall be as specified:

| THICKNESS | DIAMETER | |
|---|---|---|
| (See procurement specification) | Up to 1 inch | - ± .003 |
| | Over 1 inch up to 3 inches | - ± .005 |
| | Over 3 inches | - ± .010 |

3. Part number: The part number consists of the letter "M", the basic number of this specification sheet, followed by a dash number taken from Table I plus a material code letter and a type number.

Example: M70344/1-01A2

- Type code
  "1" Type I
  "2" Type II
  "3" Type III
- Material
  "A" Aluminum alloy
  "B" Brass
  "C" CRES
- Dash number as tabulated in Table I
- Specification sheet number

M70344/1-09C2 Indicates - Shim, Laminated, Round; .120 ID x .340 OD x .030 Thick in CRES, one-half solid, one-half laminations of .002 thickness each.

M70344/1-26A1 Indicates - Shim, Laminated, Round; .900 ID x 1.100 OD x .048 Thick in Aluminum Alloy, all laminations of .002 thickness each.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:25Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS (.002 LAMINATES)

| T THICKNESS | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| .006 | | | .010 | | | .016 | | | .020 | | | .024 | | | .030 | | |
| DASH NO | ØR ID | ØS OD | DASH NO | ØR ID | ØS OD | DASH NO | ØR ID | ØS OD | DASH NO | ØR ID | ØS OD | DASH NO | ØR ID | ØS OD | DASH NO | ØR ID | ØS OD |
| 01 | .452 | .875 | 03 | .530 | 1.000 | 05 | .130 | .210 | 06 | .200 | .340 | 08 | .375 | .531 | 09 | .120 | .340 |
| 02 | 3.500 | 4.000 | 04 | 1.310 | 2.000 | | | | 07 | .270 | .390 | | | | | | |

TABLE I. DASH NUMBERS AND DIMENSIONS (.002 LAMINATES) -CONTINUED

| T THICKNESS | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| .032 | | | .035 | | | .042 | | | .048 | | | .060 | | | .062 | | |
| DASH NO | ØR ID | ØS OD | DASH NO | ØR ID | ØS OD | DASH NO | ØR ID | ØS OD | DASH NO | ØR ID | ØS OD | DASH NO | ØR ID | ØS OD | DASH NO | ØR ID | ØS OD |
| 10 | .107 | .215 | 21 | .280 | .500 | 22 | .321 | .430 | 23 | .265 | .500 | 27 | .800 | 1.200 | 28 | .203 | .438 |
| 11 | .140 | .230 | | | | | | | 24 | .328 | .625 | | | | 29 | .340 | .620 |
| 12 | .180 | .280 | | | | | | | 25 | .516 | 1.000 | | | | 30 | .406 | .625 |
| 13 | .190 | .280 | | | | | | | 26 | .900 | 1.100 | | | | 31 | .390 | .687 |
| 14 | .110 | .290 | | | | | | | | | | | | | 32 | .520 | .720 |
| 15 | .266 | .430 | | | | | | | | | | | | | 33 | .515 | .875 |
| 16 | .255 | .500 | | | | | | | | | | | | | 34 | .625 | .875 |
| 17 | .265 | .500 | | | | | | | | | | | | | 35 | .641 | .938 |
| 18 | .480 | .610 | | | | | | | | | | | | | 36 | 1.190 | 1.500 |
| 19 | .385 | .875 | | | | | | | | | | | | | 37 | .900 | 1.520 |
| 20 | .390 | 1.250 | | | | | | | | | | | | | 38 | 5.420 | 5.890 |





Source: https://assist.dla.mil -- Downloaded: 202610-23T03:25Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS (.002 LAMINATES) - CONTINUED

| T THICKNESS | | | | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| .064 | | | .072 | | | .093 | | | .094 | | | .120 | | | .150 | | | .156 | | |
| DASH NO | ØR ID | ØS OD | DASH NO | ØR ID | ØS OD | DASH NO | ØR ID | ØS OD | DASH NO | ØR ID | ØS OD | DASH NO | ØR ID | ØS OD | DASH NO | ØR ID | ØS OD | DASH NO | ØR ID | ØS OD |
| 39 | .190 | .238 | 42 | .550 | .680 | 43 | .124 | .275 | 45 | .205 | .430 | 47 | .495 | .660 | 48 | .520 | .810 | 49 | .385 | .780 |
| 40 | 1.063 | 1.500 | | | | 44 | .190 | .420 | 46 | .156 | .500 | | | | | | | 50 | .820 | 1.770 |
| 41 | 1.805 | 2.125 | | | | | | | | | | | | | | | | | | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:25Z
Check the source to verify that this is the current version before use.

Custodians:
Army - AR
Air Force - 99

Review activities:
Army - AV, MI
Air Force - 82
DLA - IS

User activities:
Army - AT
NSA - NS

Preparing activity:
Army - AR

Agent:
DLA - IS

(Project 5365-0122)



Source: https://assist.dla.mil -- Downloaded: 202610-23T03:25Z
Check the source to verify that this is the currentversion before use.