MILITARY SPECIFICATION SHEET

ELECTRON TUBE, MAGNETRON

TYPE 4J52A

This amendment forms a part of MIL-E-1/800E, dated 4 February 1969, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 8

FIGURE 1, Quality conformance inspection, part 3 (periodic check), dimensions "P" and "AF": Delete "Nominal" and substitute "Maximum".

PAGE 11

* Following figure 1, add figure 2 as printed on pages 2, 3, 4, 5, 6, and 7 of this amendment.

The margins of this amendment are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Air Force - 11, 17
DLA - ES

User activities:
Army - AR, ME
Navy - AS, CG, OS, SH
Air Force - 19


Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5960-3371)

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T13:30Z
Check the source to verify that this is the current version before use.

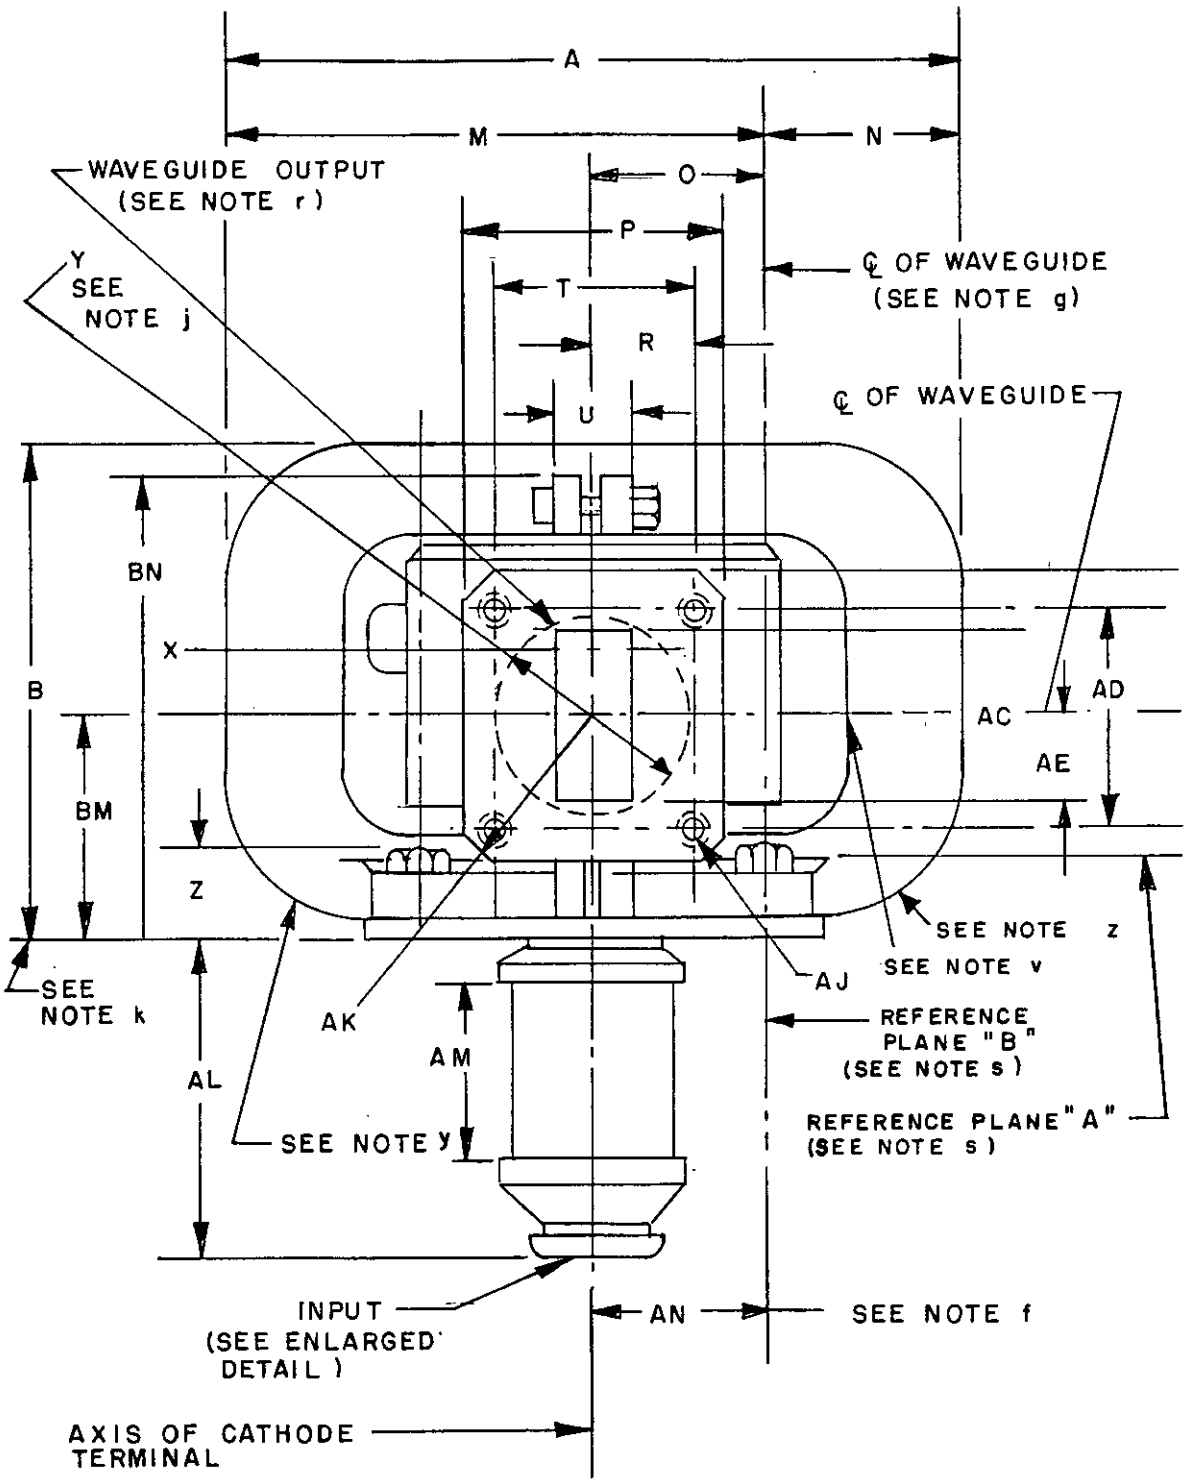

FRONT VIEW

FIGURE 2. Alternate outline drawing of electron tube type 4J52A.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T13:39Z
Check the source to verify that this is the current version before use.

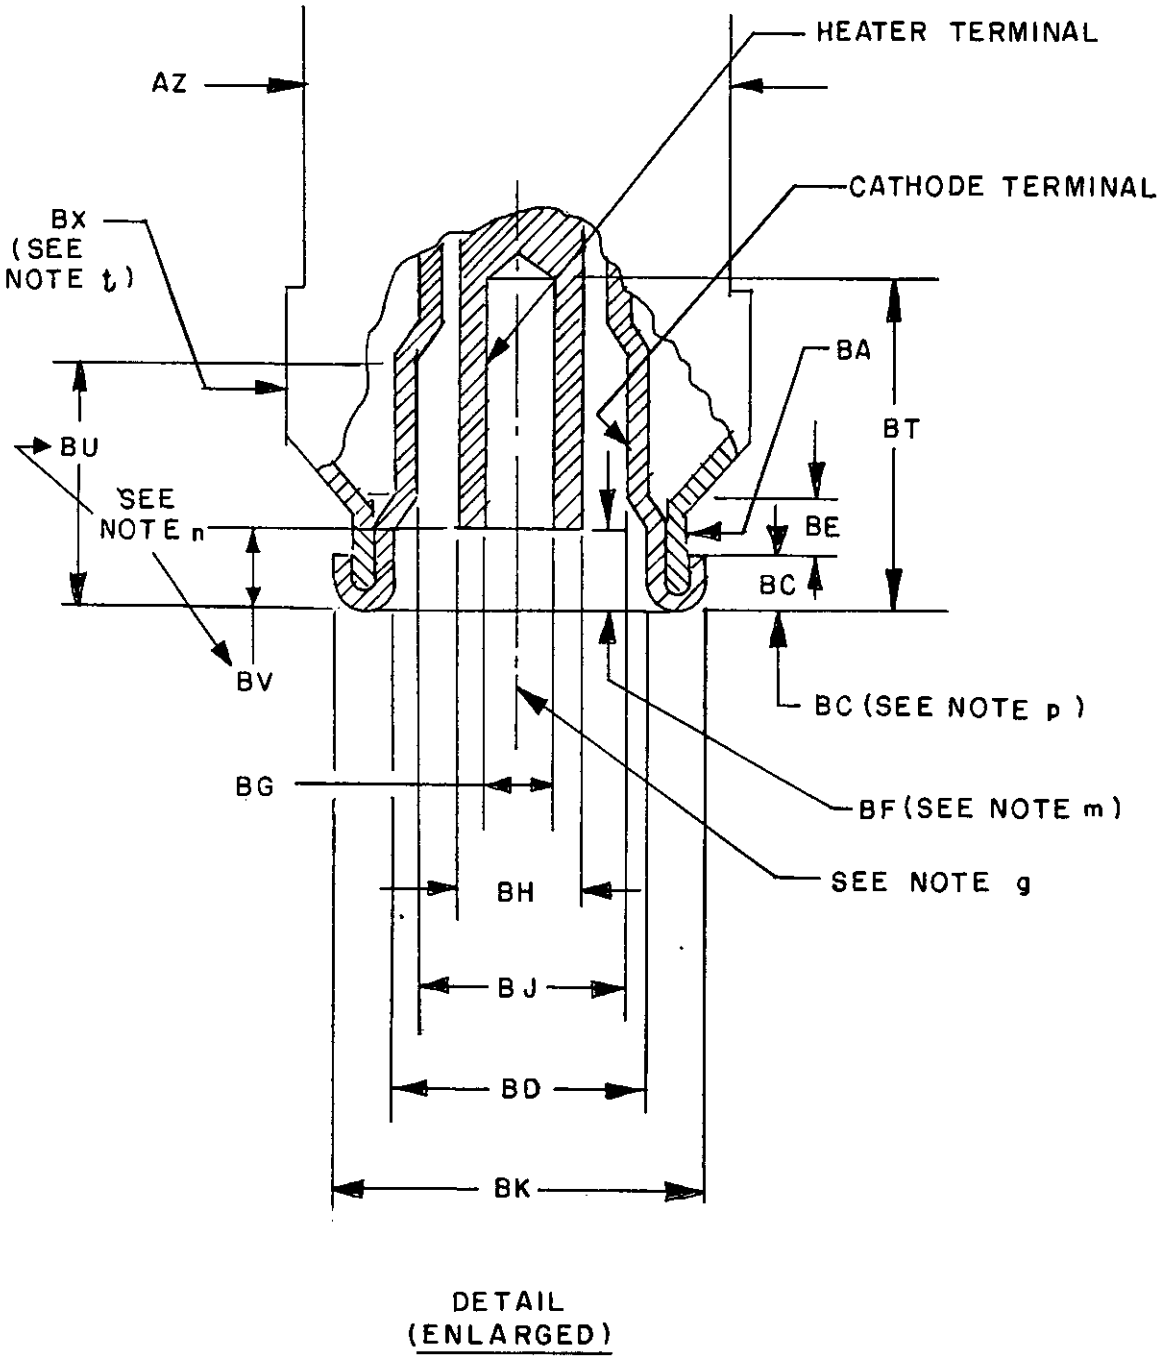


FIGURE 2. Alternate outline drawing of electron tube type 4J52A - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T13:39Z
Check the source to verify that this is the current version before use.

Ltr	Dimensions in inches with metric equivalents (mm) in parentheses		Notes
	Minimum	Maximum	
Quality conformance inspection, part 1			a
O	1.250 (31.75)	1.280 (32.51)	g
R	.732 (18.59)	.742 (18.85)	
T	1.470 (37.34)	1.478 (37.54)	
Z	.594 (15.09)	.656 (16.66)	
AD	1.348 (32.24)	1.356 (34.44)	
AE	.671 (17.04)	.681 (17.30)	
AL	2.094 (53.19)	2.219 (56.36)	
BC	.115 (2.92)	.135 (3.43)	p
BD	.610 (15.49)	.650 (16.51)	
BF	.125 (3.18)	.187 (4.75)	m
BG	.164 (4.17)	.174 (4.42)	
BH	.234 (5.94)	.266 (6.76)	
BJ	.532 (13.51)	.545 (13.84)	
BK	.825 (20.96)	.838 (21.29)	
BM	1.386 (35.20)	1.426 (36.22)	
Quality conformance inspection, part 2			b
A	---	5.938 (150.83)	
B	---	3.156 (80.16)	
M	---	4.250 (107.95)	
N	---	1.688 (42.88)	
Q	---	1.906 (48.41)	
U	---	1.438 (36.53)	
AM	1.250 (31.75)	---	
BE	.125 (3.18)	---	
BN	---	2.938 (74.63)	
BT	.750 (19.05)	---	
BU	.516 (13.11)	---	n
BV	---	.200 (5.08)	n


QCI-3

Ltr	Dimensions in inches with metric equivalents (mm) in parentheses		Notes
	Minimum	Maximum	
Quality conformance inspection, part 3			c
P	---	1.830 (46.48)	
AF	---	1.830 (46.48)	
	References Dimensions		
X	.497 (12.62)		
Y	1.625 (41.28)		
AJ	No. 8-32 UNC-2B		
AK	1.156 (29.36)		
AN	1.265 (32.13)		f
AZ	1.125 (28.58)		
BA	.750 (19.05)		
BX	1.000 (25.40)		t

FRONT VIEW AND DETAIL DIMENSION

FIGURE 2. Alternate outline drawing of electron tube type 4J52A - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T13:39Z
Check the source to verify that this is the current version before use.

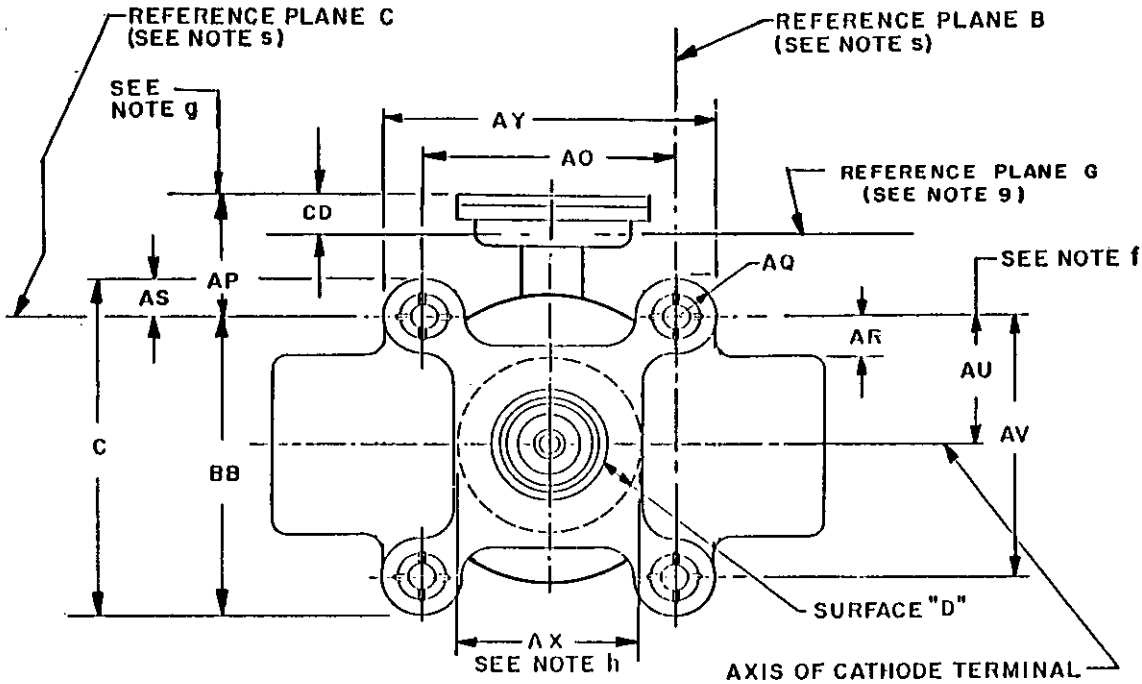


BOTTOM VIEW

Ltr	Dimensions in inches with metric equivalents (mm) in parentheses		Notes
	Minimum	Maximum	
Quality conformance inspection, part 1			a
AP	.990 (25.15)	1.040 (26.42)	g
AV	2.771 (70.38)	2.791 (70.89)	
AO	2.521 (64.03)	2.541 (64.54)	
Quality conformance inspection, part 2			b
C	---	3.625 (92.08)	
AR	---	.594 (15.09)	
AS	---	.422 (10.72)	
AX	1.875 (47.63)	---	h
AY	---	3.438 (87.33)	
BB	---	3.203 (87.33)	
Quality conformance inspection, part 3 periodic check			c
	Reference dimensions		c
AQ	.375 (9.53)		
AU	1.391 (35.33)		f
CD	.411 (10.44)		9

FIGURE 2. Alternate outline drawing of electron tube type 4J52A - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T13:39Z
Check the source to verify that this is the current version before use.

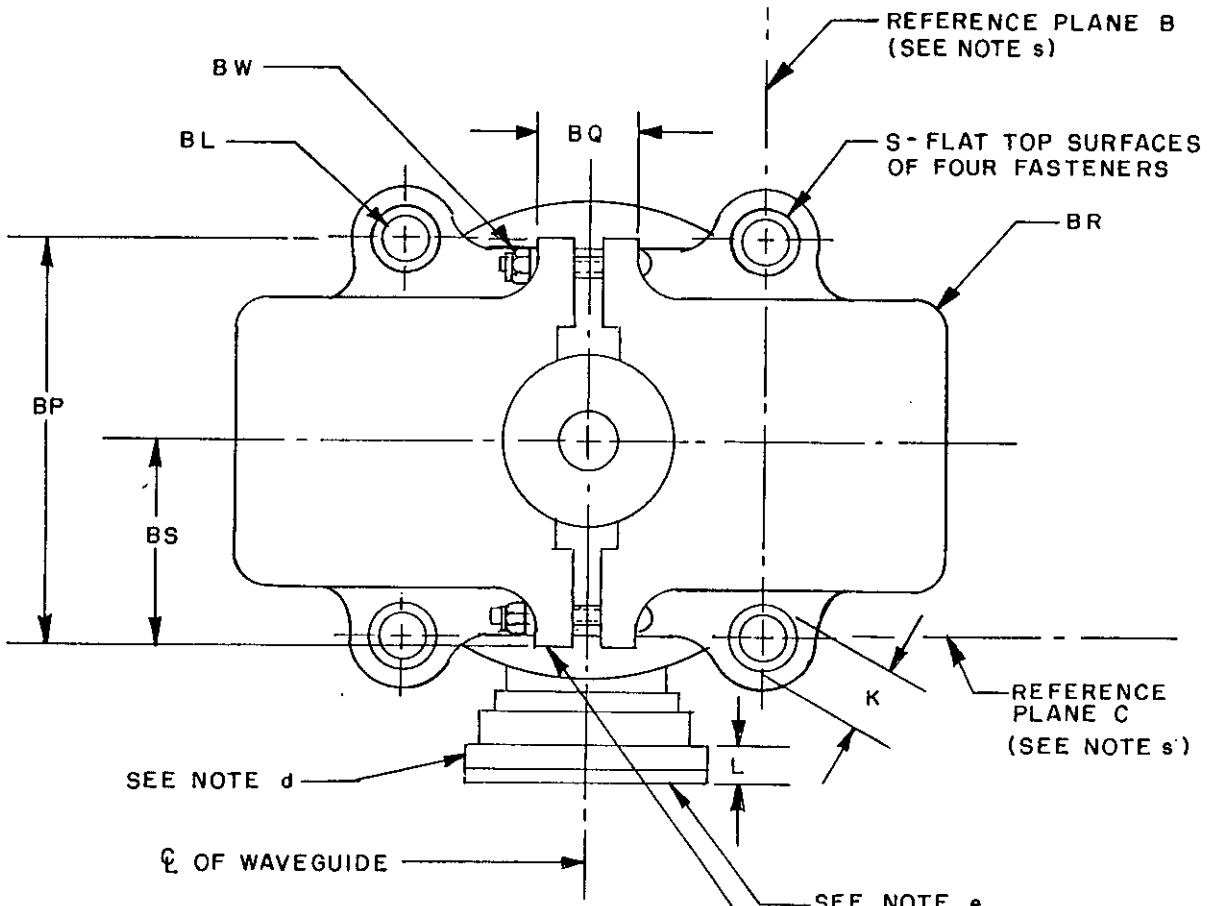

Ltr	Dimensions in inches with metric equivalents (mm) in parentheses		Notes
	Minimum	Maximum	
Quality conformance inspection, part 1			a
BS	1.334 (34.14)	1.438 (36.53)	
BL	.276 (7.01)	.286 (7.26)	
Quality conformance inspection, part 2			b
BP	---	2.875 (73.03)	
BQ	---	.625 (15.88)	
BR	.031R (0.79)		
Quality conformance inspection, part 2			b
Reference dimensions			
Nominal			
K	.500 (12.70)		
L	.250 (6.35)		
BW	No. 6-32 UNC-2A		

TOP VIEW

FIGURE 2. Alternate outline drawing of electron tube type 4J52A - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T13:39Z
Check the source to verify that this is the current version before use.

NOTES:

a. Unless otherwise specified, the AQL for all tests listed under quality conformance inspection, part 1 shall be 1 percent with inspection level of II.
b. Unless otherwise specified, the AQL for all tests listed under quality conformance inspection, part 2 shall be 6.5 percent with inspection level of S3.
c. If these tests have been previously performed by the tube manufacturer, and if the materiel, manufacturing process and test requirements are the same as when the tests were performed, the subject test(s) need not be performed.
d. All metal surfaces black finished except those designated surface S and surface D. Surfaces S shall be gold, silver, nickel or bright alloy plated, or brass surfaces, except as specified.
e. Hermetic connections may be made to surface D.
f. Axis of cathode terminal shall occupy specified location within .047 (1.19 mm) radius. Note g shall apply.
g. Limits include angular and lateral deviations.
h. With diameter AX resting on a plane surface coincident with reference plane A, a gage .010 (0.25 mm) thick and .125 (3.18 mm) wide shall not enter, and areas of the base plate outside diameter AX shall be within .010 (0.25 mm) of the plane surface.
j. With diameter Y resting on a plane surface, a gage .005 (0.13 mm) thick and .125 (3.18 mm) wide shall not enter.
k. Any portion of the assembly which extends below reference plane A shall be within .625 (15.88 mm) radius of specified axis of input.
m. Defines extremity of cylindrical section designated BG.
n. Defines extremity of cylindrical section designated BJ.
p. Clamping shall be confined to this area.
q. Heater terminal and cathode terminal shall be concentric within .010 (0.25 mm).
r. Protective covers shall be provided with tube.
s. Reference planes A, B and C are mutually perpendicular.
t. Reference point for cathode temperature measurements. Locate on dimension BX.
u. Gold, silver or nickel plate over full extent of maximum plug penetration.
v. Reference point for anode temperature measurements. Locate where a central fin meets the anode block near the output section.
w. Extremity of magnet lug shall coincide with reference plane C within .094 (2.39 mm).
x. For vibration tests, planes of vibration shall be reference planes A, B and C.
y. See note z. Warning: Maintain minimum 2 inches (50.8 mm) between this magnet and magnetic materials (magnets, steel tool, plates, etc).
z. Manufacturers code designation and tube serial number shall appear within this area.

FIGURE 2. Alternate outline drawing of electron tube type 4J52A - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T13:39Z
Check the source to verify that this is the current version before use.