MILITARY SPECIFICATION SHEET

ELECTRON TUBE, POWER

TYPE 845W

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the electron tube described herein shall consist of this document and the latest issue of Specification MIL-E-1.

DESCRIPTION: Triode

See figure 1

Mounting position: Vertical with base down, or in horizontal position with pins 1 and 3 in vertical plane.

Weight: 8-ounces nominal (228.8 grams)

ABSOLUTE RATINGS: C Telegraphy

Parameter:	Fl	Ef	Eb	Ec	Ib	Ic	Pp	Pi
Unit:	MHz	V	Vdc	Vdc	mAdc	mAdc	W	W
Maximum:	6	10.5	1,250	-400	175	40	100	220
Minimum:	---	9.5	---	---	---	---	---	---
TEST CONDITIONS:	---	10.0 Vdc (Note 2)	1,250	---	---	---	---	---

GENERAL:

Qualification - Required

© denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T13:41Z
Check the source to verify that this is the current version before use.

METHOD	REQUIREMENT OR TEST	CONDITIONS	AQL (PERCENT DEFECTIVE)	INSPECTION LEVEL OR CODE	SYMBOL	LIMITS MIN	LIMITS MAX	UNIT
	Quality conformance inspection, part 1							
1221	Short and discontinuity detection		0.4	II	---	---	---	---
1301	Filament current		0.65	II	If	3.1	3.4	Adc
1236	Power oscillation	Ic = 25 mAdc; Rg = 10,000 ohms; Ib = 175 mAdc	0.65	II	Po	135	---	W (useful)
1256	Electrode current (anode)	Eb = 1,000 Vdc; Ec = -150 Vdc	0.65	II	Ib	40	90	mAdc
1266	Total grid current	Ec/Ib = 100 mAdc (see note 1)	0.65	II	Ic	0	-10	µAdc
1231	Emission by oscillation	Power oscillation (see note 1)	0.65	II	Ef	---	9.0	Vdc
	Quality conformance inspection, part 2							
Ⓒ 1041	Shock	Accel = 30 G, 11 ±2 ms	---	---	---	---	---	---
1031	Low-frequency vibration	Eb = 250 Vdc; Ec/Ib = 10 mAdc; Rp = 2,000 ohms	---	---	Ep	---	500	mVac
1236	Internal insulation		---	---	---	---	---	---
1316	Amplification factor	Eb = 1,000 Vdc; Ec/Ib = 75 mAdc	---	---	Mu	4.8	5.8	---
1331	Direct-interelectrode capacitance		---	---	Cgp Cin Cout	9.5 3.9 3.8	14.7 6.1 6.2	pF pF pF
	Quality conformance inspection, part 3							
Ⓒ ---	Life test	Group C; Ff = 10 V; Pp = 100 W; Eb = 1,000 Vdc (min); t = 500 hours	---	---	---	---	---	---
--- 1231	Life - test end point: Emission by oscillation		---	---	Ef	---	9.5	Vdc

NOTES:

1. The tests listed below shall be the first tests performed after the holding period in the following order:
   First: Total grid current.
   Second: Emission by oscillation.

2. When using DC on the filament, then the negative filament terminal, shall be ground and serve as the reference point for the other DC electrode voltages.

Custodians:
Army - EL
Navy - EC
Air Force - 85

Review activities:
Air Force - 11, 17, 80
DSA - ES


User activities:
Army - ME
Navy - AS, OS, MC, CG, SH

Preparing activity:
Navy - EC

Agent:
DSA - ES

(Project 5960-2891)

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T13:41Z
Check the source to verify that this is the current version before use.

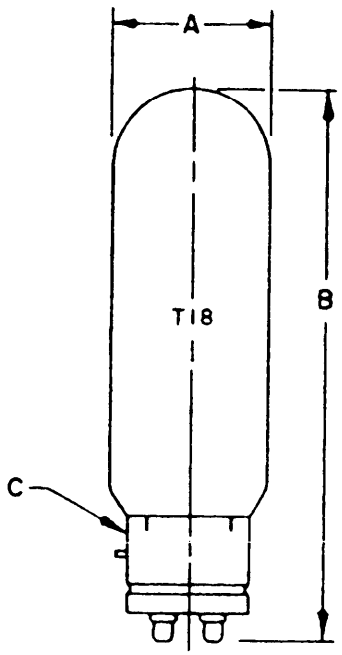

PIN CONNECTIONS	
Pin No.	Element
1	g
2	f
3	a
4	f

Ltr	Dimensions in inches with metric equivalents (mm) in parentheses	
	Minimum	Maximum
Quality conformance inspection, part 1		
A		2.312 (58.72)
B		7.875 (200.03)
© Quality conformance inspection, part 3 (see note)		
C	Base: A4-29 (EIA)	

NOTE:
A sample size of three tubes shall be checked annually, with no failures allowed. In case of a sample failure, the test shall become a quality conformance inspection (QCI), part 2 test, for three successful consecutive submissions, at which time the test may revert to the QCI, part 3 test.

FIGURE 1. Outline drawing of electron tube type 845W.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T13:41Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T13:41Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
NAVAL ELECTRONIC SYSTEMS COMMAND
WASHINGTON, D. C. 20360

POSTAGE AND FEES PAID
NAVY DEPARTMENT
DOD 316

OFFICIAL BUSINESS

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, D. C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T13:41Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T13:41Z
Check the source to verify that this is the current version before use.