MILITARY SPECIFICATION SHEET

ELECTRON TUBE, POWER

TYPE 5762

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the electron tube described herein shall consist of this document and the latest issue of Specification MIL-E-1.

DESCRIPTION: Triode, forced air-cooled

See figure 1

Mounting position: Vertical, either end up

Weight: 6.25-pounds (2.84 kg) nominal

ABSOLUTE RATINGS: C Telephony

Parameter:	Fl	Ef	Eb	Ecl	Ic	Ib	Pi	Pp	Cooling
Unit:	MHz	Vac	Vdc	Vdc	Adc	Adc	kW	kW	Note 2
Maximum:	110	13.23	5,250	-1,000	0.3	1.4	5.5	2.5	---
Minimum:	---	11.97	---	---	---	---	---	---	---
TEST CONDITIONS:	---	12.6	4,000	---	---	---	---	---	Note 2

GENERAL:

Qualification - Required

Ⓑ denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T13:41Z
Check the source to verify that this is the current version before use.

METHOD	REQUIREMENT OR TEST	NOTES	CONDITIONS	AQL (PERCENT DEFECTIVE)	INSPECTION LEVEL OR CODE	SYMBOL	LIMITS MIN	LIMITS MAX	UNIT
	Quality conformance inspection, part 1								
1301	Filament current	-		0.65	II	If	27.0	31.0	Aac
1261	Electrode voltage (grid)	-	Ec/Ib = 0.05 Adc	0.65	II	Ec	-125	-190	Vdc
1231	Peak emission	3	eb = ec = 1,500 v	0.65	II	is	19	---	a
1266	Total grid current	1,3	Ec/Ib = 0.7 Adc; t = 300 sec	0.65	II	Ic	---	-40	µAdc
	Quality conformance inspection, part 2								
1261	Electrode voltage (1) (anode)	-	Eb/Ib = 0.5 Adc; Ec = -50 Vdc	---	---	Eb(1)	2,600	3,400	Vdc
1261	Electrode voltage (2) (anode)	-	Eb/Ib = 0.5 Adc; Ec = 0	---	---	Eb(2)	1,350	1,750	Vdc
1316	Amplification factor	-	Eb(1)-Eb(2)/50	---	---	Mu	25	33	---
1236	Power oscillation	1	Eb = 5,000 Vdc; Ib = 1.1 Adc; Ic = 275 mAdc; Rg = 1,500 ohms; F = 110 MHz; t = 300 sec	---	---	Po	3,000	---	W (useful)
1331	Direct-interelectrode capacitance			---	---	Cgp Cin Cout	16.5 15.5 0.38	20.5 22.5 0.62	pf pF pF
	Quality conformance inspection, part 3								
---	Service-life guarantee	-	t = 1,000 hours	---	---	---	---	---	---

NOTES:

1. The airflow through the radiator shall be such that the anode temperature at the end of the specified test duration is between 240° to 260°C. Minimum airflow to heater from a 1-inch diameter nozzle shall be 10 cfm.
2. Maximum bulb, anode-seal, and grid seal temperature shall be 150°C; maximum radiator temperature, 180°C; and maximum filament seal temperature, 175°C.
3. These tests are to be the first tests performed at the conclusion of the holding period in the following order: Total grid current and peak emission.

Custodians:
Army - EL
Navy - EC
Air Force - 85

Review activities:
Air Force - 17, 80
DSA - ES


User activities:
Army - MU
Navy - AS, OS, MC, CG, SH
Air Force - 11

Preparing activity:
Navy - EC

Agent:
DSA - ES

(Project 5960-2939)

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T13:41Z
Check the source to verify that this is the current version before use.

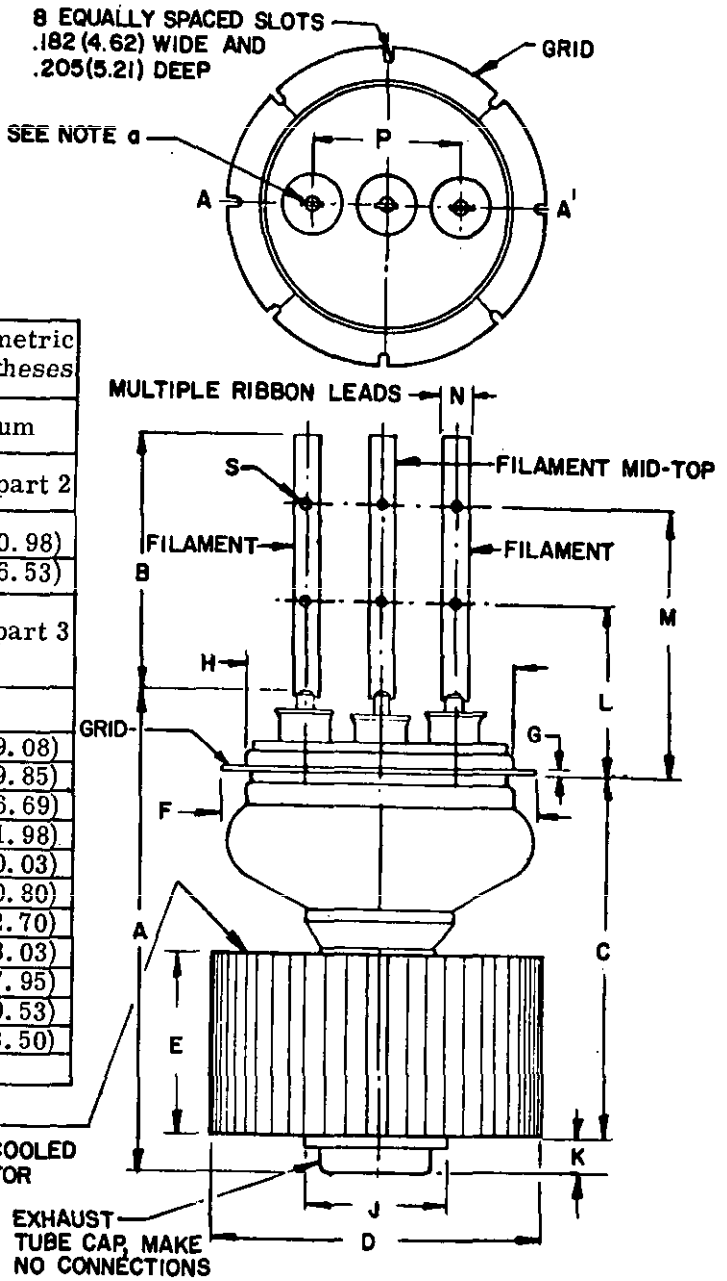

Ltr	Dimensions in inches with metric equivalents (mm) in parentheses	
	Minimum	Maximum
Quality conformance inspection, part 2		
A	---	7.125 (180.98)
C	5.125 (130.18)	5.375 (136.53)
Ⓑ Quality conformance inspection, part 3 (see note b)		
B	3.500 (88.90)	---
D	4.563 (115.90)	4.688 (119.08)
E	---	2.750 (69.85)
F	4.531 (115.09)	4.594 (116.69)
G	.047 (1.19)	.078 (1.98)
H	---	3.938 (100.03)
J	---	2.000 (50.80)
K	---	.500 (12.70)
L	2.125 (53.98)	2.875 (73.03)
M	3.500 (88.90)	4.250 (107.95)
N	.250 (6.35)	.375 (9.53)
P	---	2.500 (63.50)
S	.144 (3.66) dia #27 drill	

NOTES:

a. Plane of filament leads shall not deviate more than 3-1/2° from plane passing through A - A' normal to grid flange.

b. Dimensions shall be checked during the initial production and once each succeeding 12-calendar months in which there is production. A regular double sampling plan shall be used, with the first sample of three tubes with an acceptance number of zero, and a second sample of three tubes with a combined acceptance number of two. In the event of failure, the test will be made as a part of quality conformance inspection, part 2, code level D, with an AQL of 6.5. The regular "12-calendar month" double sampling plan shall be reinstated after three consecutive samples have been accepted.

FIGURE 1. Outline drawing of electron tube type 5762.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T13:41Z
Check the source to verify that this is the current version before use.