INCH-POUND

MIL-PRF-1/806G
17 September 1999
SUPERSEDING
MIL-E-1/806F
9 May 1975

PERFORMANCE SPECIFICATION SHEET

ELECTRON TUBE, THYRATRON
TYPE 4C35A

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the electron tube described herein shall consist of this document and the latest issue of MIL-PRF-1.

DESCRIPTION: Triode, hydrogen.

See figure 1.

Mounting position: Any.

Weight: 8 ounces (226.8 grams) nominal.

ABSOLUTE RATINGS:

Parameter:	Ef	epy	epx	Ebb	Ecc	egx	egy
Unit:	V	kv	kv	V dc	V dc	v	v
Maximum:	6.6	8.0 1/	8.0 2/	---	---	200	---
Minimum:	5.7	---	5 % epy	2,500	---	---	3/
Test conditions:	6.3	8.0	---	---	0	---	130

ABSOLUTE RATINGS:

Parameter:	ib	Ib	prr	Pb	$\frac{dik}{dt}$	tk	TA
Unit:	a	mA dc	---	---	$\frac{a}{\mu s}$	---	°C
Maximum:	90	100	---	2.0×10^9	1,000	---	+90
Minimum:	---	---	---	---	---	180	-50
Test conditions:	---	---	2,800	---	---	---	---

See footnotes at end of table I.

GENERAL:

Qualification: Required.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T13:40Z
Check the source to verify that this is the current version before use.

TABLE I. Testing and inspection.

Inspection	Method	Notes	Conditions	Acceptance Level 11/	Symbol	Limits		Unit
						Min	Max	
Conformance inspection, part 1								
Heater current	3241	---		0.65	If	5.50	6.70	A ac

Instantaneous starting	3267	5/ 6/	epy = 7.0 kv (min);
			tk = 180 sec;
			Ef = 6.60 V ac
				0.65	---	---	---	---

Operation (1)	3246	5/ 9/	epy = 10.0 kv (min); Ef = 5.70 V ac; t = 300 sec	0.65	egy	---	130	v
DC anode voltage for conduction	3247	---	Ef = 5.70 V ac	0.65	Ebb	---	1,500	V dc
Pulse emission (method A)	3251	---	ik = 90a (min); prr = 60 ± 10 percent; tp = 5.0 µs ± 10 percent; tr = 0.5 µs (max); specified time interval = 2.5 µs	0.65	egk	---	150	v
Conformance inspection, part 2								
High-frequency vibration	1031	---	No voltages applied	---	---	---	---	---
Operation (2)	3246	---	Operation (1); Ef = 6.60 V ac	---	egy	---	130	v
Anode delay time	3256	---	Operation (1); Ef = 6.3 V ac; t = 120 sec	---	tad	---	0.60	µs
Anode delay time drift	3256	7/	Anode delay time	---	Δtad	---	0.10	µs
Time jitter	3261	5/	epy = 3.0 kv (max)	---	tj	---	0.005	µs

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T13:40Z
Check the source to verify that this is the current version before use.

TABLE I. Testing and inspection - Continued.

Inspection	Method	Notes	Conditions	Acceptance Level 11/	Symbol	Limits		Unit
						Min	Max	
Conformance inspection, part 3								
Life test	---	5/	Group B; t = 96 hours "on" and 1 hour "off" (tube mounted horizontally); t = 500 hours	---	---	---	---	---
Life test end points:	---							
Operation (1) and operation (2)	3246	8/		---	egy	---	140	v
DC anode voltage for conduction	3247	---	egy = 140 v	---	Ebb	---	2,000	V dc
Anode delay time	3256	---	egy = 140 v	---	tad	---	0.70	µs
Anode delay time drift	3256	---	egy = 140 v	---	Δtad	---	0.10	µs
Time jitter	3261	---	egy = 140 v	---	tj	---	0.01	µs
Variable-frequency vibration	1031	10/	No voltages applied	---	---	---	---	---
Shock	1041	4/ 10/	Angle = 24°	---	---	---	---	---

Electrical characteristics measured before and after shock	---	5/ 10/	epy = 10.0 kv (min);
			t = 300 sec;
			epy = 3.0 kv (max)
				---	egy
					Ebb
					tj
						--- 	
						--- 	
						--- 	
							130
							1,500
							0.005
								v
								V dc
								µs

Operation at elevated ambient temperature	3246	5/ 10/	TA = 90°C; Ef = 6.3 ± 0.50 V ac; t = 5.0 hours	---	egy	---	130	v

See footnotes at top of next page.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T13:40Z
Check the source to verify that this is the current version before use.

TABLE I. Testing and inspection - Continued.

1/ For instantaneous starting applications where anode voltage is applied instantaneously, the maximum permissible epy is 7.0 kv and shall be attained in not less than 0.04 second.

2/ In pulsed operation, the peak inverse voltage, exclusive of a spike of 0.05 µs maximum duration, shall not exceed 2.5 kv during the first 25 µs after the pulse.

3/ The driver pulse, measured at tube socket with thyratron grid disconnected, shall be: egy = 175 v minimum; time of rise = 0.5 µs maximum; grid pulse duration = 2 µs minimum. Impedance of drive circuit = 1,500-ohms maximum.

4/ Use clamp as specified on Drawing 243-JAN.

5/ The anode circuit constants shall be so chosen that at epy = 8.0 kv under resonant charging conditions: dik/dt = 1,000 a/µs minimum; ib = 90 a; tp = 0.5 µs ± 10 percent; prr = 3,000. The grid pulse characteristics shall be tp = 2.0 µs maximum; tr = 0.5 µs minimum; driver impedance = 1,500 ohms minimum.

6/ The grid-drive voltage shall be applied within 10 seconds before application of anode voltage. The tube shall operate satisfactorily on pushbutton starting within three attempts when the anode voltage (epy) is applied to the tube under test (TUT) in such a manner as to rise from 0 to 7,000 v within 0.03 second (the filter in the rectifier shall be so designed that the epy reaches at least 3,500 v within 0.015 second). Any tube failing to start within three attempts shall be considered a failure.

7/ During the interval between 2 minutes and 7 minutes of the anode delay time test, the change in anode delay time (Δtad) relative to the tad value observed on the anode delay time test shall not exceed the specified value.

8/ Anode heating shall not be cause for rejection on operation (1) and operation (2) performed during life-test end point tests.

9/ This test shall be the first test performed at the conclusion of the holding period.

10/ This test shall be performed during the initial production and once each succeeding 12-calendar months in which there is production. A regular double sampling plan shall be used, with the first sample of three tubes with an acceptance number of zero, and a second sample of three tubes with a combined acceptance number of zero. In the event of failure, the test will be made as a part of conformance inspection, part 2, code level D, with a sampling plan of 6.5. The regular "12-calendar month" double sampling plan shall be reinstated after three consecutive samples have been accepted.

11/ This specification uses accept on zero (c = 0) sampling plan, in accordance with MIL-PRF-1, Table III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T13:40Z
Check the source to verify that this is the current version before use.

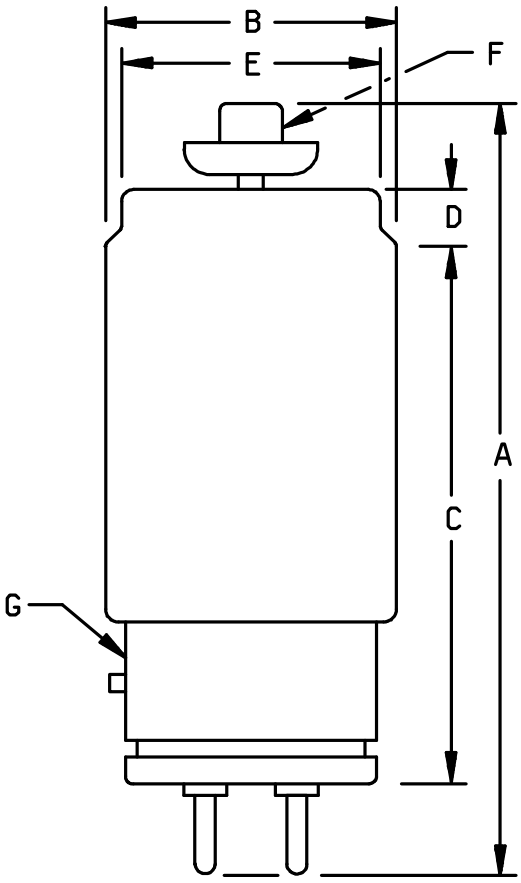

Pin connections	
Pin No.	Element
1	g
2	h, k
3	h
4	k
cap	a

Ltr	Dimensions			
	Inches		Millimeters	
	Min	Max	Min	Max
Conformance inspection, part 2				
A	6.250	6.875	158.75	174.63
B	2.380	2.562	60.45	65.07
Conformance inspection, part 3 (see note)				
C	4.000	5.000	101.60	127.00
D	.400	---	10.16	---
E	2.000	2.300	50.80	58.42
F	Cap: C1-43 (EIA)			
G	Base: A4-18 (EIA)			

NOTE:
These dimensions shall be checked annually with the following sampling plan:

n1 = 4	c1 = 0	Where c2 represents the total failures for the first
n2 = 4	c2 = 0;	and second samples combined.

In case of failure after double sampling, the failing dimension(s) shall become conformance inspection, part 2, for three successful consecutive submissions, at which time the test may revert to the conformance inspection, part 3 basis.

FIGURE 1. Outline drawing of electron tube type 4C35A.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T13:40Z
Check the source to verify that this is the current version before use.

Custodians::
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Review activities:
Army - AR
Navy - AS, CG, MC, OS, SH
Air Force - 99

Preparing activity:
DLA - CC

(Project 5960-3558-01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T13:40Z
Check the source to verify that this is the current version before use.