NOT MEASUREMENT SENSITIVE

MIL-DTL-3943/209
30 June 1997
SUPERSEDING
MIL-M-3946/21C
10 December 1993

DETAIL SPECIFICATION SHEET

MEDAL, GOOD CONDUCT, MARINE CORPS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3943 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

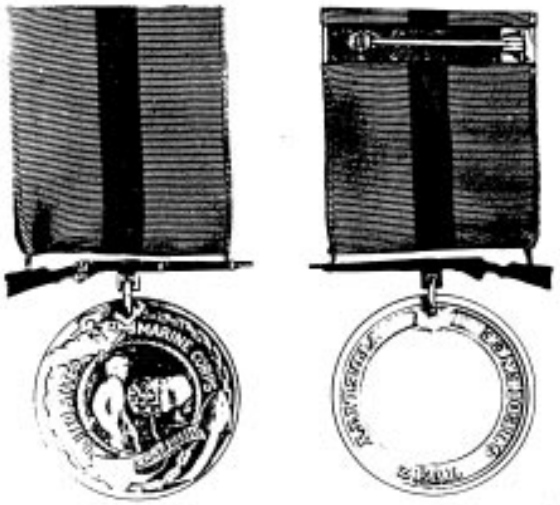

OBVERSE REVERSE

DASH NO.
-1: Regular Size
-2: Miniature Size

MATERIAL: Red Brass

FINISH: Oxidized, Relieved, Matte Finish and shall match TIOH metal finish chip Number 4.

DIMENSIONS:
PENDANT:
DIAMETER:
-1: 1-3/8 inches (3.49 cm) (REF)
-2: 5/8 inch (1.59 cm) (REF)

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T01:29Z
Check the source to verify that this is the current version before use.

THICKNESS (At Thickest Point):
-1: 0.105 inch ± 0.010 inch (0.267 cm ± 0.025 cm)
-2: 0.080 inch ± 0.010 inch (0.203 cm ± 0.025 cm)

SUSPENSION RIFLE:
HEIGHT (At Lug):
-1: 1/4 inch (0.64 cm) (REF)
-2: 1/8 inch (0.32 cm) (REF) (SEE NOTE 3)

WIDTH (Overall):
-1: 1-19/32 inches (4.05 cm) (REF)
-2: 51/64 inch (0.242 cm) (REF) (SEE NOTE 3)

THICKNESS (At Thickest Point):
-1: 0.075 inch ± 0.010 inch (0.191 cm ± 0.025 cm)
-2: 0.060 inch ± 0.010 inch (0.152 cm ± 0.025 cm)

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. A hole 1/16 inch + 1/64 inch - 0 (0.16 cm + 0.04 cm -0) in diameter shall be drilled through the medal and suspension rifle in the location shown.

3. The pendant ribbon ring for Dash No. -1 shall be formed from 0.050 inch ± 0.002 inch (0.127 cm ± 0.005 cm) diameter wire and shall have an outside diameter of 9/32 inch ± 1/64 inch (0.71 cm ± 0.04 cm).

4. The suspension rifle and the pendant for Dash No. -2 shall be one piece.

5. The width of the opening above the pendant rifle shall be 1-3/8 inch + 1/64 inch - 0 (3.49 cm + 0.04 cm - 0) for Dash No. -1 and 11/16 inch + 1/64 inch - 0 (1.75 cm + 0.04 cm - 0) for Dash No. -2.

6. The ribbon for the pendant drape shall conform to MIL-DTL-11589/69.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - IH
Navy - NU

Preparing activity:
Army - IH

Review activities:
Navy - MC
DLA - CT

(Project No. 8455-0897)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T01:29Z
Check the source to verify that this is the current version before use.