MILITARY SPECIFICATION

HANDSET H-138( )/U AND HANDSET H-207( )/U

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers two types of miniaturized and lightweight handsets designated as Handset H-138( )/U and Handset H-207( )/U. The handsets consist of a dynamic moving-coil noise cancelling microphone and earphone, push-to-talk switch, retractile cord, and an integrally molded clip for securing the unit to the carrying harness strap or the operator's pocket.

1.1.1 Handset H-138( )/U retractile cord extends 6 feet and is terminated in a connector U-182B/U.

1.1.2 Handset H-207( )/U retractile cord extends 20 feet and is terminated with spade terminals.

2. APPLICABLE DOCUMENTS

2.1 Documents. - The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

L-P-393	Plastic Molding, Polycarbonate Resins, Injection and Extruded
NN-P-71	Pallets Material Handling Wood Double Faced Stringer Construction
PPP-B-585	Boxes Wood, Wirebound
PPP-B-601	Boxes Wood, Cleated-Plywood
PPP-B-621	Boxes Wood, Nailed and Lock Corner
PPP-B-636	Box, Fiberboard
PPP-F-320	Fiberboard Corrugated and Solid, Sheet Stock (Container Grade) and Cut Shapes.
PPP-P-291	Paperboard, Wrapping, Cushioning
PPP-T-45	Tape Gummed Paper Reinforced and Plain for Sealing and Securing
PPP-T-76	Tape, Pressure-sensitive adhesive paper, (For Carton Sealing)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:16Z
Check the source to verify that this is the current version before use.

PPP-T-97	Tape, Pressure-Sensitive Adhesive Filament Reinforced
QQ-S-781	Strapping Flat Steel

MILITARY

MIL-B-43014	Boxes, Water Resistance Paperboard, folding set-up, and metal stayed.
MIL-P-116	Preservation, Methods of
MIL-P-11268	Parts, Materials and Processes Used in Electronic Communication Equipment
MIL-M-13231	Marking of Electronic Items
MIL-F-14072	Finishes for Ground Signal Equipment
MIL-C-55116	Connector, Miniature Audio, Five-pin
MIL-C-55668	Cord, Electrical, Audio, Retractile, Subminiature

STANDARDS

FEDERAL

FED TEST METHOD 141	Paint, Varnish, Lacquer and Related Materials; Methods of Inspection, Sampling and Testing

MILITARY

MIL-STD-105	Sampling Procedures and Table for Inspection by Attributes
MIL-STD-129	Marking for shipment and storage
MIL-STD-147	Palletized Loads,
MIL-STD-252	Classification of Visual and Mechanical Defects for Equipment, Electronic, Wired, and other Devices
MIL-STD-454	Standards, General Requirements for Electronic Equipment
MIL-STD-781	Reliability Tests exponential Distribution
MIL-STD-810	Environmental Test Methods

DRAWINGS

SHIPS SYSTEMS COMMAND

SK-N-864	Simulated Gun Blast Production Equipment

ELECTRONIC COMMAND

SC-A-46439	List of Accessories for Package Tester

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:16Z
Check the source to verify that this is the current version before use.

(Copies of specifications, standards and drawings required by contractors in connection with specific procurement functions should be obtained from the procuring activity, or as directed by the Contracting Officer. Both the title and number or symbol should be stipulated when requesting copies.)

2.2 Other Publications. - The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply:

AMERICAN NATIONAL STANDARDS INSTITUTE, INC.

ASA Z24.9-1949 - Coupler Calibration of Earphones
USAS S1.10-1966 - USA Standard Method for the Calibration of Microphones

(Application for copies should be addressed to the American National Standards Institute, Inc., 1430 Broadway, NY 10018).

3. REQUIREMENTS

3.1 First Article. - When specified in the contract or purchase order, the contractor shall furnish first articles in accordance with 4.3.

3.2 Procurement Models. - Unless otherwise specified in the invitation for bid, request for proposal, contract or purchase order, two procurement models of the handset will be available for inspection by prospective bidders and will be loaned to the contractor. One procurement model shall be kept intact, and one procurement model may be disassembled without destroying any parts, for the purpose of physical construction. Unless otherwise specified, physical construction shall conform to the model, and the performance characteristics shall be as specified herein.

3.2.1 Cord for H-138( )/U. - The cord for Handset H-138( )/U shall be Type II in accordance with MIL-C-55668. The overall extended length of the cord shall be 6 feet + 6 inches - 0 inches with one end terminated in the handset and the other end terminated in a U-182B/U Connector in accordance with MIL-C-55116.

3.2.2 Cord for H-207( )/U. - The cord for Handset H-207( )/U shall be Type II in accordance with MIL-C-55668. The overall extended length of the cord shall be 20 feet ± 6 inches with one end terminated in the handset and the other end terminated in spade terminals as used on the procurement model.

3.2.3 Cord Size. - The cord shall be four conductor with one conductor shielded and have a 0.15 inch jacket diameter and a helix diameter not greater than 0.625 inch.

3.2.4 Plastic Material. - The plastic molding material shall be in accordance with L-P-393.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:16Z
Check the source to verify that this is the current version before use.

3.2.5 Switch Boot Material. - The switch boot material shall be silicone rubber in accordance with Dow Corning Part No. 950U, or equal.

3.2.6 Ear-to-mouth. - The ear-to-mouth special relationship shall be in accordance with Figure 1.

3.2.7 Insulation of Metal Parts. - All metal parts shall be properly insulated to prevent the operator from receiving an rf burn.

3.2.8 Switch. - The switch shall be double pole, single throw, bar actuated type, with a positive detent action.

3.2.9 Switch Sequence. - The switch sequence shall permit the microphone contacts to make before the control contacts make, and the control contacts shall break before the microphone contacts.

3.3 Parts, Materials and Processes - General.- In addition to the requirements of this specification, the requirements of MIL-P-11268, including the selection requirements therein, shall apply.

3.4 Finish, Protective. - The handsets shall be given protective finish in accordance with MIL-F-14072.

3.5 Marking. - The marking shall conform to MIL-M-13231.

3.5.1 Visibility. - Wherever practicable, parts and assemblies shall be so mounted that their identification markings shall be readily visible with a minimum disassembly of the equipment.

3.5.2 Serial Numbers. - Serial numbers are not required.


3.6 Bounce Preconditioning. - Each handset produced and first article shall be subjected to the bounce preconditioning of 4.6. After bounce preconditioning the handset shall be inspected for loose or broken parts and controls. If a failure occurs, the loose or broken part or control shall be repaired or replaced and the test repeated. Bounce preconditioning shall be performed prior to Group A inspection.

3.7 Electrical. -

3.7.1 Microphone. - All readings shall be taken at cable end, at U-182B/U for H-138( )/U and spade terminals for H-207( )/U.

3.7.1.1 Frequency Response. - The frequency response shall be substantially flat over the frequency range of 300 to 3500 Hz from 0 to 10,000 feet altitude. The response curve shall be within the upper and lower limits of Figure 2, when the 1000 Hz response is aligned to pass through the cross, 0db at 1000 Hz. The response shall be devoid of any pronounced peaks and dips, when tested in accordance with 4.7.1.1.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:16Z
Check the source to verify that this is the current version before use.

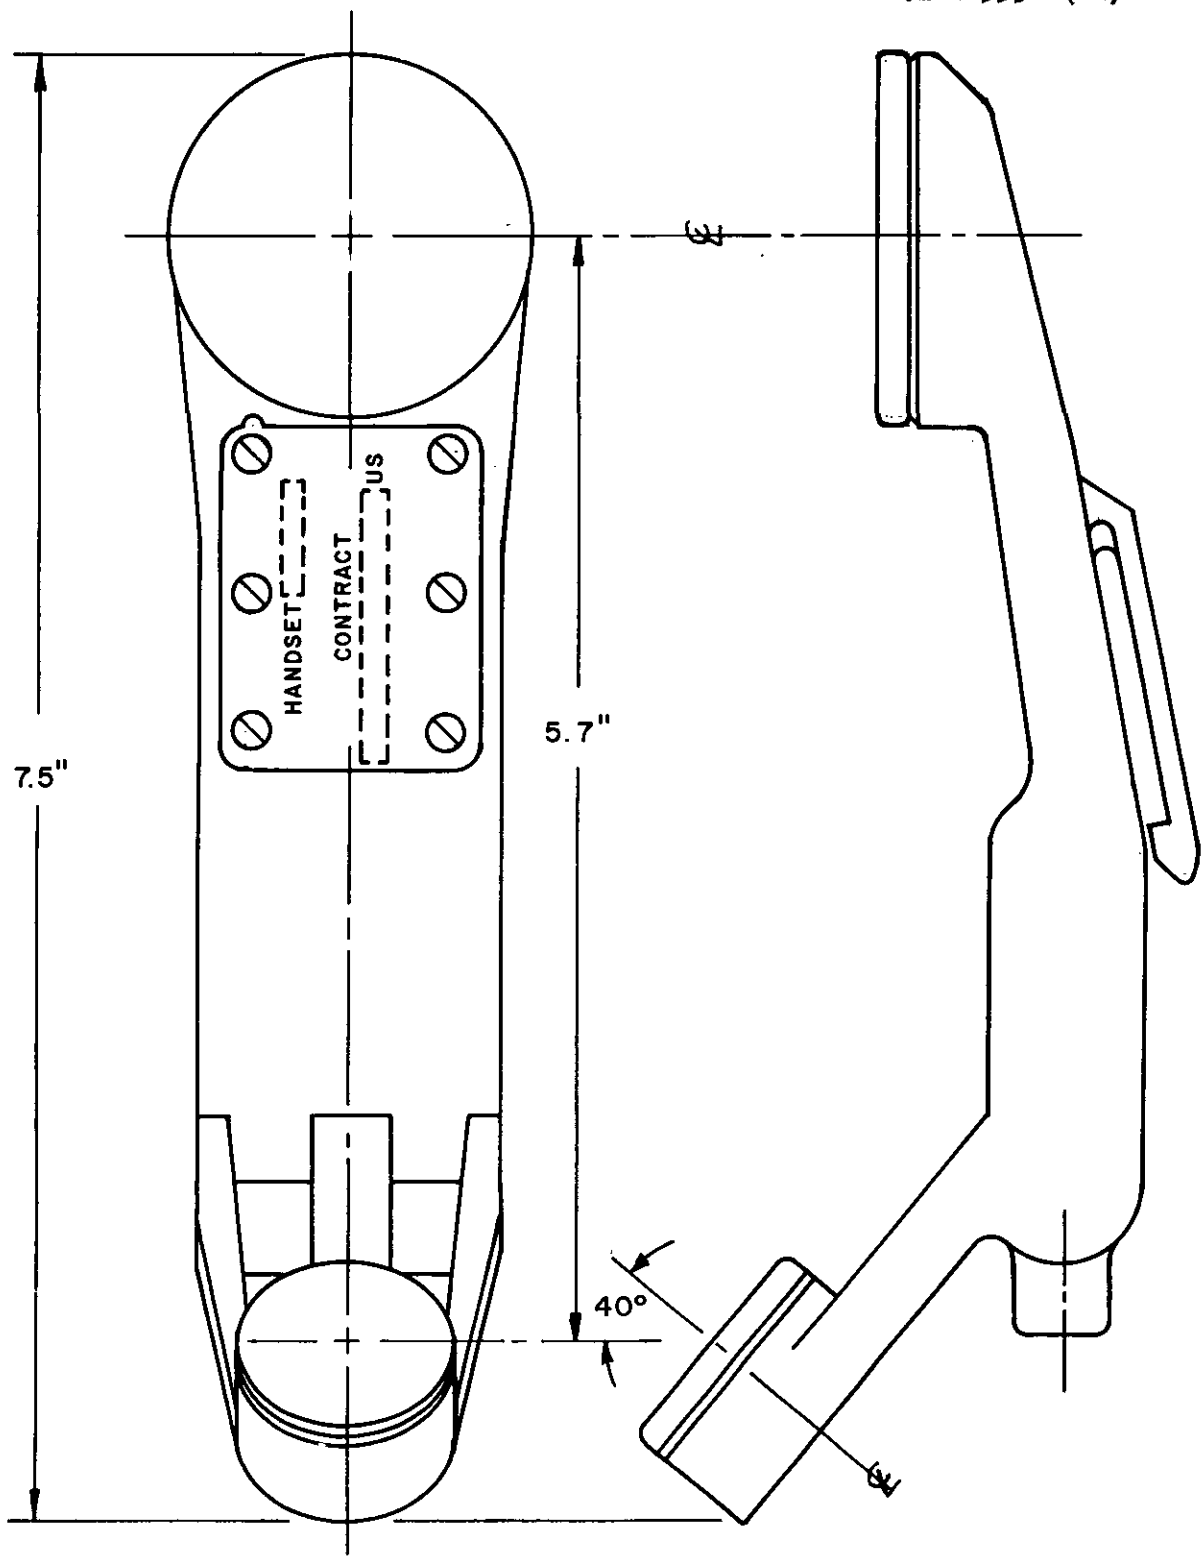

EAR-TO-MOUTH SPECIAL RELATIONSHIP

FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:16Z
Check the source to verify that this is the current version before use.

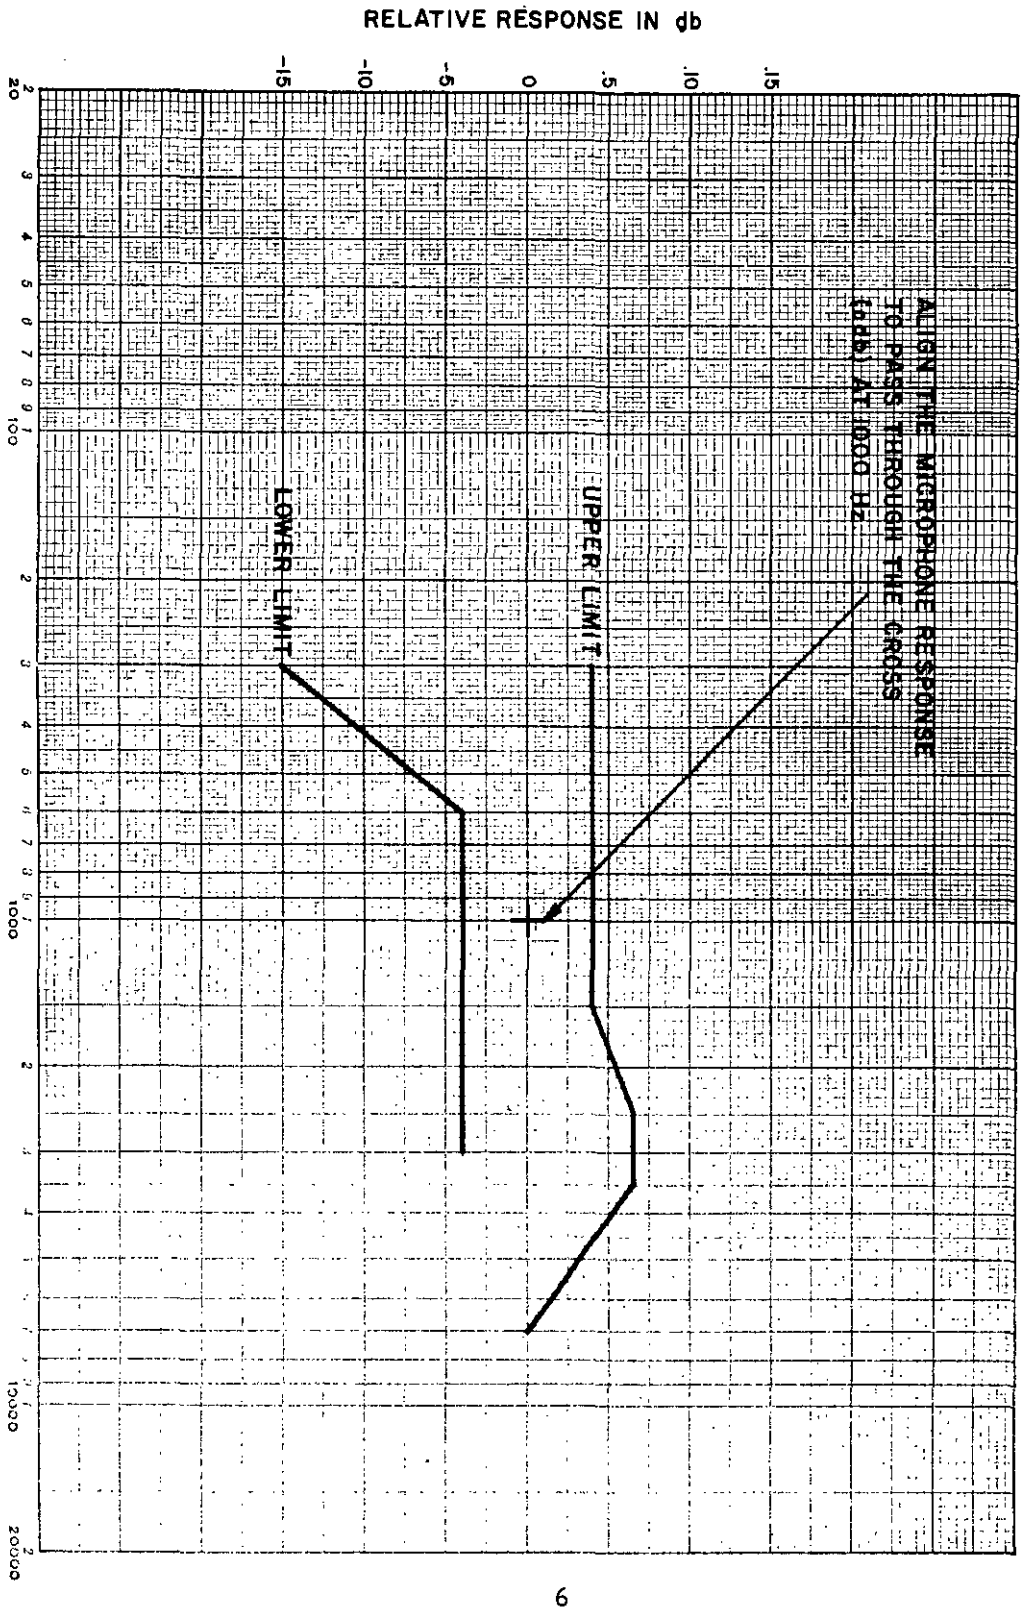

MICROPHONE FREQUENCY RESPONSE LIMITS

FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:16Z
Check the source to verify that this is the current version before use.

3.7.1.2 Power Output. - The power output shall be not less than -54db (0.00079 volts across a 150 ohm load) at 1000 Hz, when tested in accordance with 4.7.1.2.

3.7.1.3 Impedance. - The impedance shall be 150 ohms ± 10 percent at 1000 Hz, when tested in accordance with 4.7.1.3.

3.7.1.4 Distortion. - The total harmonic distortion shall be not greater than 5 percent at a sound level of 115db referenced to 0.0002 dynes per centimeter squared, over the frequency range of 300 to 3500 Hz, when tested in accordance with 4.7.1.4.

3.7.1.5 Signal to Noise Ratio. - The signal to noise ratio shall be not less than 18db signal to noise, when tested in accordance with 4.7.1.5.

3.7.2 Earphone. - All readings shall be taken at cable end, at U-182B/U for H-138( )/U and spade terminals for H-207( )/U.

3.7.2.1 Frequency response. - The frequency response shall be substantially flat over the frequency range of 300 to 3500 Hz at 0 to 10,000 feet altitude. The response curve shall be within the envelope specified in Figure 3, when tested in accordance with 4.7.2.1.

3.7.2.2 Impedance. - The impedance shall be 1000 ohms ± 10 percent at 1000 Hz, when tested in accordance with 4.7.2.2.

3.7.2.3 Distortion. - The acoustic output shall not be greater than 5 percent total harmonic distortion at any given frequency in the range of 300 to 3500 Hz, when tested in accordance with 4.7.2.3.


3.7.2.4 Overload. - The earphone shall show not more than 3db change from its original response curve taken in 3.7.2.1 after being tested in accordance with 4.7.2.4.

3.7.3 Leakage Resistance. - The insulation shall not breakdown or decrease below 1 megohm between any insulation metallic part of the handset and the terminals of the U-182B/U or spade terminals, when tested in accordance with 4.7.3.

3.8 Operation. - The completely assembled handset shall with the switch in normal not depressed position receive a signal and cannot transmit. Depressing the switch cuts off receive signal, permits voice transmission, and turns on radio transmitter, when tested in accordance with 4.8.

3.9 Sixty Degree Specular Gloss. - The 60° specular gloss of all external surfaces of the handset shall not exceed 10 percent of specular gloss value of 110 in accordance with paragraph 1.3.1 Method 6101, Federal Test Method 141, when tested in accordance with 4.9.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:16Z
Check the source to verify that this is the current version before use.

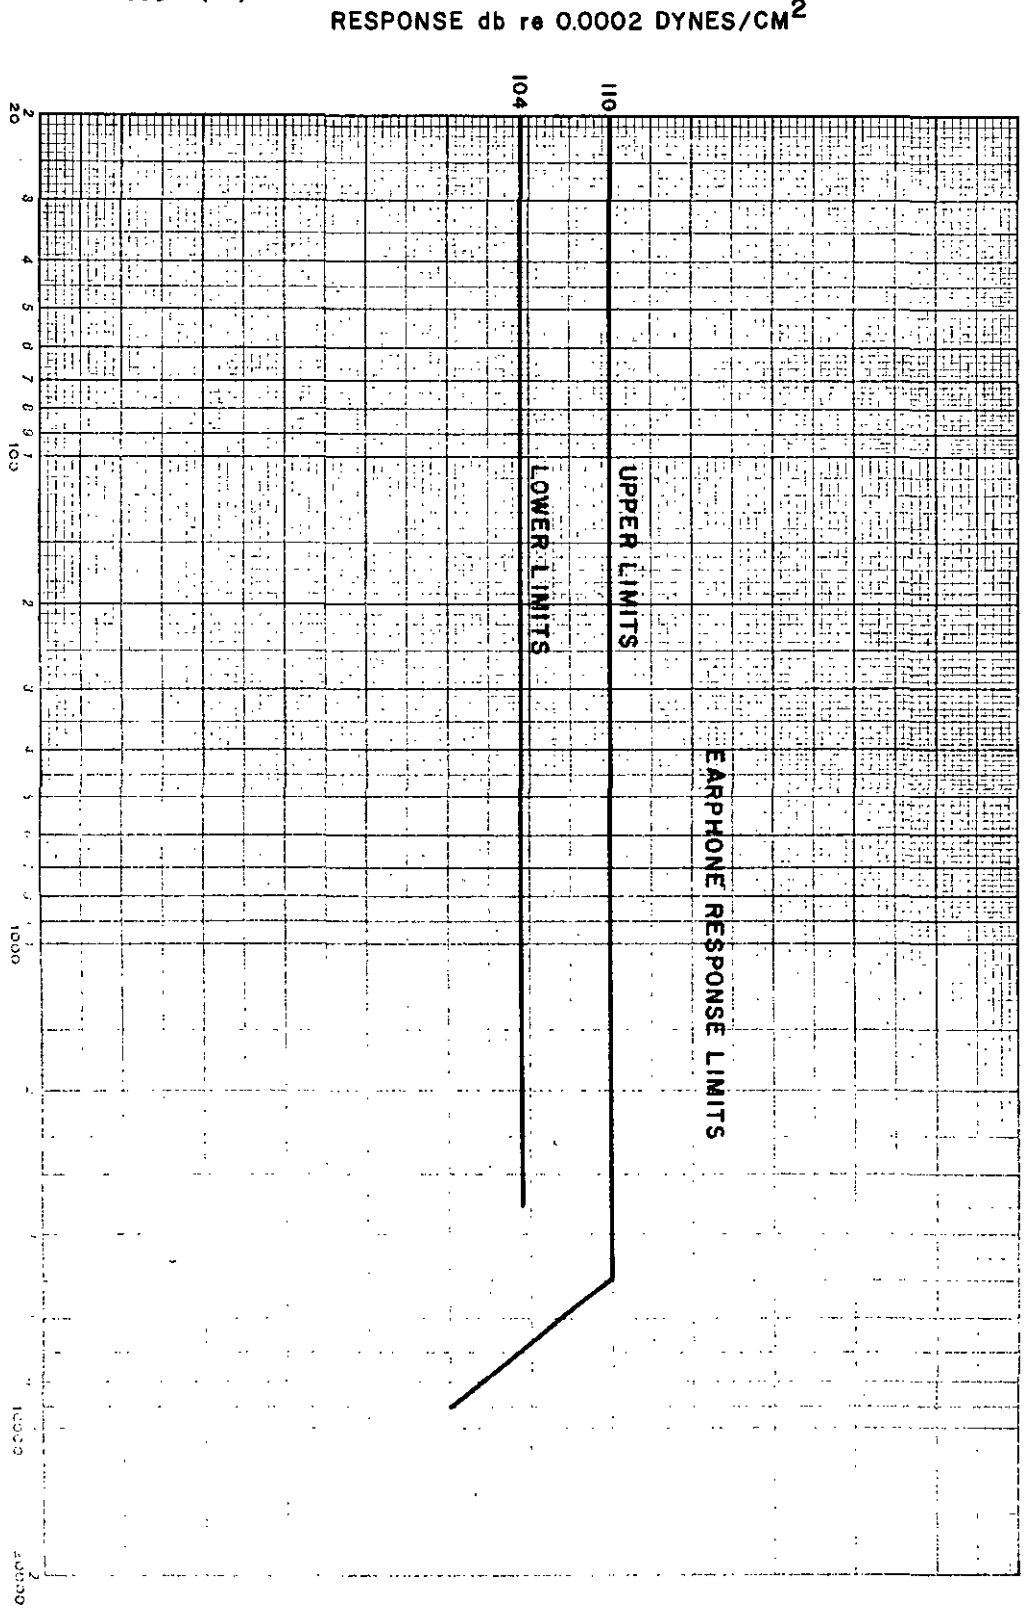

EARPHONE FREQUENCY RESPONSE

FIGURE 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:16Z
Check the source to verify that this is the current version before use.

3.10 Environmental. - The handset shall be constructed so that no fixed part shall become loose, cracked, flaked, pitted or blistered, no movable part or control shall be shifted in setting, position or adjustment, and no permanent degradation shall be caused in performance below that specified in the following environmental conditions.

3.10.1 Low Temperature. - The frequency response of the microphone and earphone taken immediately upon removal from the test chamber after exposure to the low temperature shall not exceed 3db degradation from the original frequency response obtained in 3.7.1.1 and 3.7.2.1, respectively. The handset shall be tested in accordance with 4.10.1.

3.10.2 High Temperature. - The frequency response of the microphone and earphone taken immediately upon removal from the test chamber after exposure to the high temperature shall not exceed 3db degradation from the original frequency response obtained in 3.7.1.1 and 3.7.2.1, respectively. The handset shall be tested in accordance with 4.10.2.

3.10.3 Immersion. - The handset shall show no evidence of leakage and the switch cover shall be opened to verify for leakage. The microphone and earphone frequency response shall meet the requirements of 3.7.1.1 and 3.7.2.1, respectively, after immersion with no degradation. The handset shall be tested in accordance with 4.10.3.

3.10.4 Altitude. -

3.10.4.1 Operating. - The frequency response of the microphone and earphone, taken at 300, 600, 1000, 2000 and 3500 Hz during the altitude test shall not exceed 3db degradation from the original frequency response obtained in 3.7.1.1 and 3.7.2.1, respectively. The handset shall be tested in accordance with 4.10.4.1.

3.10.4.2 Nonoperating. - The frequency response of the microphone and earphone taken immediately upon removal from the test chamber after exposure to nonoperating altitude shall not exceed 3db degradation from the original frequency response obtained in 3.7.1.1 and 3.7.2.1, respectively. The handset shall be tested in accordance with 4.10.4.2.

3.10.5 Vibration. - The handset shall show no evidence of breakage or loosening of parts and the frequency response of the microphone and earphone taken immediately after the vibration test shall not exceed 3db degradation from the original frequency response obtained in 3.7.1.1 and 3.7.2.1 respectively. The handset shall be tested in accordance with 4.10.5.

3.10.6 Bounce. - The handset shall show no evidence of breakage or loosening of parts, except minor surface abrasion, and the frequency response of the microphone and earphone taken immediately after the bounce test shall not exceed 3db degradation from the original frequency response obtained in 3.7.1 1 and 3.7.2.1, respectively. The handset shall be tested in accordance with 4.10.6.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:16Z
Check the source to verify that this is the current version before use.

3.10.7 Humidity. - The handset shall exhibit no physical damage of parts and material, such as corrosion, rust, blistering, swelling, deterioration, etc., and the frequency response of the microphone and earphone taken immediately upon removal from the test chamber after exposure to the humidity test shall not exceed 3db degradation from the original frequency response obtained in 3.7.1.1 and 3.7.2.1, respectively. The handset shall be tested in accordance with 4.10.7.

3.10.8 Drop. - The handset shall show no evidence of mechanical fracture, only minor chipping and abrasion are acceptable, and the frequency response of the microphone and earphone taken immediately after the drop test shall not exceed 3db degradation from the original frequency response obtained in 3.7.1.1 and 3.7.2.1, respectively. The handset shall be tested in accordance with 4.10.8.

3.10.9 Drop at Low Temperature. - The handset shall show no evidence of mechanical fracture, only minor chipping and abrasion are acceptable, and the frequency response of the microphone and earphone taken immediately after the drop test at low temperature shall not exceed 3db degradation from the original frequency response obtained in 3.7.1.1 and 3.7.2.1, respectively. The handset shall be tested in accordance with 4.10.9.

3.10.10 Blast. - The frequency response of the microphone and earphone taken immediately after the blast test shall not exceed 3db degradation from the original frequency response obtained in 3.7.1.1 and 3.7.2.1. The handset shall be tested in accordance with 4.10.10.

3.10.11 Dust. - The handset shall show no evidence of damage or inoperation due to dust, and the frequency response of the microphone and earphone taken immediately upon removal from the test chamber after exposure to the dust test shall not exceed 3db degradation from the original frequency response obtained in 3.7.1.1 and 3.7.2.1. The handset shall be tested in accordance with 4.10.11.

3.10.12 Salt Fog. - The handset shall show no evidence of corrosion, as evidenced by any visible degradation that can be attributed to flaky, pitted, blistered, or otherwise loosened finish or metal surface, and the frequency response of the microphone and earphone taken immediately upon removal from the test chamber after exposure to the salt fog test shall not exceed 3db degradation from the original frequency response obtained in 3.7.1.1 and 3.7.2.1, respectively. The handset shall be tested in accordance with 4.10.12.

3.10.13 Fungus. - The handset shall show no evidence of viable fungus. Operation is not required. The handset shall be tested in accordance with 4.10.13.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:16Z
Check the source to verify that this is the current version before use.

3.11 Pull. - The handset shall have no change of the stay cord knot, no damage to the strain relief hook, no separation of the molded grommet and cord jacket, and the cord shall not have pulled out from the handle by more than 0.03125 inch. The microphone and earphone frequency response shall meet the requirements of 3.7.1.1 and 3.7.2.1, respectively after pull test with no degradation. The handset shall be tested in accordance with 4.11.

3.12 Jerk. - The handset shall have no change of the stay cord knot, no damage to the strain relief hook, no separation of the molded grommet and cord jacket, and the cord shall not have pulled out from the handle by more than 0.03125 inch. The microphone and earphone frequency response shall meet the requirements of 3.7.1.1 and 3.7.2.1, respectively after jerk test with no degradation. The handset shall be tested in accordance with 4.12.

3.13 Switch Life. - The switch shall operate 2,000,000 make and break cycles without a failure, when tested in accordance with 4.13.

3.14 Workmanship. - The handset shall be manufactured and assembled in accordance with Requirement 9 of MIL-STD-454, and with the applicable portions of MIL-P-11268 as follows:

a. Adhesives.

b. Cables, cords and wires electrical.

c. Lubricants.

d. Plastic material and parts.

e. Rubber.

f. Tropicalization of material and parts.

g. Connectors (electrical).

h. Screws, other threaded devices, and related parts.

i. Brazing, soldering and welding.

3.15 Reliability qualification test. - The handsets specified herein shall demonstrate a specified MTBF (Oo) of 20,000 hours when tested in accordance with 4.16.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:16Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS.

4.1 Responsibility for Inspection. - Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of Inspections. - The inspection requirements specified herein are classified as follows:

a. First Article inspection (does not include preparation for delivery). (See 4.3)

b. Inspections covered by subsidiary documents. (See 4.4)

c. Quality conformance inspections.

(1) Quality conformance inspection of equipment before preparation for delivery. (See 4.5)

(2) Quality conformance inspection of preparation for delivery. (See 4.15)

4.3 First Article. - Unless otherwise specified in the contract or purchase order, the first article inspection shall be performed by the contractor.

4.3.1 First Article Units. - The contractor shall furnish the number of first article units as follows:

a. Twelve (12) each Handset H-138( )/U, if item on contract.

b. Twelve (12) each Handset H-207( )/U, if item on contract.

c. Six (6) each switch assemblies.

4.3.2 First Article Inspection. - The first article inspection shall consist of the inspections specified in subsidiary documents covering the items listed in 4.4, preconditioning specified in 4.6, and the inspections specified for Groups A, B and C (See Tables I, II and III, respectively). The inspection shall be performed in the following order: 4.4, 4.6, Group A and B for all units; and designated units for specific subgroups within Group C in accordance with 4.5.3.1. After completion of Group C environmental tests, conforming units shall be reinspected and shall pass all Group A inspections.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:16Z
Check the source to verify that this is the currentversion before use.

4.3.3 First Article Data. - The first article test plan and test report shall be as required in the contract or purchase order.

4.4 Inspection Covered by Subsidiary Documents. - The following shall be inspected under the applicable subsidiary documents as part of the inspection required by this specification, and the inspection requirement specified in the contract or purchase order:

ITEM	WHERE REQUIRED
Cord for H-138( )/U	3.2.1
Cord for H-207( )/U	3.2.2
Plastic Material	3.2.4
Parts, Materials and Processes - General	3.3
Finish, Protective	3.4
Marking	3.5

4.5 Quality Conformance Inspection of Equipment before Preparation for Delivery. - The contractor shall perform the inspection specified in 4.4, 4.6, and 4.5.1 through 4.5.4. This does not relieve the contractor of his responsibility for performing any additional inspection which is necessary to control the quality of the product and to assure compliance with all specification requirements.

4.5.1 Group A Inspection. - Each unit on contract or purchase order shall be inspected for conformance to the inspections specified in Table I. Lots shall be formed only from units that pass this inspection. Factors of lot composition not defined herein, or in the contract or purchase order, shall be in accordance with MIL-STD-105. Each lot shall be subject to sampling inspection, utilizing the procedures of MIL-STD-105, using the general inspection levels and AQL's indicated in Table I.

4.5.1.1 Order of Inspection Within Group A. - Group A inspection shall be performed in an order satisfactory to the Government, except that operation in 4.8 shall be last.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:16Z
Check the source to verify that this is the currentversion before use.

TABLE I - GROUP A INSPECTION

INSPECTION	REQT. PARA.	TEST PARA.	AQL	
			MAJOR	MINOR
Visual and Mechanical	3.14	4.14	4 dphu	10 dphu
Electrical				
Microphone				
Frequency Response	3.7.1.1	4.7.1.1	1.5%	N/A
Power Output	3.7.1.2	4.7.1.2	1.5%	N/A
Impedance	3.7.1.3	4.7.1.3	1.5%	N/A
Earphone				
Frequency Response	3.7.2.1	4.7.2.1	1.5%	N/A
Impedance	3.7.2.2	4.7.2.2	1.5%	N/A
Operation	3.8	4.8	1.5%	N/A

4.5.2 Group B Inspection. - Group B Inspection shall normally be performed on inspection lots that have passed Group A inspection and on samples selected from units that have been subjected to and met the Group A inspection. This inspection shall conform to Table II and to the special inspection levels of Table I of MIL-STD-105.

4.5.2 Group B Sampling Plans. - The Group B sampling plans, for the AQL's listed in Table II, shall be as follows:

AQL	INSPECTION LEVEL
4	S4
6.5	S5

4.5.2.2 Order of Inspection Within Group B. - Group B inspection shall be performed in an order satisfactory to the Government.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:16Z
Check the source to verify that this is the current version before use.

TABLE II - GROUP B INSPECTION

INSPECTION	REQT. PARA.	TEST PARA.	AQL
Electrical			
Microphone			
Distortion	3.7.1.4	4.7.1.4	4%
Signal to Noise Ratio	3.7.1.5	4.7.1.5	4%
Earphone			
Distortion	3.7.2.3	4.7.2.3	4%
Overload	3.7.2.4	4.7.2.4	4%
Leakage Resistance	3.7.3	4.7.3	6.5%
60° Specular Gloss	3.9	4.9	6.5%

4.5.3 Group C Inspection. - Group C inspection shall be performed on units that have passed Group A and B inspection. The inspection shall consist of the inspections specified in Table III. Samples shall be selected in accordance with 4.5.3.1.

4.5.3.1 Sampling for Group C Inspection.

4.5.3.1.1 Twelve (12) samples of the complete handset shall be selected at random, two (2) samples for each Subgroup 1 through Subgroup 6 in Table III, and six (6) switch assemblies for Subgroup 7 in Table III. The samples selected shall be at the start of the contract from the first quality conformance lot. These samples shall constitute Group C requirement for first 1000 units produced.

4.5.3.1.2 Thereafter, six (6) samples of the complete handset shall be selected at random, two (2) samples for each Subgroup 1 through Subgroup 3 in Table III from every 1000 units and fraction thereof produced.

4.5.3.1.3 Thereafter, two (2) samples of the complete handset shall be selected at random for Subgroup 4, Blast, in Table III from every 5000 units an fraction thereof produced.

4.5.3.1.4 Thereafter, two (2) samples of the switch assembly shall be selected at random for Subgroup 7 in Table III from every 2000 units and fraction thereof produced.

4.5.3.2 Order of Inspection Within Group C. - Group C inspection shall be performed in order specified in each subgroup.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:16Z
Check the source to verify that this is the current version before use.

TABLE III - GROUP C INSPECTION

INSPECTION	REQT. PARA.	TEST. PARA.
Subgroup 1		
Low Temperature	3.10.1	4.10.1
High Temperature	3.10.2	4.10.2
Pull	3.11	4.11
Jerk	3.12	4.12
Immersion	3.10.3	4.10.3
Subgroup 2		
Altitude	3.10.4	4.10.4
Vibration	3.10.5	4.10.5
Bounce	3.10.6	4.10.6
Subgroup 3		
Humidity	3.10.7	4.10.7
Drop	3.10.8	4.10.8
Drop at Low Temperature	3.10.9	4.10.9
Subgroup 4		
Blast	3.10.10	4.10.10
Dust	3.10.11	4.10.11
Subgroup 5		
Salt Fog	3.10.12	4.10.12
Subgroup 6		
Fungus	3.10.13	4.10.13
Subgroup 7		
Switch Life	3.13	4.13

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:16Z
Check the source to verify that this is the current version before use.

4.5.3.3 Noncompliance. - The contractor shall immediately report, in writing, each Group C failure occurrence, including details of the failure and characteristics affected. The contractor shall immediately investigate the cause of failure and further report the results of investigation and details of the proposed corrective action on the processes and materials, as applicable, and on all units of product which are manufactured under the same conditions and which the Government considers subject to the same failure. Reports shall be forwarded through the Government Quality Assurance Representative to the responsible technical activity designated in the contract. After corrective action has been taken, additional sample units shall be subjected to Group C inspection (all inspections, or the inspections which the sample failed, at the option of the technical activity). However, final acceptance and shipment will be withheld until Group C reinspection results have shown that the corrective action was effective and approved by the technical activity.

4.5.4 Reinspection of Conforming Group B and C Sample Units. - Unless otherwise specified, sample units which have been subjected to and passed both Group B and C inspection may be accepted on the contract, provided all damage is repaired and the sample units are resubjected to and pass Group A inspection.

4.5.5 Disposition of Group C Sample Units. - Unless otherwise specified, sample units which have been subjected to and passed Group C inspection may be delivered on the contract or purchase order, provided sample units meet requirements of 4.5.4, except switch assemblies subjected to Subgroup 7 in Table III shall not be delivered on the contract.

4.6 Bounce Preconditioning. - Each handset produced and first article shall be placed in its normal operating position on the table of a package tester of suitable capacity as made by the L.A.B. Corporation, Skaneateles, New York, with accessories as per Model 1000SC and SC-A-46439, or equal. The package tester, shafts in phase, shall have a speed such that it is just possible to insert a 0.03125 inch thick strip of material under one corner or edge of the equipment under test to a distance of 3 inches as the equipment bounces. The handset shall be subjected to this preconditioning for 1 minute and shall meet the requirements of 3.6.

4.7 Electrical. -

4.7.1 Microphone. -

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:16Z
Check the source to verify that this is the current version before use.

4.7.1.1 Frequency response. - The frequency response of the microphone, mounted in the completed handset, shall be measured by means of an ac electronic voltmeter, having an input impedance of not less than 0.5 megohm. The frequency response of the microphone shall be determined using a constant sound pressure of 28 dynes per square centimeter at the point where the microphone is placed. The driver unit used to obtain the desired sound pressure input, Western Electric Co. Type No. 5551V, or equal, shall have been previously calibrated by means of a condenser microphone, Western Electric Co. Type No. 640AA, or equal, calibrated by reciprocity method in accordance with USAS S1.10-1966. The microphone in the handset shall be positioned with its face 0.25 inch directly in front of the driver unit with the diaphragm of the microphone parallel to the driver unit. The frequency response of the microphone shall be measured across a noninductive load resistance of 150 ohms. If not measured automatically from 300 to 3500 Hz, the measurements shall be taken as follows: 100 Hz increments from 300 to 1000 Hz and 250 Hz increments from 1000 Hz to 3500 Hz. The microphone shall meet the requirements of 3.7.1.1.

4.7.1.2 Power Output. - The power output shall be measured using the test setup specified in 4.7.1.1, and the microphone shall meet the requirement of 3.7.1.2.

4.7.1.3 Impedance. - The microphone, mounted in the completed handset, shall be placed in front of the driver unit as specified in 4.7.1.1 with a calibrated variable resistor in the open circuit position, replacing the 150 ohm resistor, and the electronic voltmeter connected across the terminals of the microphone. With an ambient temperature of 20° ± 3°C, increase the sound pressure of the driver unit at 1000 Hz until the output of the microphone is 0.001 volt. Vary the resistance until the output is reduced to 0.0005 volt. The resistance thus determined shall be taken as the electrical impedance of the microphone and shall meet the requirement of 3.7.1.3.

4.7.1.4 Distortion. - The harmonic distortion shall be determined using the equipment and circuitry specified in 4.7.1.1, except the constant sound pressure shall be 115db referenced at 0.0002 dynes per square centimeter and the output of the microphone terminated in 150 ohms that shall be connected to a Hewlett-Packard Distortion Analyzer Model 330C, or equal. The measurements shall be made at 100 Hz increments from 300 to 3500 Hz. The microphone shall meet the requirements of 3.7.1.4.

4.7.1.5 Signal to Noise Ratio. -

Source: https://assist.dla.mil -- Downloaded: 20261O-26T04:16Z
Check the source to verify that this is the current version before use.

4.7.1.5.1 Noise Spectrum. - By means of apparatus detailed in Figure 4, and the test circuit of Figure 5, provision shall be made for the production of the noise spectrum, Table IV, at an rms sound pressure of 115db above a reference level of 0.0002 dyne per square centimeter as measured at the microphone diaphragm. The "noise" source shall incorporate a loudspeaker capable of producing a sound pressure of 115db above a reference level of 0.0002 dyne per square centimeter at the rear, as well as the front of the microphone. The loudspeaker shall be located as far away from the microphone as practicable. The calibrating condenser microphone shall be mounted in the test rig, in the box, 0.25 inch from the mouth of the signal speaker, which shall be short-circuited during adjustments of the noise spectrum.

TABLE IV - NOISE SPECTRUM


FREQUENCY IN HZ	SOUND PRESSURE IN DB RELATIVE TO SOUND PRESSURE AT 130 HZ
40	0
70	0
130	0
300	-5
600	-9
1000	-13
2000	-17
3000	-19
4000	-21

4.7.1.5.2 Signal Spectrum. - By means of the apparatus as set up previously, provision shall also be made for the production of the following signal spectrum, Table V at an rms sound pressure of 115db above a reference level of 0.0002 dyne per square centimeter. The signal source shall be the driver unit. The calibrating condenser microphone shall be positioned 0.25 inch directly in front of the driver unit.

TABLE V - SIGNAL SPECTRUM

FREQUENCY IN HZ	SOUND PRESSURE IN DB RELATIVE TO SOUND PRESSURE AT 130 HZ
130	0
300	+7
600	+8
1000	+5
2000	-3
3000	-7
4000	-9


Source: https://assist.dla.mil -- Downloaded: 202610-26T04:16Z
Check the source to verify that this is the current version before use.

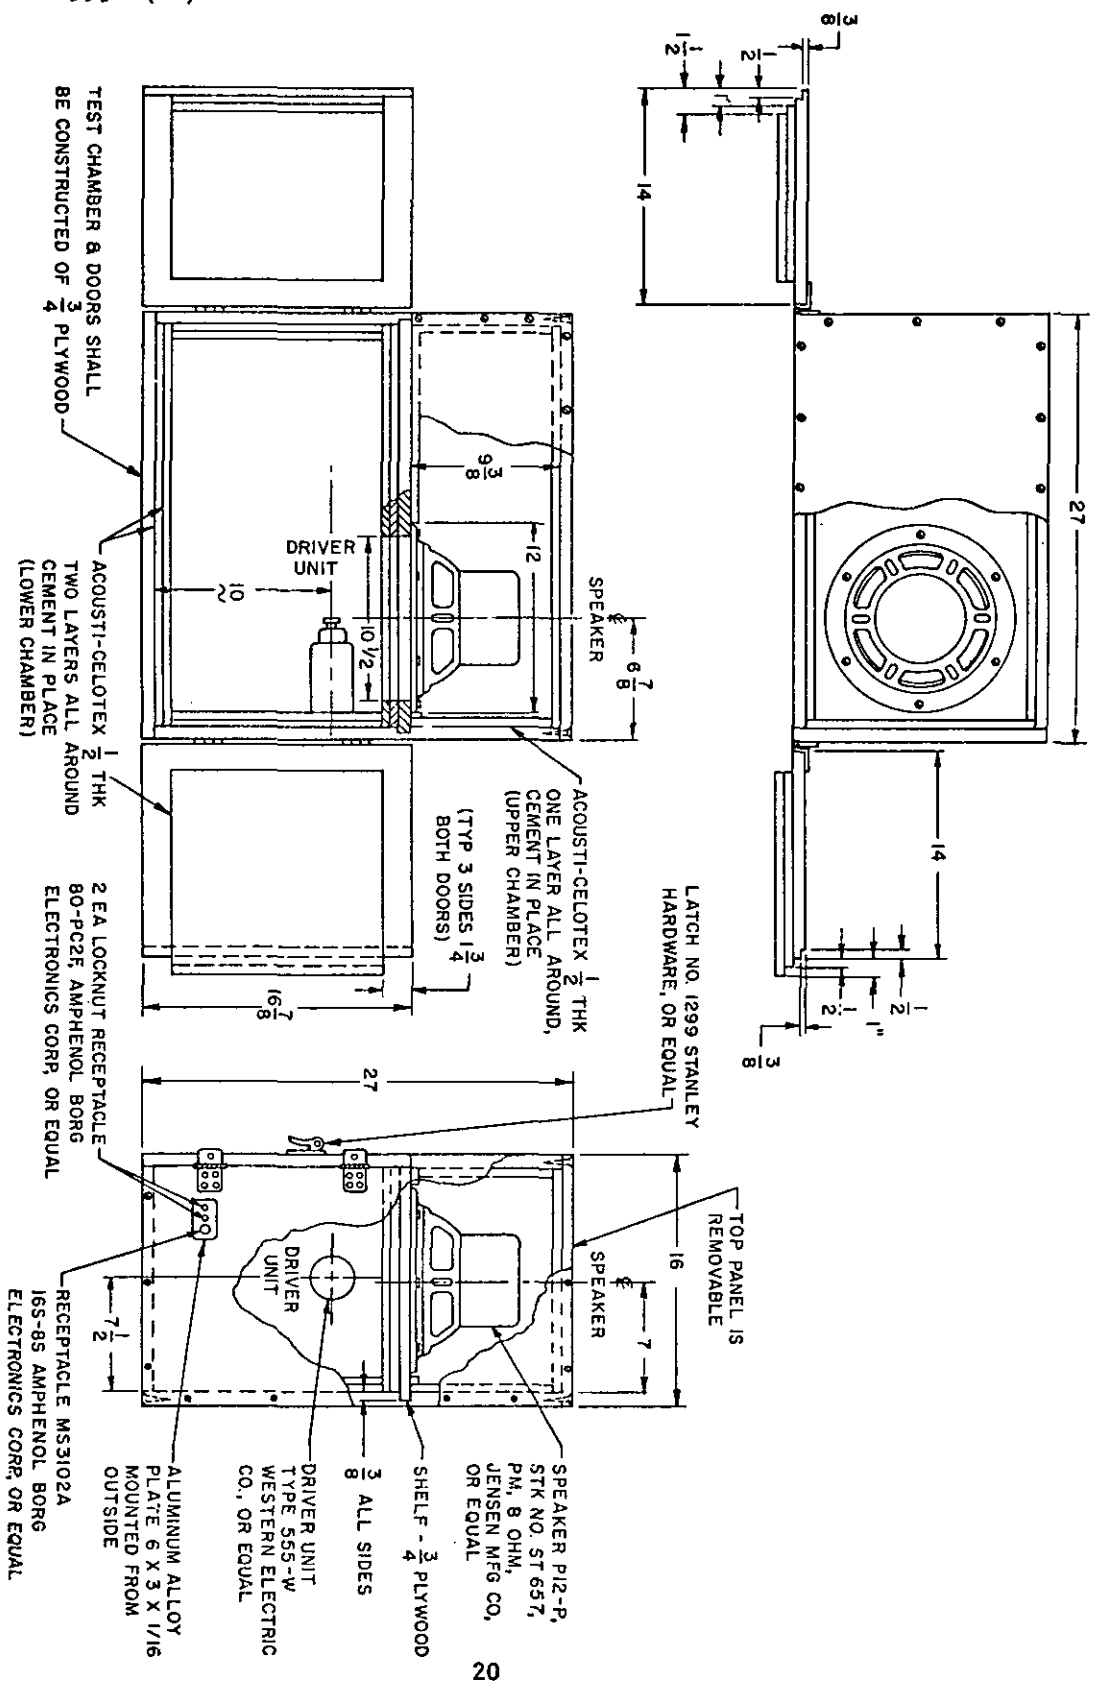

SIGNAL TO NOISE RATIO TEST BOX FOR DIFFERENTIAL MICROPHONES

FIGURE 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:16Z
Check the source to verify that this is the current version before use.

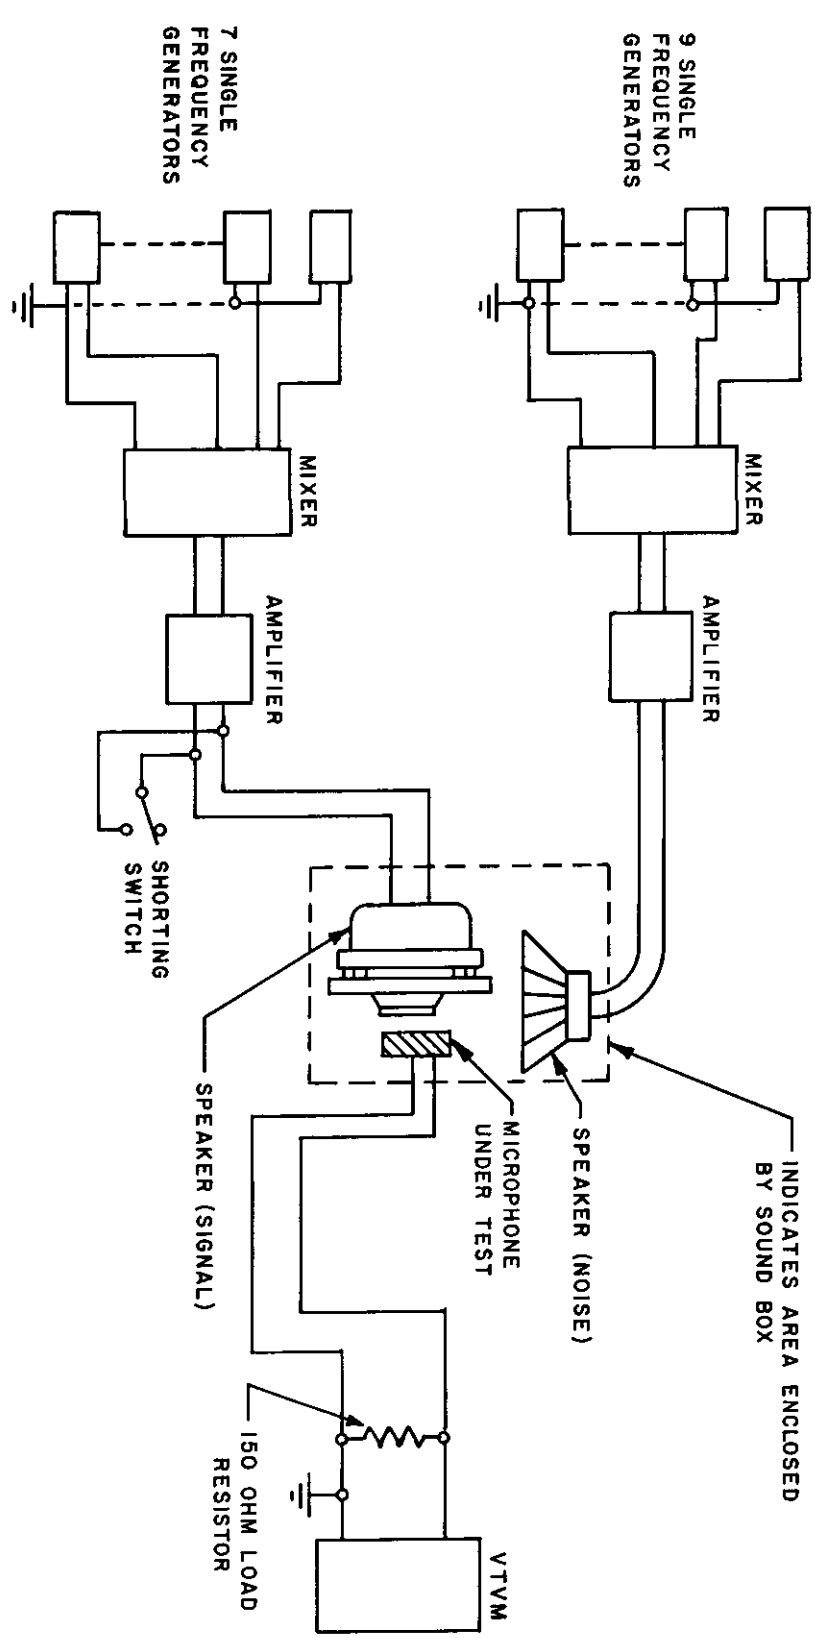

MICROPHONE SIGNAL-TO-NOISE RATIO TEST CIRCUIT

FIGURE 5

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:16Z
Check the source to verify that this is the current version before use.

4.7.1.5.3 Measurement of the Signal-to-Noise Ratio. - The microphone shall be mounted in its test rig with its front grid 0.25 inch from the mouth of the signal speaker. The microphone shall be connected to the test circuit shown in Figure 5. The noise spectrum shall be applied for 3 seconds, and the output of the microphone shall be measured. The noise spectrum shall be removed, and the signal spectrum shall be applied for 3 seconds. The output of the microphone shall be measured. The db difference between the signal value and the noise value is the signal-to-noise ratio, and shall meet the requirements of 3.7.1.5.


4.7.2 Earphone. -

4.7.2.1 Frequency Response. - The frequency response of the earphone, mounted in the completed handset, shall be measured in accordance with ASA Standard Z24.9-1949, using a preferred source resistance of 1000 ohms, and the test 6cc coupler. A condenser microphone, Western Electric Co. Type No. 640AA, or equal, calibrated by the reciprocity method in accordance with USAS S1.10-1966, shall be used for measuring sound pressure. The earphone shall be centered on the 6cc coupler, and a good seal shall be insured by placing a 1 kilogram non-magnetic weight on the back of the handset. A voltage of 2 volts rms, at frequencies of 300 to 1000 Hz at 100 Hz intervals; and 1000 to 35000 Hz at 250 Hz intervals, shall be maintained across the series combination of the earphone and noninductive resistance. The test circuit is shown in Figure 6. The earphone shall meet the requirement of 3.7.2.1.

4.7.2.2 Impedance. - The impedance of the earphone, in the completed handset, shall be measured with 1 volt at 1000 Hz applied at the cable terminals. The impedance shall be determined either by measuring the voltage across and the current through the earphone, or with an impedance bridge. The impedance of the earphone when mounted on the coupler shall meet the requirements of 3.7.2.2.

4.7.2.3 Distortion. - The earphone, mounted in the completed handset, shall be mounted on the 6cc coupler, and shall be connected to the test circuit specified in 4.7.2.1. The output of the oscillator shall be adjusted to 2 volts rms at 1000 Hz across the series combination of the 1000 ohm resistor connected at the earphone terminals. The rms harmonic distortion shall be measured with a Hewlett-Packard Distortion Analyzer Model 330C, or equal, connected across the output of the condenser microphone specified in 4.7.2.1. The distortion measurements shall be made at the frequencies specified in 4.7.2.1 to determine the frequency where maximum distortion exists. The earphone shall meet the requirement of 3.7.2.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:16Z
Check the source to verify that this is the current version before use.

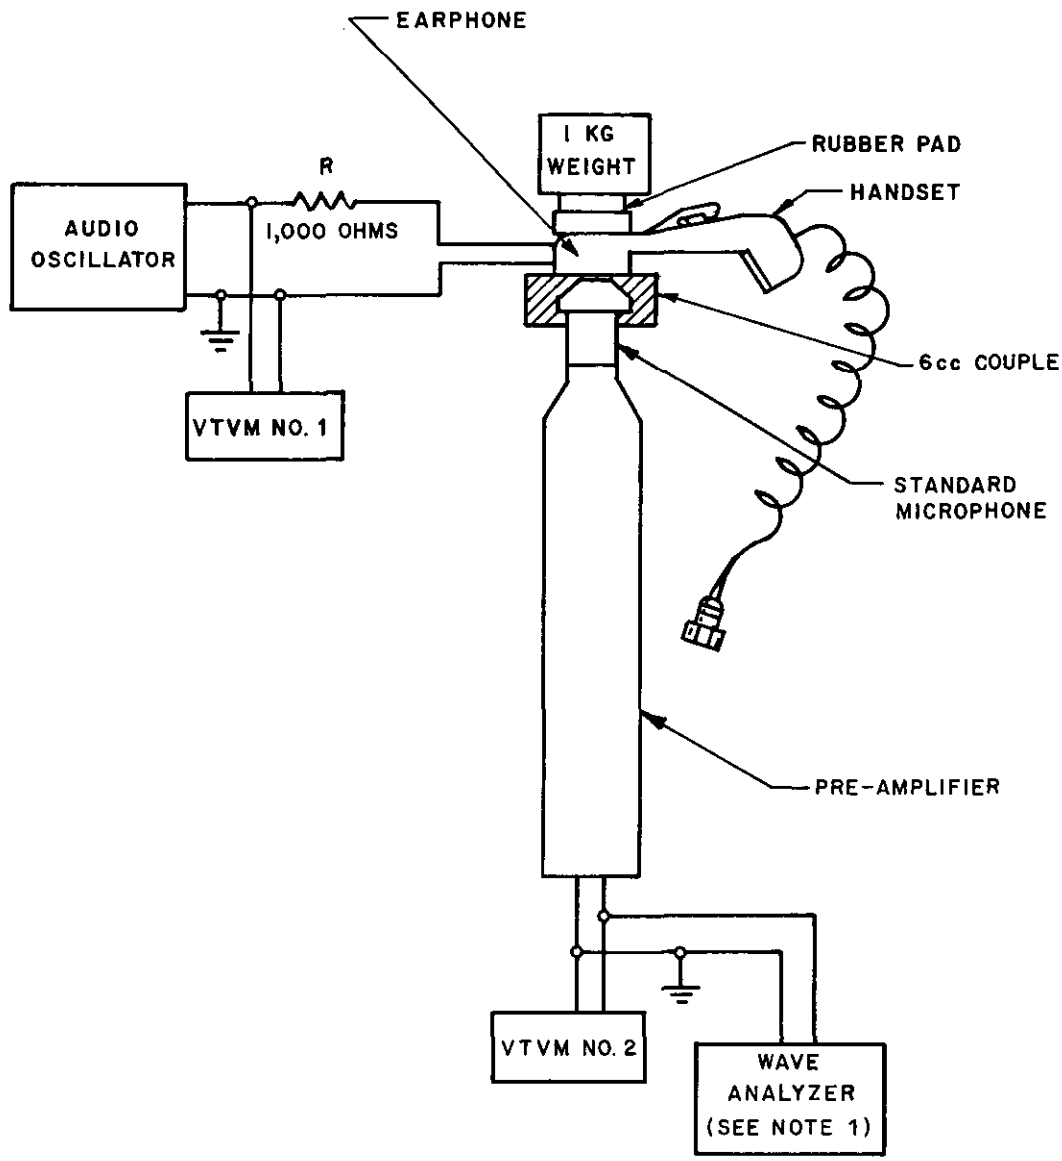

NOTE 1: WAVE ANALYZER REQUIRED FOR DISTORTION TEST ONLY.

EARPHONE FREQUENCY RESPONSE TEST CIRCUIT

FIGURE 6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:16Z
Check the source to verify that this is the current version before use.

4.7.2.4 Overload. - The earphone, in the completed handset, shall be operated for 8 hours with 300 milliwatts input power (17.3 volts) at 1000 Hz and shall meet the requirements of 3.7.2.4.

4.7.3 Leakage Resistance. - A voltage of 100 Vdc shall be applied for 10 seconds to points specified and shall meet the requirements of 3.7.3.

4.8 Operation. - A test circuit shall be built to check the operation of the completed handset. The test circuit shall apply a constant signal to the earphone when handset is connected. An indicator will show microphone operates when a signal is applied. The completed handset shall meet the requirements of 3.8.

4.9 Sixty Degree Specular Gloss. - The exposed surfaces of the handset, in its normal operating configuration, shall be tested in accordance with Method 6101 of Federal Test Method Standard 141, and shall meet the requirements of 3.9.

4.10 Environmental. - The handset shall be tested in accordance with the following environmental conditions:

4.10.1 Low Temperature. - The handset, in its normal operating configuration, shall be subjected to the low temperature test specified in Procedure I, Method 502 of MIL-STD-810, with temperature in Step 2 at -65°F and maintained until temperature stabilization of the handset occurs and delete Steps 4 and 5. The handset shall meet the requirements of 3.10.1.

4.10.2 High Temperature. - The handset, in its normal operating configuration, shall be subjected to the high temperature test specified in Procedure II, Method 501 of MIL-STD-810, with Steps 7 and 8 deleted. The handset shall meet the requirements of 3.10.2.

4.10.3 Immersion. - The handset, in its normal operating configuration, shall be subjected to the immersion test specified in Procedure I, Method 512 of MIL-STD-810, except the temperature of the water shall be 70° ± 3°F and the test item shall be 110 ° ± 3°F. External weight, tied loosely to equipment with string, may be used to hold handset at proper depth. The handset shall meet the requirements of 3.10.3.

4.10.4 Altitude. -

4.10.4.1 Operating. - The handset, in its normal operating configuration, shall be subjected to atmospheric pressure corresponding to 10,000 feet above sea level (20.6 inches of mercury for a minimum of 20 minutes. The frequency response shall be taken at sea level prior to subjection to altitude; 5 minutes after reaching 10,000 feet; prior to returning to sea level; and 5 minutes after returning to sea level. The handset shall be tested in accordance with 3.10.4.1.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:16Z
Check the source to verify that this is the current version before use.

4.10.4.2 Nonoperating. - The handset, in its normal operating configuration, shall be subjected to atmospheric pressure corresponding to 50,000 feet above sea level (3.44 inches of mercury) for a minimum of 20 minutes. The frequency response shall be taken at sea level prior to subjection to altitude, and 5 minutes after returning to sea level. The handset shall meet the requirements of 3.10.4.2.

4.10.5 Vibration. - The handset, in its normal operating configuration, shall be rigidly supported on a vibration machine, with the microphone and earphone elements perpendicular to surface direction of vibration. The vibration frequency shall be varied uniformly between 10 and 55 Hz and returned to 10 Hz in approximately 1 minute and at a vibratory displacement of not less than 0.030 inches, double amplitude. The test shall be conducted for 5 hours. The handset shall meet the requirements of 3.10.5.

4.10.6 Bounce. - The handset, in its normal operating configuration, shall be subjected to the bounce test specified in Part 2, Procedure XI, Methods 514 of MIL-STD-810. The equipment shall meet the requirements of 3.10.6.

4.10.7 Humidity. - The handset, in its normal operating configuration, shall be subjected to the humidity test specified in Procedure III, Method 507 of MIL-STD-810, deleting operation during humidity test. The handset shall meet the requirements of 3.10.7.

4.10.8 Drop. - The handset, in its normal operating configuration, shall be dropped 12 times, in a random manner, from a height of 6 feet onto concrete faced with 0.125 inch thick asphalt tile. The handset shall meet the requirements of 3.10.8.

4.10.9 Drop at Low Temperature. - The handset, in its normal operating configuration, shall be dropped 12 times, in a random manner, from a height of 6 feet onto concrete faced with 0.125 inch thick asphalt tile. The handset shall be at -40° ± 5°F prior to each drop. The handset shall meet the requirements of 3.10.9.

4.10.10 Blast. - The handset, in its normal operating configuration, shall be mounted on the carriage of US Navy Simulated Gun Blast Equipment in accordance with SK-N-864. The handset shall be supported so the plane of the microphone and earphone parts are at right angles to the plane of the shock wave. The handset shall be subjected to 30 blasts, each producing a pressure of 9.5 pounds peak per square inch. The handset shall meet the requirements of 3.10.10.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:16Z
Check the source to verify that this is the current version before use.

4.10.11 Dust. - The handset, in its normal operating configuration, shall be subjected to the Dust Test specified in Procedure I, Method 510 of MIL-STD-810. The handset shall meet the requirements of 3.10.11.

4.10.12 Salt Fog. - The handset, in its normal operating configuration, shall be exposed to the Salt Fog Test in accordance with Procedure I, Method 509 of MIL-STD-810 for 48 hours. The handset shall meet the requirements of 3.10.12.

4.10.13 Fungus. - The handset, in its normal operating configuration, shall be subjected to 28 days of the Fungus Test specified in Procedure I, Method 508 of MIL-STD-810. The handset shall meet the requirements of 3.10.13.

4.11 Pull. - With the equipment rigidly mounted in a vertical position, apply a steady pull of 18 pounds to the straight portion of the cord without damaging the cord. This shall be accomplished by suspending an 18 pound weight to cord for a period of 15 minutes. This pull test shall be repeated at the connector end of the cord by mounting the connector in a vertical position and applying the 18 pounds as above. The handset shall meet the requirements of 3.11.

4.12 Jerk. - With the equipment mounted in the configuration indicated in 4.11, attach a 4 pound weight to the straight portion of the cable for this test. The Jerk Test shall be accomplished by vertically raising the 4 pound weight to a height of 12 inches above the static position and releasing the weight for a free drop of 12 inches. This test shall be performed 12 times and the complete test of 12 drops of 12 inches shall be repeated at the connector end. The handset shall meet the requirements of 3.12.

4.13 Switch Life. - The switch shall be activated through a complete operation cycle at a rate not greater than 60 times a minute with a rated load of 0.5A and 20 Vdc flowing through the control circuit in series with a resistive load, and shall meet the requirements of 3.13.

4.14 Visual and Mechanical. - The handset shall be subjected to a thorough visual and mechanical inspection. The defects shall be classified in accordance with MIL-STD-252.

4.15 Quality Conformance Inspection of Preparation for Delivery. - Preparation for delivery shall be inspected in accordance with MIL-P-116 to determine conformance to the requirements of Section 5.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:16Z
Check the source to verify that this is the current version before use.

4.16 Reliability qualification test. - Reliability qualification testing shall be performed on 20 units randomly selected from the first production lot. The samples shall be subjected to the accept, reject criteria of Test Plan XXV of MIL-STD-781. The following tests shall be conducted at ambient temperature and humidity conditions:

a. Each handset under test shall be energized by applying 0.5a at 20 V dc through the control circuit in series with an appropriate resistive load for not less than 20 hours per 24 hour time period throughout the test.

b. The switch circuit shall be cycled at a minimum rate of 6 times per operating hour.

c. At the conclusion of each 20 hours of operation per a. and b. above, the handsets under test shall be subjected to the bounce test specified in Part 2, Procedure XI, Method 514 of MIL-STD-810, for one continuous hour.

d. Upon completion of the bounce test per c. above, the microphone and earpiece shall meet the frequency response and distortion requirements specified herein.

e. The minimum operating time per handset shall be in accordance with paragraph 4.2.2.4 of MIL-STD-781.

f. The total cumulative operating time shall not be less than 7400 hours.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. - Preservation and packaging shall be level A or C, as specified. (See 6.2).

5.1.1 Level A. -

5.1.1.1 Cleaning. - Handset H-138( )/U or H-207( )/U shall be cleaned in accordance with process C-1 of MIL-P-116.

5.1.1.2 Drying. - Handset H-138( )/U or H-207( )/U shall be dried in accordance with the applicable procedure of MIL-P-116.

5.1.1.3 Preservation application. - None required.

5.1.1.4 Unit packaging. - Handset H-138( )/U or H-207( )/U shall be individually packaged method III as follows: Cushion each handset by wrapping in paperboard conforming to PPP-P-291, type I. Secure wrap with tape conforming to PPP-T-45, type III, grade A.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:16Z
Check the source to verify that this is the current version before use.

5.1.1.4 Unit packaging. - (Cont'd) Place each cushioned item within a close-fitting box conforming to MIL-B-43014, form I, style II. Closure shall be in accordance with the appendix of the box specification.

5.1.2 Level C. - Handset H-138( )/U or H-207( )/U shall be preserved and packaged in a manner that will afford adequate protection against physical and environmental damage during shipment, handling and limited intransit storage.

5.2 Packing. - Packing shall be level A, B or C as specified. Shipping containers for all levels shall be capable of stacking and supporting superimposed loads during shipment and storage without damaging the container(s) or its contents. **(See 6.2).**

5.2.1 Level A. -

5.2.1.1 Consolidation. - A quantity of Handset H-138( )/U or H-207( )/U, packaged as specified in 5.1, bearing the same stock numbers, shall be packed within a close-fitting fiberboard box conforming to PPP-B-636, type CF, class weather-resistant. Box closure shall be as specified in the appendix of the box specification. To facilitate palletization, fiberboard boxes shall be uniform in size and contain equal quantities of the packaged items to the greatest extent practicable.

5.2.1.2 Palletized load. - A quantity of containers packed as specified in 5.2.1.1, bearing the same stock number, shall be placed on a pallet, load type 1, conforming to MIL-STD-147 except that the pallet shall be softwood conforming to NN-P-71, type IV, size 2. A fiberboard cap shall be employed over the load having two sides extending down the stacked load at least 12 inches to accommodate marking requirements. The cap shall be fabricated of fiberboard conforming to PPP-F-320, class weather resistant, W5s or V3c. The load shall be "bonded" to the pallet by strapping.

5.2.1.3 Less than palletized load. - When quantities per destination are less than a pallet load, the containers packed as specified in 5.2.1.1, bearing the same stock number, shall be water-proofed, with tape conforming to PPP-T-76, in accordance with the taping requirements of the appendix of the box specification. A quantity of the waterproofed containers shall be packed within a close-fitting box conforming to PPP-B-601, overseas type; PPP-B-621, style 4, class 2; or PPP-B-585, style 2 or 3, class 3. When the gross weight exceeds 200 pounds, or the container length and width is 48 x 24 inches or more and the weight exceeds 100 pounds, 3 x 4 inch skids, laid flat, shall be applied in accordance with the requirements of the container specification, or if not specified in the specification, in a manner which will adequately support the item and facilitate the use of material handling equipment. Closure and strapping shall be in accordance with the applicable container specification or appendix thereto except that metal strapping shall conform to QQ-S-781, type 1, class B.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:16Z
Check the source to verify that this is the current version before use.

5.2.2 Level B. -

5.2.2.1 Consolidation. - A quantity of Handsets H-138( )/U or H-207( )/U, packaged as specified in 5.1, bearing the same stock number shall be packed as specified in 5.2.1.1.

5.2.2.2 Palletized load. - A quantity of containers, in 5.2.2.1, bearing the same stock number packed as specified shall be palletized as specified in 5.2.1.2.

5.2.2.3 Less than palletized load. - When quantities per destination are less than a pallet load, the containers packed as specified in 5.2.2.1 shall be reinforced by pressure-sensitive filament tape conforming to PPP-T-97, type IV as specified in the appendix of the box specification. No further packing shall be required.

5.2.3 Level C. -

5.2.3.1 Consolidation. - A quantity of Handset H-138( )/U or H-207( )/U, packaged as specified in 5.1, bearing the same stock number, shall be packed as specified in 5.2.1.1, except that the fiberboard boxes shall be class domestic.

5.2.3.2 Palletized load. - A quantity of containers, in 5.2.3.1, bearing the same stock number, packed as specified shall be palletized as specified in 5.2.1.2, except that the fiberboard cap shall be class domestic.

5.2.3.3 Less than palletized load. - When quantities per destination are less than a pallet load, the containers packed as specified in 5.2.3.1 shall be used as the shipping container. No further packing shall be required.

5.3 Marking. - In addition to any special marking required by the contract or order, interior packages and exterior shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended Use. - The handsets, covered by this specification, are intended for use with all AN/VRC-12 Radio sets and can be operated in high ambient noise areas.

6.2 Ordering Data. - Procurement documents should specify the following:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:16Z
Check the source to verify that this is the current version before use.

a. Title, number and date of this specification and any amendment thereto.

b. Level of preservation, packaging, packing and marking. (See Section 5).

c. If rough handling and functional tests are required.

d. Quantity of first articles required.

e. Place of final inspection.

f. Technical literature required.

g. Quantity of tools and running spare parts required.

6.3 Nomenclature. - The contractor should apply the nomenclature (item name and type designation) in accordance with the application clause in the contract. The parentheses in the type designation will be deleted or replaced by a letter identifying the particular design, for example: H-149( )/U to H-149A/U.

6.4 Group C Inspection. - Approval to ship may be withheld, at the discretion of the Government, pending the decision from the Contracting Officer on the adequacy of corrective action.

6.5 Sampling Inspection. - Sampling inspection by the Government will be limited to the amount deemed necessary to determine compliance with the contract or purchase order and will be limited in severity to the definitive quality assurance provisions established in this specification and the contract or purchase order. The amount of sampling inspection by the Government will be adjusted to make maximum utilization of the contractor's quality control system and the quality history of the product.

CUSTODIANS:
Army-EL

PREPARING ACTIVITY:
Army-EL

PROJECT NUMBER: 5965-A113

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:16Z
Check the source to verify that this is the current version before use.

FOLD

Department of the Army
Headquarters
U.S.Army Electronics Command
Fort Monmouth, New Jersey 07703

POSTAGE AND FEES PAID

OFFICIAL BUSINESS

Commanding General
U.S.Army Electronics Command
ATTN: AMSEL-RD-ED
Fort Monmouth, New Jersey 07703

FOLD

To detach this form, cut along this line

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:16Z
Check the source to verify that this is the current version before use.

To detach this form, cut along this line

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION MIL-H-55380(EL) HANDSET H-138( )/U AND HANDSET H-207( )/U

ORGANIZATION

CITY AND STATE | CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?
   ☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)* | DATE

DD FORM 1 JAN 56 1426 REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

ESC-FM 1068-68

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:16Z
Check the source to verify that this is the current version before use.