MILITARY SPECIFICATION SHEET

CABLE, RADIO FREQUENCY, FLEXIBLE, COAXIAL, 95 OHMS, M17/100-RG133

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the cable described herein shall consist of this document and the latest issue of Specification MIL-C-17.

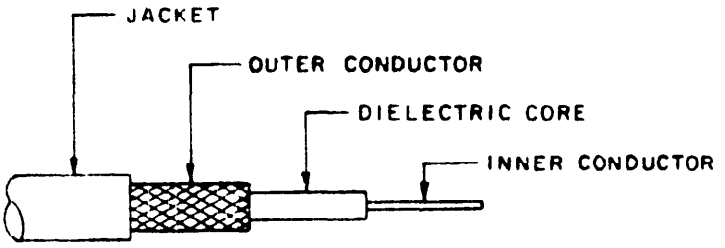


FIGURE 1. Configuration.

TABLE I. Description.

Components	Construction details
Inner conductor	Solid bare copper wire. Diameter: .0253 inch ±.0010.
Dielectric core	Type A-1: Solid polyethylene. Diameter: .285 inch ±.007.
Outer conductor	Single braid of AWG size 33 bare copper wire. Diameter: .340 inch, maximum. Coverage: 95.3%, nominal Carriers: 24 Ends: 8 Picks/inch: 6.5 ±10%
Jacket	Type IIa: PVC. Diameter: .405 inch ±.010.

© denotes change

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:10Z
Check the source to verify that this is the current version before use.

ENGINEERING INFORMATION:

Continuous working voltage: 3,700 Vrms, maximum.

Operating frequency: 1 GHz, maximum.

Velocity of propagation: 65.9 percent, nominal.

Power rating: See figure 2.

Operating temperature range: -40° to +85°C.

Inner conductor properties:

DC resistance (maximum at 20°C): .897 ohm per 100 feet.

Elongation: 15 percent, minimum.

Engineering notes: This cable useful in low temperature applications (see connector series "N", "C", and "SC" per MIL-C-39012).

REQUIREMENTS:

Dimensions, configuration, and descriptions: See figure 1 and table I.

Environmental and mechanical:

Visual and mechanical examination:

Eccentricity: 10 percent, maximum.

Adhesion of conductors:

(C) Inner conductor to core: 7 pounds, minimum; 50 pounds, maximum.

Aging stability: +98° ±2°C.

Cold bend: -40° ±2°C.

Dimensional stability: +85° ±2°C.

Inner conductor from core: .062 inch, maximum.

Inner conductor from jacket: .125 inch, maximum.

Weight: 9.5 pounds per 100 feet, maximum.

Electrical:

Spark test: 5,000 Vrms, minimum.

Voltage withstanding: 10,000 Vrms, minimum.

Corona extinction voltage: 5,000 Vrms, minimum.

Characteristic impedance: 95 ±5 ohms.

Attenuation: 5.7 dB per 100 feet, maximum at .4 GHz.

Capacitance: 16.2 pF per foot, maximum.

Capacitance unbalance: Not applicable.

Transmission unbalance: Not applicable.

Mechanically induced noise voltage: Not applicable.

Source: https://assist.dla.mil -- Downloaded: 202610-15T16:10Z
Check the source to verify that this is the current version before use.

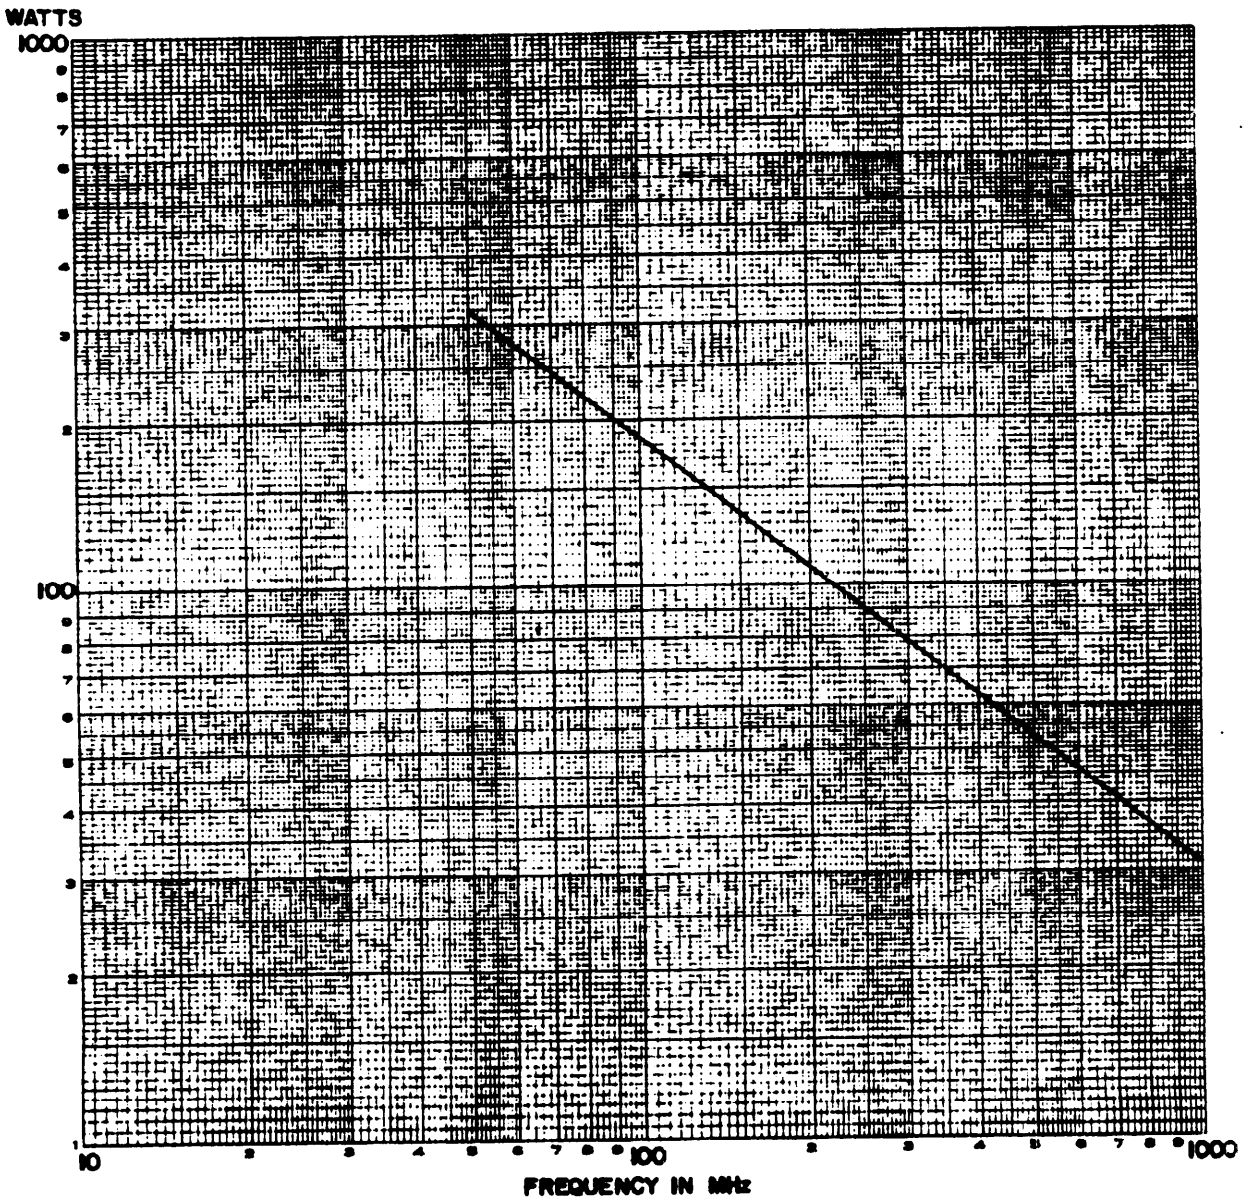


FIGURE 2. Power rating @ 25°C sea level.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:10Z
Check the source to verify that this is the current version before use.

Time delay: Not applicable.

Contamination: Applicable.

Part number: M17/100-RG133 (NATO preferred type NWR-7).

Supersession data: See table II.

TABLE II. Cross reference of part number.

Part number	Superseded part number or type designation
M17/100-RG133	RG-133A/U

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - SH
Air Force - 11, 17, 99
DLA - ES, IS

User activities:
Army - AR, AT, ME
Navy - AS, MC, OS
Air Force - 19

Preparing activity:
Army - CR

Agent:
DLA - ES

(Project 6145-0793-7)

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:10Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER (Number) AND TITLE MIL-C-17/100C Cable, Radio Frequency, Flexible, Coaxial, 95OHMS, M17/100-RG133

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

HQ, USA CORADCOM
ATTN: DRDCO-CM-DM
Ft. Monmouth, N.J., 07703

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY (Printed or typed name and address — Optional)

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:10Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY CARD

FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

HQ, USA CORADCOM
ATTN: DRDCO-CM-DM
Ft. Monmouth, NJ 07703

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:10Z
Check the source to verify that this is the current version before use.