
MILITARY SPECIFICATION SHEET


INDICATORS, FAULT LOCATING, DUAL DRUM INDICATING, MECHANICAL RESET

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the indicators described herein shall consist of this specification sheet and the latest issue of MIL-I-83287

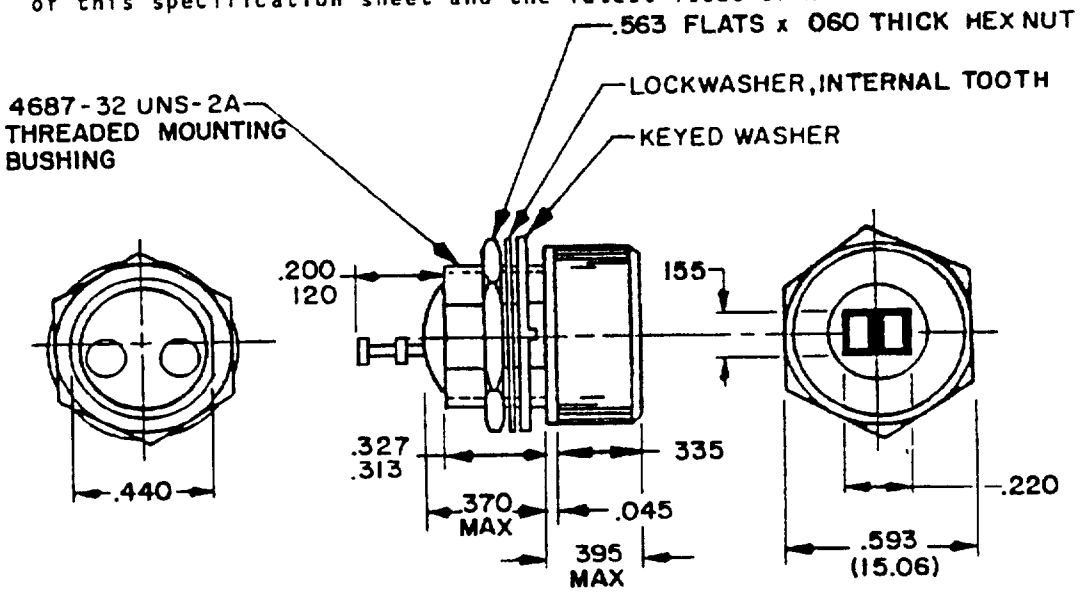

SOLDER TERMINALS

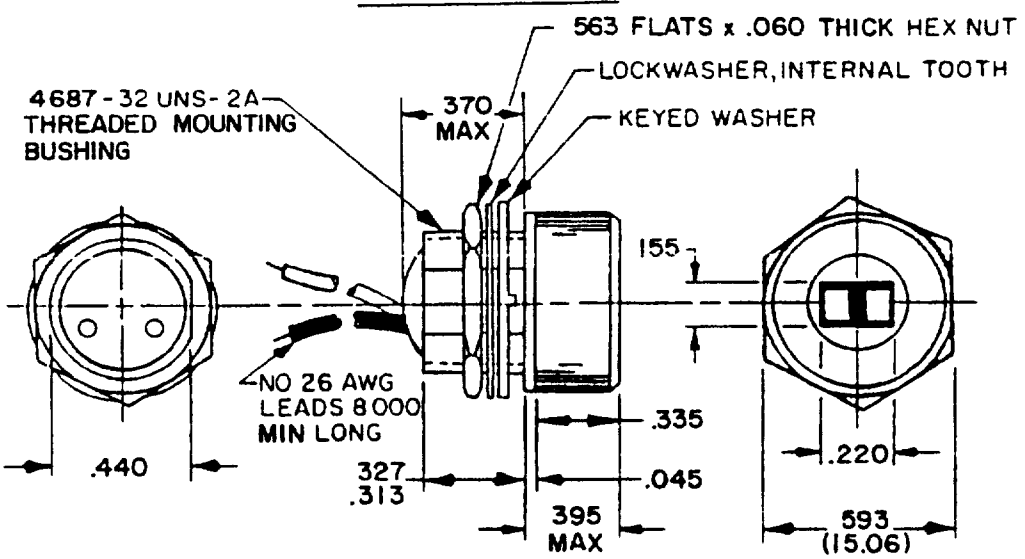


WIRE LEADS

FIGURE 1. Dimensions and configurations.


(A) denotes changes

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:46Z
Check the source to verify that this is the current version before use.

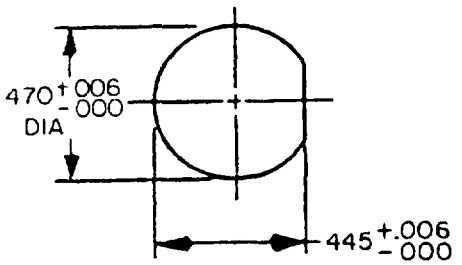

PANEL LAYOUT

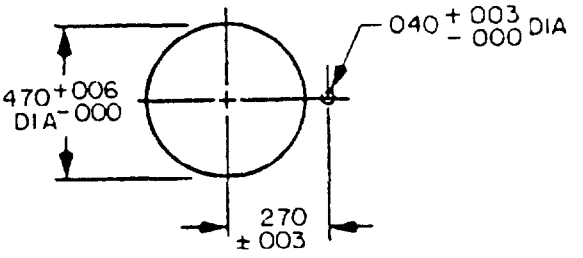


OPTIONAL PANEL LAYOUT
USING KEYED WASHER



"FAULT" INDICATION
WHITE AND BLACK



"NO FAULT" INDICATION
BLACK



POLARITY

Inches	mm
003	0 08
.006	0.15
.040	1.02
044	1 12
.045	1.14
.060	1.52
.120	3 05
.155	3 94
.200	5 08
.220	5 59
240	6 86
.313	7 95
.327	8 31
.335	8 51
370	9 40
.395	10.03
445	11.30
4687	11.900
470	11 94
563	14 30
593	15 06

NOTES
1. Dimensions are in inches
2. Metric equivalents are given for general information only
3. Unless otherwise specified, tolerance is ± 005 (0.13 mm).
4. The mounting nut shall be black.
5. The shape and location of the solder terminal shown is not intended to limit specific manufacturing processes. When the shape of terminal in the schematic is used, the hole diameter shall be as shown
6. Metric equivalents are in parentheses
7. No fault indication color may be lusterless gray no 36081 per FED-STD-595
8. Mounting torque of 5 to 7 in lbs may be used

FIGURE 1 Dimensions and configurations - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:46Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and characteristics See figure 1 and table I.

Weight (including hardware) 6.5 grams, maximum.

Pulse power 50 milliwatts, minimum.

Pulse length 25 ms minimum.
2 ms maximum.

Terminal strength

Rigid type solder terminals Test condition A (3 pounds, minimum)
Test condition E (8 ounce-inches, minimum).

Wire type solder terminals Test condition A (3 pounds, minimum).
Test condition C (1 pound, minimum).

Marking of terminals The positive terminal shall be identified by a red dot.

Vibration. Test condition B of MIL-STD-202 (method 204).

Ⓐ Extent of qualification Qualification testing and approval of M83287/04-01 and M83287/04-24 shall be sufficient to grant qualification approval for all indicators covered by this specification sheet.

Part number M83287/04- (dash number from table I).

Ⓐ Random vibration Not applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:46Z
Check the source to verify that this is the current version before use.

Ⓐ TABLE I Indicator characteristics.

Military part numbers M83287/04-	Voltage (volts, dc)			DC coil resistance at						Termination type	Anti-reflection coating
		Operating		-55°C		+125°C		Ambient			
	Rated	Min 1/	Max	Min	Max	Min	Max	Min	Max		
01	1 5	1 2	1.8	26	33	55	70	40	50	Wire leads	No coating
02											With coating
03										Solder terminals	No coating
04											With coating
05	3.0	2.4	3.6	106	129	224	274	162	198	Wire leads	No coating
06											With coating
07										Solder terminals	No coating
08											With coating
09	6 0	4 8	7.2	423	518	897	1097	648	792	Wire leads	No coating
10											With coating
11										Solder terminals	No coating
12											With coating
13	12 0	9 6	14 4	1694	2070	3590	4388	2592	3168	Wire leads	No coating
14											With coating
15										Solder terminals	No coating
16											With coating
17	24.0	19 2	28 8	6763	8267	14335	17520	10350	12650	Wire leads	No coating
18											With coating
19										Solder terminals	No coating
20											With coating
21	28.0	22 4	30 0	9233	11286	19570	23919	14130	17270	Wire leads	No coating
22											With coating
23										Solder terminals	No coating
24											With coating

1/ Refers to the minimum operating voltage which the indicator will operate

CONCLUDING MATERIAL

Custodians
Navy - AS
Air Force - 85

Review activities
Air Force - 82
DLA - ES

User activities
Air Force - 17, 80

Preparing activity
Air Force - 85

Agent
DLA - ES

(Project 6625-0643-4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:46Z
Check the source to verify that this is the current version before use.