INCH-POUND
MIL-PRF-83287/4C
w/AMENDMENT 2
22 August 2014
SUPERSEDING
MIL-PRF-83287/4C
w/AMENDMENT 1
12 December 2013

PERFORMANCE SPECIFICATION SHEET

# INDICATORS, FAULT LOCATING, DUAL DRUM INDICATING, MECHANICAL RESET

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-83287.


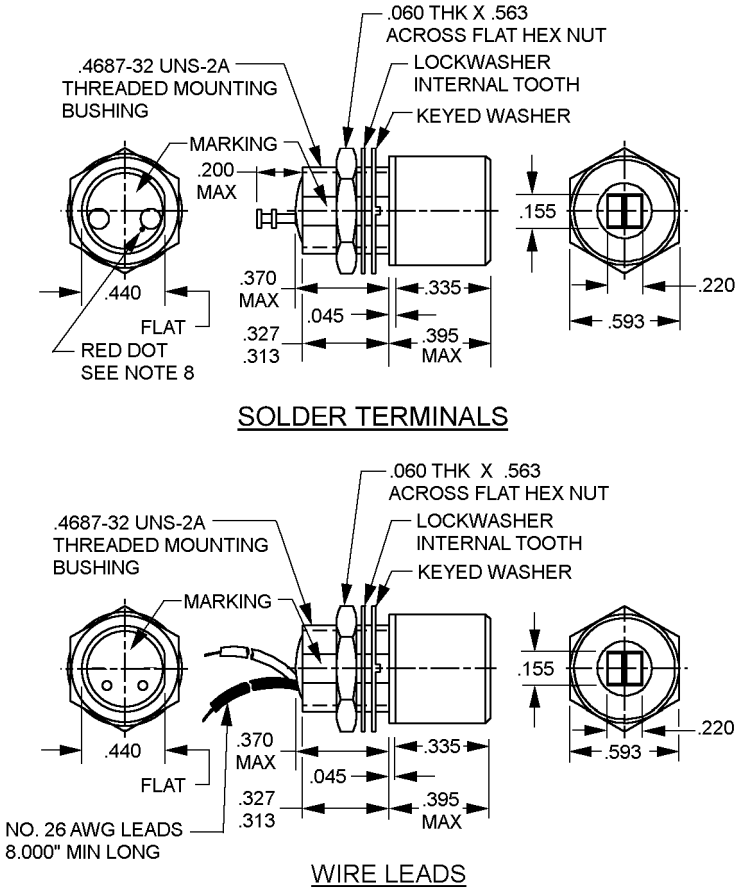




FIGURE 1. Dimensions and configurations.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:46Z
Check the source to verify that this is the current version before use.





PANEL LAYOUT

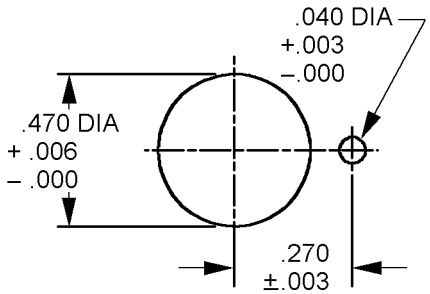



OPTIONAL PANEL LAYOUT
USING KEYED WASHER


| Inches | mm |
|---|---|
| .003 | 0.08 |
| .006 | 0.15 |
| .040 | 1.02 |
| .044 | 1.12 |
| .045 | 1.14 |
| .060 | 1.52 |
| .120 | 3.05 |
| .155 | 3.94 |
| .200 | 5.08 |
| .220 | 5.59 |
| .240 | 6.10 |
| .313 | 7.95 |
| .327 | 8.31 |
| .335 | 8.51 |
| .370 | 9.40 |
| .395 | 10.03 |
| .445 | 11.30 |
| .4687 | 11.904 |
| .470 | 11.94 |
| .563 | 14.30 |
| .593 | 15.06 |
| 8.000 | 203.20 |

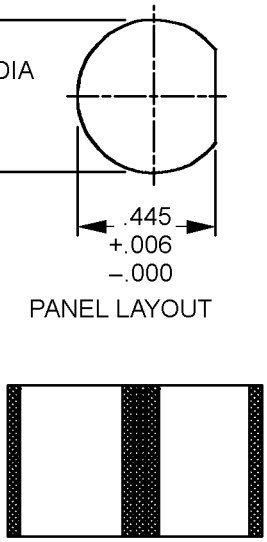

"FAULT" INDICATION:
BLACK AND WHITE



"NO FAULT" INDICATION:
BLACK

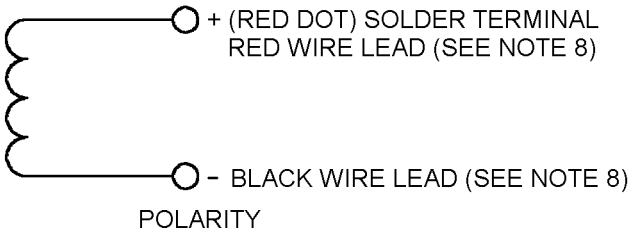


POLARITY

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm).
4. The mounting nut shall be black.
5. The shape and location of the solder terminal shown is not intended to limit specific manufacturing processes.
6. No fault indication color may be lusterless gray as specified in FED-STD-595/36081.
7. Mounting torque of 5 to 7 in lbs. may be used.
8. The positive polarity on the Solder Terminals shall be identified by a red dot. The positive polarity on the Wire Leads shall be identified by a Red Wire Jacket color.

FIGURE 1. Dimensions and configurations - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:46Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and characteristics: See figure 1 and table I.

Weight (including hardware): 0.0143 pound (6.5 grams), maximum.

Pulse power: 50 milliwatts, minimum.

Transfer pulse length: A pulse length of 25 milliseconds or greater shall cause a fault indication. A pulse length of 2 milliseconds or less shall not cause a fault indication.

Terminal strength:

| | |
|---|---|
| Rigid-type solder terminals: | Test condition A (3 pounds, minimum).<br>Test condition E (8 ounce-inches, minimum.) |
| Wire-type solder terminals: | Test condition A (3 pounds, minimum).<br>Test condition C (1 pound, minimum). |

Marking of terminals: The positive terminal shall be identified by a red dot.

Vibration: Test condition B of MIL-STD-202 (method 204).

Extent of qualification: Qualification testing and approval of M83287/04-01 and M83287/04-24 shall be sufficient to grant qualification approval for all indicators covered by this specification sheet.

Part or Identifying Number (PIN): M83287/04- (dash number from table I).

Random vibration: Not applicable.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:46Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics.

| Military PIN M83287/04- | Voltage (volts, dc) | | | DC Coil resistance (ohms) at | | | | | | Termination type | Anti-reflection coating |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | | Operating | | -65°C | | +125°C | | Ambient (+25°C) | | | |
| | Rated | Min 1/ | Max | Min | Max | Min | Max | Min | Max | | |
| 01 | 1.5 | 1.2 | 1.8 | 26 | 33 | 55 | 70 | 40 | 50 | Wire leads | No coating |
| 02 | | | | | | | | | | | With coating |
| 03 | | | | | | | | | | Solder terminals | No coating |
| 04 | | | | | | | | | | | With coating |
| 05 | 3.0 | 2.4 | 3.6 | 106 | 129 | 224 | 274 | 162 | 198 | Wire leads | No coating |
| 06 | | | | | | | | | | | With coating |
| 07 | | | | | | | | | | Solder terminals | No coating |
| 08 | | | | | | | | | | | With coating |
| 09 | 6.0 | 4.8 | 7.2 | 423 | 518 | 897 | 1097 | 648 | 792 | Wire leads | No coating |
| 10 | | | | | | | | | | | With coating |
| 11 | | | | | | | | | | Solder terminals | No coating |
| 12 | | | | | | | | | | | With coating |
| 13 | 12.0 | 9.6 | 14.4 | 1694 | 2070 | 3590 | 4388 | 2592 | 3168 | Wire leads | No coating |
| 14 | | | | | | | | | | | With coating |
| 15 | | | | | | | | | | Solder terminals | No coating |
| 16 | | | | | | | | | | | With coating |
| 17 | 24.0 | 19.2 | 28.8 | 6763 | 8267 | 14335 | 17520 | 10350 | 12650 | Wire leads | No coating |
| 18 | | | | | | | | | | | With coating |
| 19 | | | | | | | | | | Solder terminals | No coating |
| 20 | | | | | | | | | | | With coating |
| 21 | 28.0 | 22.4 | 30.0 | 9233 | 11286 | 19570 | 23919 | 14130 | 17270 | Wire leads | No coating |
| 22 | | | | | | | | | | | With coating |
| 23 | | | | | | | | | | Solder terminals | No coating |
| 24 | | | | | | | | | | | With coating |

1/ Refers to the minimum operating voltage which the indicator will operate.

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to MIL-PRF-83287, this document references the following:

MIL-STD-202
FED-STD-595/36081



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:46Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Navy - AS
Air Force - 11
DLA – CC

Preparing activity:
DLA - CC

(Project 6625-2014-022)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:46Z
Check the source to verify that this is the current version before use.