FED. SUP CLASS
9530

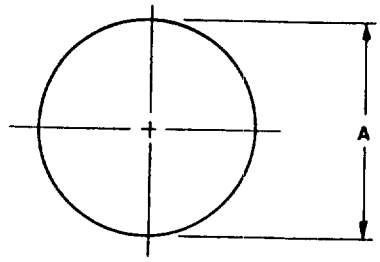


TABLE I. DASH NUMBERS.

DASH NO	A	TEMPER	FORMING PROCESS 2/
001	.375	T651	C
003	.500	T6	C
005	.500	T651	C
007	.625	T6	C
009	.688	T7351	C
011	.750	T6	C
013	.750	T73	C
015	.750	T651	C
017	.750	T6511	C
019	.875	T6	C
021	.875	T7351	C
023	.938	T73	C
025	.938	T7351	C
027	1.000	T6	C
029	1.000	T73	C
031	1.000	T651	C
033	1.062	T7351	C
035	1.125	T651	C
037	1.125	T7351	C
039	1.190	T7351	C
041	1.250	T6	C
043	1.250	T651	C
045	1.375	T7351	C
047	1.500	T651	C
049	1.500	T7351	C
051	1.625	T6	C
053	1.625	T651	C
055	1.750	T6	C
057	1.750	T73	C
059	1.875	T7351	C

DASH NO	A	TEMPER	FORMING PROCESS 2/
061	2.000	T6	C
063	2.000	T73	C
065	2.000	T651	C
067	2.000	T6511	C
069	2.125	T73	C
071	2.125	T73511	C
073	2.125	T651	C
075	2.250	T6	C
077	2.250	T6511	C
079	2.250	T7351	C
081	2.375	T73	C
083	2.500	T6	C
085	2.500	T73	C
087	2.500	T6511	C
089	2.625	T7351	C
091	2.750	T6	C
093	2.750	T6511	C
095	2.875	T7351	C
097	3.000	T6	C
099	3.000	T651	C
101	3.000	T6511	C
103	3.250	T6	R,D,C,E
105	3.500	T6	R,C,C,E
107	3.500	T651	R,D,C
109	3.500	T6511	E
111	4.000	T651	R,D,C
113	4.000	T6511	E
115	4.500	T6	E
117	5.500	T6	R,D,C,E

USER ACTIVITIES:

REVIEWER ACTIVITIES:
Air Force - 84
DLA - IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

APPROVED 14 SEP 83 REVISED

P. A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust AS MR 99		ROD, ALUMINUM ALLOY 7075	MS 14260
PROCUREMENT SPECIFICATION QQ-A-200, QQ-A-225	SUPERSEDES:		PAGE 1 OF 2

DD FORM 1 MAY 73 672-1 (COORDINATED)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

9530-0257

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:38Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. MATERIAL. ALUMINUM ALLOY 7075, (UNS A97075) AS SPECIFIED IN QQ-A-200/11 AND QQ-A-225/9.

2/ FORMING PROCESS. ROLLED - CODE "R"
DRAWN - CODE "D"
COLD FINISHED - CODE "C"
EXTRUDED - CODE "E"

3. PART NUMBER. THE PART NUMBER CONSISTS OF THE BASIC MS NUMBER, PLUS A FORMING PROCESS CODE, PLUS A DASH NUMBER FROM TABLE I.

EXAMPLE: MS14260 C 001

- 001 — .375, T651 (SEE TABLE I)
- C — COLD FINISHED (SEE REQUIREMENT 2/)
- MS14260 — BASIC MS NUMBER

4. MARKING. ALUMINUM AND ALUMINUM ALLOYS SHALL BE MARKED WITH THE PRODUCER'S NAME OR REGISTERED TRADEMARK, THE PART NUMBER (MILITARY STANDARD (MS) NUMBER PLUS THE APPLICABLE DASH NUMBER), AND THE LOT AND/OR HEAT NUMBER, AND THIS MARKING SHALL BE APPLIED IN ACCORDANCE WITH FED-STD-184.

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. STANDARD LENGTH OF BAR IS 10 FEET MINIMUM, 12 FEET MAXIMUM.
3. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS, OR REQUEST FOR PROPOSAL, EXCEPT THE REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.
4. FOR DESIGN FEATURE PURPOSES THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

USER ACTIVITIES:

REVIEWER ACTIVITIES:
Air Force - 84
DLA - IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 14 SEP 83 REVISED

P. A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust AS MR 99		ROD, ALUMINUM ALLOY 7075	MS 14260
PROCUREMENT SPECIFICATION QQ-A-200, QQ-A-225	SUPERSEDES:		PAGE 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:38Z
Check the source to verify that this is the current version before use.