
INCH-POUND
MS16843G
16 April 2012
SUPERSEDING
MS16843F
09 March 2011

DETAIL SPECIFICATION SHEET

CLAMP, WIRE ROPE (DOUBLE GRIP), THREADED, STEEL, TYPE IV

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and FF-C-450.

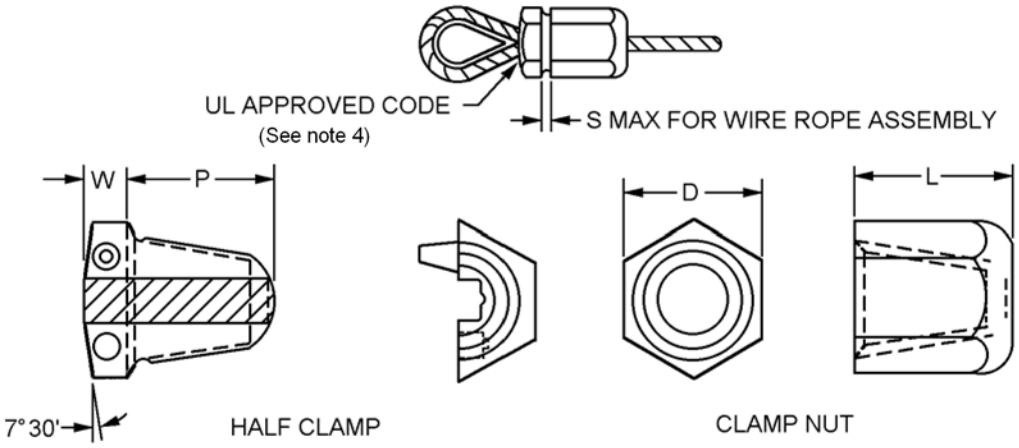

TYPE IV

Clamp dimensions and size.

Dash Number	Threads per inch	Wire rope diameter	D ±.01	W ±.01	P ±.01	L ±.01	S Distance between hexagons (MAX)	Weight per unit pounds
10	20	1/16 (.063)	.62	.19	.69	.77	.06	.08
1	20	1/8 (.125)	.62	.19	.69	.77	.06	.08
2	20	3/16 (.188)	.81	.22	.88	1.00	.09	.22
3	16	1/4 (.250)	1.00	.25	1.03	1.12	.12	.31
4	16	5/16 (.313)	1.25	.31	1.22	1.38	.19	.62
5	16	3/8 (.375)	1.38	.38	1.41	1.56	.19	.81
6	12	7/16 (.438)	1.62	.44	1.62	1.81	.25	1.06
7	12	1/2 (.500)	1.88	.50	1.88	2.12	.25	2.00
8	10	5/8 (.625)	2.25	.75	2.19	2.38	.25	3.00
9	10	3/4 (.750)	2.62	.88	2.62	3.00	.25	5.25

FIGURE 1. Clamp, steel threaded (double grip) wire rope.

AMSC N/A FSC 4030

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:00Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.06	1.52	.313	7.95	.77	19.56	1.56	39.62
.063	1.60	.375	9.53	.81	20.57	1.62	41.15
.09	2.29	.38	9.65	.88	22.35	1.81	45.97
.12	3.05	.438	11.13	1.00	25.40	1.88	47.75
.125	3.18	.44	11.18	1.03	26.16	2.12	53.85
.188	4.78	.500	12.70	1.12	28.45	2.19	55.63
.19	4.83	.62	15.75	1.22	30.99	2.25	57.15
.22	5.59	.625	15.88	1.25	31.75	2.38	60.45
.25	6.35	.69	17.53	1.38	35.05	2.62	66.55
.31	7.87	.750	19.05	1.41	35.81	3.00	76.20

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. All dimensions are “reference” dimensions.
4. Marking: The half-clamp.

FIGURE 1. Clamp, steel threaded (double grip) wire rope – Continued.

REQUIREMENTS:

Clamps shall be in accordance with figure 1.

Material carbon steel, 1035 (UNS G10350) to 1040 (UNS G10400), shall be in accordance with SAE J403.

Protective coating:

Finish Code	Finish
A	Protective coating shall be, mechanically deposited zinc coating in accordance with ASTM-B695, class 50, type II, or zinc coated (hot dip galvanized) in accordance with ASTM-A153/A153M or zinc coating (electrodeposited) in accordance with ASTM-B633, Fe/Zn 5, type VI.
C	Cadmium plated, in accordance with SAE AMS-QQ-P-416, type II, class 3.
Z1	Zinc coating, hot-dip, in accordance with ASTM-A153/A153M
Z2	Zinc coating (electrodeposited) in accordance with ASTM-B633, Fe/Zn 5, type VI. (protects to 120hr in salt spray in accordance with ASTM-B117 and environmentally friendly)
Z3	Zinc coating, mechanically deposited, in accordance with ASTM-B695, class 50, type II (Chromate)
Z4	Zinc coating, mechanically deposited, in accordance with ASTM-B695, class 50, type I (Plain zinc; lowest cost protection, but may be environmentally friendly)

Environmental safety note:


If at all possible and for a safer environment, do not use cadmium or hexavalent chromate conversion. Recommend to use ASTM-B633, Fe/Zn 5, type VI.

For design feature purposes, this specification takes precedence over acquisition documents referenced herein.

In the event of a conflict between the text of this specification sheet and the references cited herein, the text of this specification sheet shall take precedence.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:00Z
Check the source to verify that this is the current version before use.

Part or Identifying Number (PIN) example:

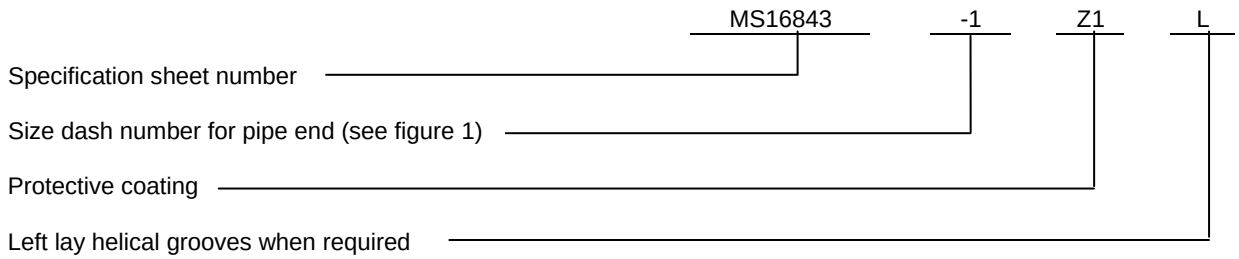

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

.

Referenced documents. In addition to FF-C-450, this document references the following:

ASTM-A153/A153M
ASTM-B117
ASTM-B633
ASTM-B695
SAE AMS-QQ-P-416
SAE J403

CONCLUDING MATERIAL

Custodians:
Army – AR
Navy – SH
Air Force – 99
DLA – CC

Preparing activity:
DLA – CC

(Project 4030-2012-003)

Review activities:
Army – AT, AV, CR4, GL
Navy – MC, SA, YD
Air Force – 71

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:00Z
Check the source to verify that this is the current version before use.