

FED. SUP CLASS
5305

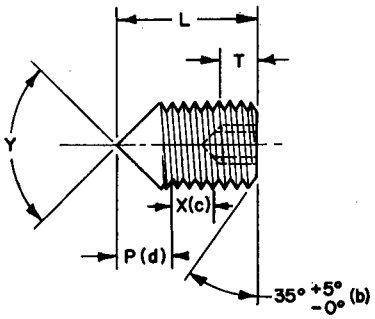



Thread
Per Handbook H 28 Screw Thread Standards for Federal Services 1957

THREAD	D DIA MAX	F		Y		SELF-LOCKING DESIGN DATA		T HEX DEPTH
				118° ±2° FOR LENGTHS AND UNDER	90° ±2° FOR LENGTHS AND OVER	F(d) MAX		
		MAX	MIN			116°	88°	MIN
#4-40NC-3A	.112	.0510	.0500	1/8	5/32	.060	.083	.040
#6-32NC-3A	.138	.0635	.0625	1/8	3/16	.075	.104	.050
#8-32NC-3A	.164	.0791	.0781	3/16	1/4	.084	.117	.062
#10-32NF-3A	.190	.0947	.0937	3/16	1/4	.092	.131	.075
1/4-28UNF-3A	.250	.1270	.1250	1/4	5/16	.114	.166	.100
5/16-24UNF-3A	.3125	.1582	.1562	5/16	3/8	.139	.204	.125
3/8-24UNF-3A	.375	.1895	.1875	3/8	7/16	.159	.236	.150
1/2-20UNF-3A	.500	.2520	.2500	1/2	9/16	.206	.309	.200

L LENGTH	TOLERANCE	DASH NUMBERS (a)							
		#4-40	#6-32	#8-32	#10-32	1/4-28	5/16-24	3/8-24	1/2-20
1/8	±.010	1	2	3	4				
3/16		5	6	7	8	9			
1/4		10	11	12	13	14	15		
5/16		16	17	18	19	20	21		
3/8		22	23	24	25	26	27	91	92
7/16		89	90	30	31	32			
1/2		33	34	35	36	37	38	39	40
9/16		41	42	43	44	45			
5/8		46	47	48	49	50	51	52	53
3/4	±.015		54	55	56	57	58	59	60
7/8			61	62		63	64	65	66
1				67	68	69	70	71	72
1-1/4						73	74	75	76
1-1/2	±.020					77	78	79	80
1-3/4		For lengths above heavy line see note (g)					81	82	83
2							84	85	86
2-1/2	±.031								87
3									88

This Standard takes precedence over documents referenced herein.
Reference documents shall be of the issue in effect on the date of invitation for bid.

APPROVED 4 Jun 63 REVISED ▲ 22 Dec 64

User: Army - GL

Reviewers: Army - EL, MI, MO, MU, WC
USAF - 69

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. Navy - WP	TITLE	MILITARY STANDARD
Other Cust Army - WC, USAF - 69	SETSCREW, HEXAGON SOCKET, CONE POINT, 250°F, SELF LOCKING ELEMENT, ALLOY STEEL, CADMIUM PLATED	MS18067
PROCUREMENT SPECIFICATION FF-S-200 & MIL-F-18240	SUPERSEDES:	SHEET 1 OF 2

DD FORM 1 SEP 67 672-1 COORDINATION PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:14Z
Check the source to verify that this is the current version before use.

(a) Unassigned dash numbers shall not be used.

(b) Socket end of screw shall be flat and chamfered. The chamfer shall extend to the minor diameter of the thread and the edge between flat and chamfer shall be slightly rounded.

(c) Location of effective locking area "X" shall be in accordance with MS 15981 except as noted herein.

(d) P Max. = Maximum point plus minimum of 1 thread pitch. For ease in starting, locking element shall not be effective within this area.

(e) Maximum major thread diameter plus .010 = Maximum ring gage diameter that locking region of part must pass thru freely or with finger pressure.

(f) See MS51037, MS51937 and MS51974 for set screws without self-locking feature.

(g) As MIL-F-18240 doesn't establish torque requirements for items above the heavy line, only a positive indication of torque is required.

MATERIAL: Steel, alloy (See Procurement Specification). Hardened by quenching in oil from the hardening temperature and tempered to a Rockwell Hardness of C 33-40 or equivalent.

LOCKING ELEMENT: In accordance with specification MIL-F-18240.

DESIGN AND USAGE LIMITATIONS: See MS 15981.

FINISH: Steel: Cadmium plate Specification QQ-P-416, Type II, Class 3. Except that paragraph 4.4.5 is not applicable.

EXAMPLE OF PART NUMBER: MS- 18067-57 = 1/4-28UNF-3A x 3/4 long cadmium plated steel cone point self-locking set screw.

User: Army - GL

Reviewers: Army - EL, MI, MO, MU, WC
USAF - 69

APPROVED 4 Jun 63 REVISED (A) 22 Dec 64

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. Navy - WP Other Cust Army - WC USAF - 69	TITLE SETSCREW, HEXAGON SOCKET, CONE POINT, 250°F, SELF LOCKING ELEMENT, ALLOY STEEL, CADMIUM PLATED	MILITARY STANDARD MS18067
PROCUREMENT SPECIFICATION FF-S-200 & MIL-F-18240	SUPERSEDES:	SHEET 2 OF 2

DD FORM 1 SEP 67 672-1 coordination. previous editions are obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-03-23T14:14Z
Check the source to verify that this is the current version before use.