
FED SUP CLASS
5935

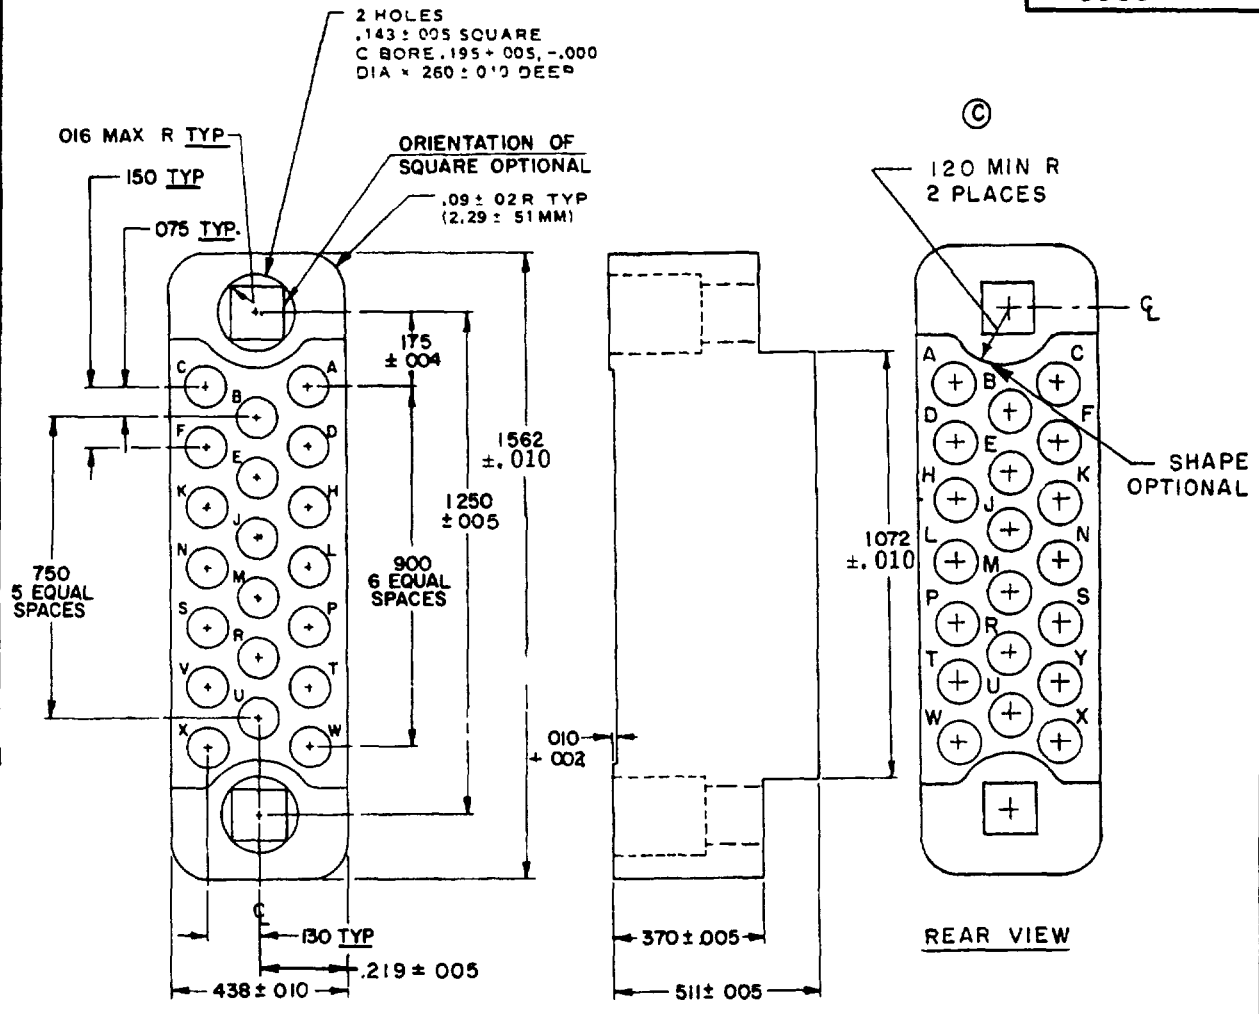

MS Part No. MS18176-1

DESIGN STANDARD FOR USE WITH MIL-C-28748/3.

© denotes changes

P A Navy - EC Other Cust AF - 85 Army - CR	International interest	TITLE Insert (insulator), rectangular connector, electrical, 20 (size 16 and 20 crimp removable) pin contacts	MILITARY STANDARD MS 18176
Procurement Specification MIL-C-28748		SUPERSEDES	PAGE 1 OF 2

DD FORM 672 (Preceding edition of this form are obsolete)

5935-3223-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23114:162
Check the source to verify that this is the current version before use.

User activities Army - ME, AM, AR
Navy - MC, OS, SH, YD
Air Force -

Review activities Army - MI, AT
Navy - AS
Air Force - 11, 99
DLA-ES

is military standard is approved for use by all Departments and Agencies of the partment of Defense Selection for all new engineering and design applications d for repetitive use shall be made from this document when applicable

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

User activities: Army - ME, AM, AR; Navy - MC, OS, SH, YD; Air Force -

Review activities: Army - MI, AT; Navy - AS; Air Force - 11, 99; DLA-ES

FED. SUP CLASS 5935

APPROVED 20 Dec 1965 REVISED (A) 20 May 1970 (B) 23 June 1972 (C) 2 August 1982

INCHES	MM
.002	.05
.004	.10
.005	.13
.010	.25
.016	.41
.02	.51
.075	1.91
.09	2.29
.120	3.06
.130	3.30
.143	3.63
.150	3.81
.175	4.45
.195	4.95
.219	5.56
.260	6.60
.370	9.40
.438	11.13
.51	12.95
.511	12.98
.750	19.05
.900	22.86
1.072	27.23
1.250	31.75
1.562	39.67
2.290	58.17

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.015 (.38 mm).
3. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
4. Tolerance between any two adjacent contact centers shall be ±.004 (.10 mm). Tolerance between any two contact centers, other than adjacent contacts, shall be ±.006 (.15 mm).
5. Contact identification may be located on either side of the contact hole but shall appear on the front and rear of each insert.
6. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
7. Reference documents shall be of the issue in effect on date of invitation for bid.
8. Designed for use with MIL-C-39029/34 contacts.
9. Contact hole details shall be in accordance with MIL-C-28748.
10. The maximum insertion and withdrawal force (connector assembly) shall be 25 pounds.
11. Insert material shall be in accordance with MIL-C-28748.

F.A Navy - EC Other Cust AF - 85 Army - CR	International interest	TITLE Insert (insulator), rectangular connector, electrical, 20 (size 16 and 20 crimp removable) pin contacts	MILITARY STANDARD MS18176
Procurement Specification MIL-C-28748		SUPERSEDES	PAGE 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:16Z
Check the source to verify that this is the current version before use.