
THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THESE SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: NONE.

Form Approved
OMB No. 0704-0188

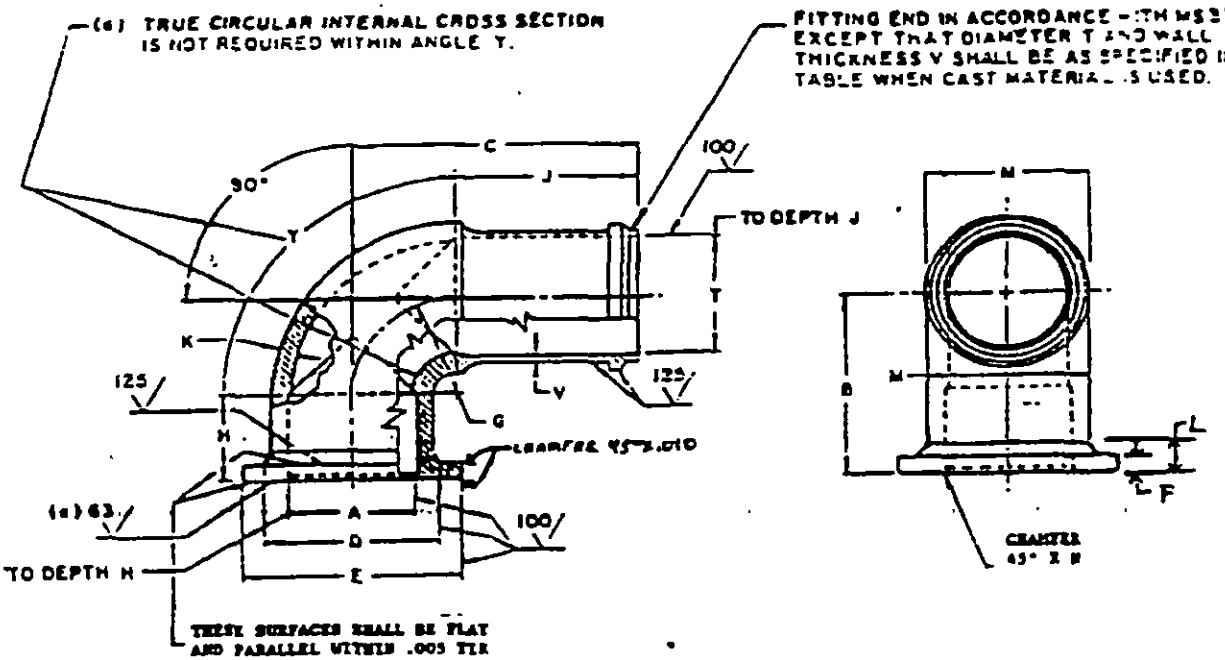

(a) INTERNAL FLOW PASSAGE AROUND BEND SHALL BE SMOOTH AND FREE FROM PROJECTIONS.
(b) DIAMETER A, D, AND E SHALL BE CONCENTRIC WITH EACH OTHER WITHIN .010 TIR.
(c) ANGULAR TOOL MARKS UP TO 63 Ra WILL BE ALLOWED.

REQUIREMENTS:
DIMENSIONS IN INCHES.
UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.005, ANGLES ±5°.
BREAK ALL SHARP EDGES AND REMOVE ALL HANGING BURRS AND SLIVERS.
UNLESS OTHERWISE SPECIFIED, SURFACE ROUGHNESS SHALL NOT EXCEED 100 Ra (SEE ANSI/ASME B46.1)
MATERIAL: ALUMINUM ALLOY FORGING, SPECIFICATION QQ-A-367, 2014-T6.
OPTIONAL MATERIAL: PERMANENT MOLD ALUMINUM ALLOY CASTING, SPECIFICATION QQ-A-596.
FINISH: ANODIZED PER MIL-A-8625, DYE LIGHT BLUE.
FITTINGS SHALL BE PERMANENTLY MARKED WITH MS PART NUMBER ON AN UNFINISHED SURFACE.
POROSITY TEST: FINISHED CASTINGS SHALL NOT LEAK WHEN SUBJECTED TO 100 PSI AIR PRESSURE AND SUBMERGED IN WATER FOR 3 MINUTES MINIMUM.

NOTES:
THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
FOR NOMINAL USE ON FUEL AND OIL SYSTEMS.
MAX OPERATING TEMPERATURE 275°F. FOR HOSE SIZES THRU 1 INCH: MAX PRESSURE 1500 PSI. FOR TUBE SIZES EXCEEDING 1 INCH: MAX PRESSURE 500 PSI.
REDUCTION BY FORGING DRAFT ANGLE OF 7° MAX IS PERMISSIBLE.
REVISION LETTERS ARE NOT USED TO DENOTE CHANGES DUE TO THE EXTENSIVENESS OF THE CHANGES.

INCH-POUND

PREPARING ACTIVITY: AIR FORCE - 82 CUSTODIANS: ARMY - NAVY - AIR FORCE - 99 REVIEW: DLA - CS USER: PROJECT NUMBER: 4730-113A	MILITARY SPECIFICATION SHEET TITLE: ELBOW, HOSE, FLANGED SWIVEL, 90°	SPECIFICATION SHEET NUMBER: MS20759, REV B 14 Apr 94 SUPERSEDING MS20759, REV A 2 SEP 82 AMSC N/A FSC 4730
DISTRIBUTION STATEMENT A: APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED.		Page 1 OF 2

Source: https://assist.dla.mil - Downloaded: 2026-05-20T14:42
Check the source to verify that this is the current version before use.

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: NONE.

Form Approved
OMB No. 0704-018[redacted]

DASH NO.	BORE ID	A ±.003 DIA	B +.047 -.000	C +.047 -.000	D +.00- .010	E +.000 -.005	F +.000 -.005	G RAD	H +.047 -.000
-D12	.750	.609	1.312	2.125	.965	1.250	.156	.594	.719
-D12-16						1.500			
-D16	1.000	.844	1.438	2.250	1.215			.719	
-D20	1.250	1.078	1.688	2.438	1.465	1.844		.875	.812
-D20-24						2.125			
-D24	1.500	1.312	1.812	2.562	1.715			1.000	
-D32	2.000	1.781	2.188	2.875	2.375	2.750	.188	1.312	.875
-D40	2.500	2.281	2.438	3.125	2.875	3.281		1.562	
-D48	3.000	2.781	2.688	3.375	3.375	3.781		1.812	

DASH NO.	J +.047 -.000	K MIN	K MAX	L ±.030	M ±.010 DIA	N DIA	T MIN DIA	V MIN LBS	WEIGHT MAX LBS
-D12	1.531	.125	.164	.250	.875	.669	.609	.065	.10
-D12-16									.12
-D16		.141	.176		1.125	.904	.859		.15
-D20	1.562	.156	.221		1.375	1.138	1.059	.080	.26
-D20-24									.28
-D24		.172	.234	.375	1.625	1.372	1.309		.25
-D32		.203	.322		2.359	1.841	1.793	.100	.73
-D40		.234	.333		2.859	2.341	2.293		1.04
-D48		.250	.344		3.359	2.841	2.793		1.40

INCH-POUND

PREPARING ACTIVITY: AIR FORCE - 82
CUSTODIANS: ARMY - NAVY - AIR FORCE - 99
REVIEW: DLA - CS
USER:
PROJECT NUMBER: 4730-1134

MILITARY SPECIFICATION SHEET
TITLE: ELBOW, HOSE, FLANGED SWIVEL, 90°

SPECIFICATION SHEET NUMBER
MS20759, REV B 14 Apr 9[redacted]
SUPERSEDING
MS20759, REV A 2 SEP 82
AMSC N/A FSC 4730

DISTRIBUTION STATEMENT A. APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED.

Page 2 OF 2

Source: https://assist.dla.mil - Downloaded: 2026-10-29T14:21Z
Check the source to verify that this is the current version before use.

DD Form 672 MAY 88 Previous editions are obsolete